

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-051-25581-00-00  
Spot: NWNWNE Sec/Twnshp/Rge: 22-14S-16W  
550 feet from N Section Line, 2310 feet from E Section Line  
Lease Name: NORBERT Well #: 1-22  
County: ELLIS Total Vertical Depth: 3500 feet

Operator License No.: 30717  
Op Name: DOWNING-NELSON OIL CO INC  
Address: PO BOX 372  
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	221		

\$ 113.75

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 10/26/2006 12:00 AM  
Plug Co. License No.: 31548 Plug Co. Name: DISCOVERY DRILLING  
Proposal Rcvd. from: TOM ALM Company: DISCOVERY DRILLING Phone: (785) 623-2920

Proposed Plugging Method: Order 135 sxs 60/40 pozmix - 6% gel with 1/4# flocele per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: HERB DEINES WitnessType: NONE  
Date/Time Plugging Completed: 10/26/2006 1:00 AM KCC Agent: HERB DEINES

Actual Plugging Report:

1st. Plug at 3400' w/25 sxs.  
2nd. Plug at 1025' w/25 sxs.  
3rd. Plug at 425' w/50 sxs.  
4th. Plug at 40' w/10 sxs.  
Rathole with 15 sxs.  
Mousehole with 10 sxs.

Perfs:

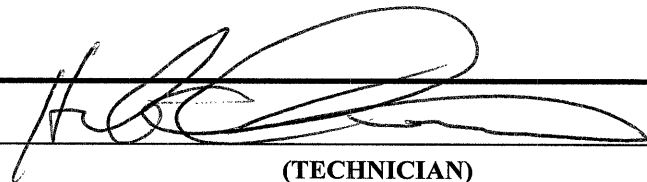
INVOICED  
DATE 11-8-06  
INV. NO. 2007060763

Remarks: ALLIED CEMENTING COMPANY.

Plugged through: DP

District: 04

Signed

  
(TECHNICIAN)

NOV 03 2006

RECEIVED  
Form CP-275  
NOV 06 2006  
KCC WICHITA