



MICRO LOG

Company BEREXCO, LLC.

Well WHP #1-18

Field MCKINNEY

County MEADE State KANSAS

Location: API #: 15-119-21471-0000

1320' FNL & 1320' FEL
C - NE

SEC 18 TWP 34S RGE 26W

Permanent Datum GROUND LEVEL Elevation 2379
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation

K.B. 2391
D.F. 2389
G.L. 2379

Date 10/3/22

Run Number TWO

Depth Driller 6150

Depth Logger 6162

Bottom Logged Interval 6146

Top Log Interval 4500

Casing Driller 8 5/8" @ 1380'

Casing Logger 1380

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/59

pH / Fluid Loss 9.5/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp 1.00 @ 77F

Rmf @ Meas. Temp .750 @ 77F

Rmc @ Meas. Temp 1.20 @ 77F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .570 @ 136F

Time Circulation Stopped 5 HOURS

Time Logger on Bottom 12:30 P.M.

Maximum Recorded Temperature 135F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By BRYAN BYNOG

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-119-21471-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
MEADE, KS., 8S. ON BLKTOP TO "RD. V", 14 EAST, SOUTH & EAST & SOUTH TO "RD. BB", 3/4
EAST TO CATTLE GUARD, 3/4 N. INTO




MAIN SECTION

Database File	7087pe.db
Dataset Pathname	pass6.3
Presentation Format	micro
Dataset Creation	Mon Oct 03 13:50:22 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

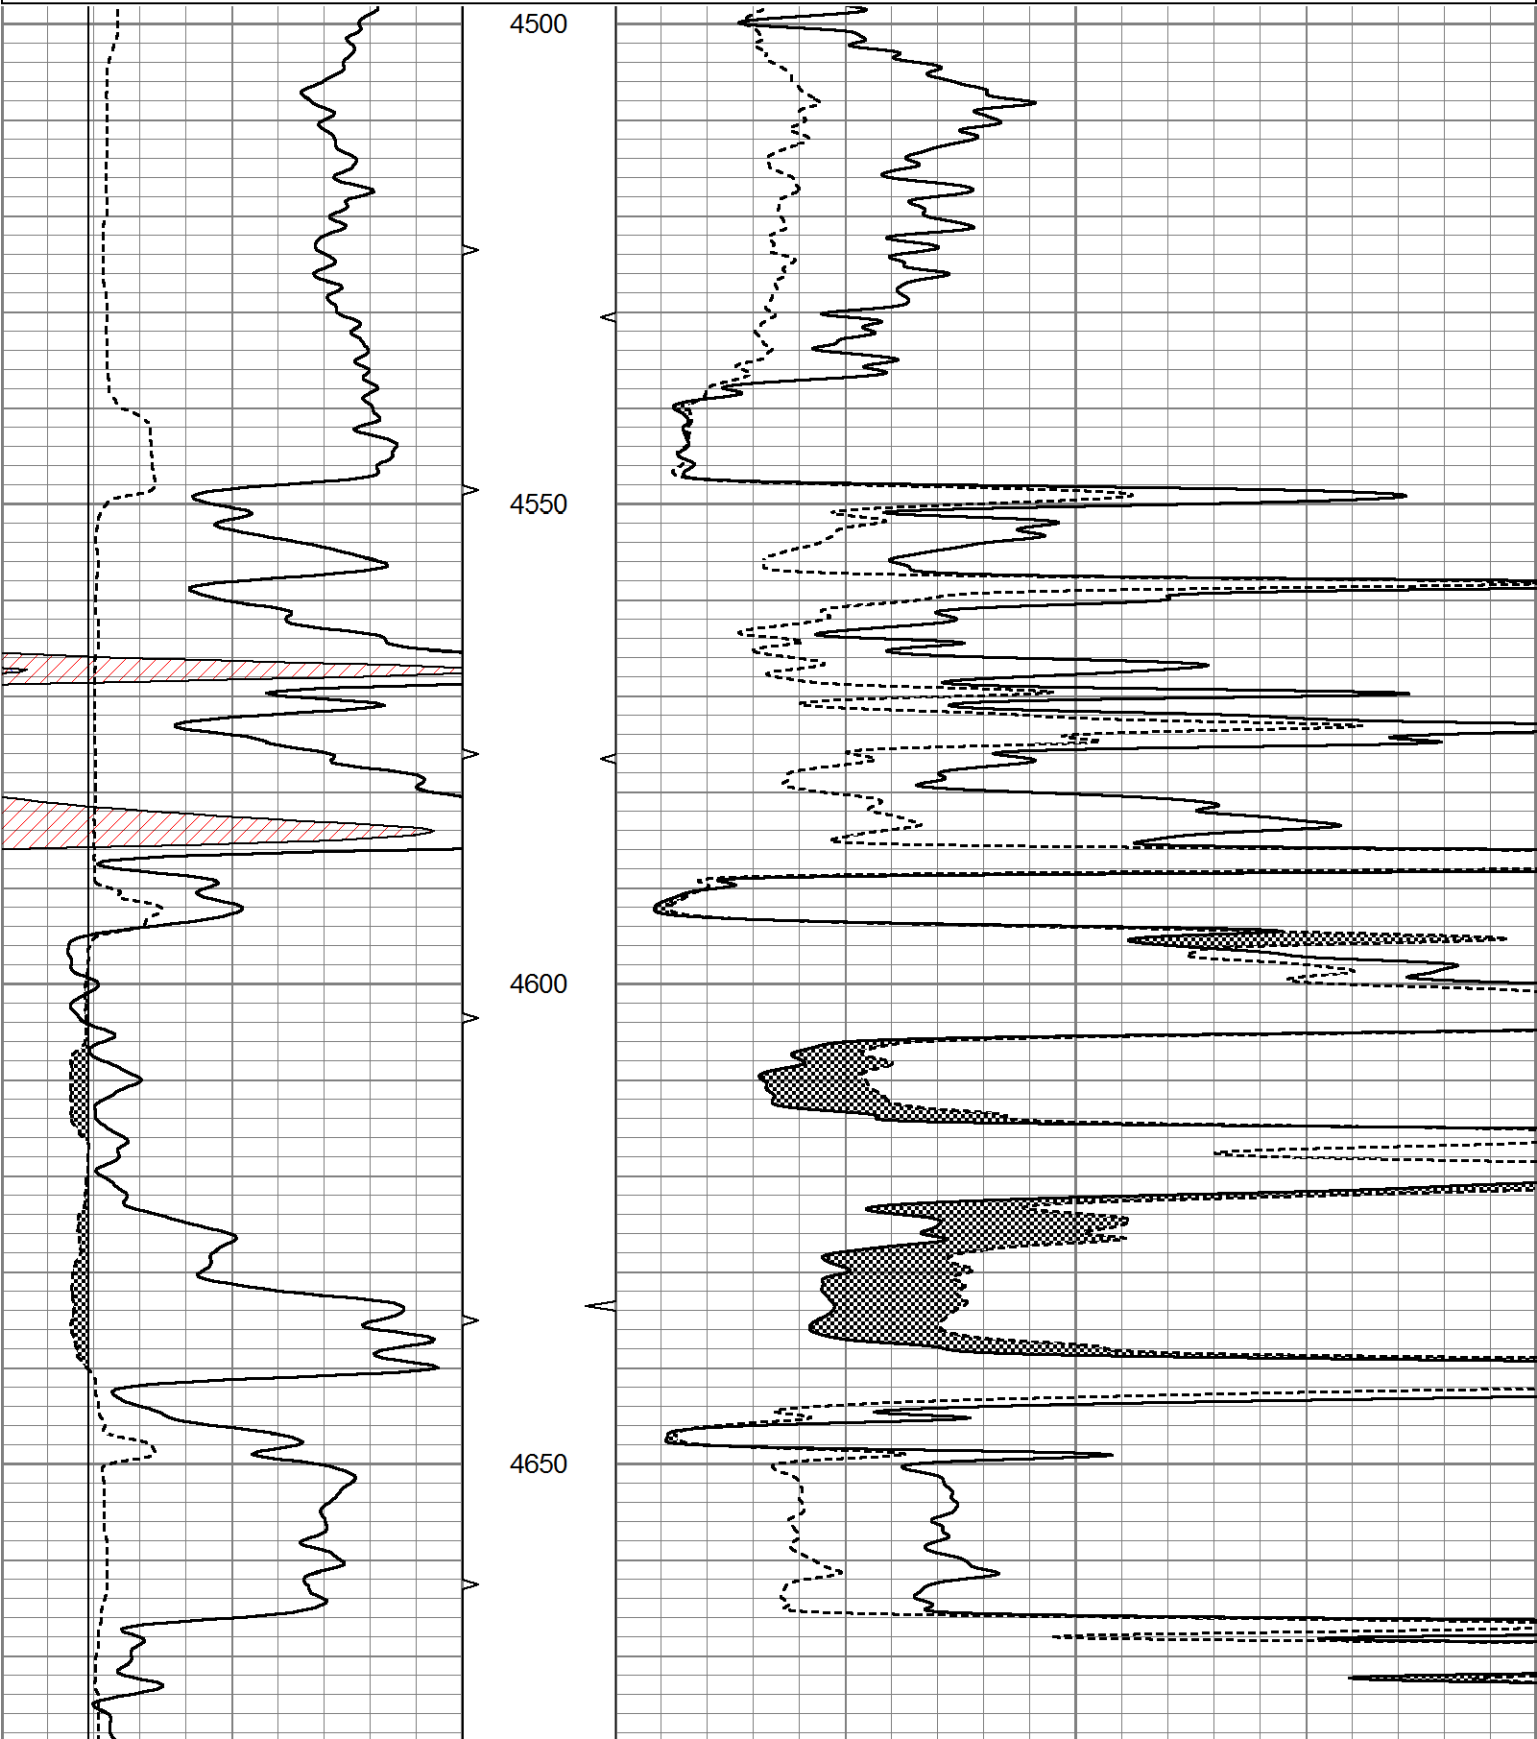

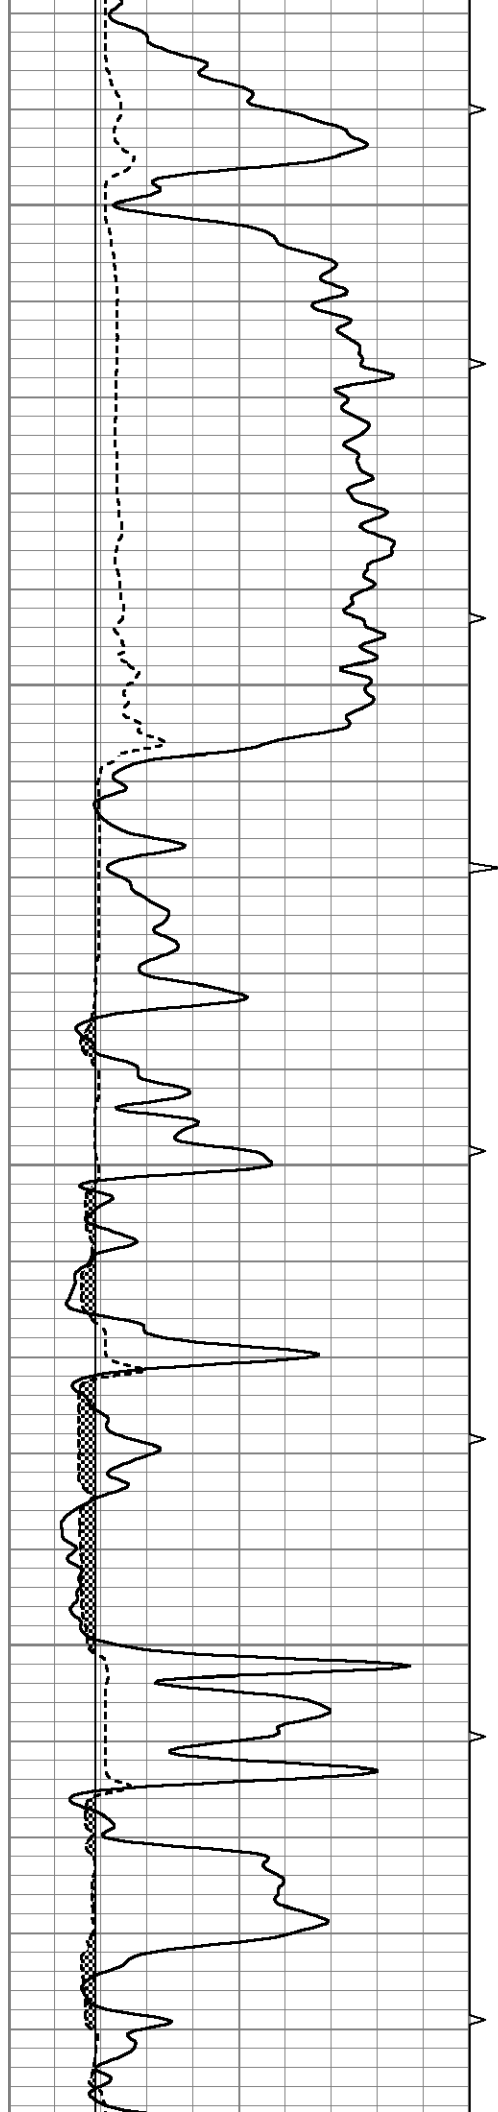



4700


4750

4800

4850

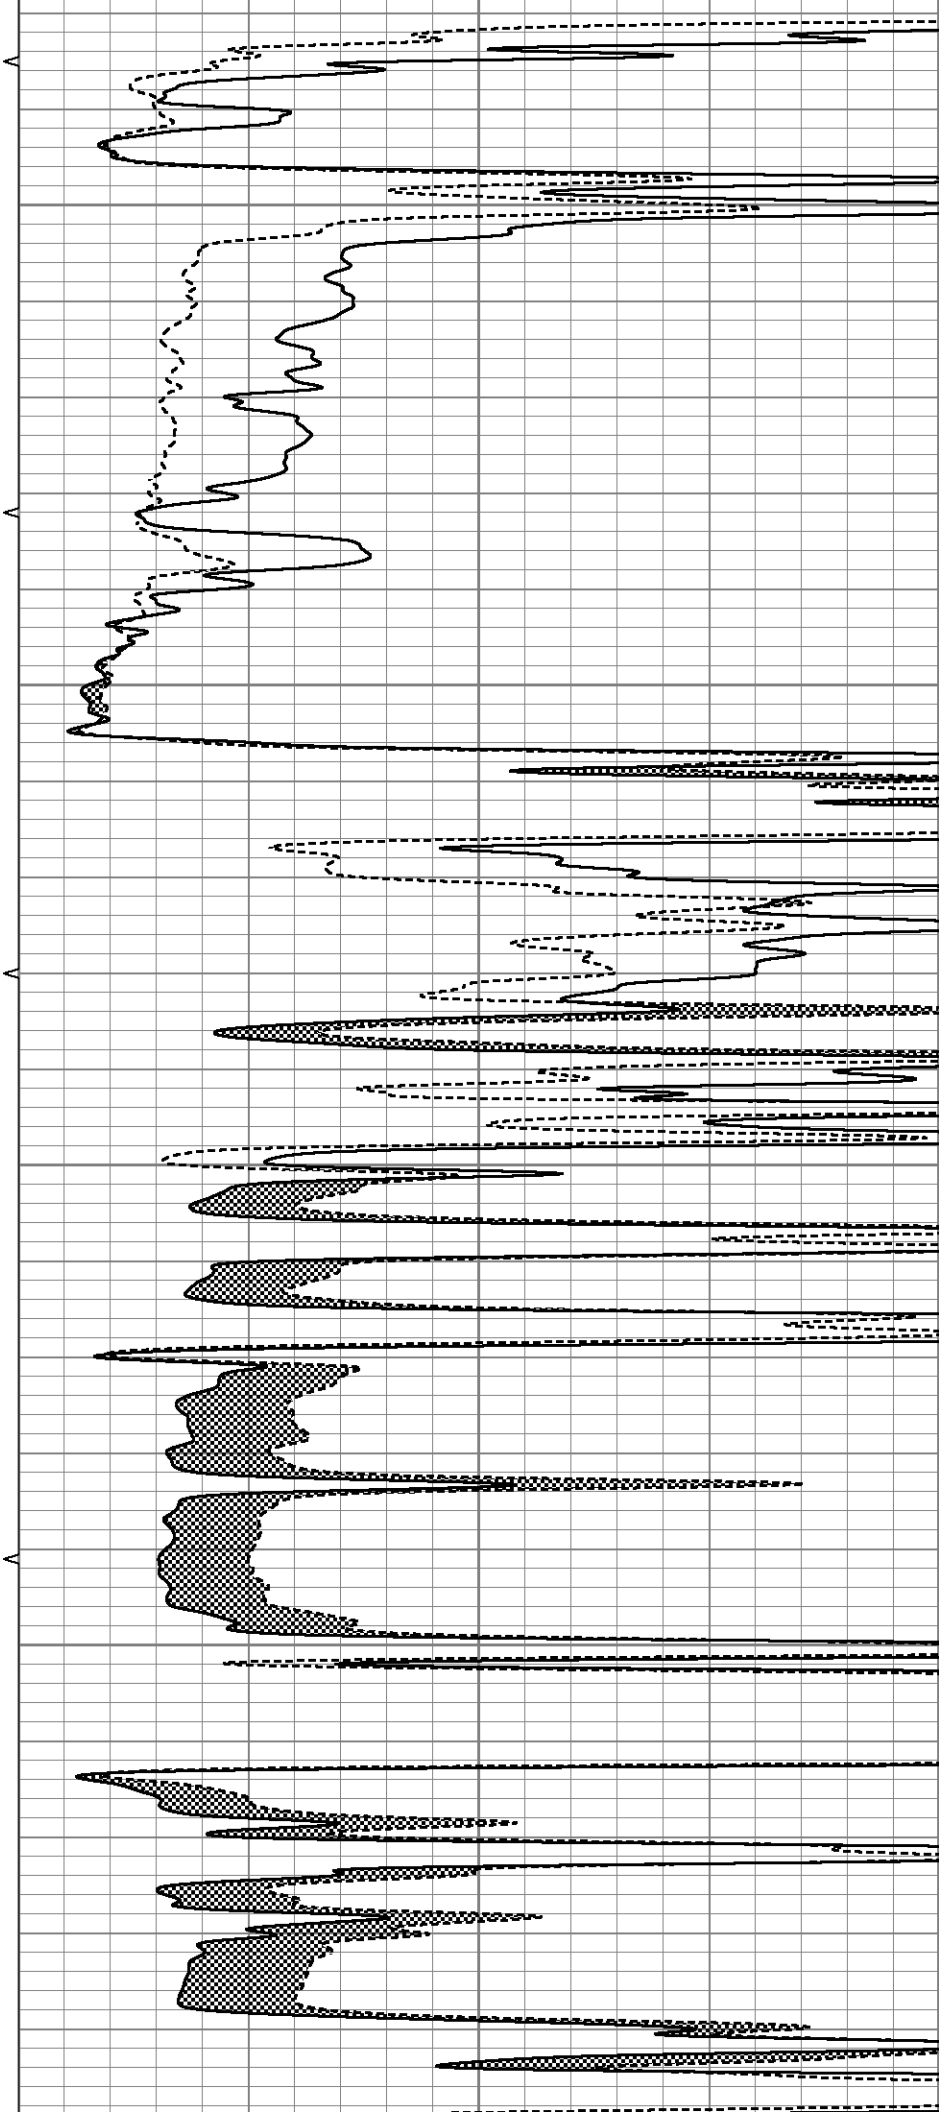

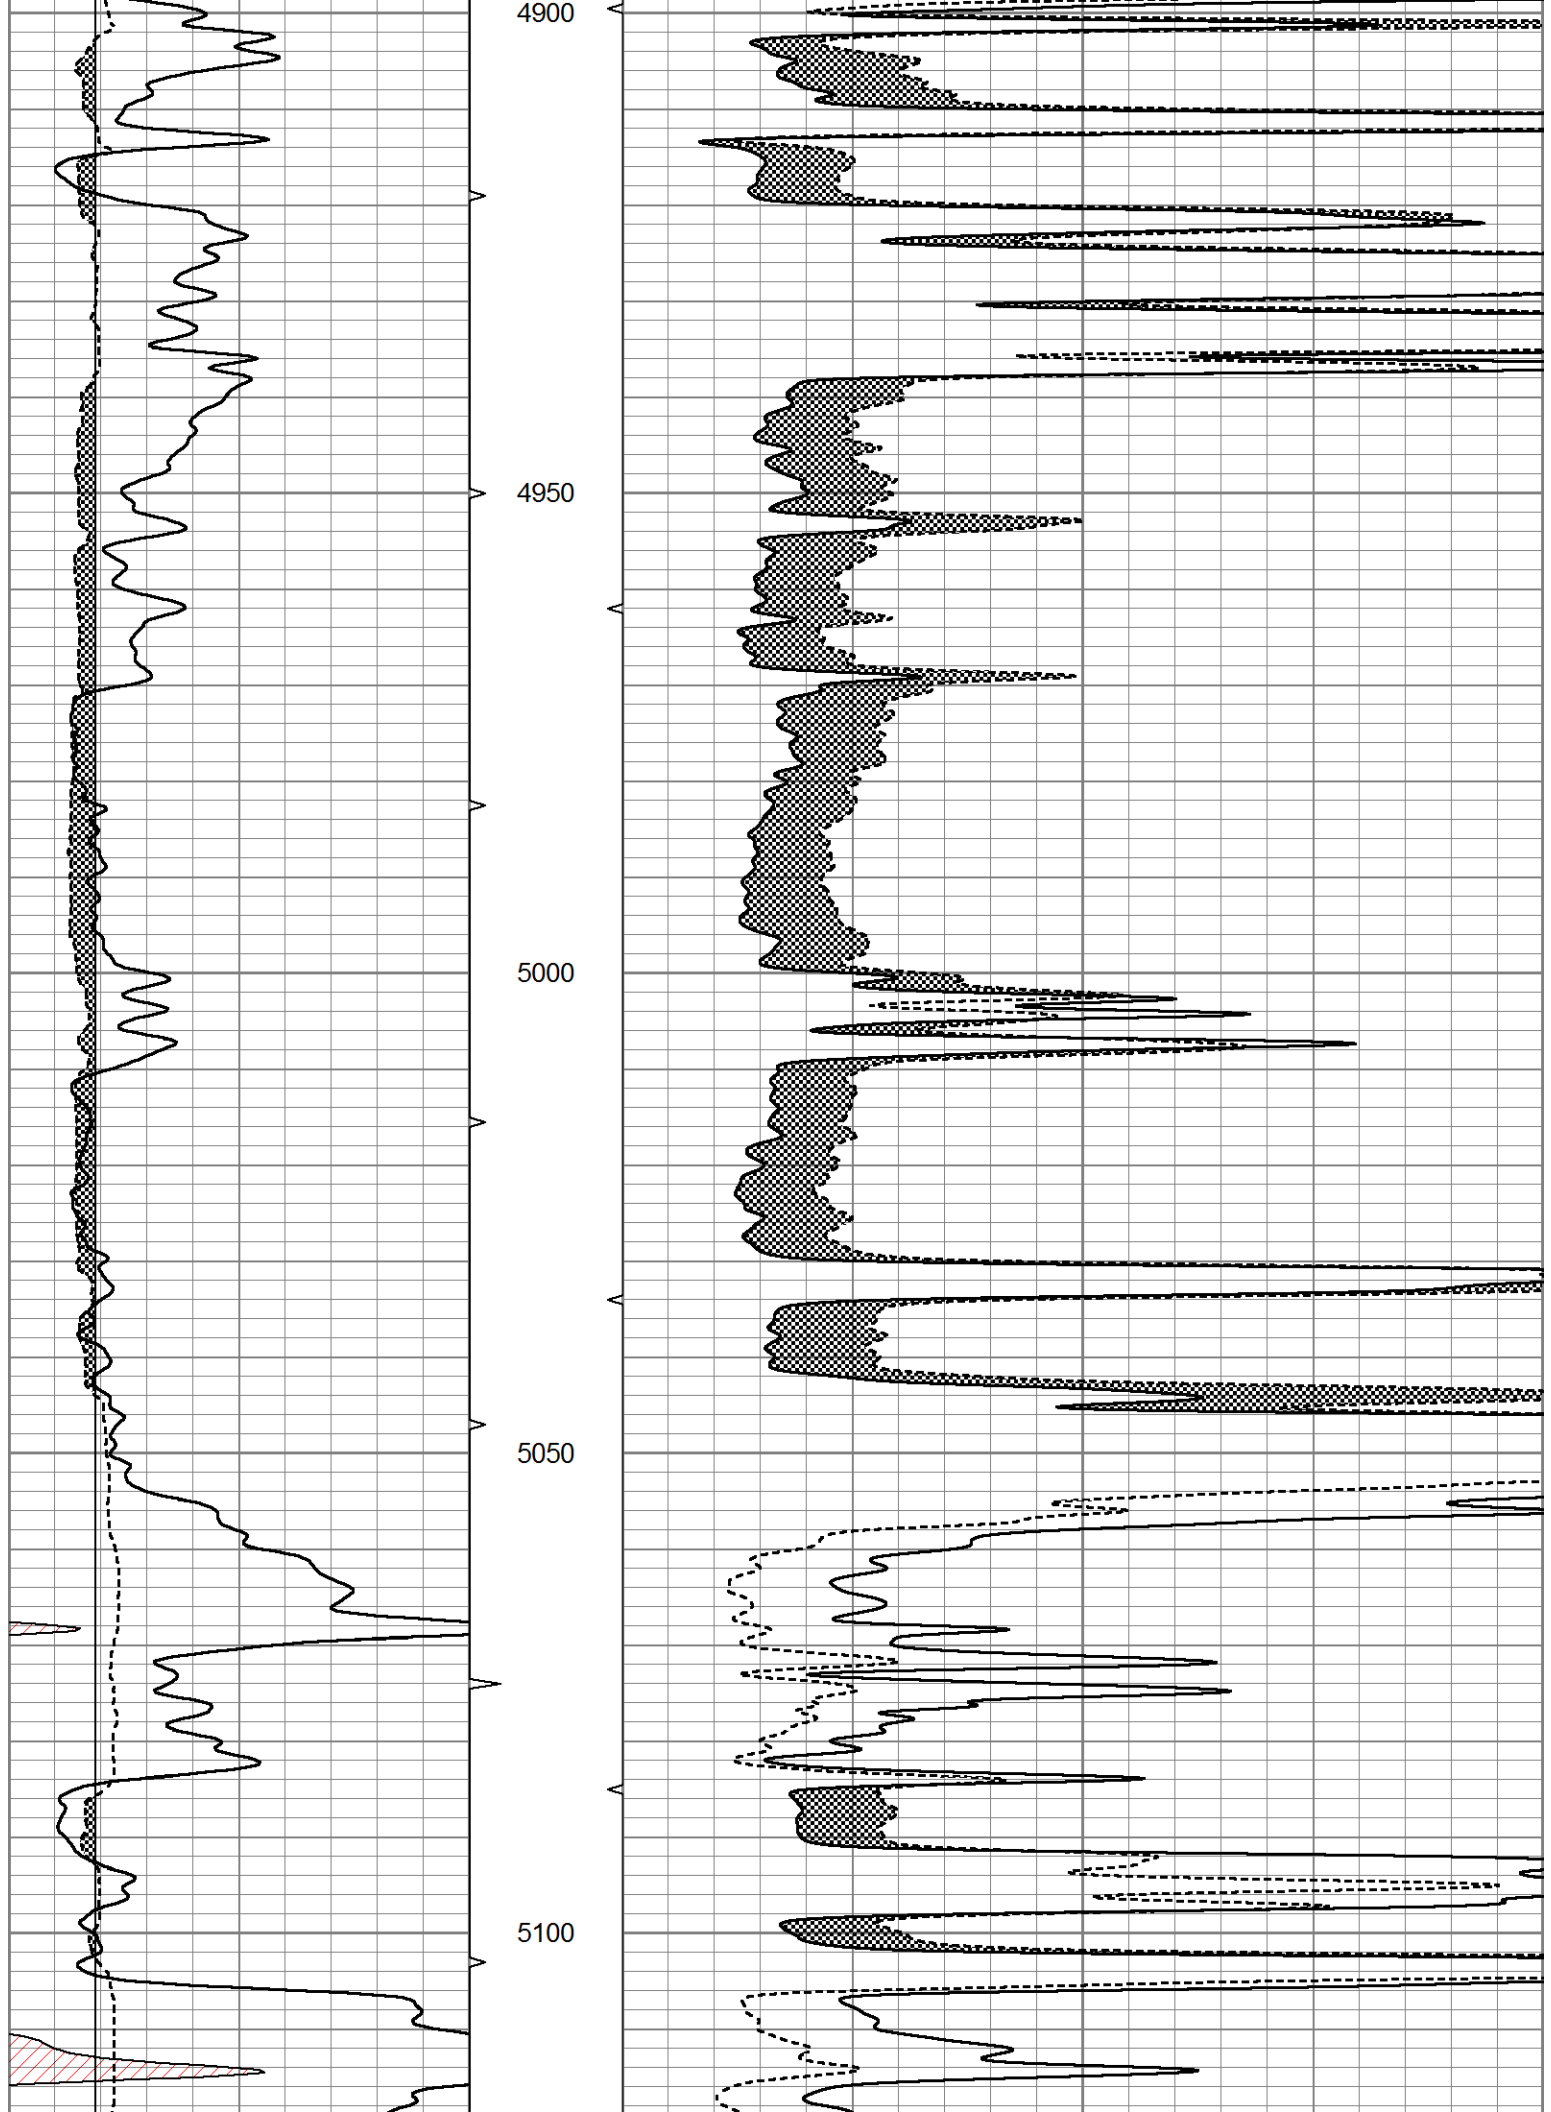

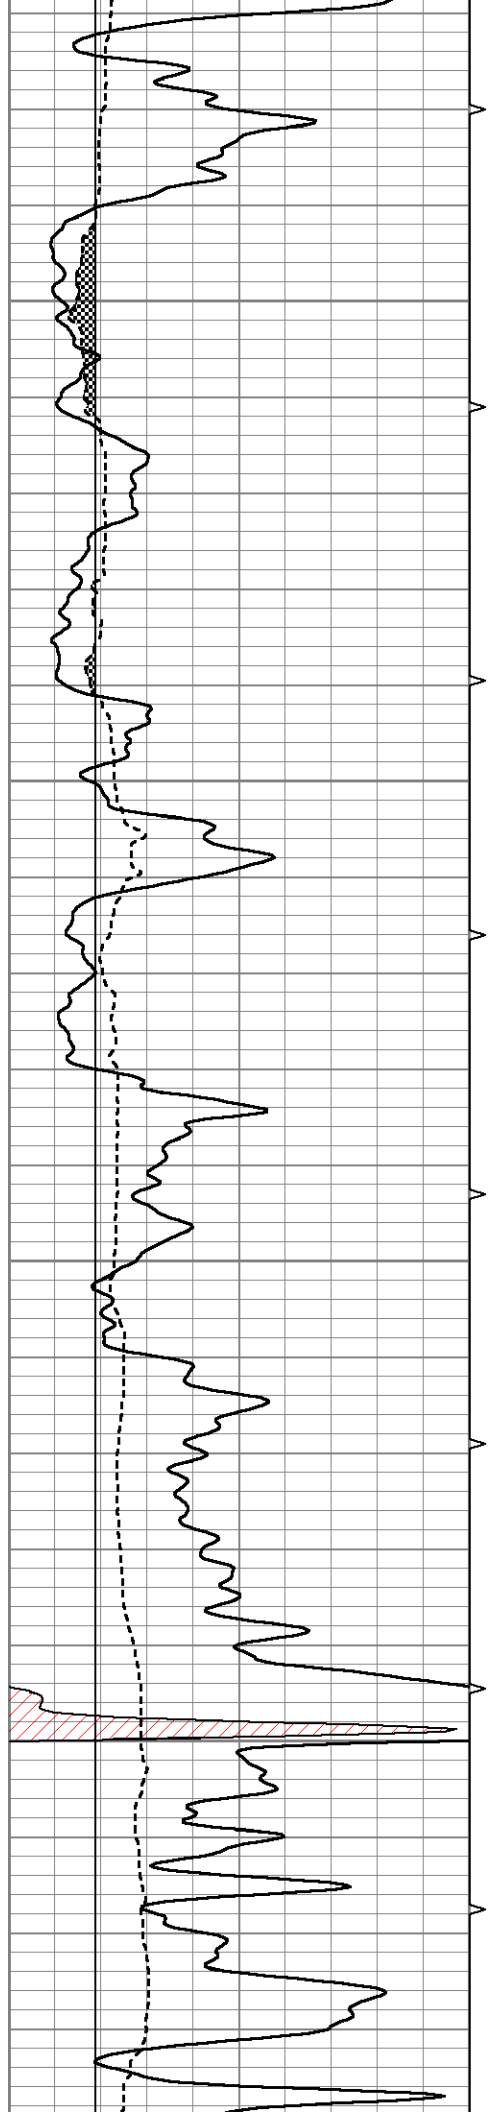



5150


5200


5250


5300

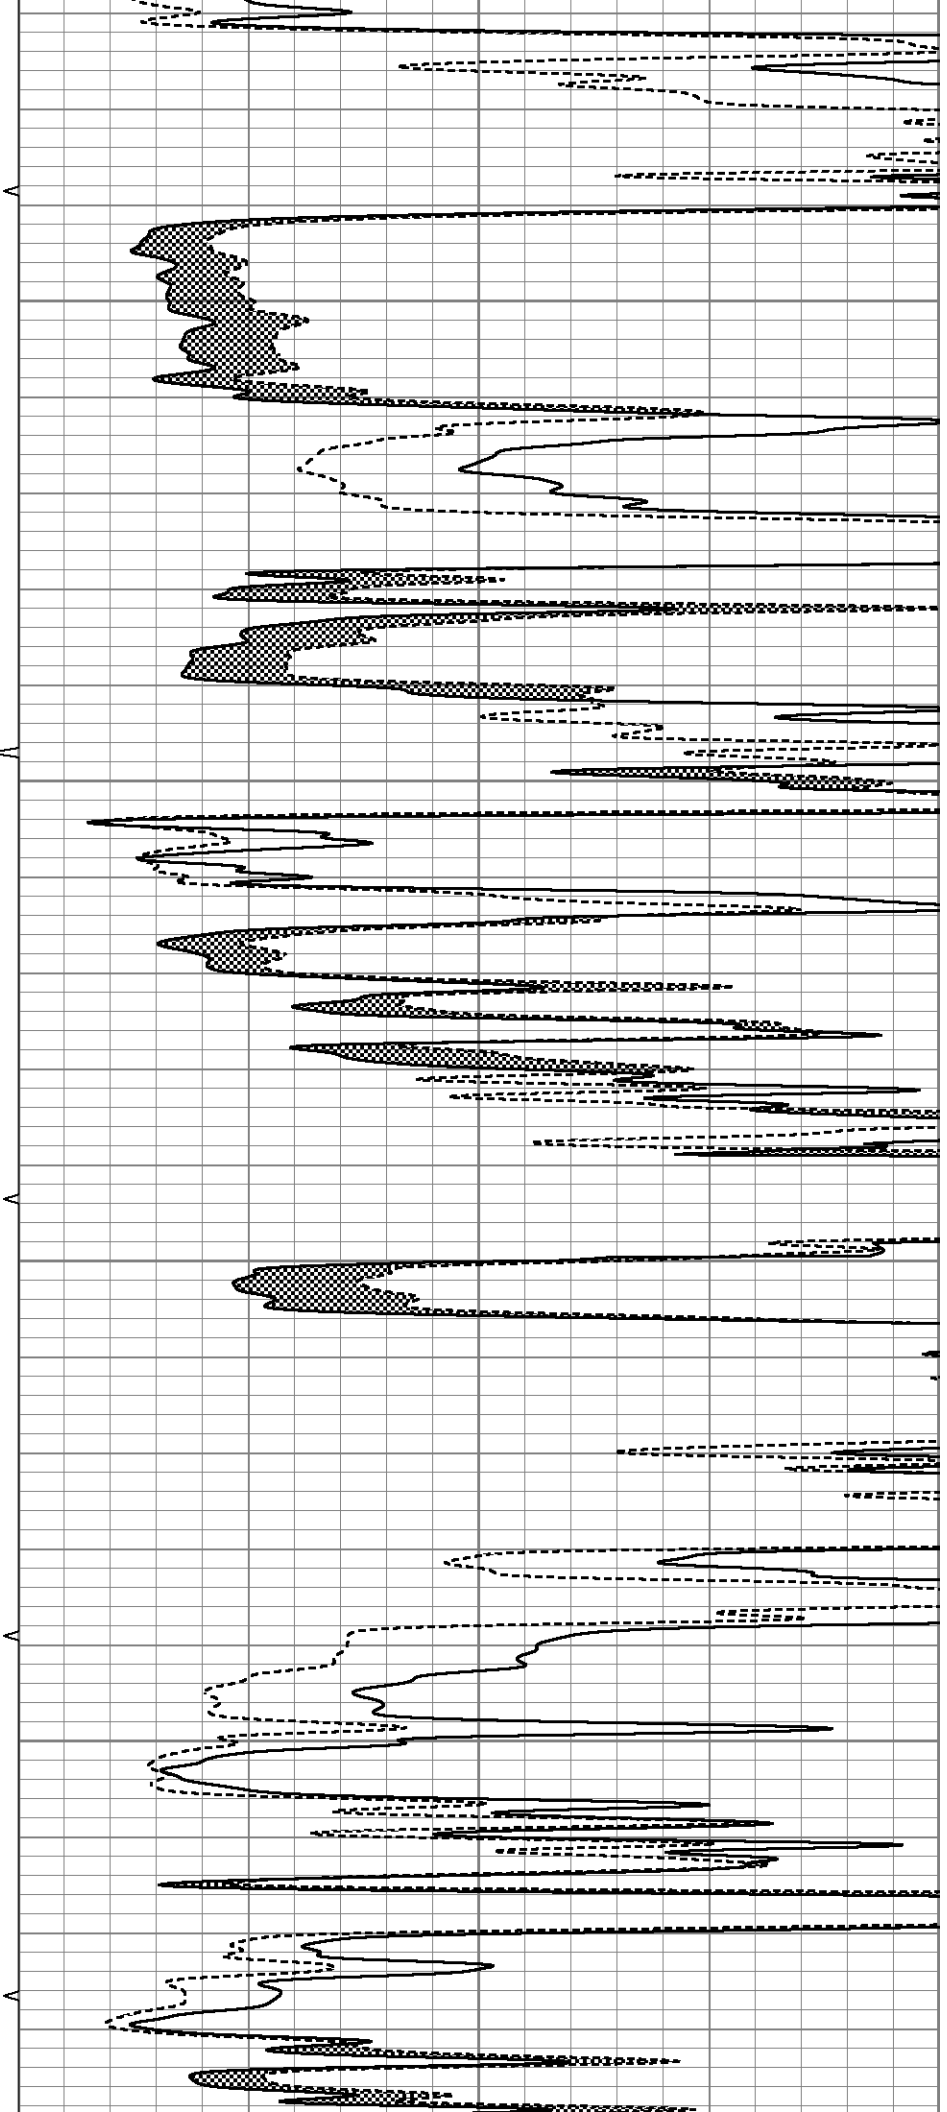

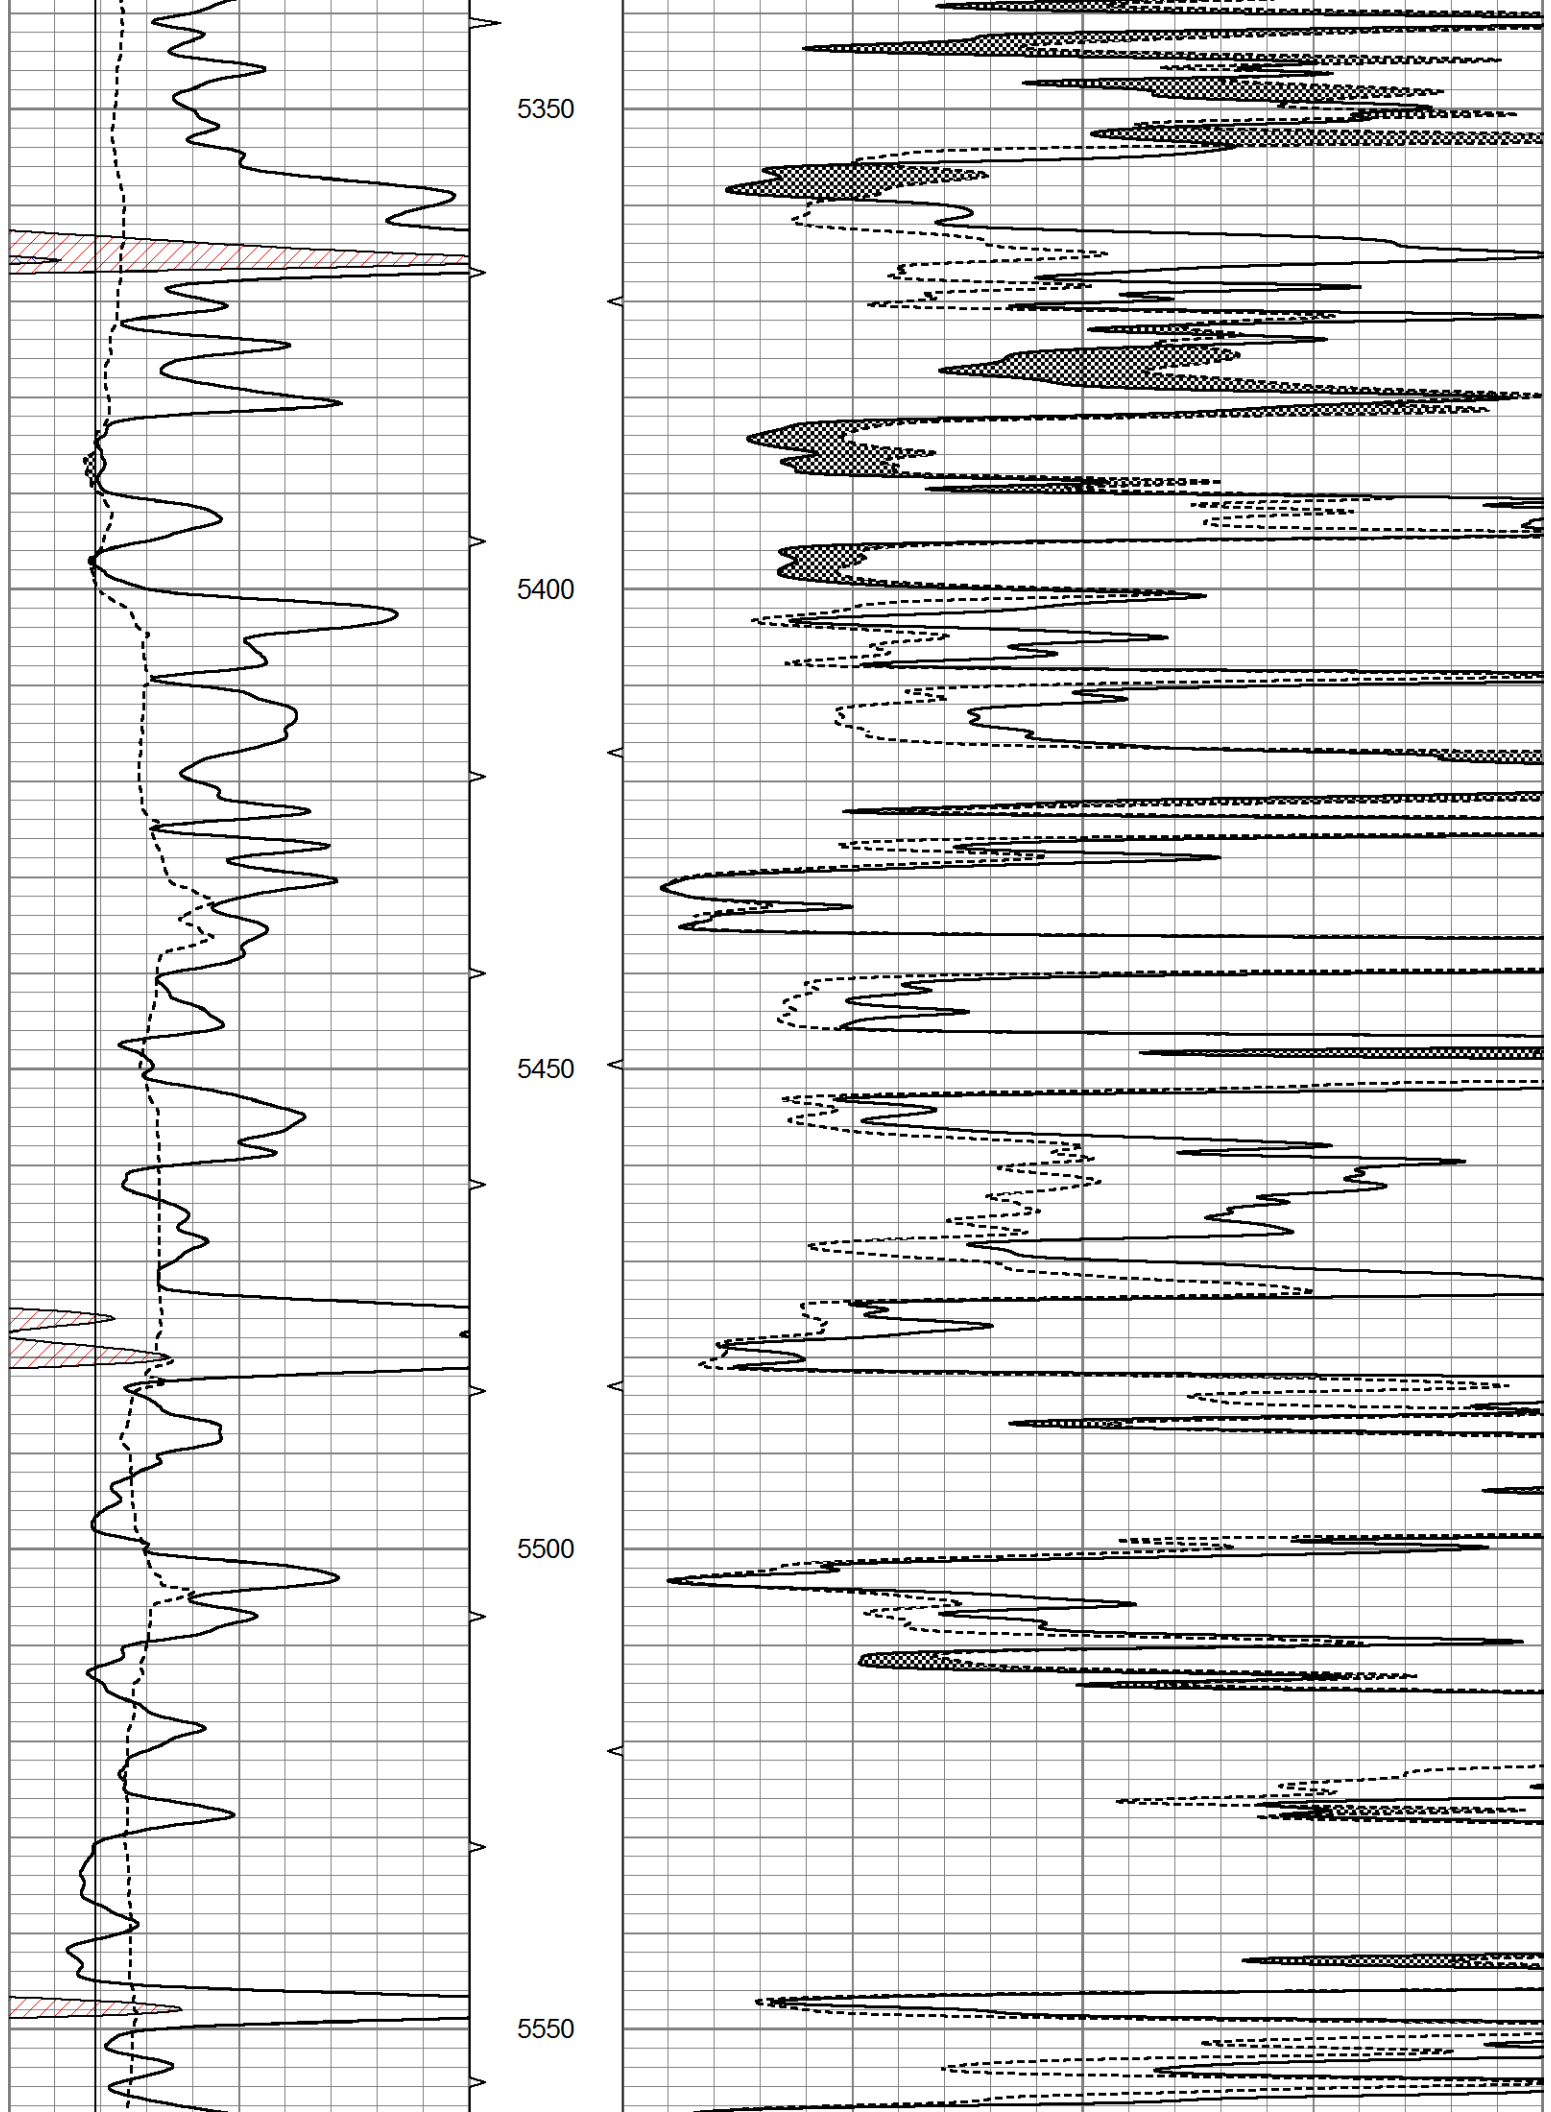

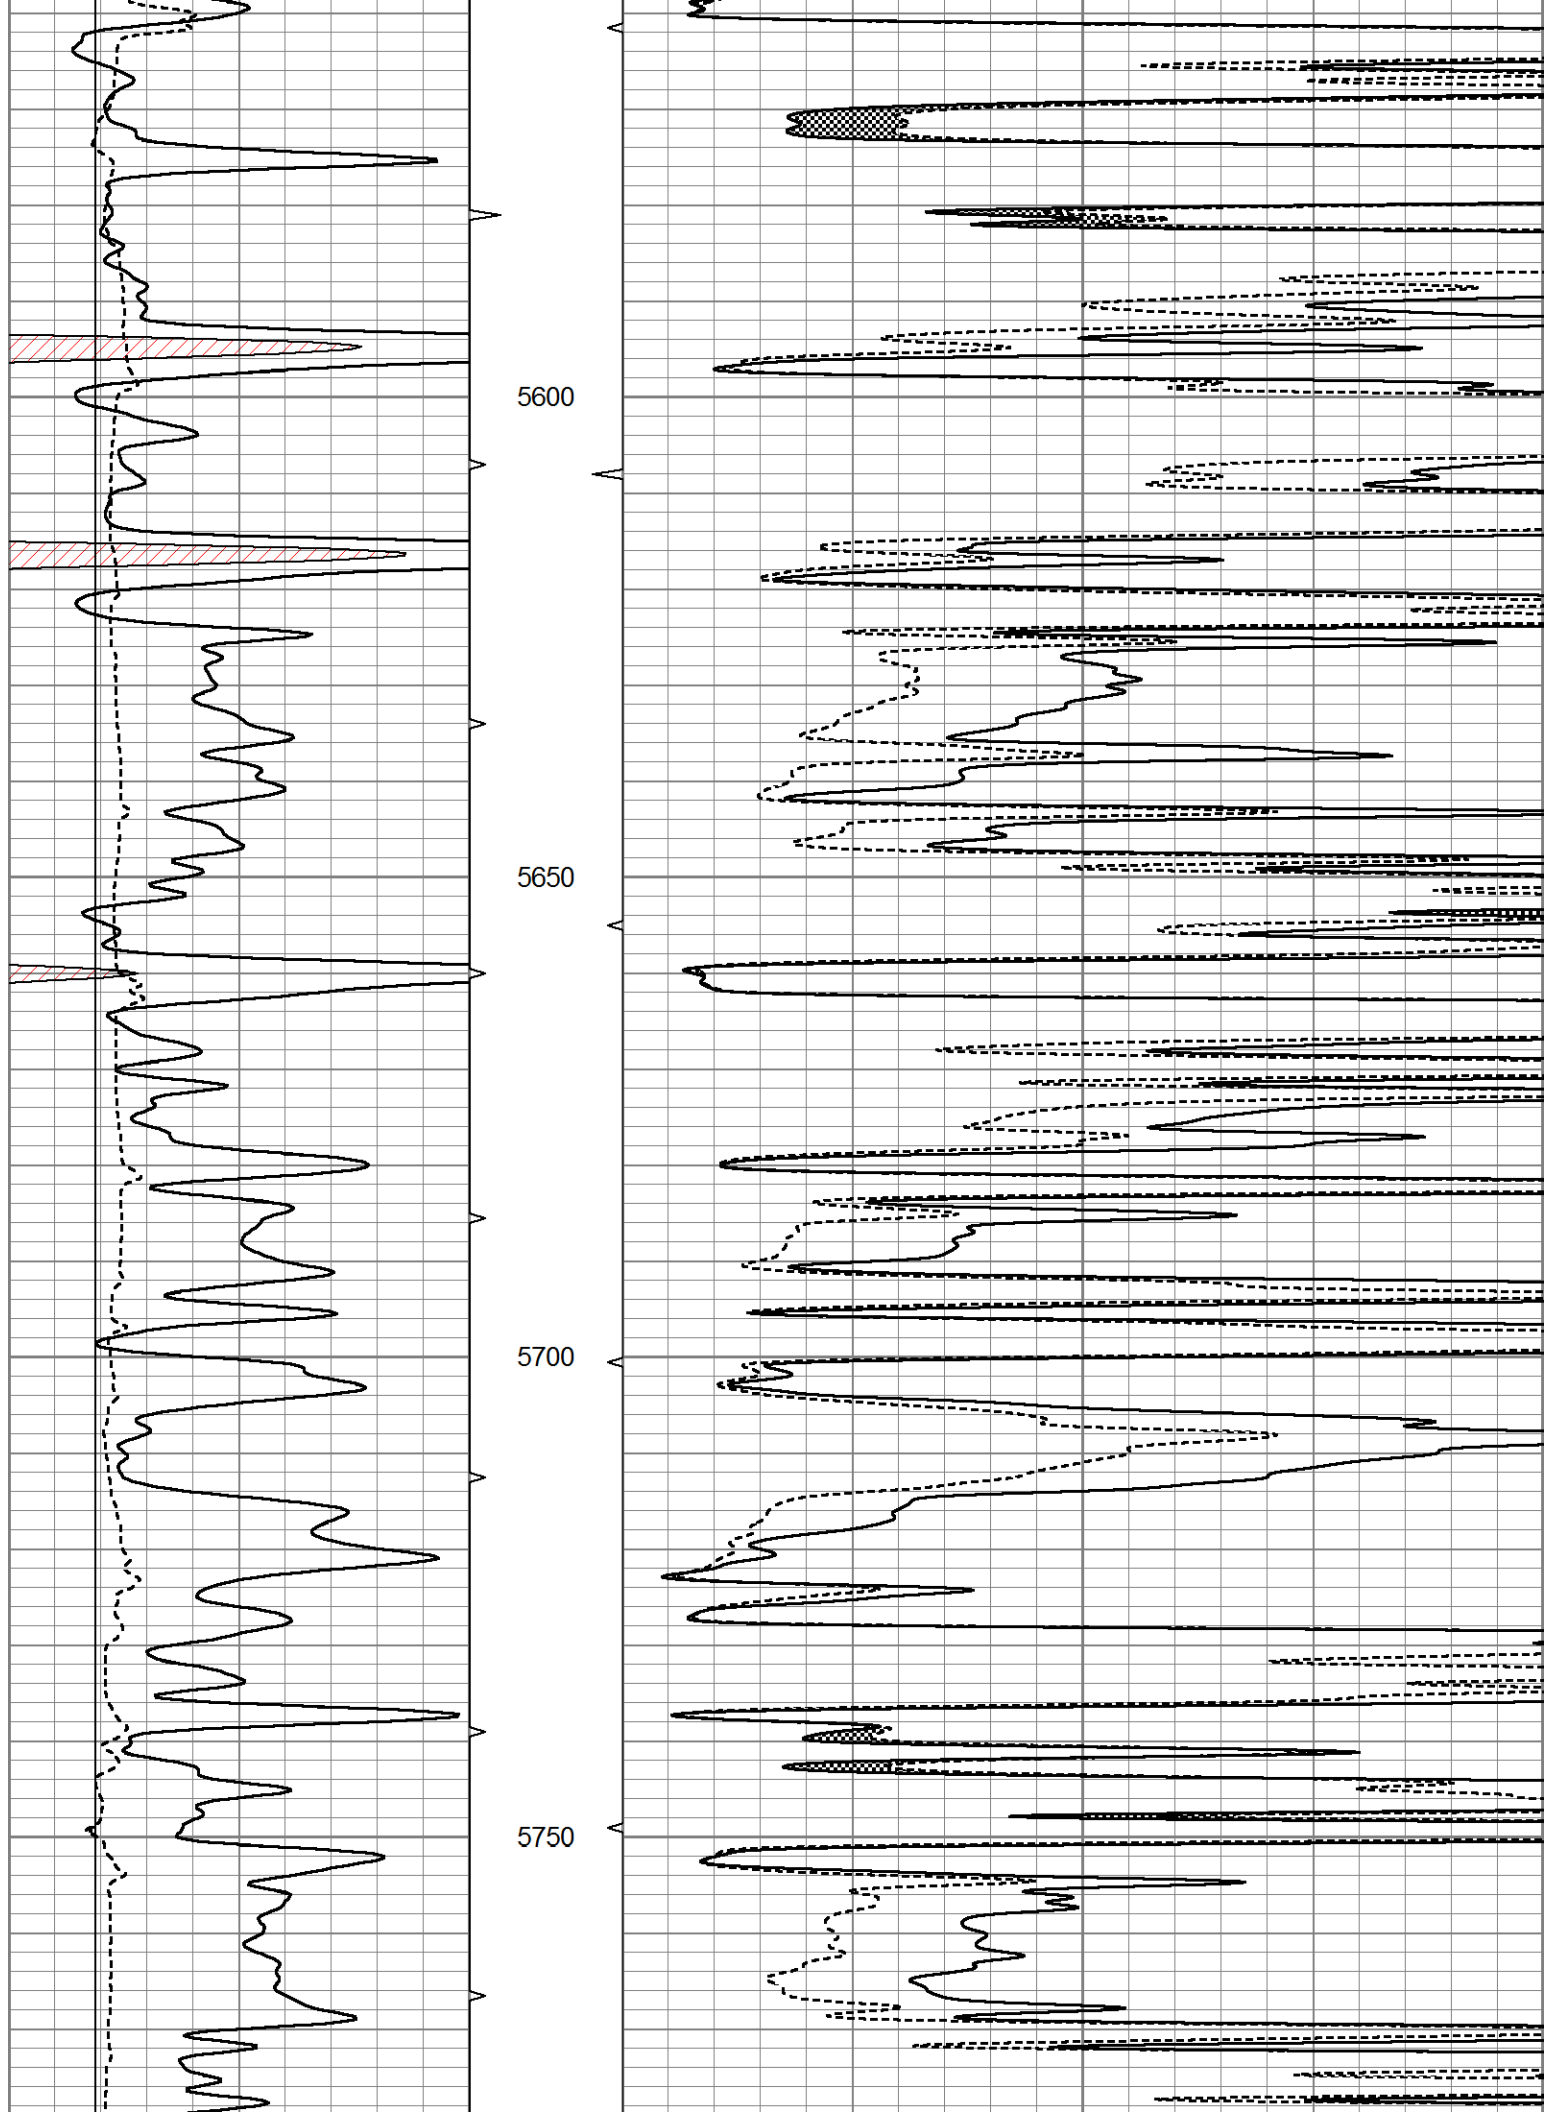


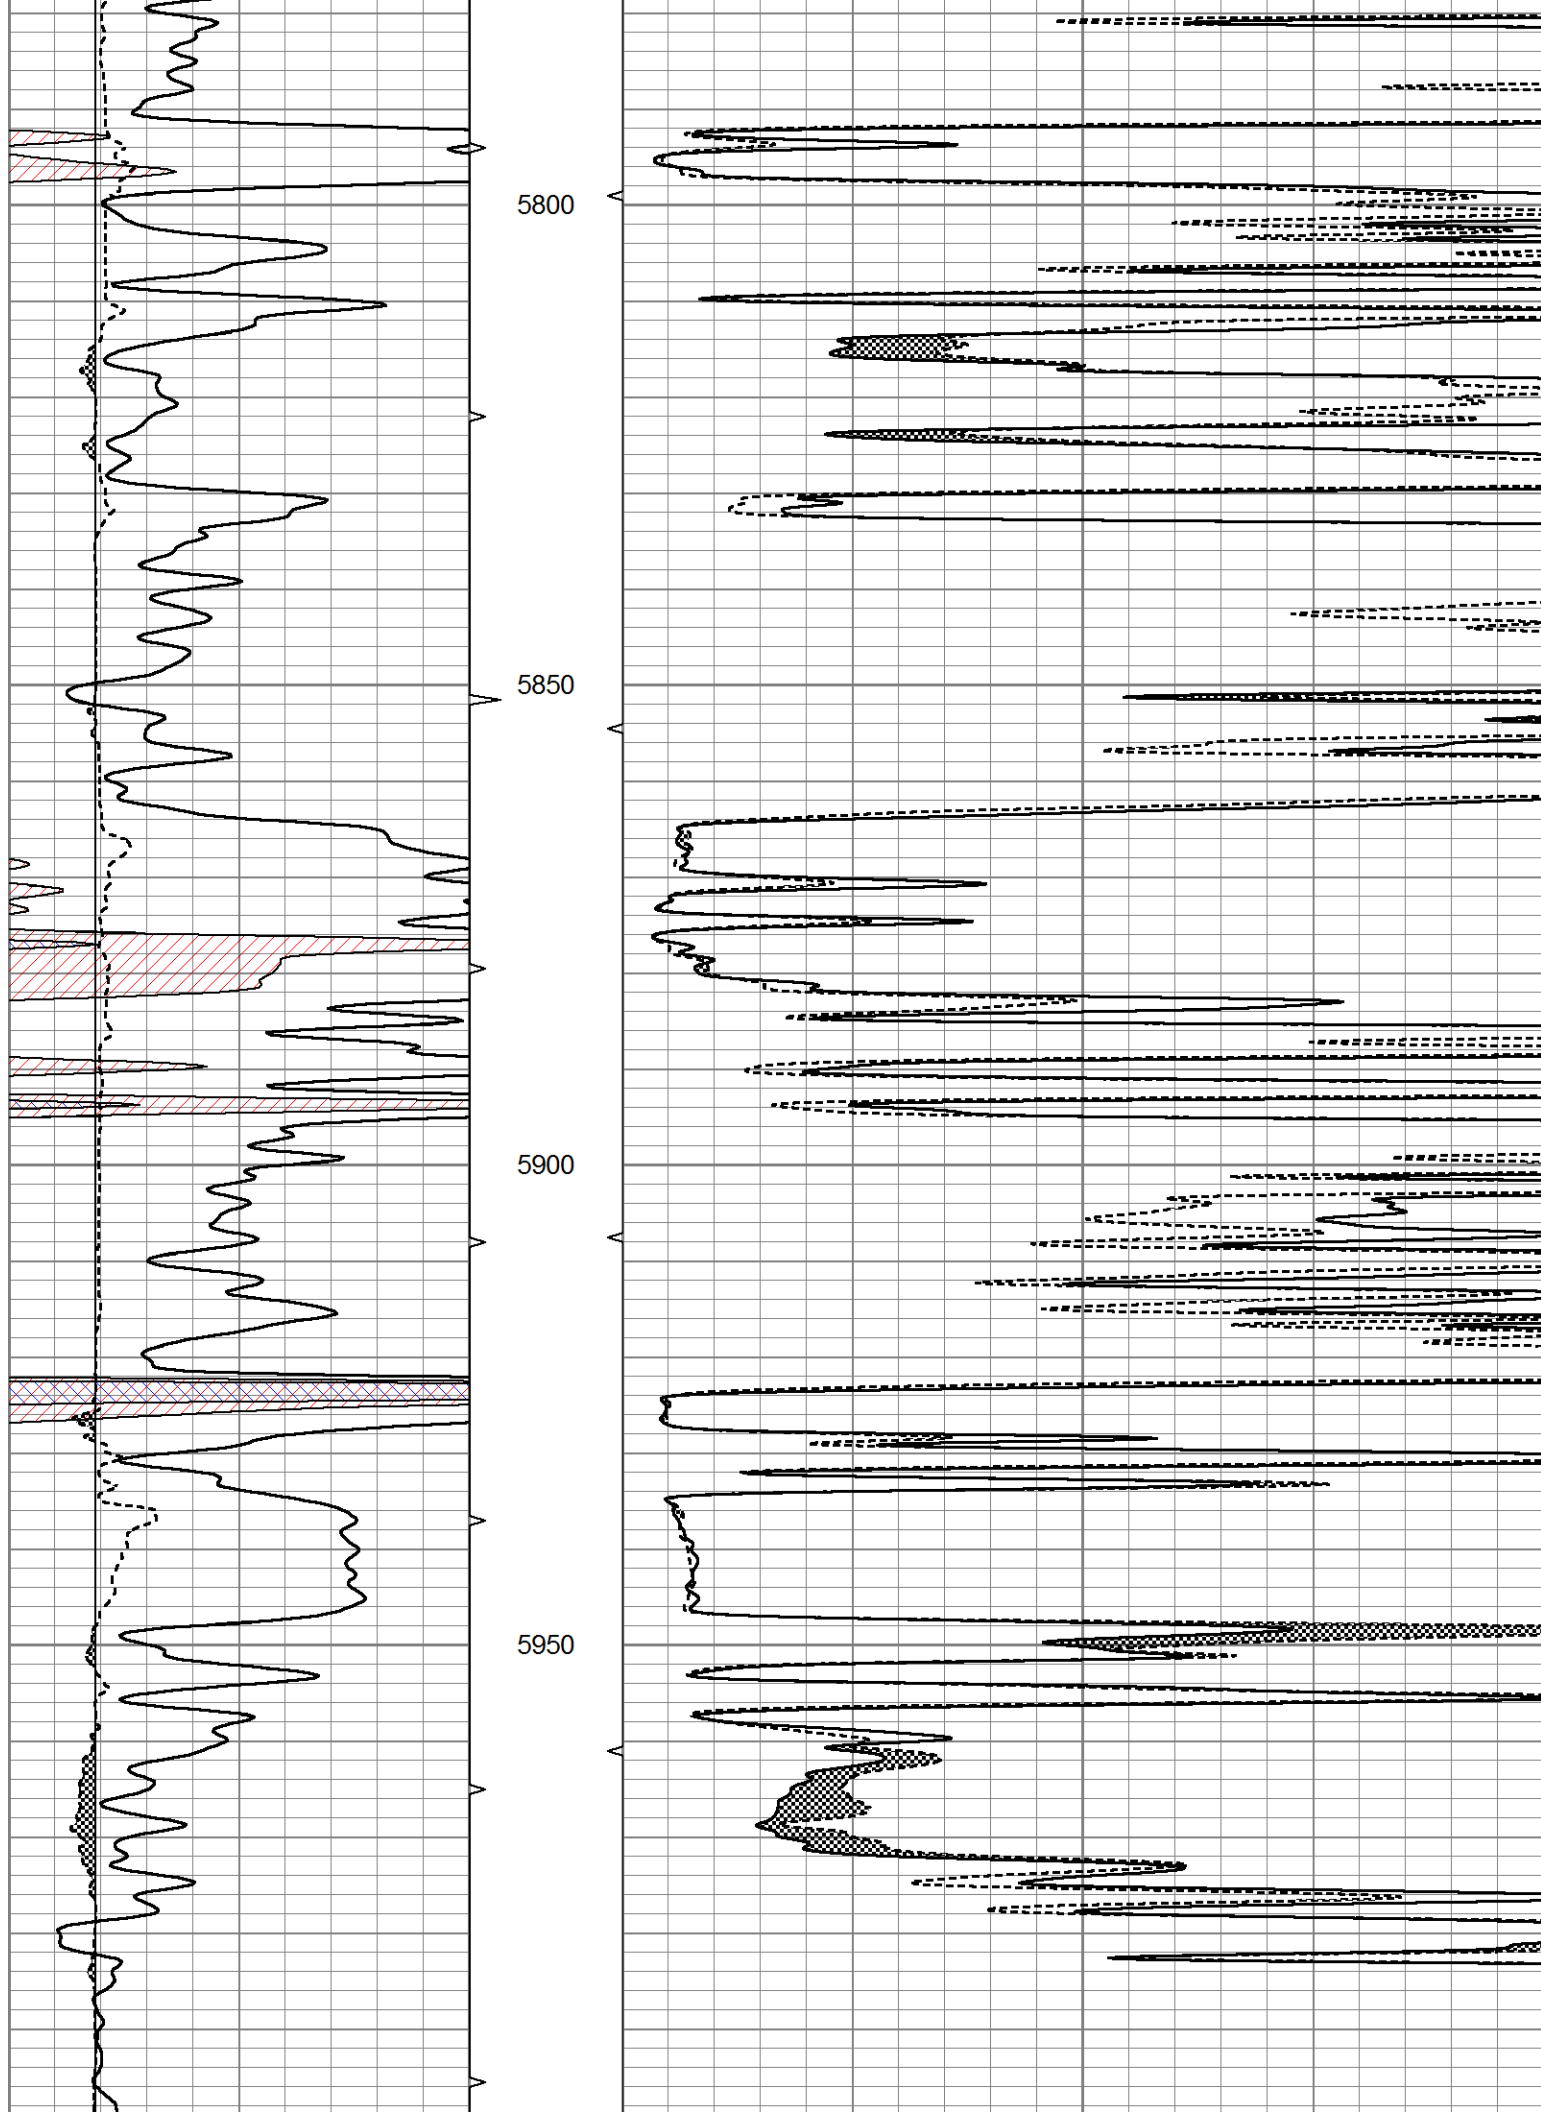


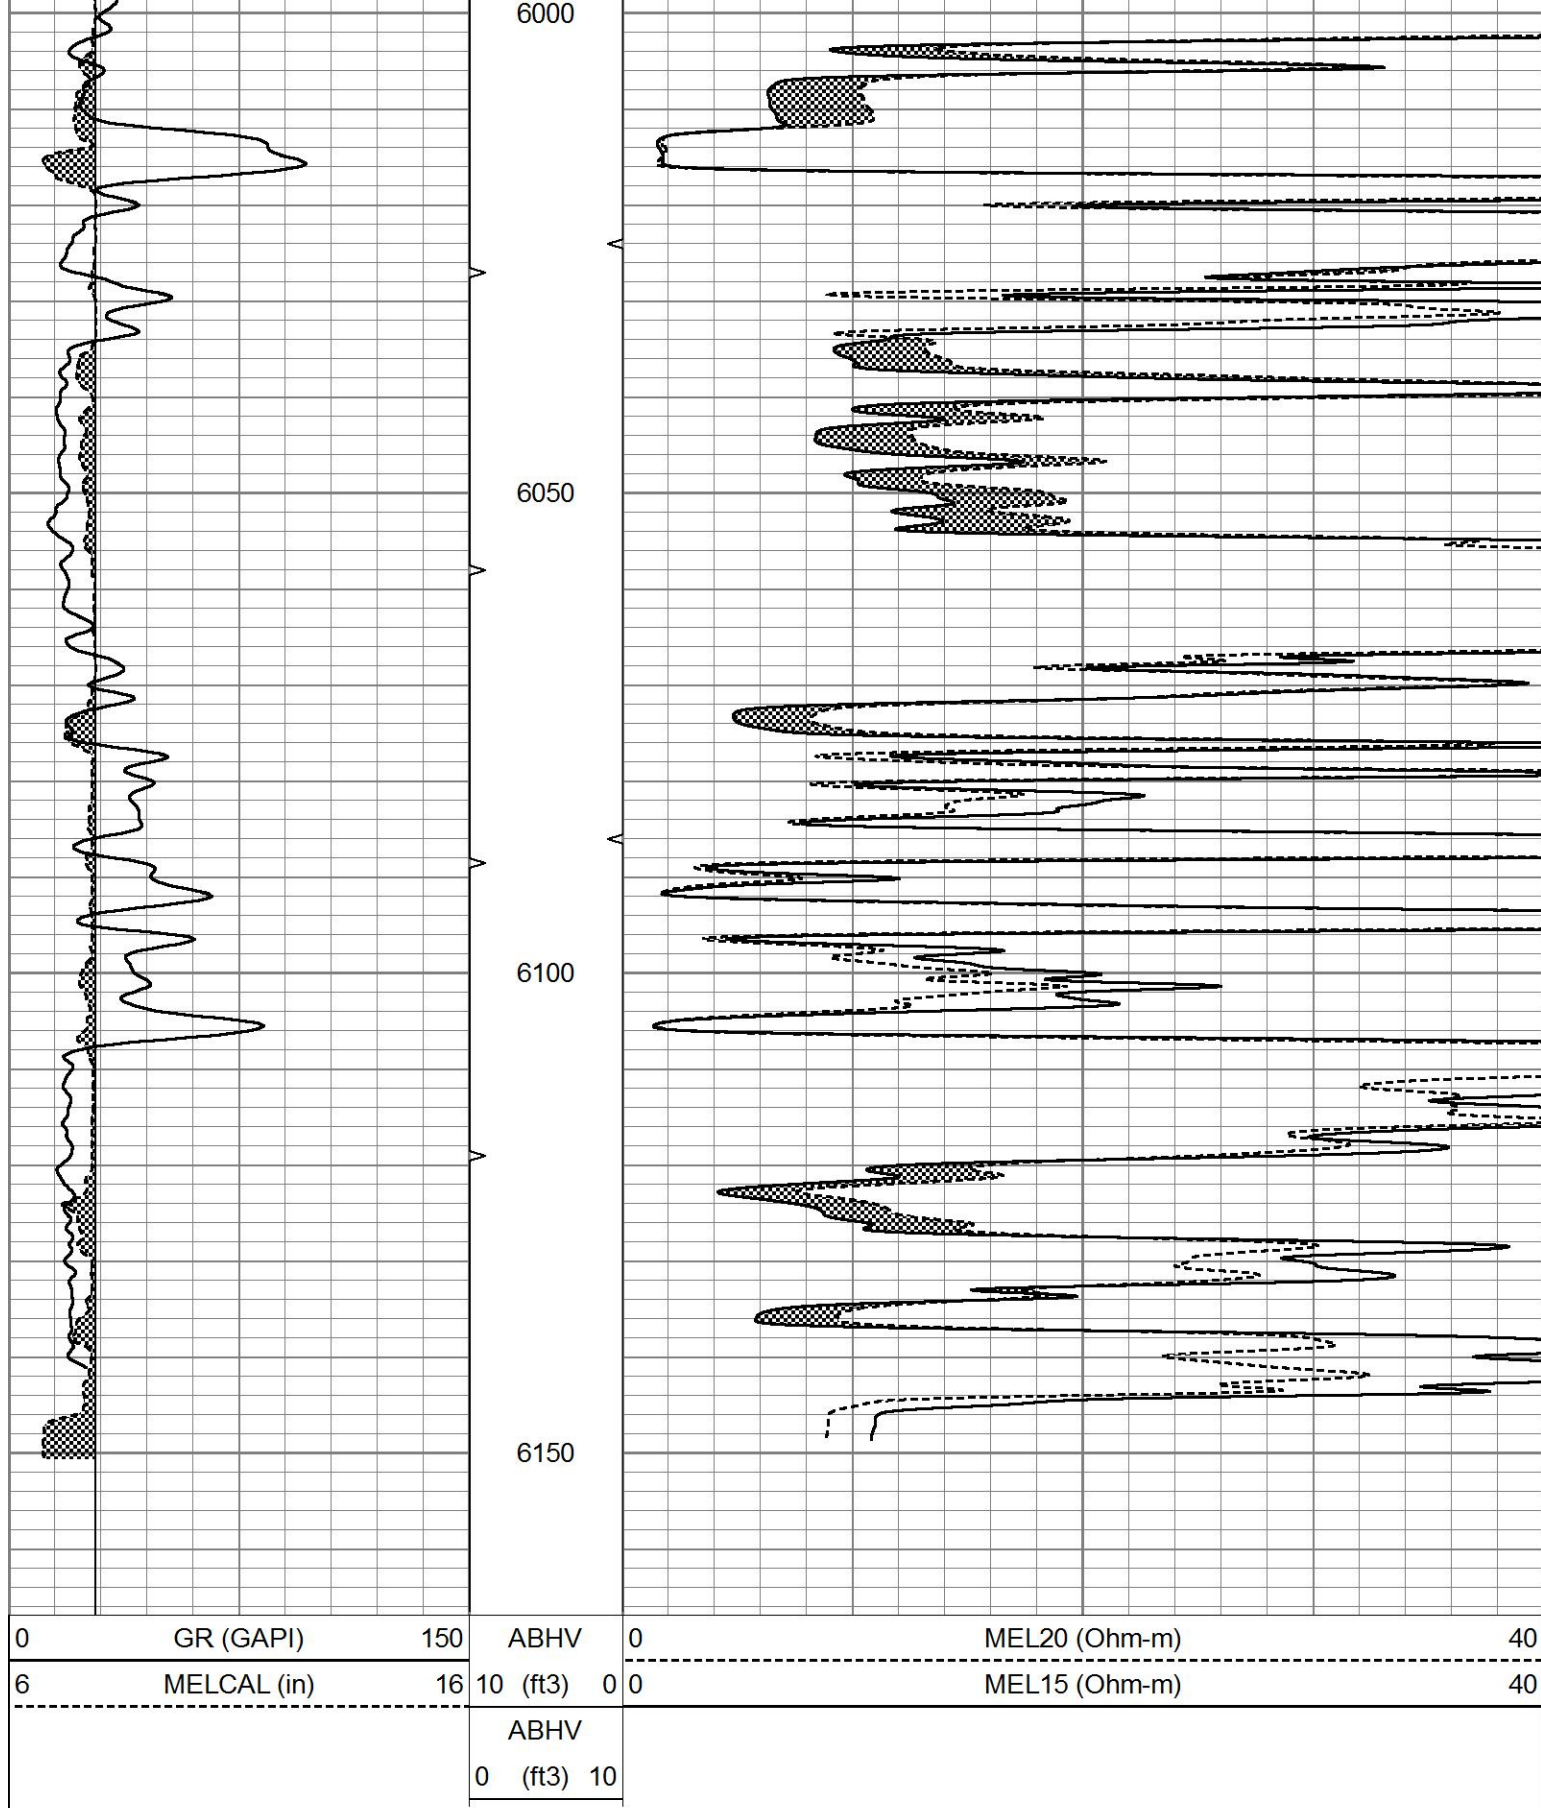

REPEAT SECTION

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

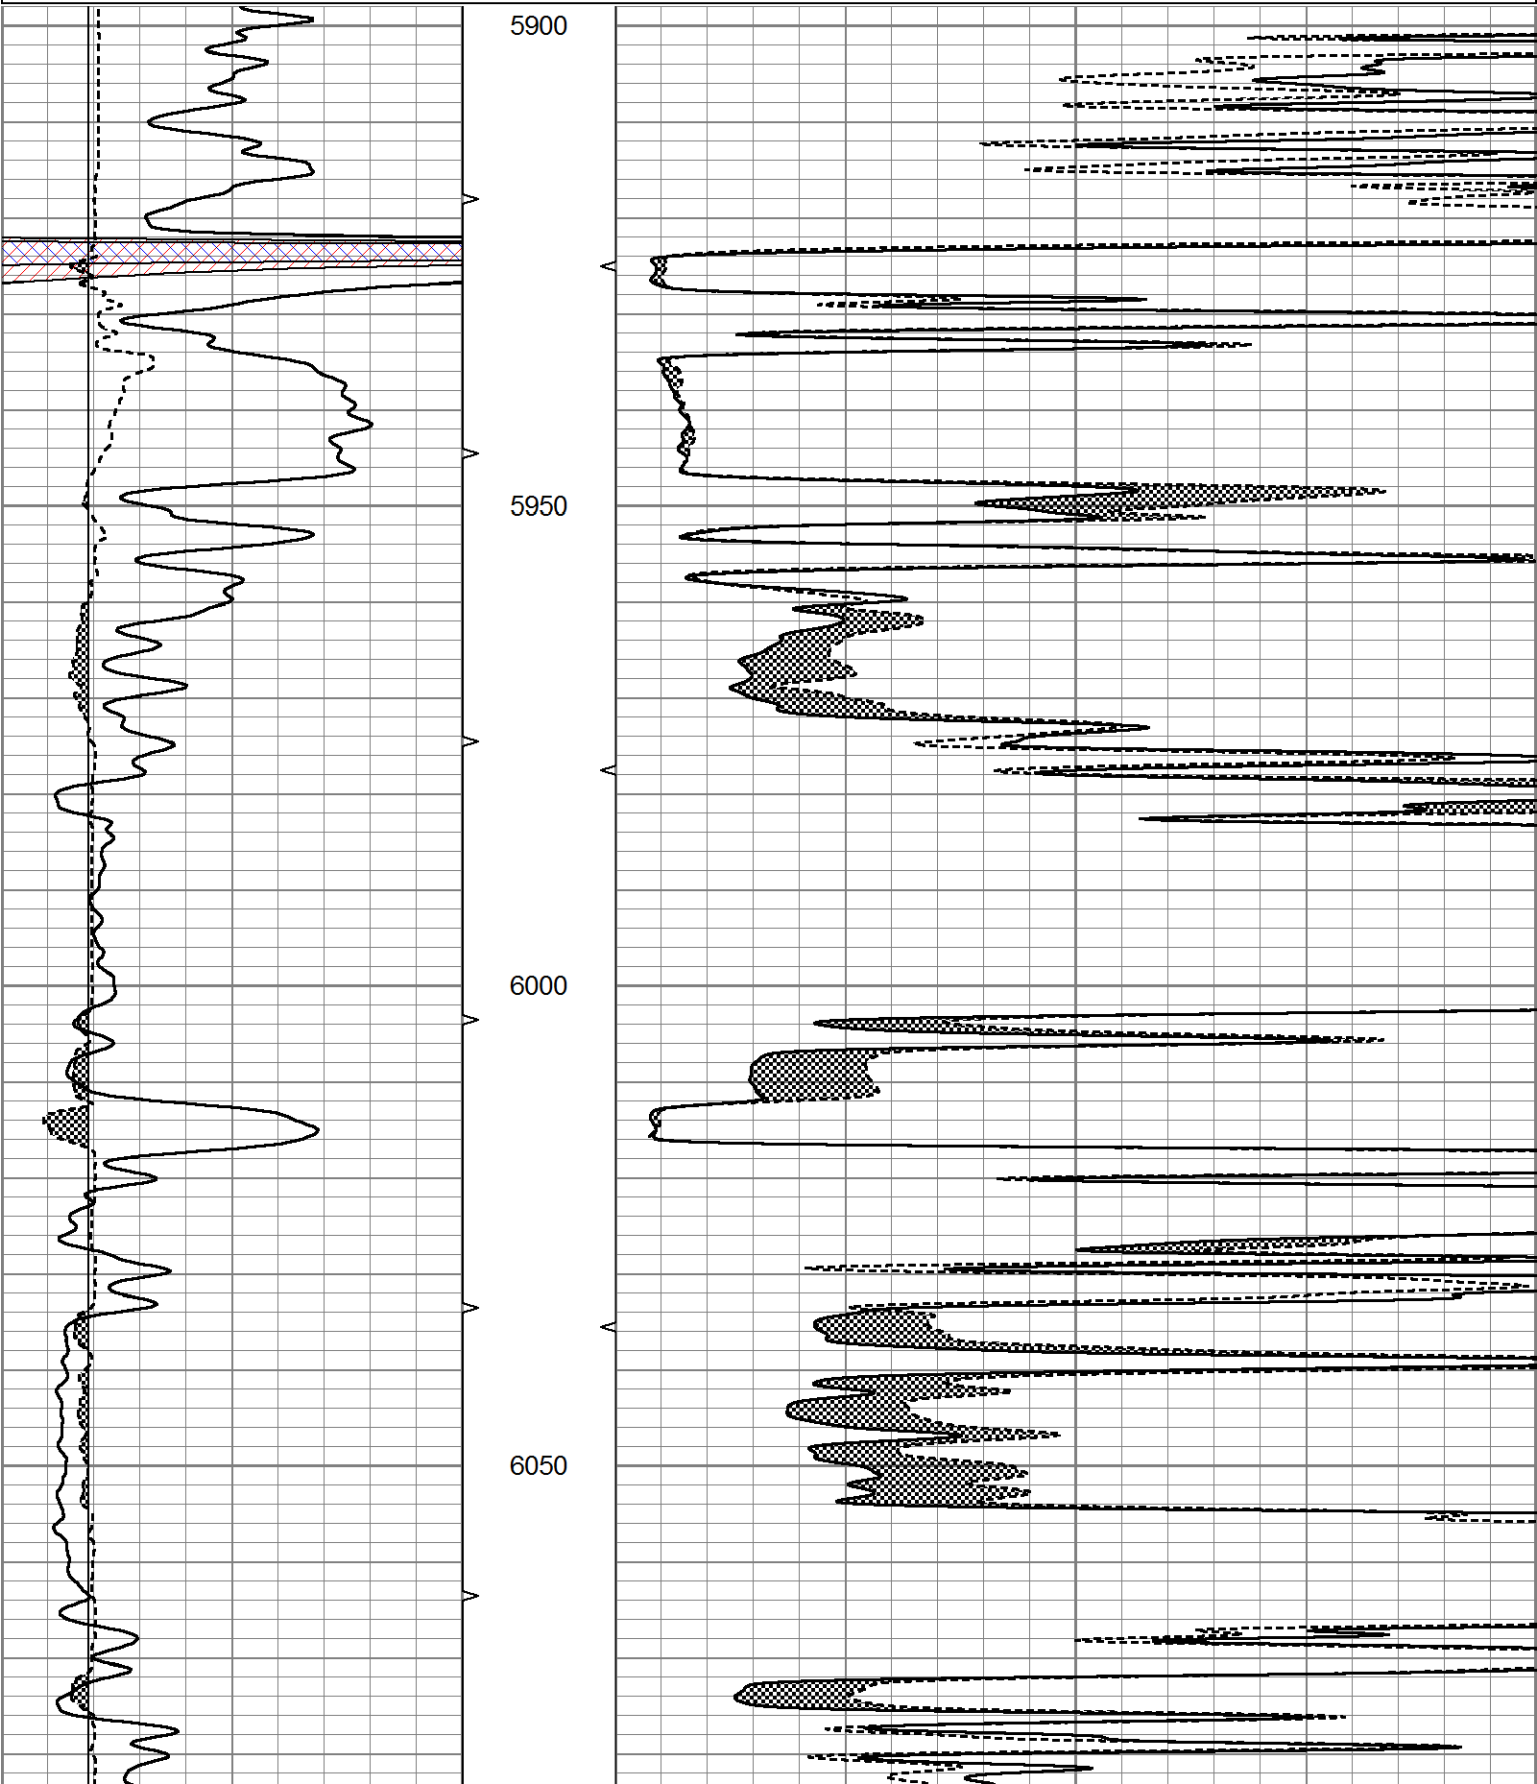

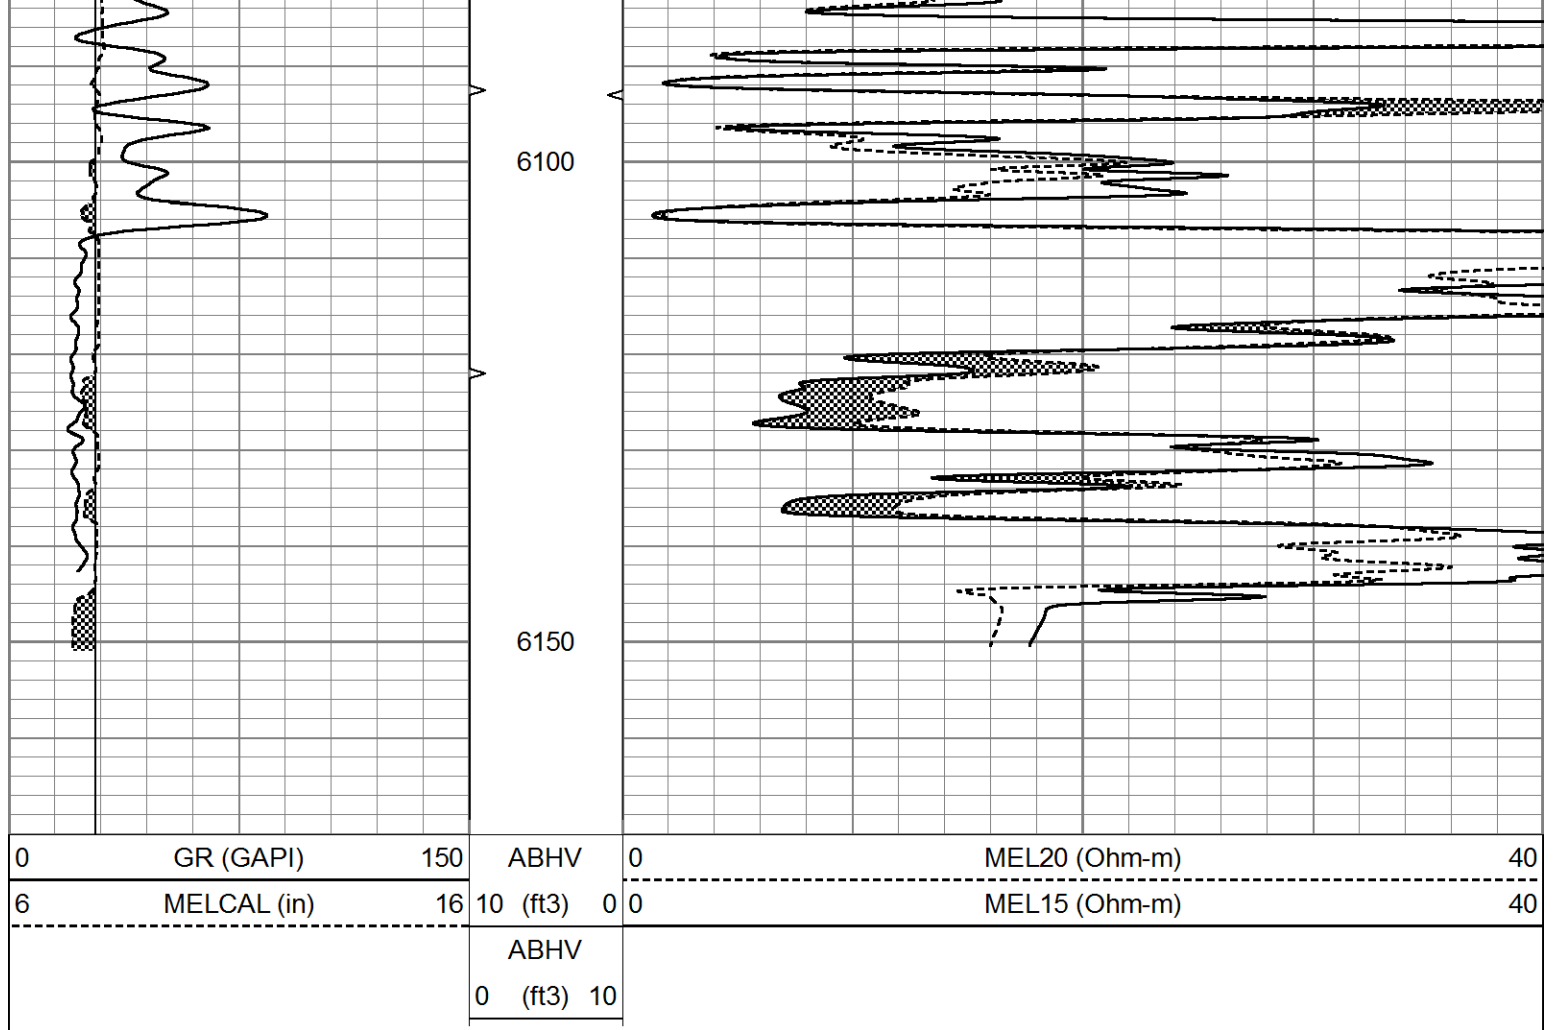

Calibration Report			
Database File	7087pe.db		
Dataset Pathname	pass6.3		
Dataset Creation	Mon Oct 03 13:50:22 2022		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Sun Oct 02 07:13:17 2022		
Caliper Calibration:	Gain=4.848	Offset=0.000	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	1.650	3.300	
1.5" Calibration:	Gain=45.000	Offset=-1.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.000	1.216	
2" Calibration:	Gain=55.000	Offset=-0.500	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN GR		

Performed:	Wed Sep 28 11:42:18 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3000	GAPI/cps