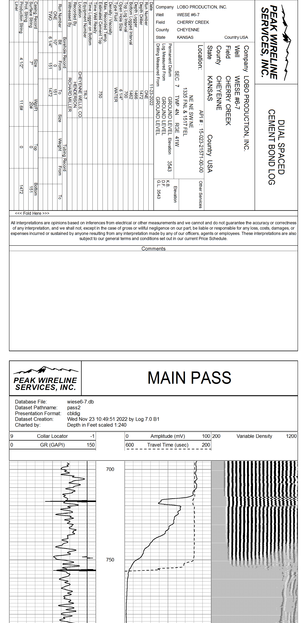


*** Font Here ***

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

PEAK WIRELINE SERVICES, INC.

MAIN PASS

Database File: weise6-7.db
Dataset Pathname: pass2
Presentation Format: cbl
Dataset Creation: Wed Nov 23 10:49:51 2022 by Log 7.0 B1
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	0	Amplitude (mV)	100 200	Variable Density	1200
0	GR (GAPI)	150	600	Travel Time (usec)	200		

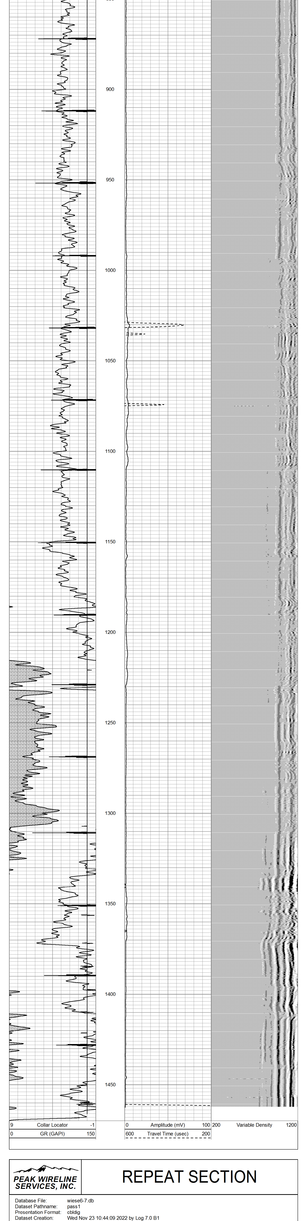


9	Collar Locator	-1	0	Amplitude (mV)	100 200	Variable Density	1200
0	GR (GAPI)	150	600	Travel Time (usec)	200		

PEAK WIRELINE SERVICES, INC.

REPEAT SECTION

Database File: weise6-7.db
Dataset Pathname: pass1
Presentation Format: cbl
Dataset Creation: Wed Nov 23 10:44:09 2022 by Log 7.0 B1
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1	0	Amplitude (mV)	100 200	Variable Density	1200
0	GR (GAPI)	150	600	Travel Time (usec)	200		

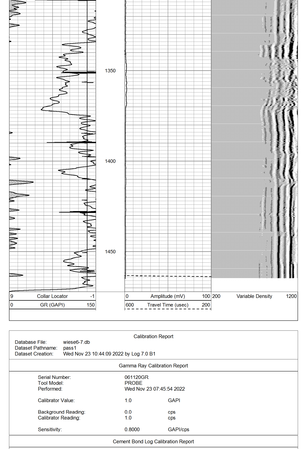

9	Collar Locator	-1	0	Amplitude (mV)	100 200	Variable Density	1200
0	GR (GAPI)	150	600	Travel Time (usec)	200		

Calibration Report

Database File: weise6-7.db
Dataset Pathname: pass1
Dataset Creation: Wed Nov 23 10:44:09 2022 by Log 7.0 B1

Gamma Ray Calibration Report

Serial Number:	06120G01	
Tool Model:	PROBE	
Performed:	Wed Nov 23 07:45:54 2022	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.8000	GAPI/cps

Cement Bond Log Calibration Report

Serial Number:	5.5dg040201			
Tool Model:	ProbeDTQdgital			
Performed:	Wed Nov 23 10:39:08 2022			
Depth:	248.469	ft		
Casing Diameter:	4.5	in		
	3' Spacing		5' Spacing	
Signal Zero:	0.00	V	0	mV
Calibrated Amplitude:	42.7561		61.1061	
Reading at Signal Zero:	-0.0146484	V	-0.00339355	V
Reading in Free Pipe:	2.22429	V	1.92004	V
Gain:	36.1538		42.3635	
Offset:	0.779395		-0.143763	