DUAL INDUCTION LOG

Company KNIGHTON OIL COMPANY, INC.
Well #1 CRAWFORD
Field UNNAMED
County TREGO State KANSAS

Company KNIGHTON OIL COMPANY, INC.
Well #1 CRAWFORD
Field UNNAMED
County TREGO
State KANSAS

Location: API # : 15-195-23141-0000
1177' FNL & 2652' FWL
SW - SW - NW - NE
SEC 3 TWP 15S RGE 21W

Other Services
CDL/CNL/PE
MEL/SONIC

Permanent Datum GROUND LEVEL Elevation 2088
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 2095
D.F. 2093
G.L. 2088

Date	7/3/22		
Run Number	ONE		
Depth Driller	3960		
Depth Logger	3959		
Bottom Logged Interval	3957		
Top Log Interval	00		
Casing Driller	8 5/8"@200'		
Casing Logger	220		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 3,000 PPM	
Density / Viscosity	9.2/49		
pH / Fluid Loss	10.0/9.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.510@89F		
Rmf @ Meas. Temp	.383@89F		
Rmc @ Meas. Temp	.612@89F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.391@116F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	12:45 P.M.		
Maximum Recorded Temperature	116F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEVIN KESSLER		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
I-70 & OGALLAH EXIT, 15 S. ON HWY 147 ACROSS DAM TO "RD. Y", 4E., S. INTO


MAIN SECTION


Database File	6704pe.db
Dataset Pathname	pass3.1M
Presentation Format	_dil2
Dataset Creation	Sun Jul 03 14:20:46 2022
Charted by	Depth in Feet scaled 1:600

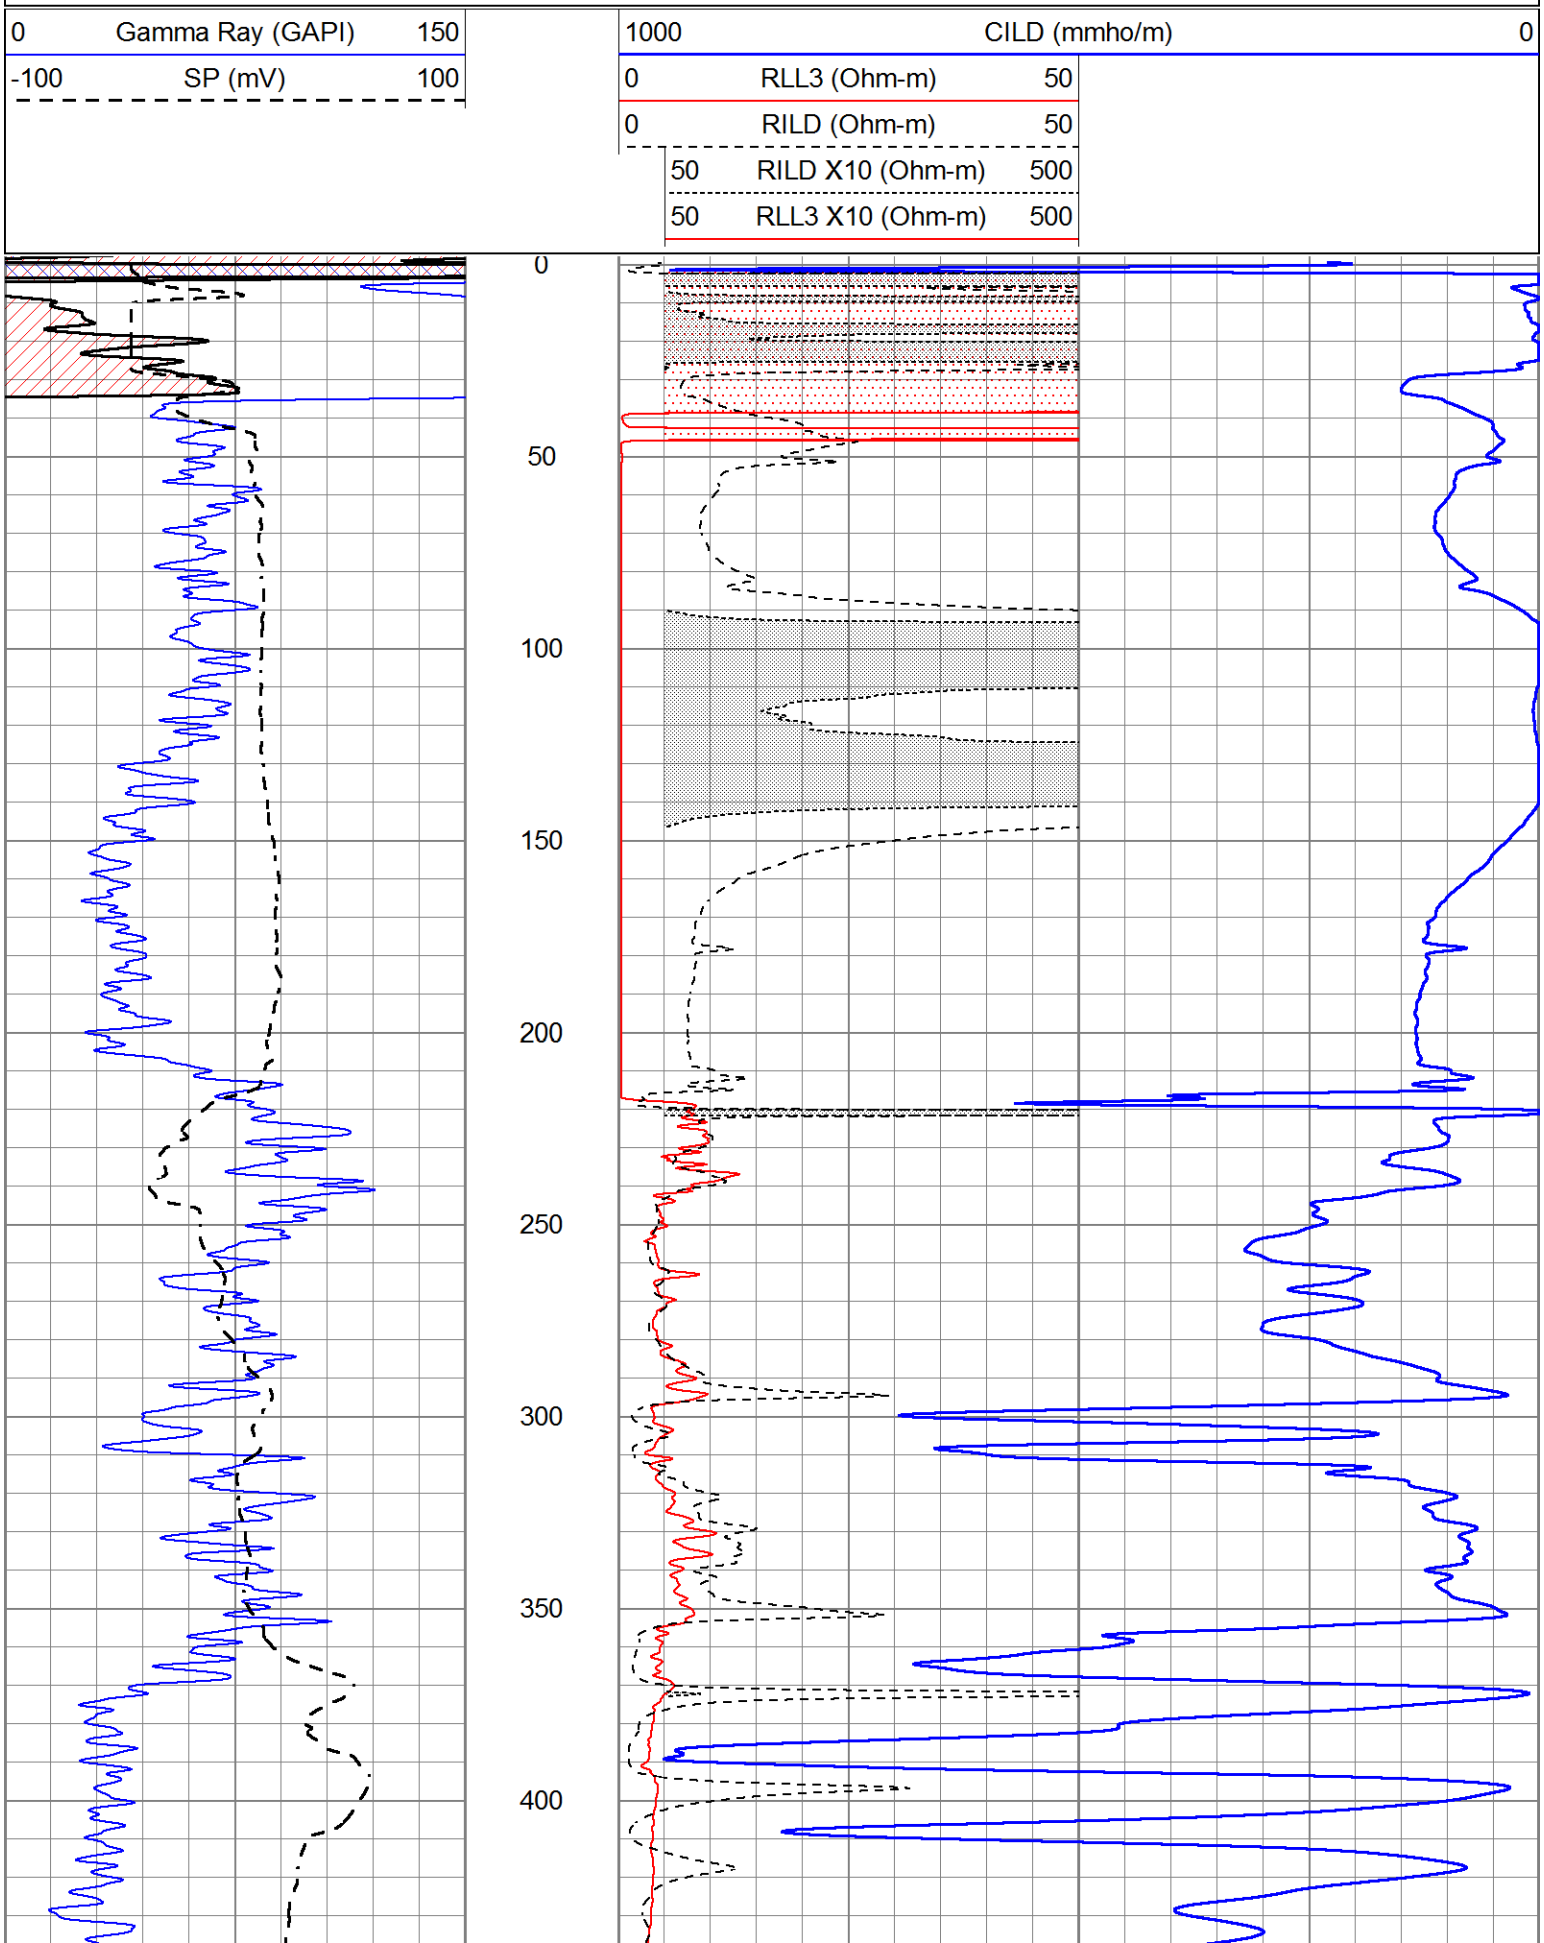


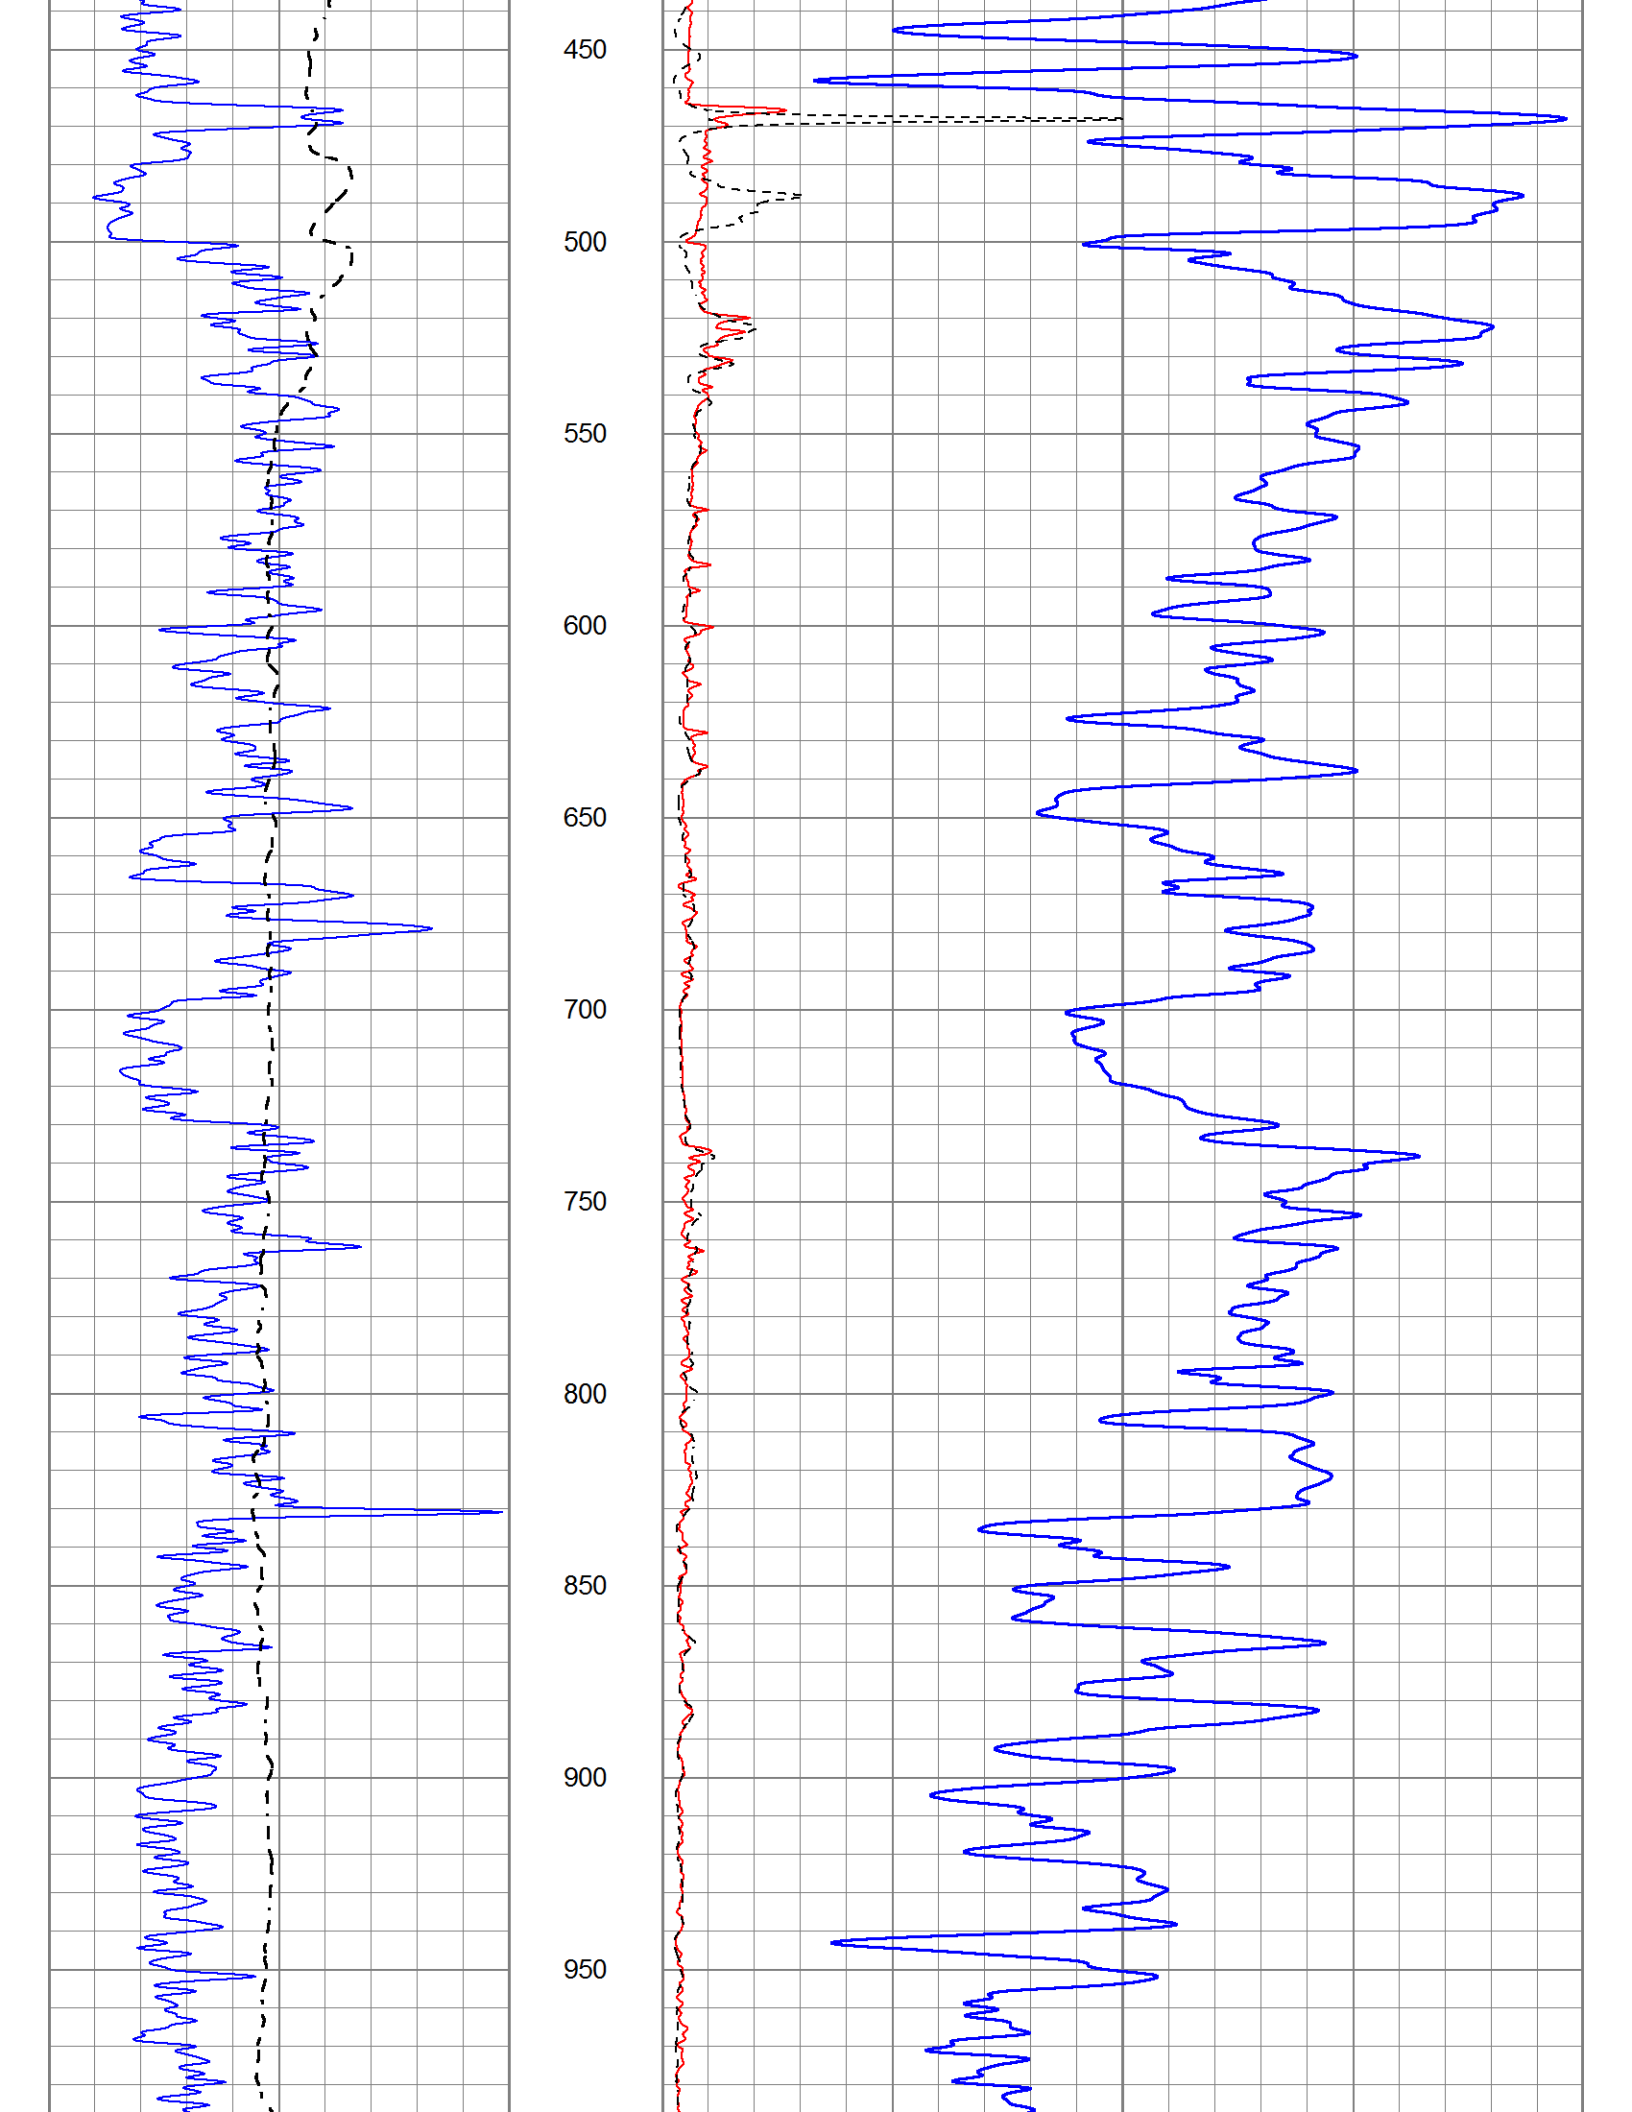

450
500
550
600
650
700
750
800
850
900
950

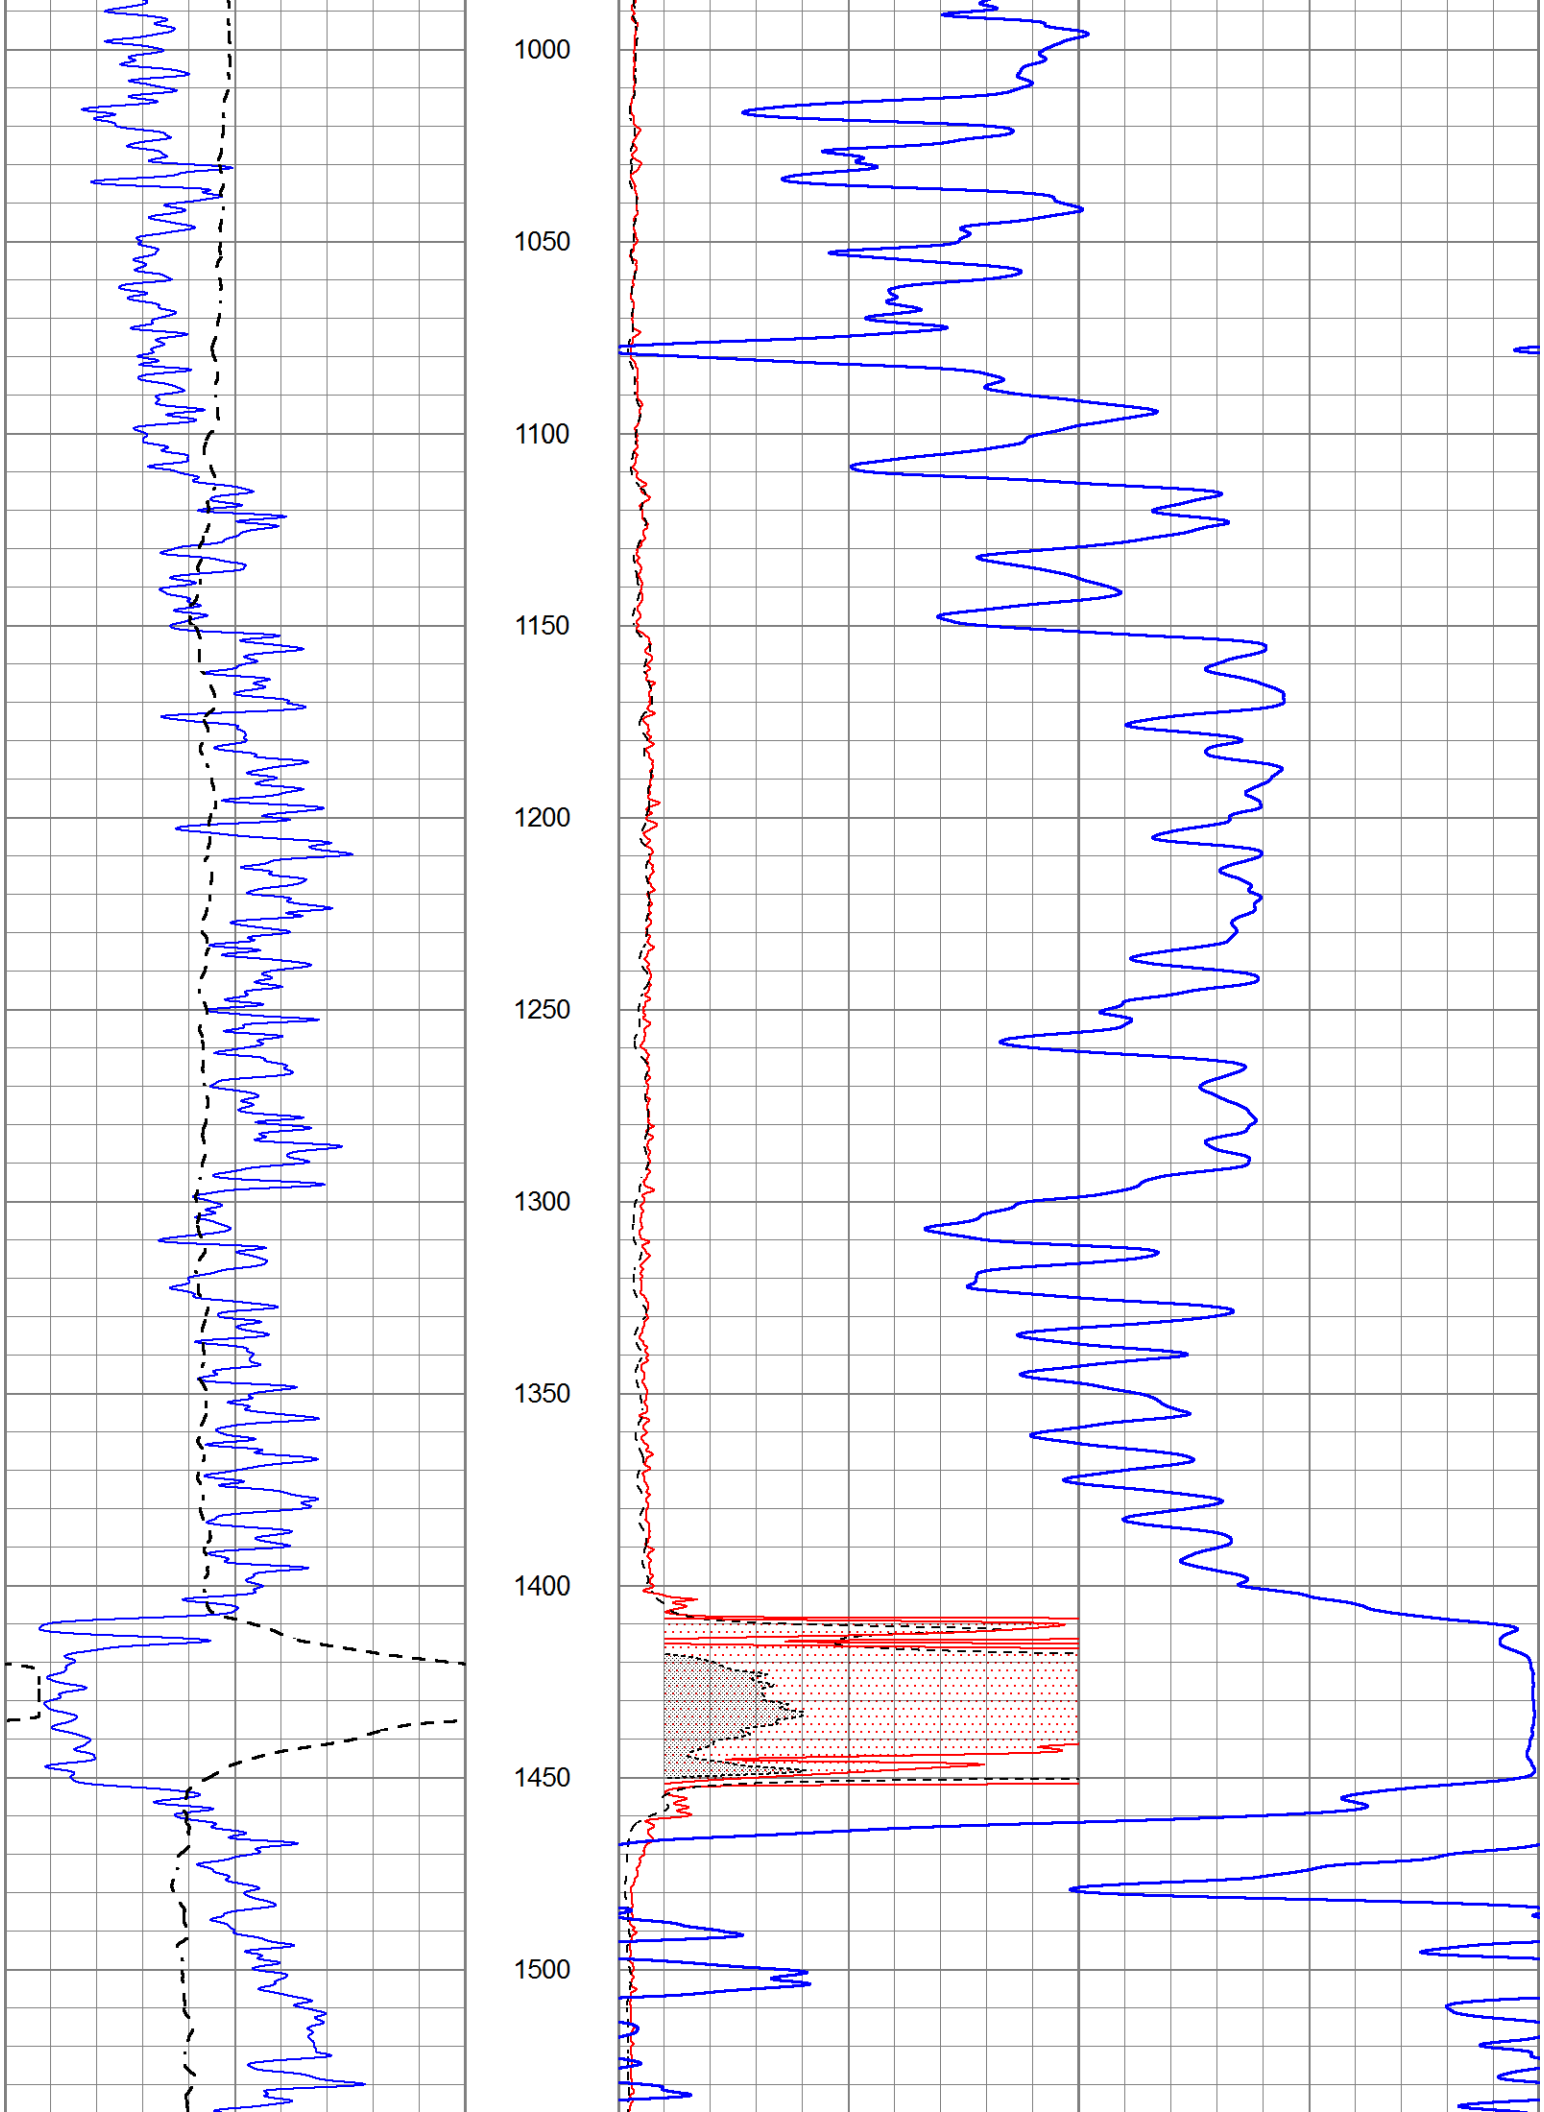

1000
1050
1100
1150
1200
1250
1300
1350
1400
1450
1500

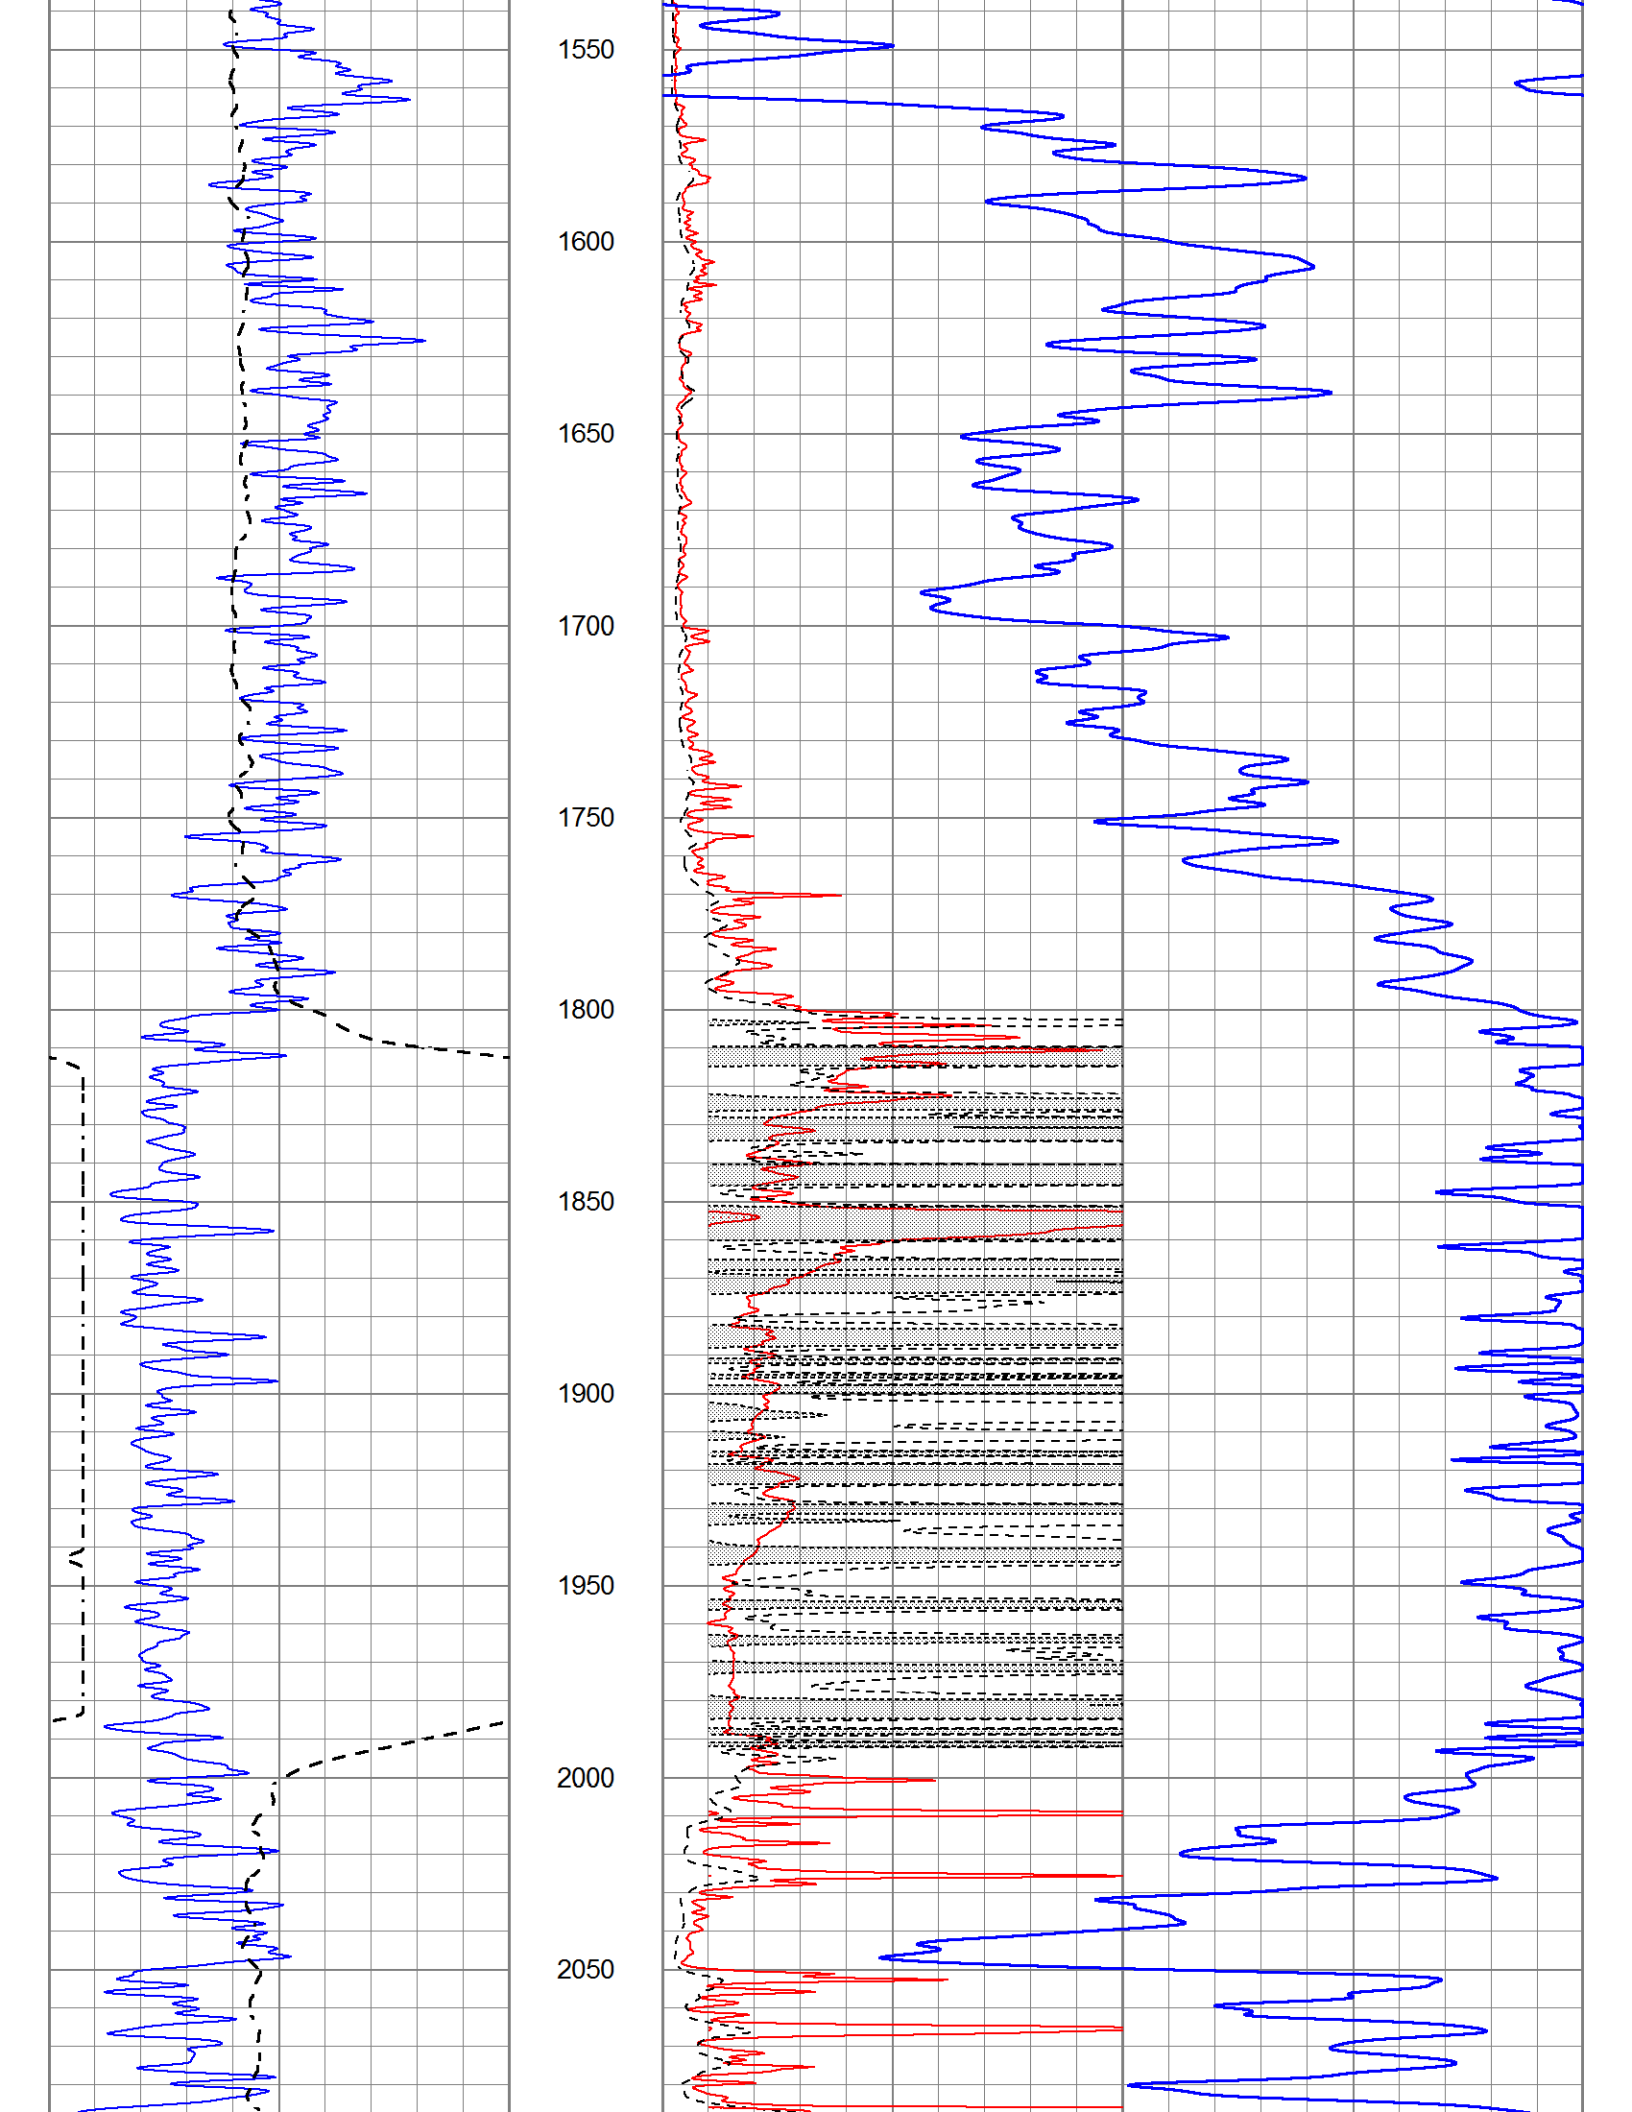
1550
1600
1650
1700
1750
1800
1850
1900
1950
2000
2050

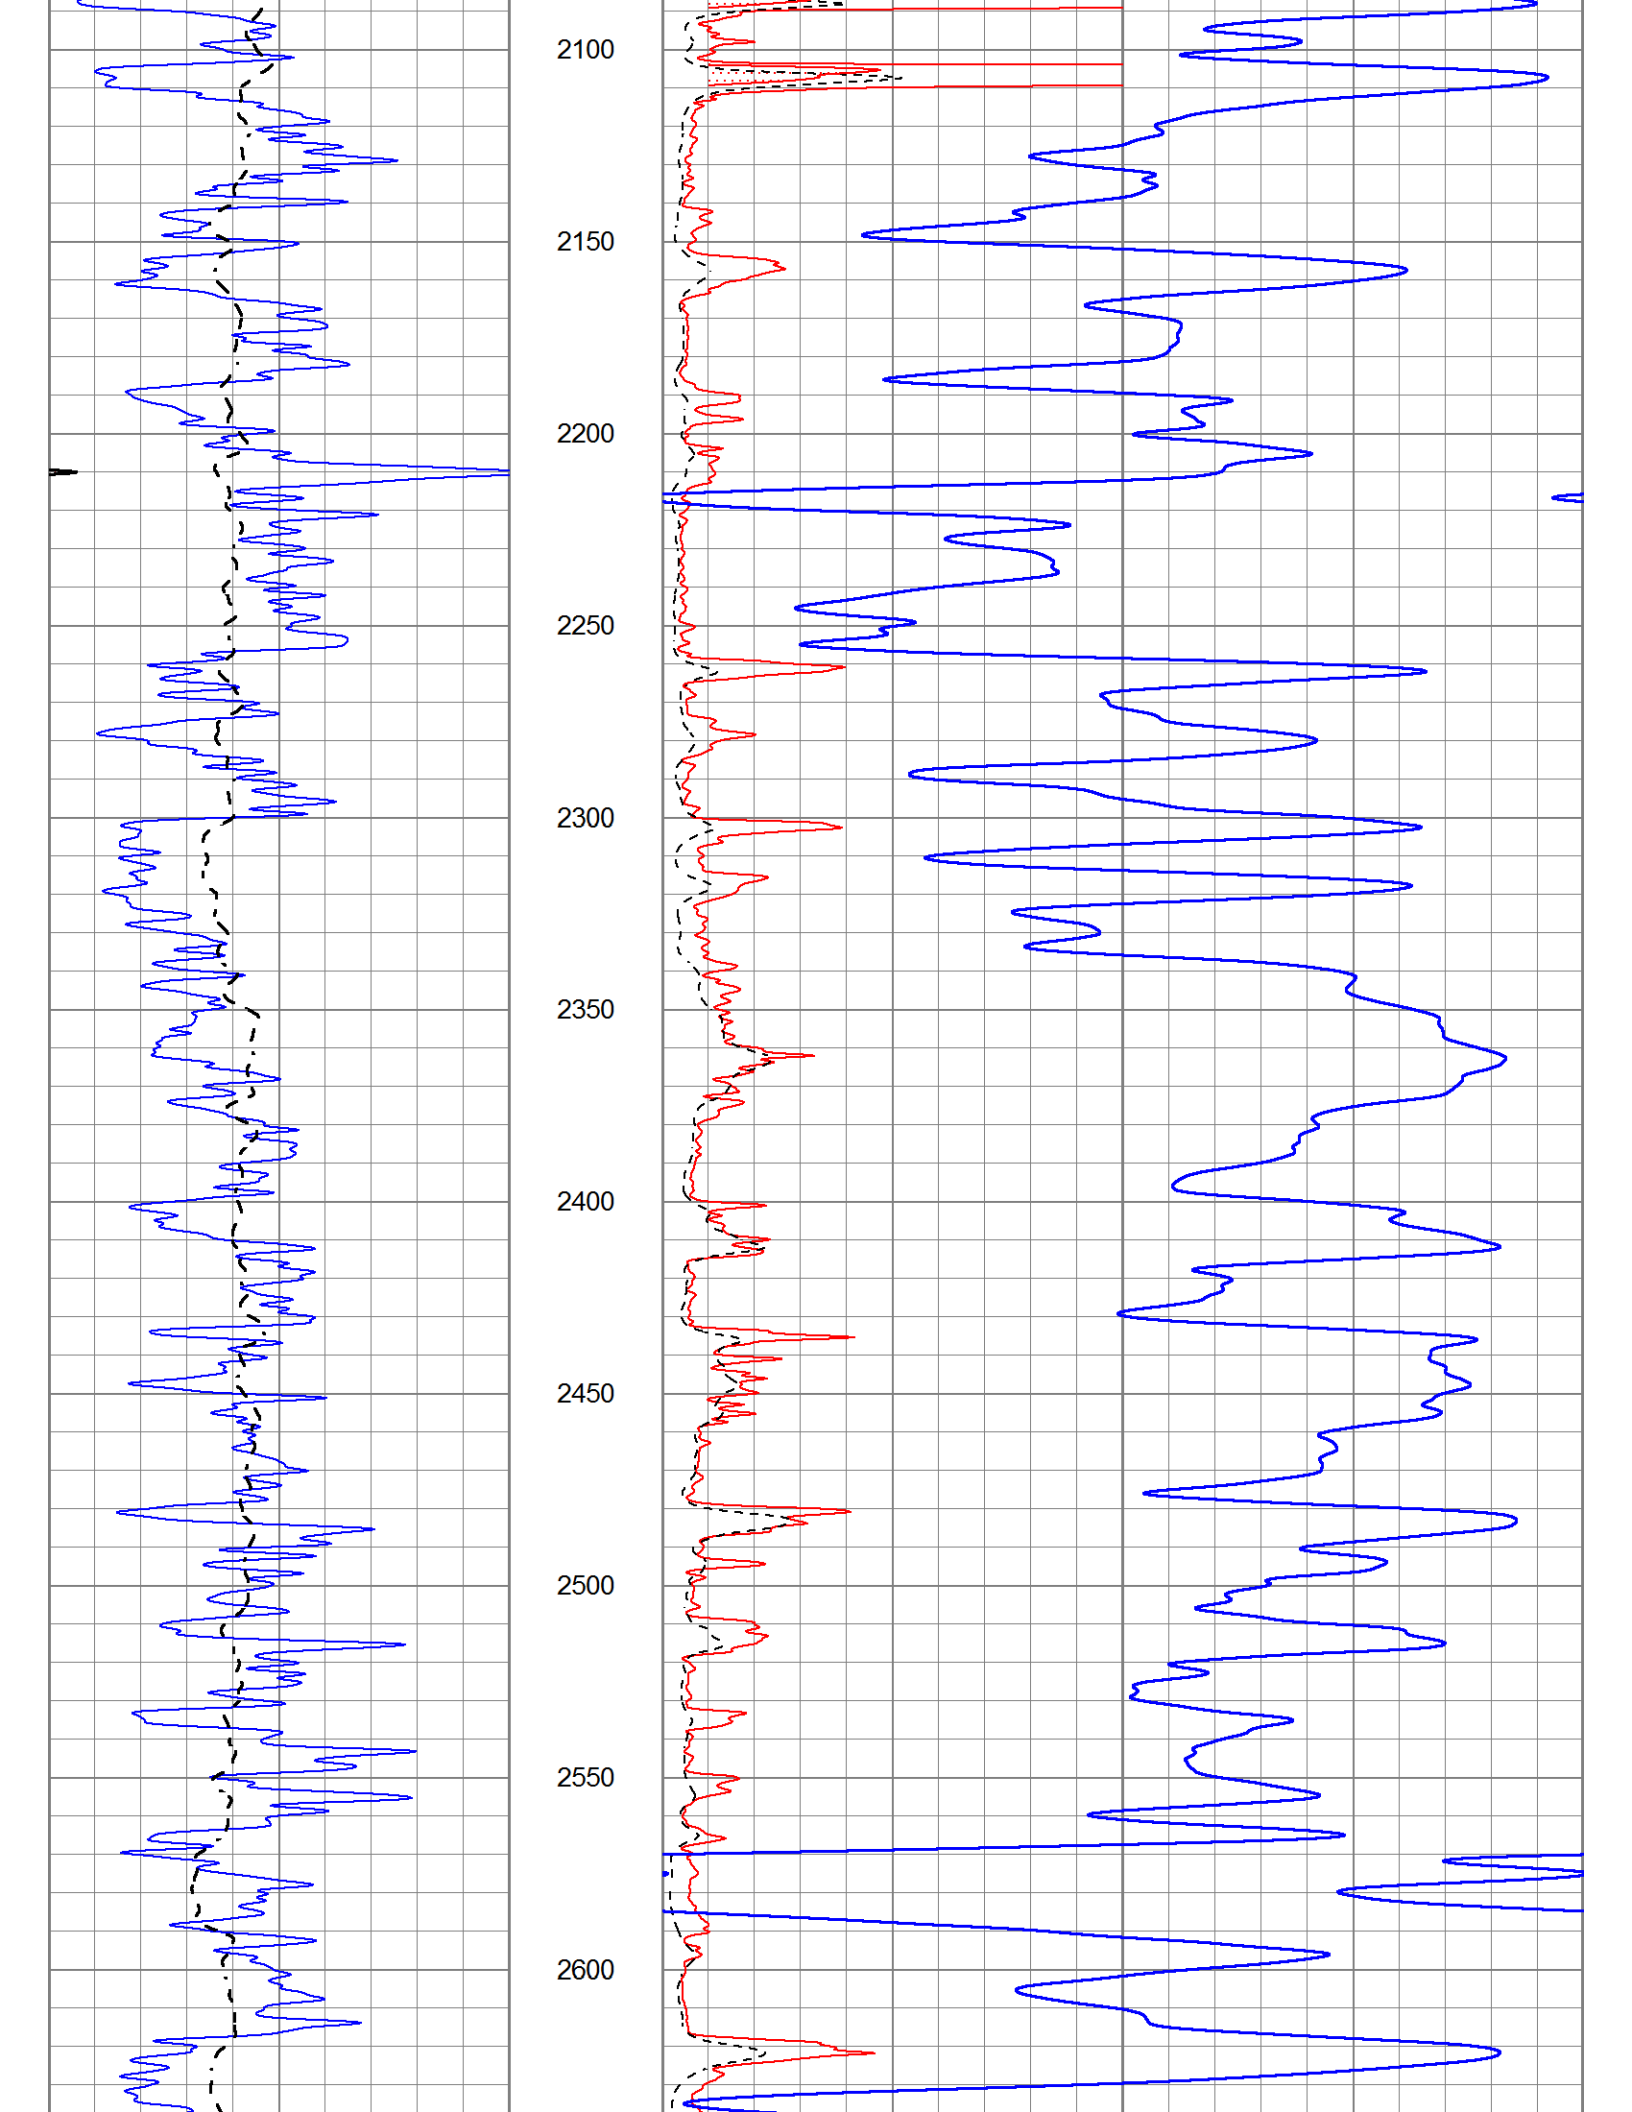
2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600

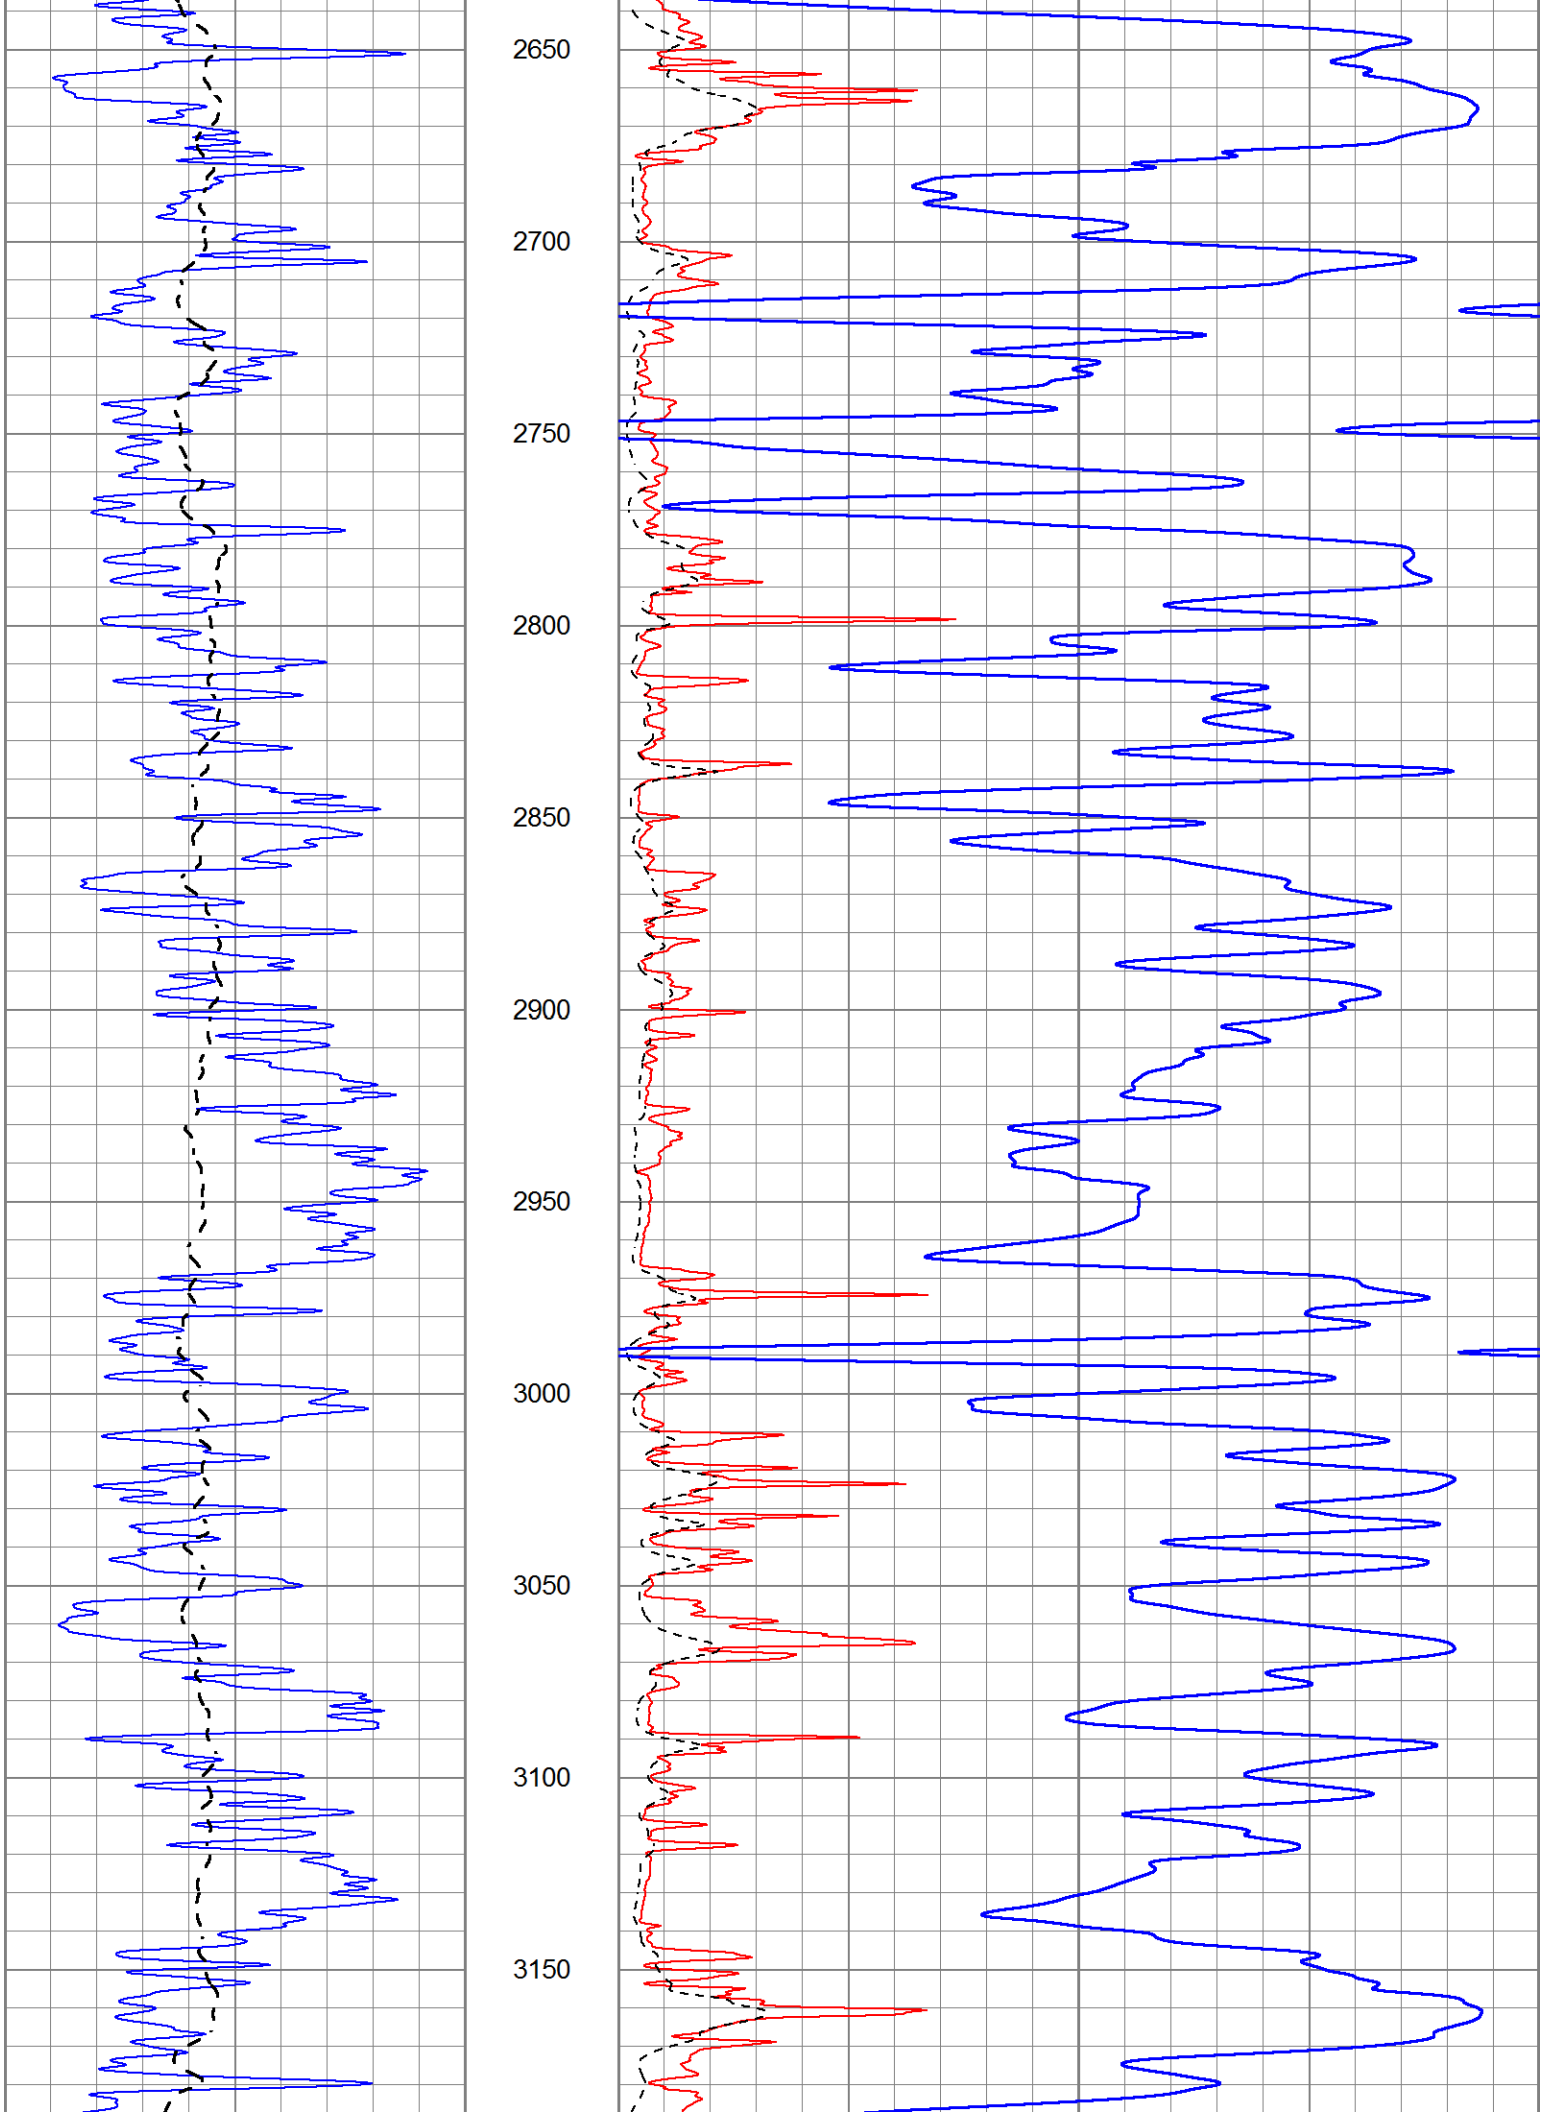
2650
2700
2750
2800
2850
2900
2950
3000
3050
3100
3150

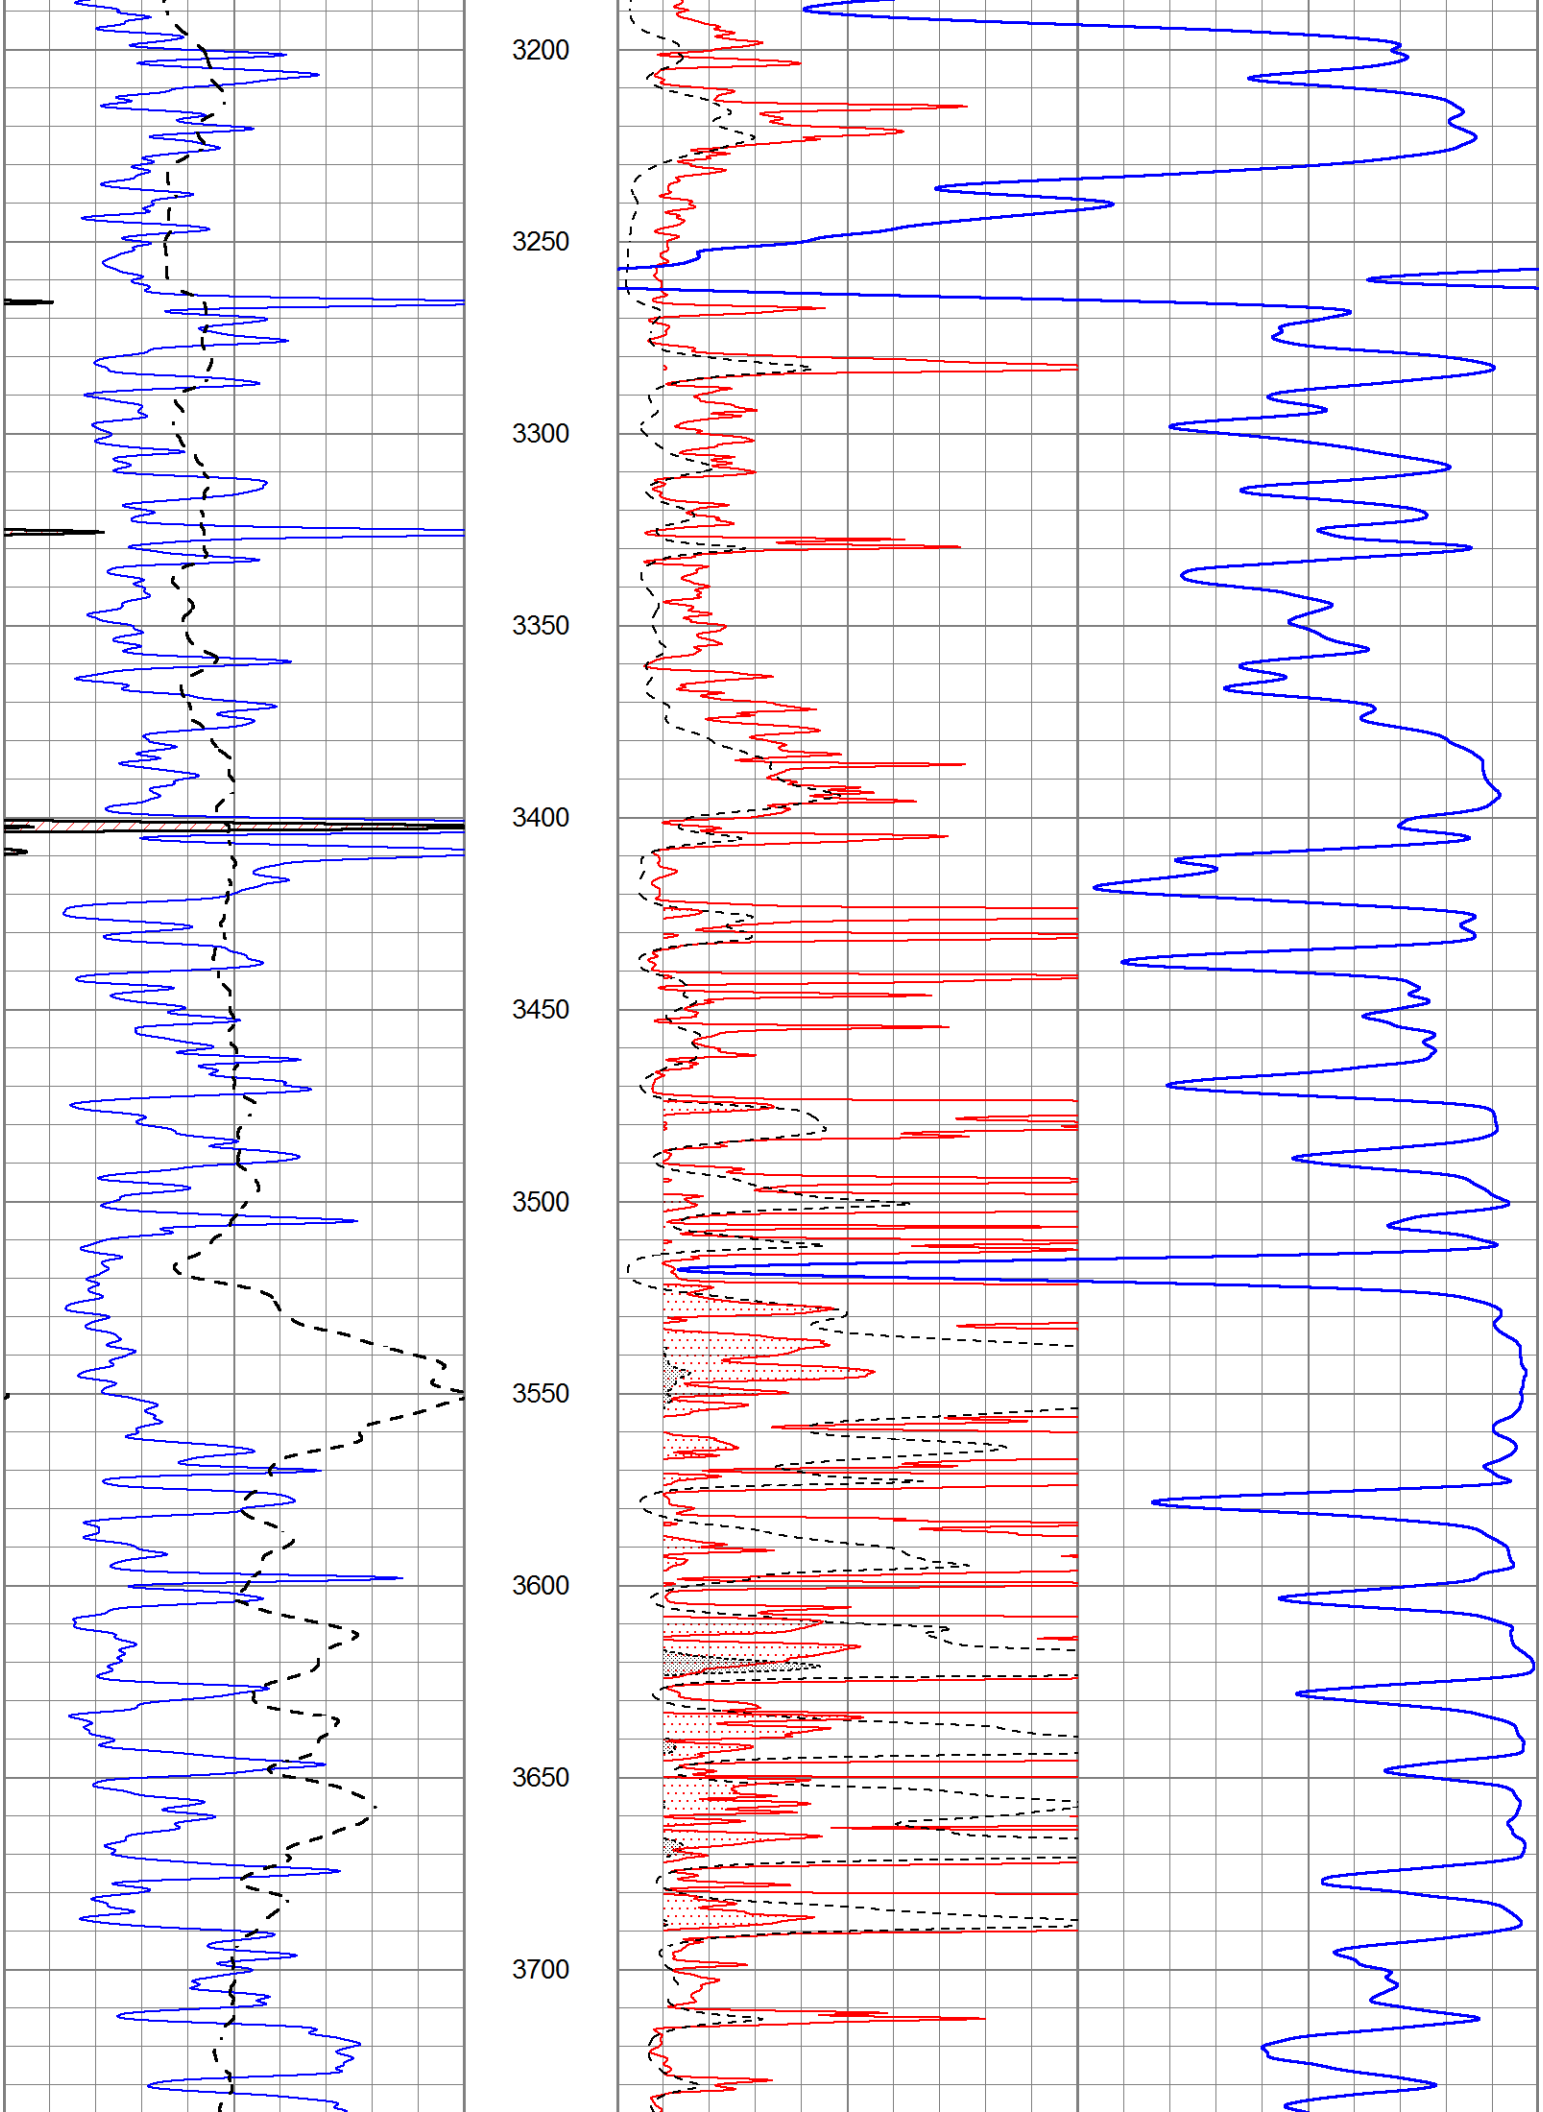
3200
3250
3300
3350
3400
3450
3500
3550
3600
3650
3700

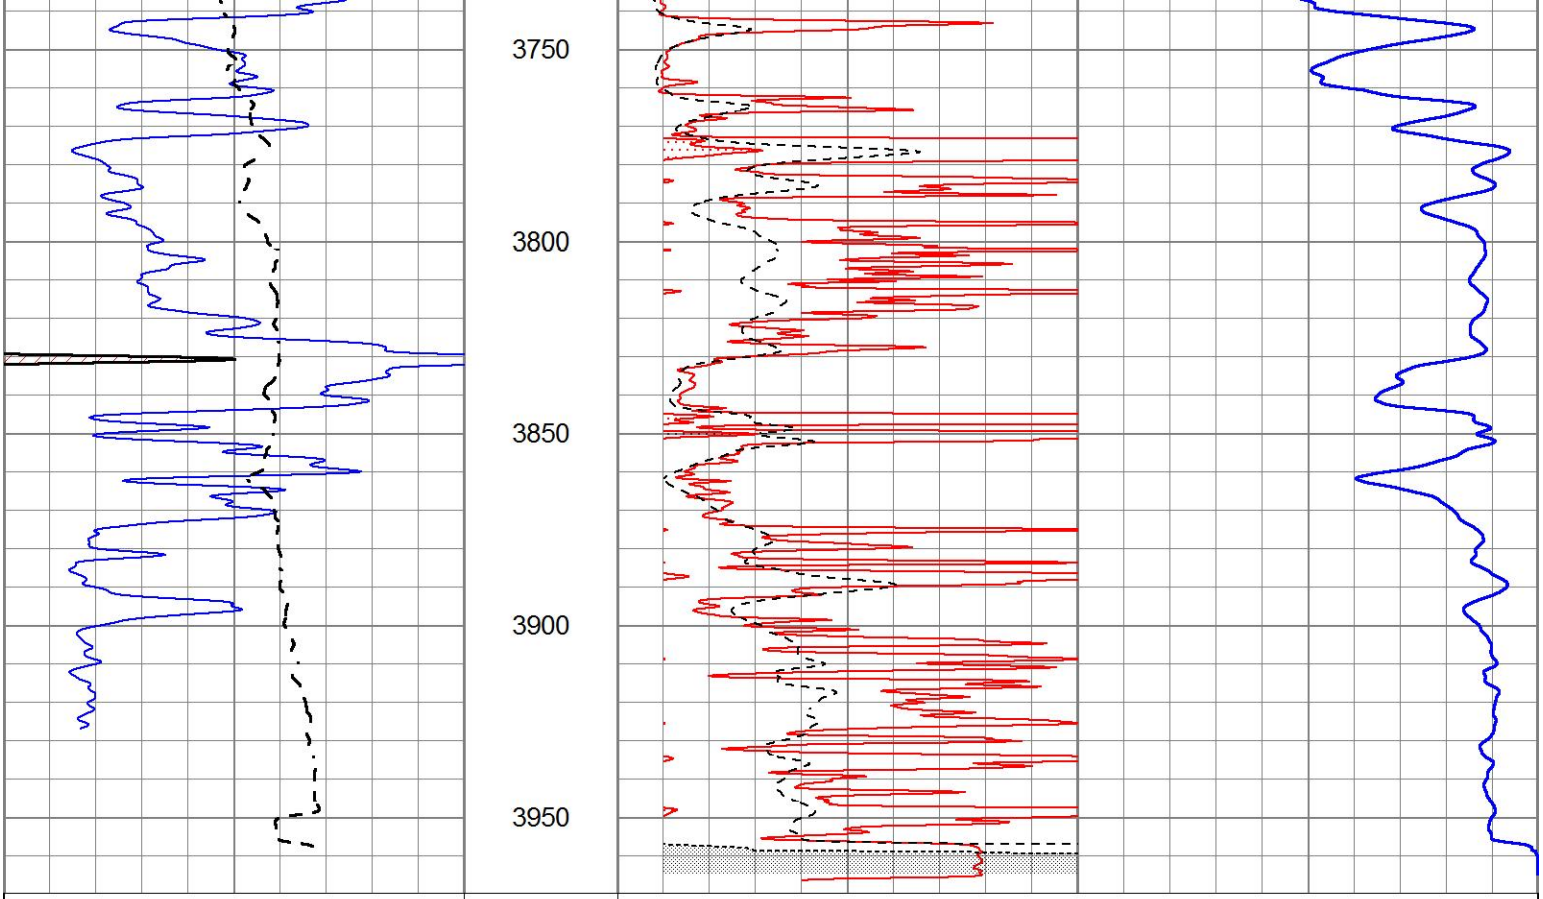



ANHYDRITE

Database File	6704pe.db
Dataset Pathname	pass3.1A
Presentation Format	_dil
Dataset Creation	Sun Jul 03 14:20:59 2022
Charted by	Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

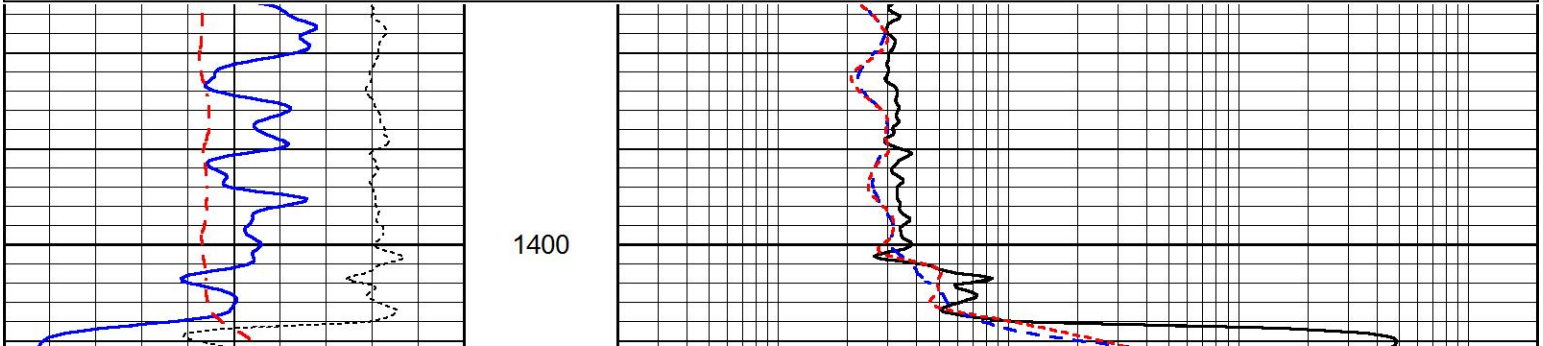

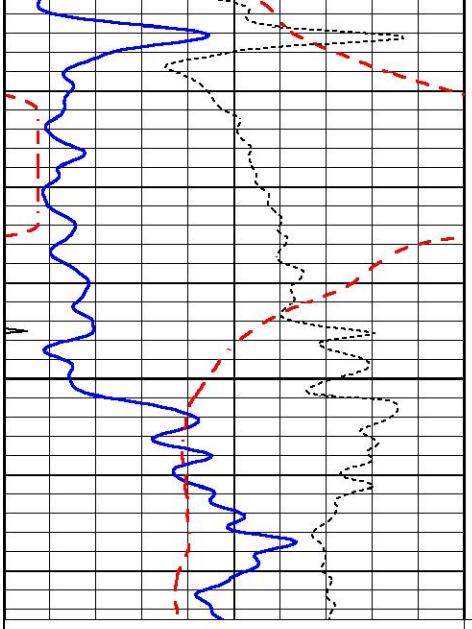

1450

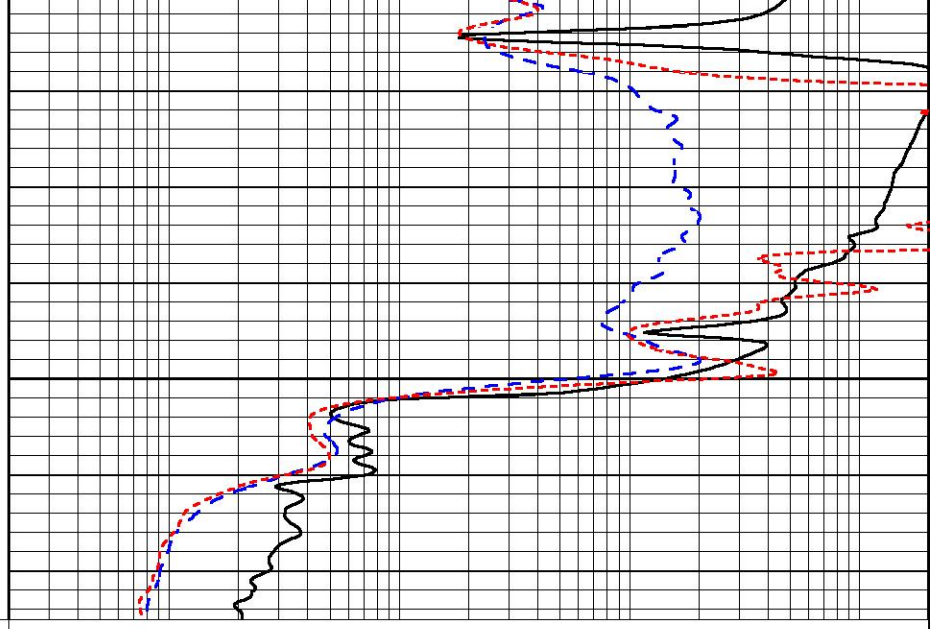

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

MAIN SECTION

Database File	6704pe.db
Dataset Pathname	pass3.1M
Presentation Format	_dil
Dataset Creation	Sun Jul 03 14:20:46 2022
Charted by	Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

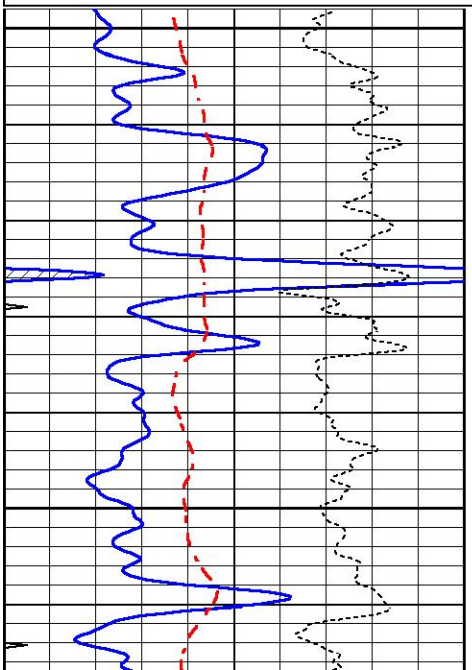



3300

3350

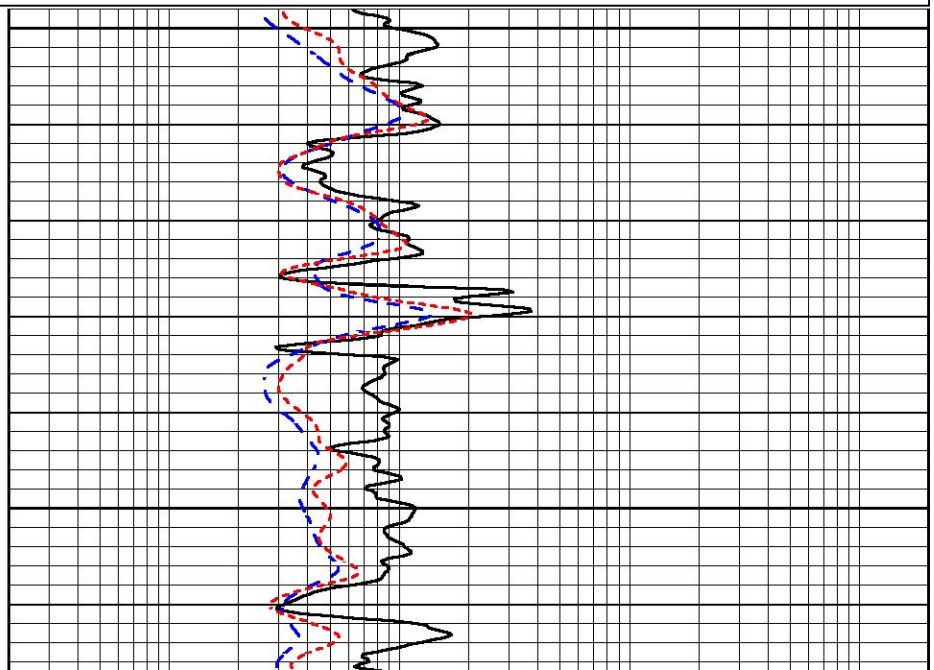

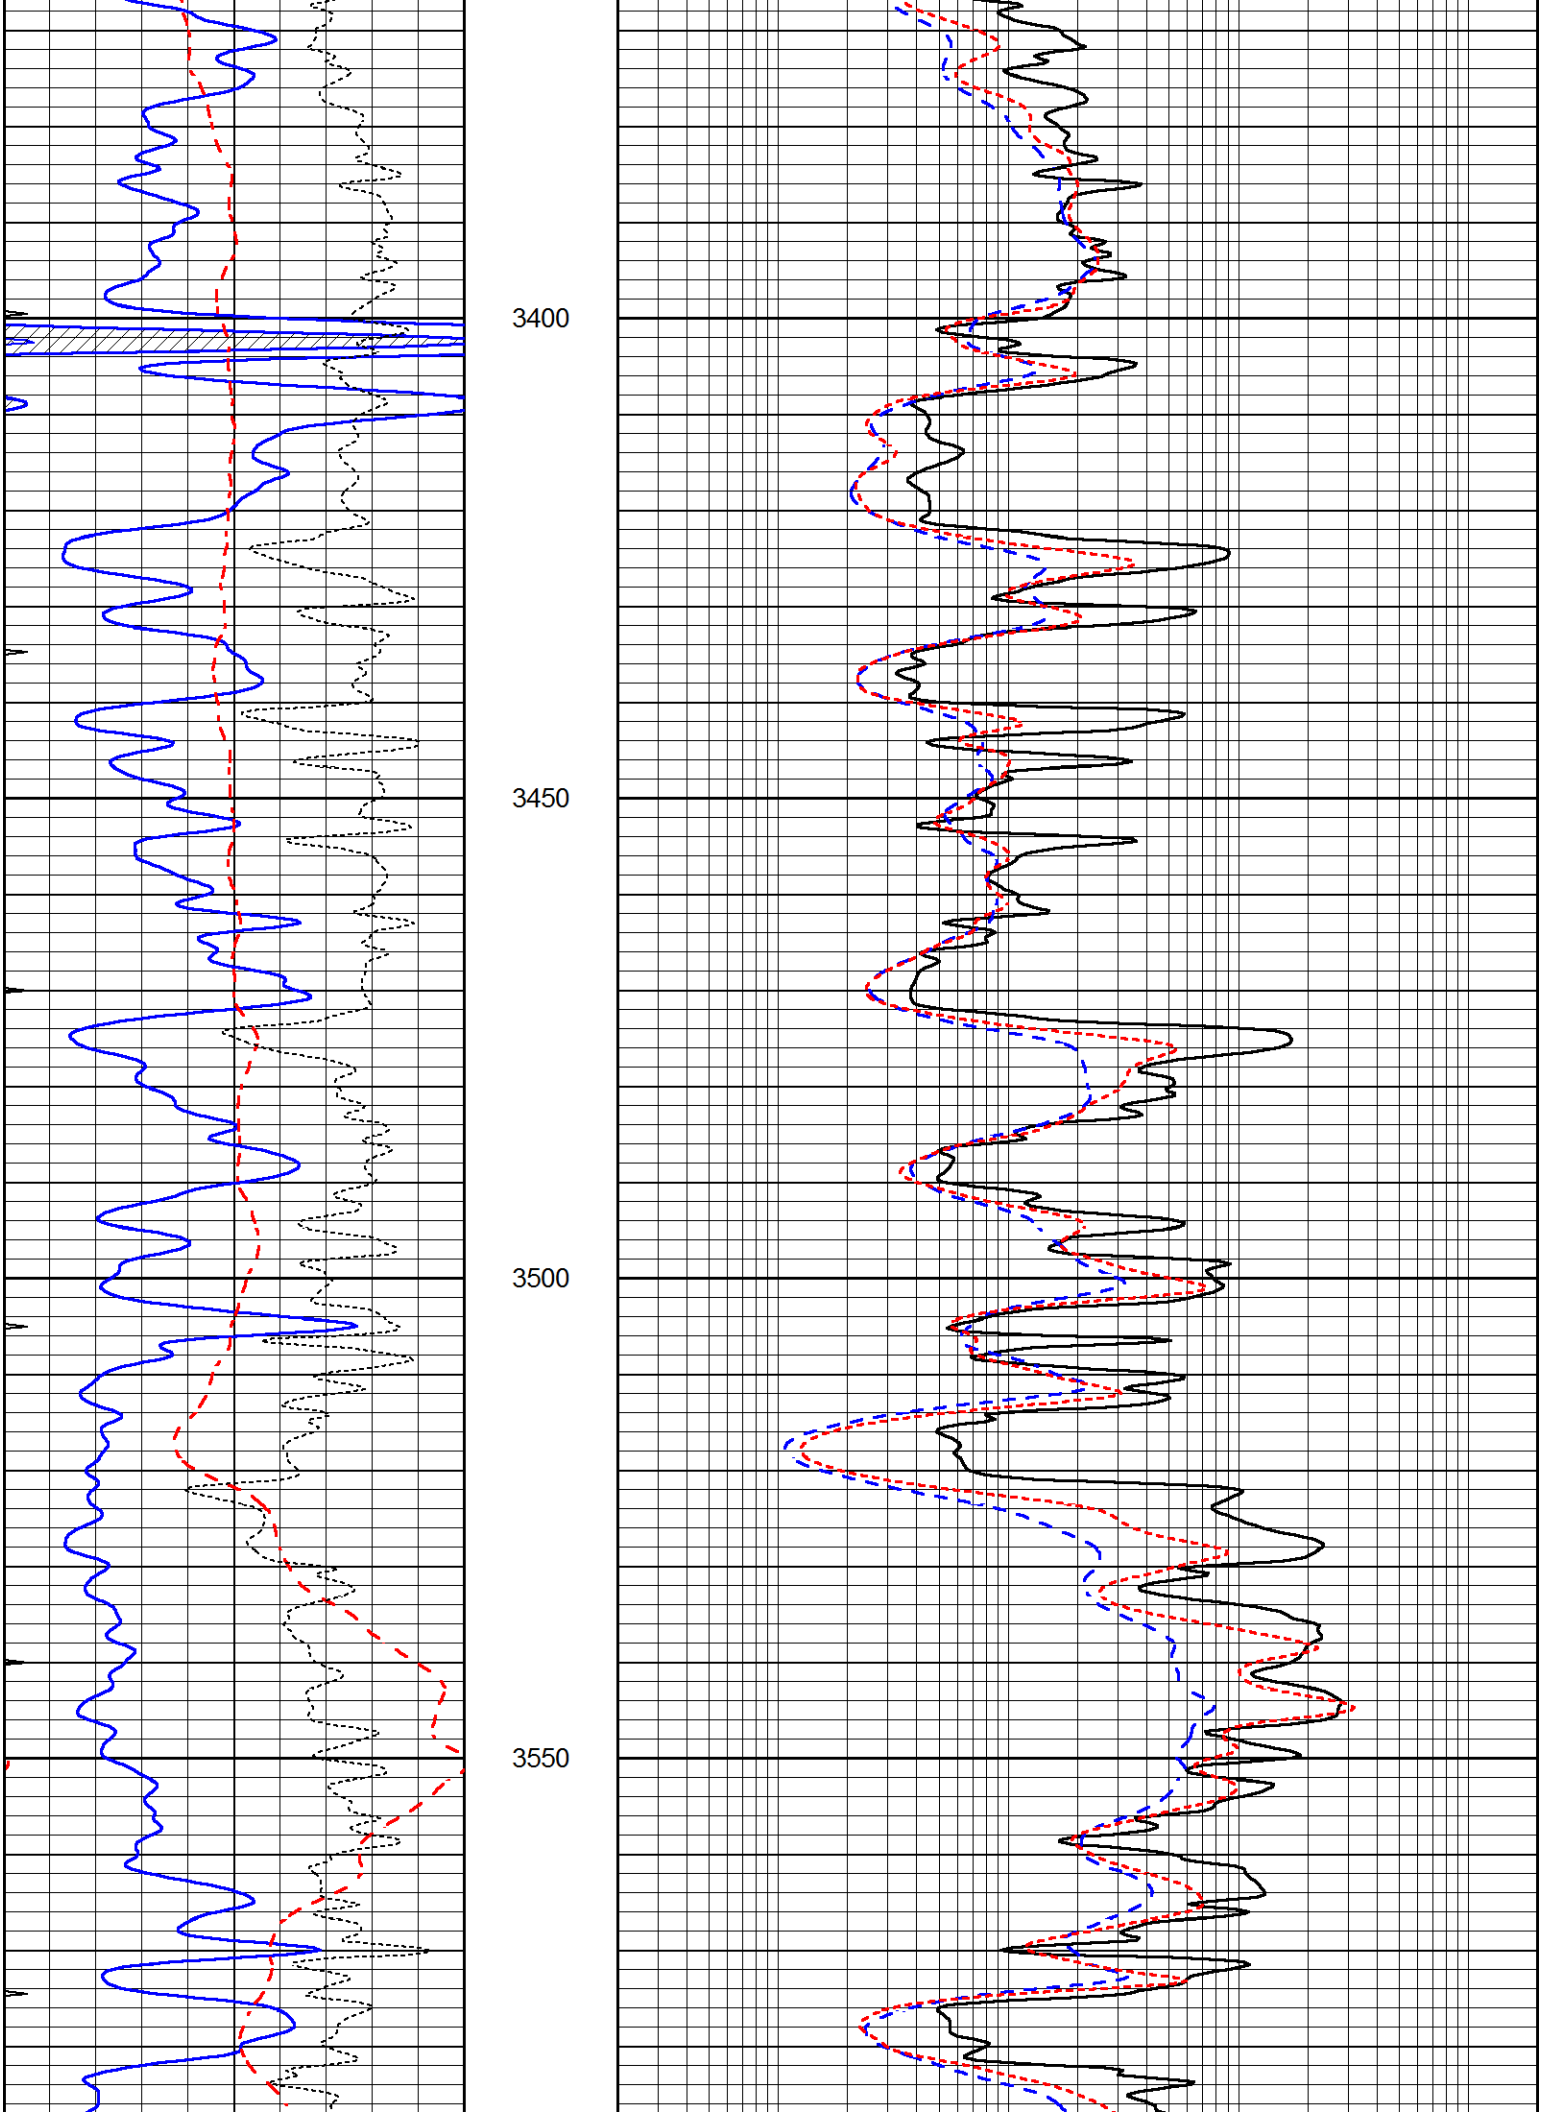
3400
3450
3500
3550

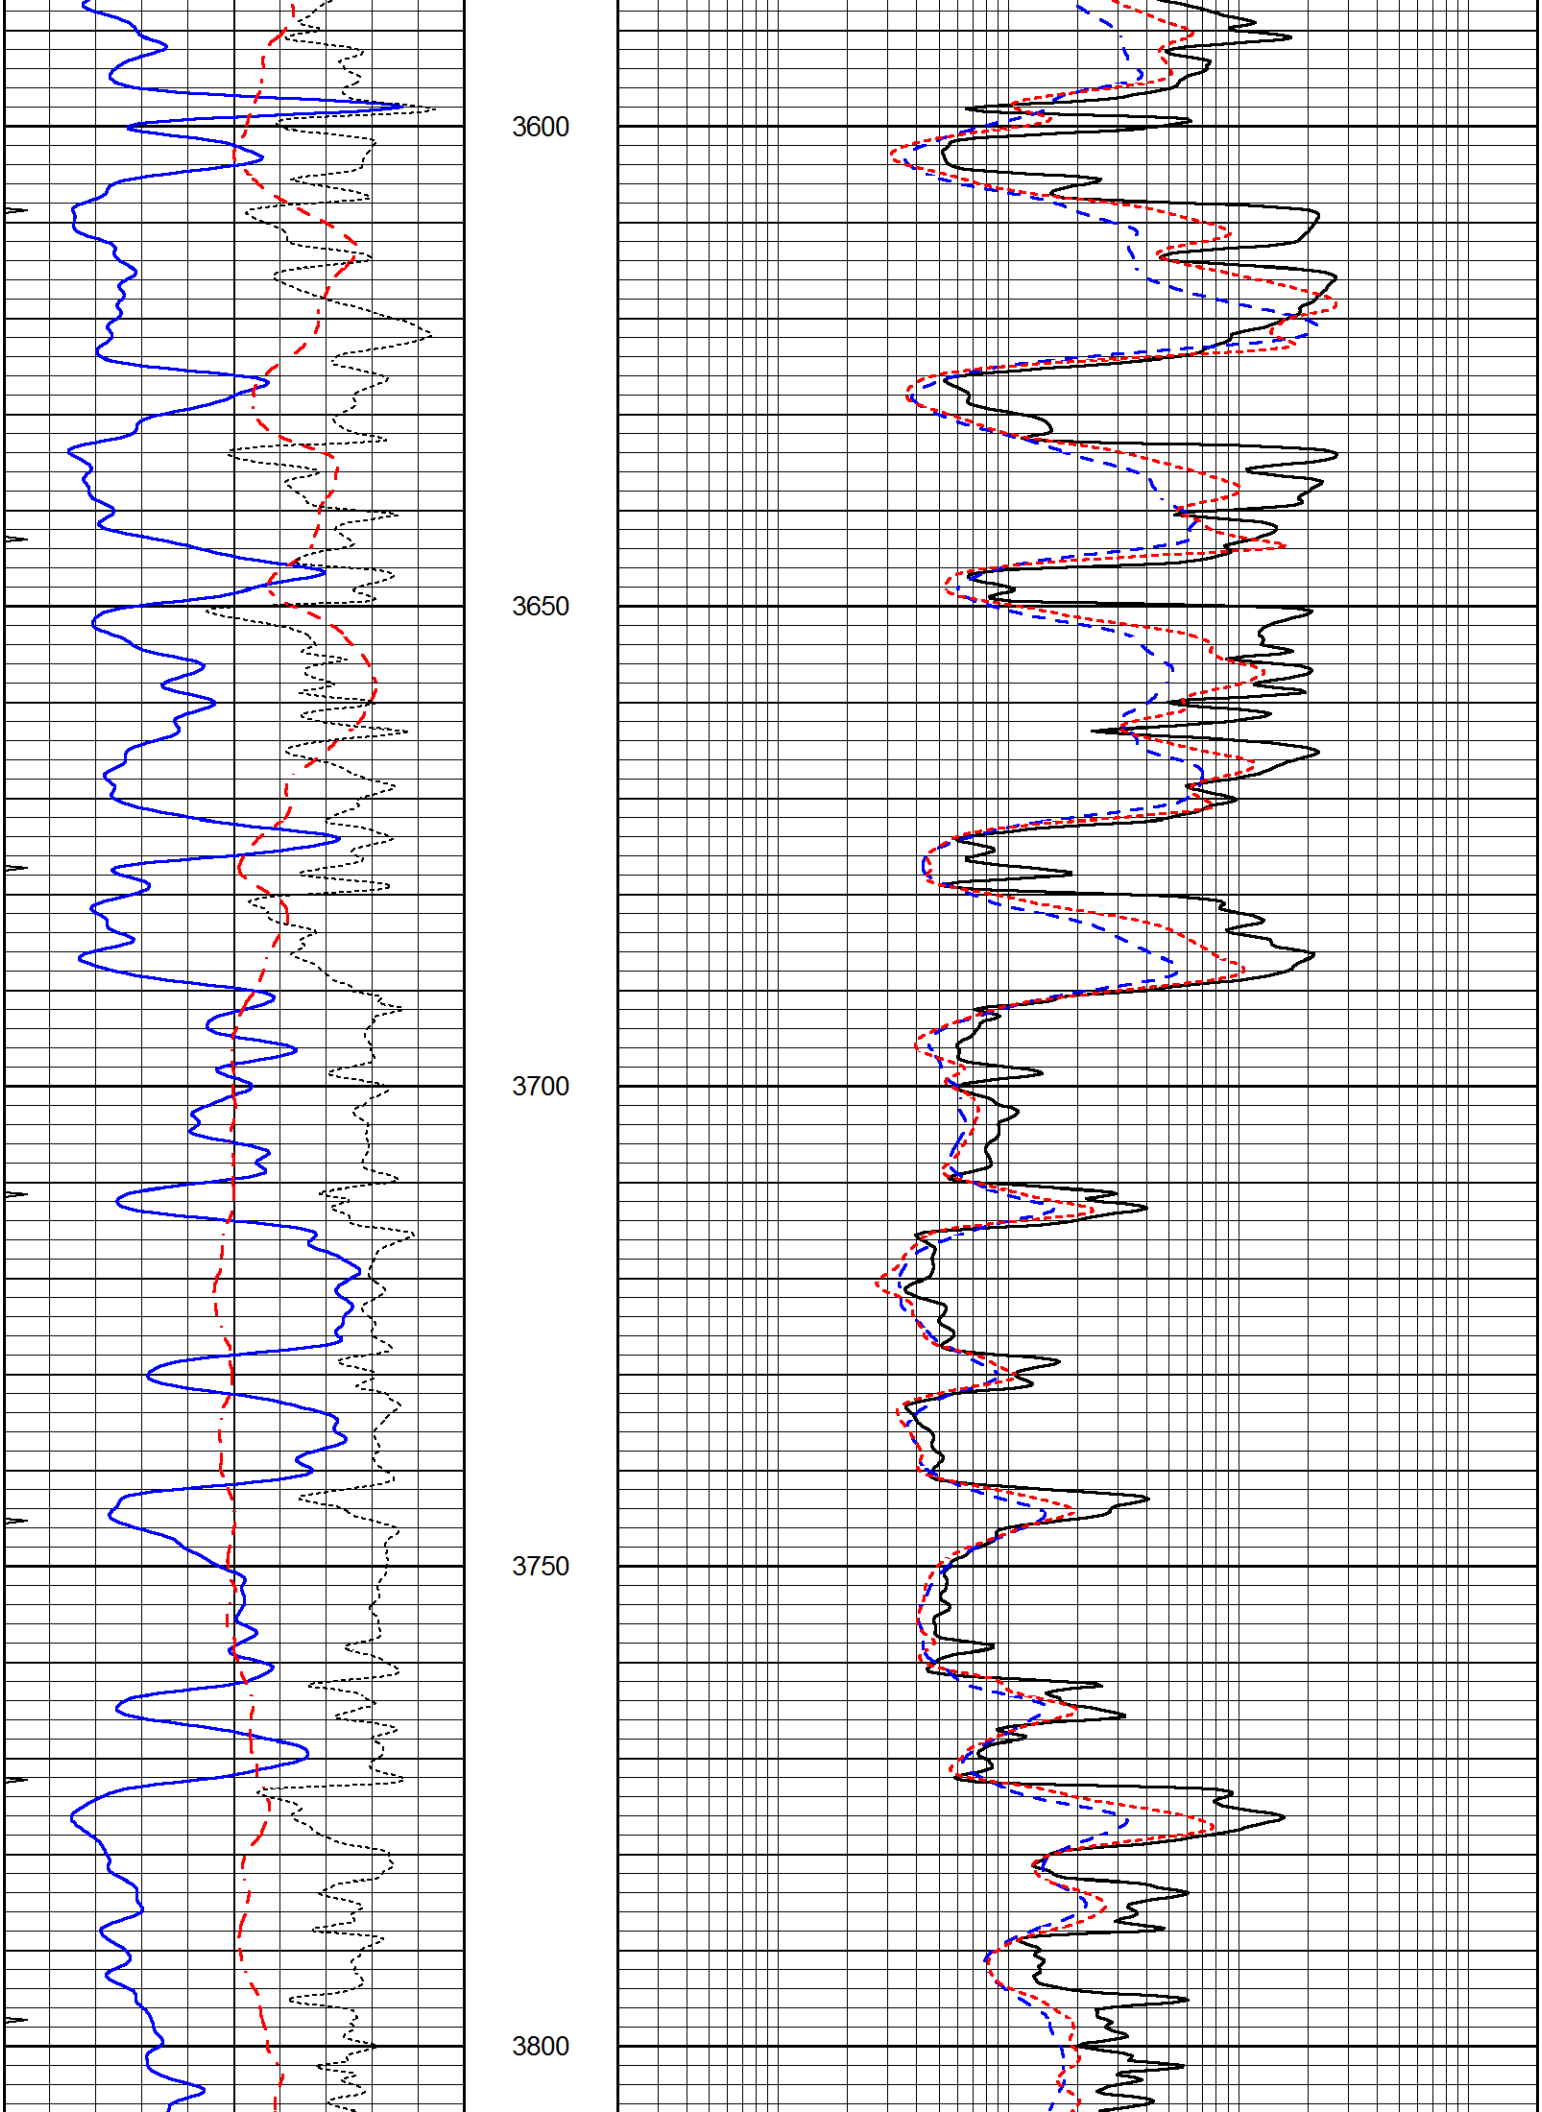
3600
3650
3700
3750
3800

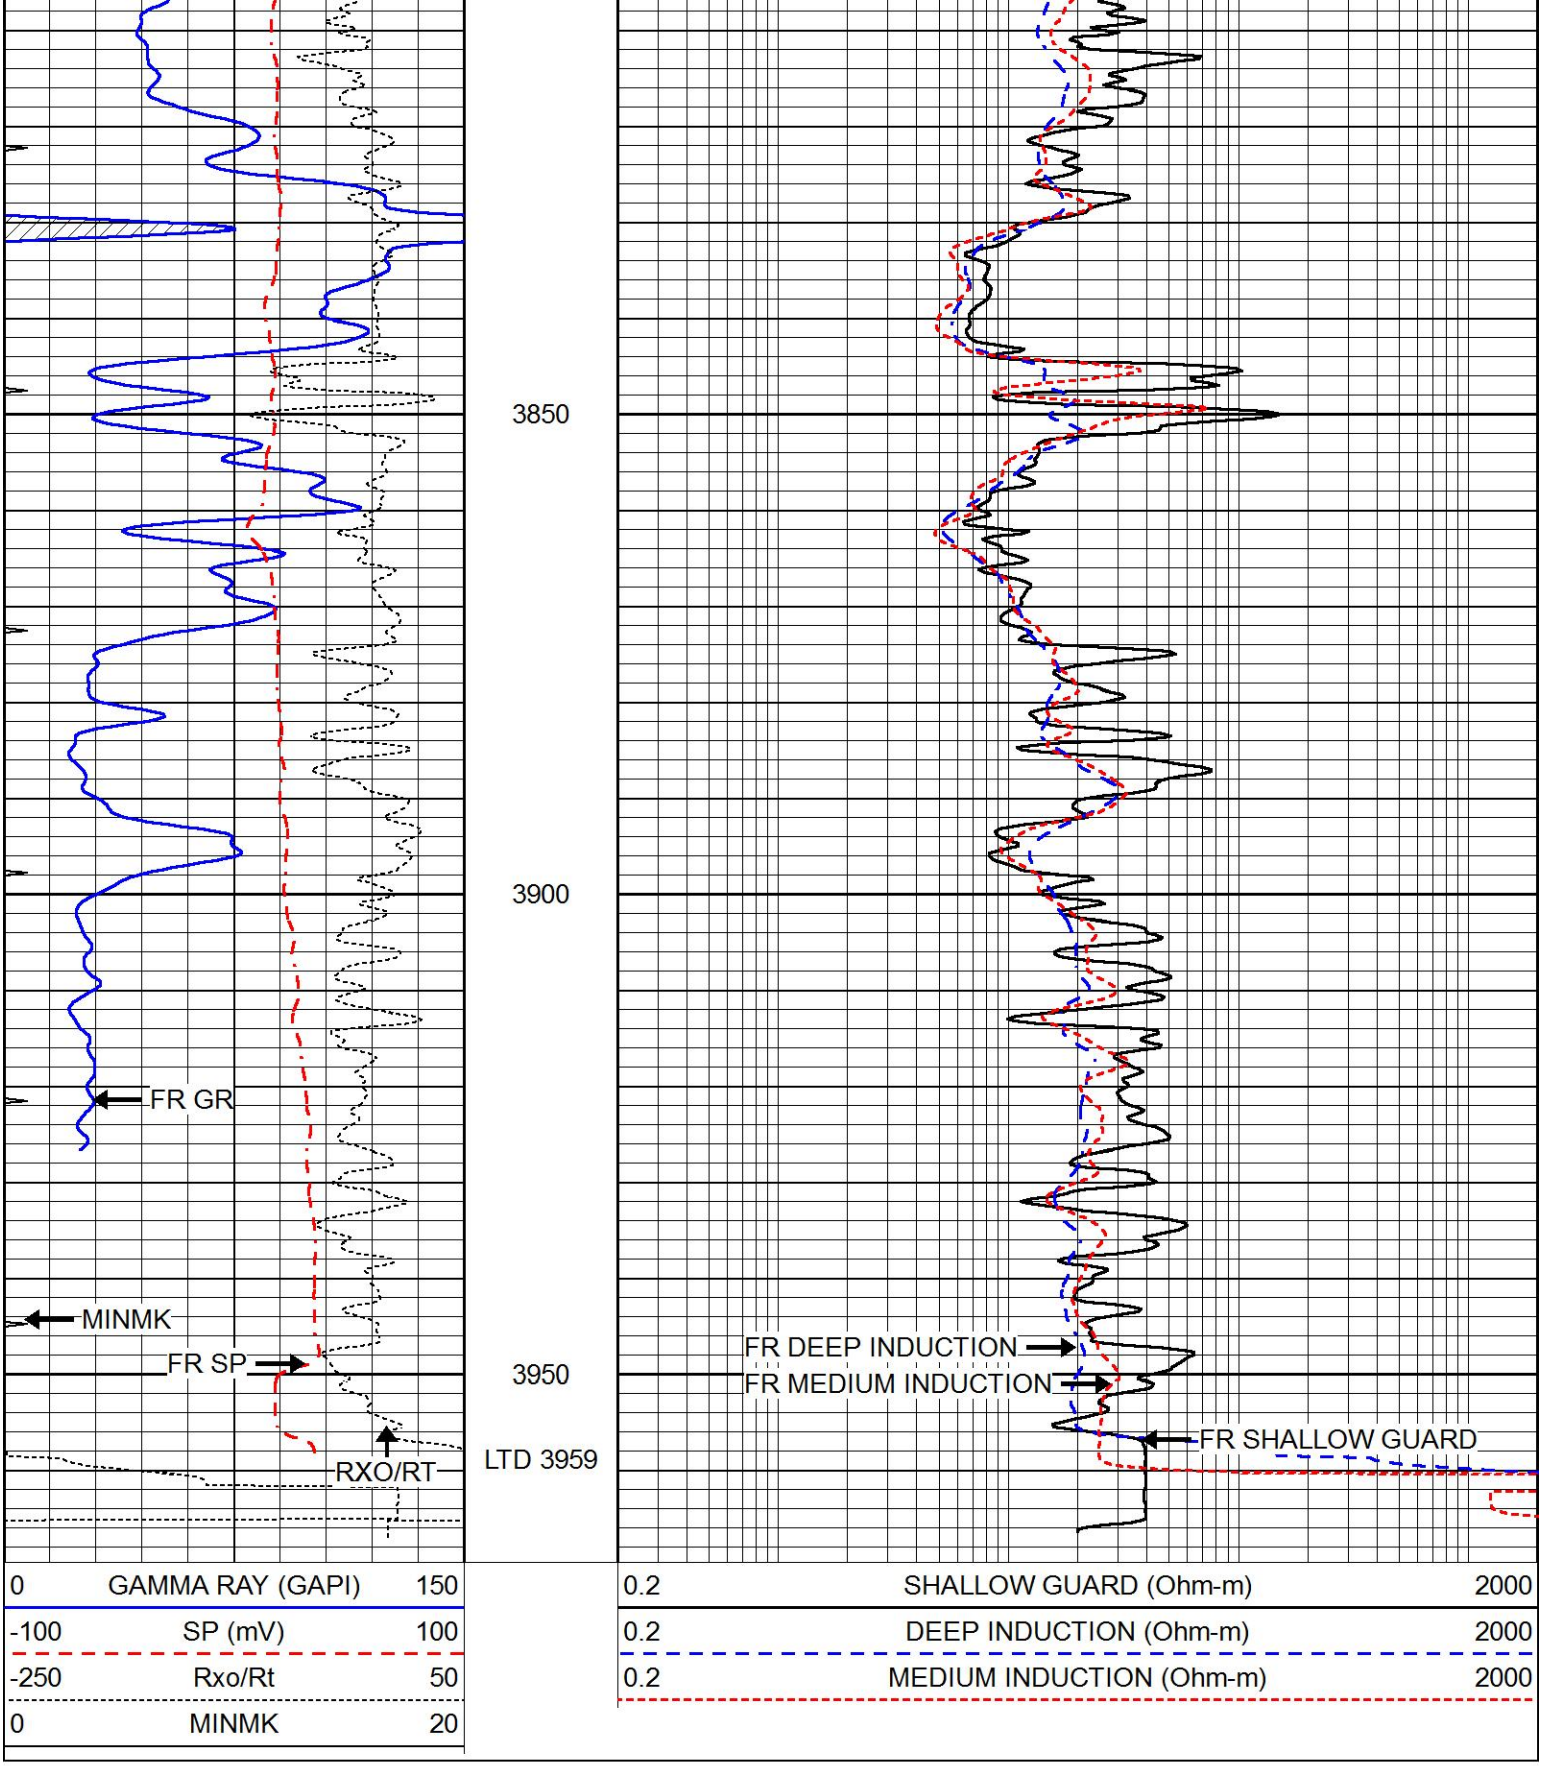


REPEAT SECTION


Database File	6704pe.db
Dataset Pathname	pass2.1R
Presentation Format	_dil

Dataset Creation	Sun Jul 03 13:56:40 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50
0	MINMK	20

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000

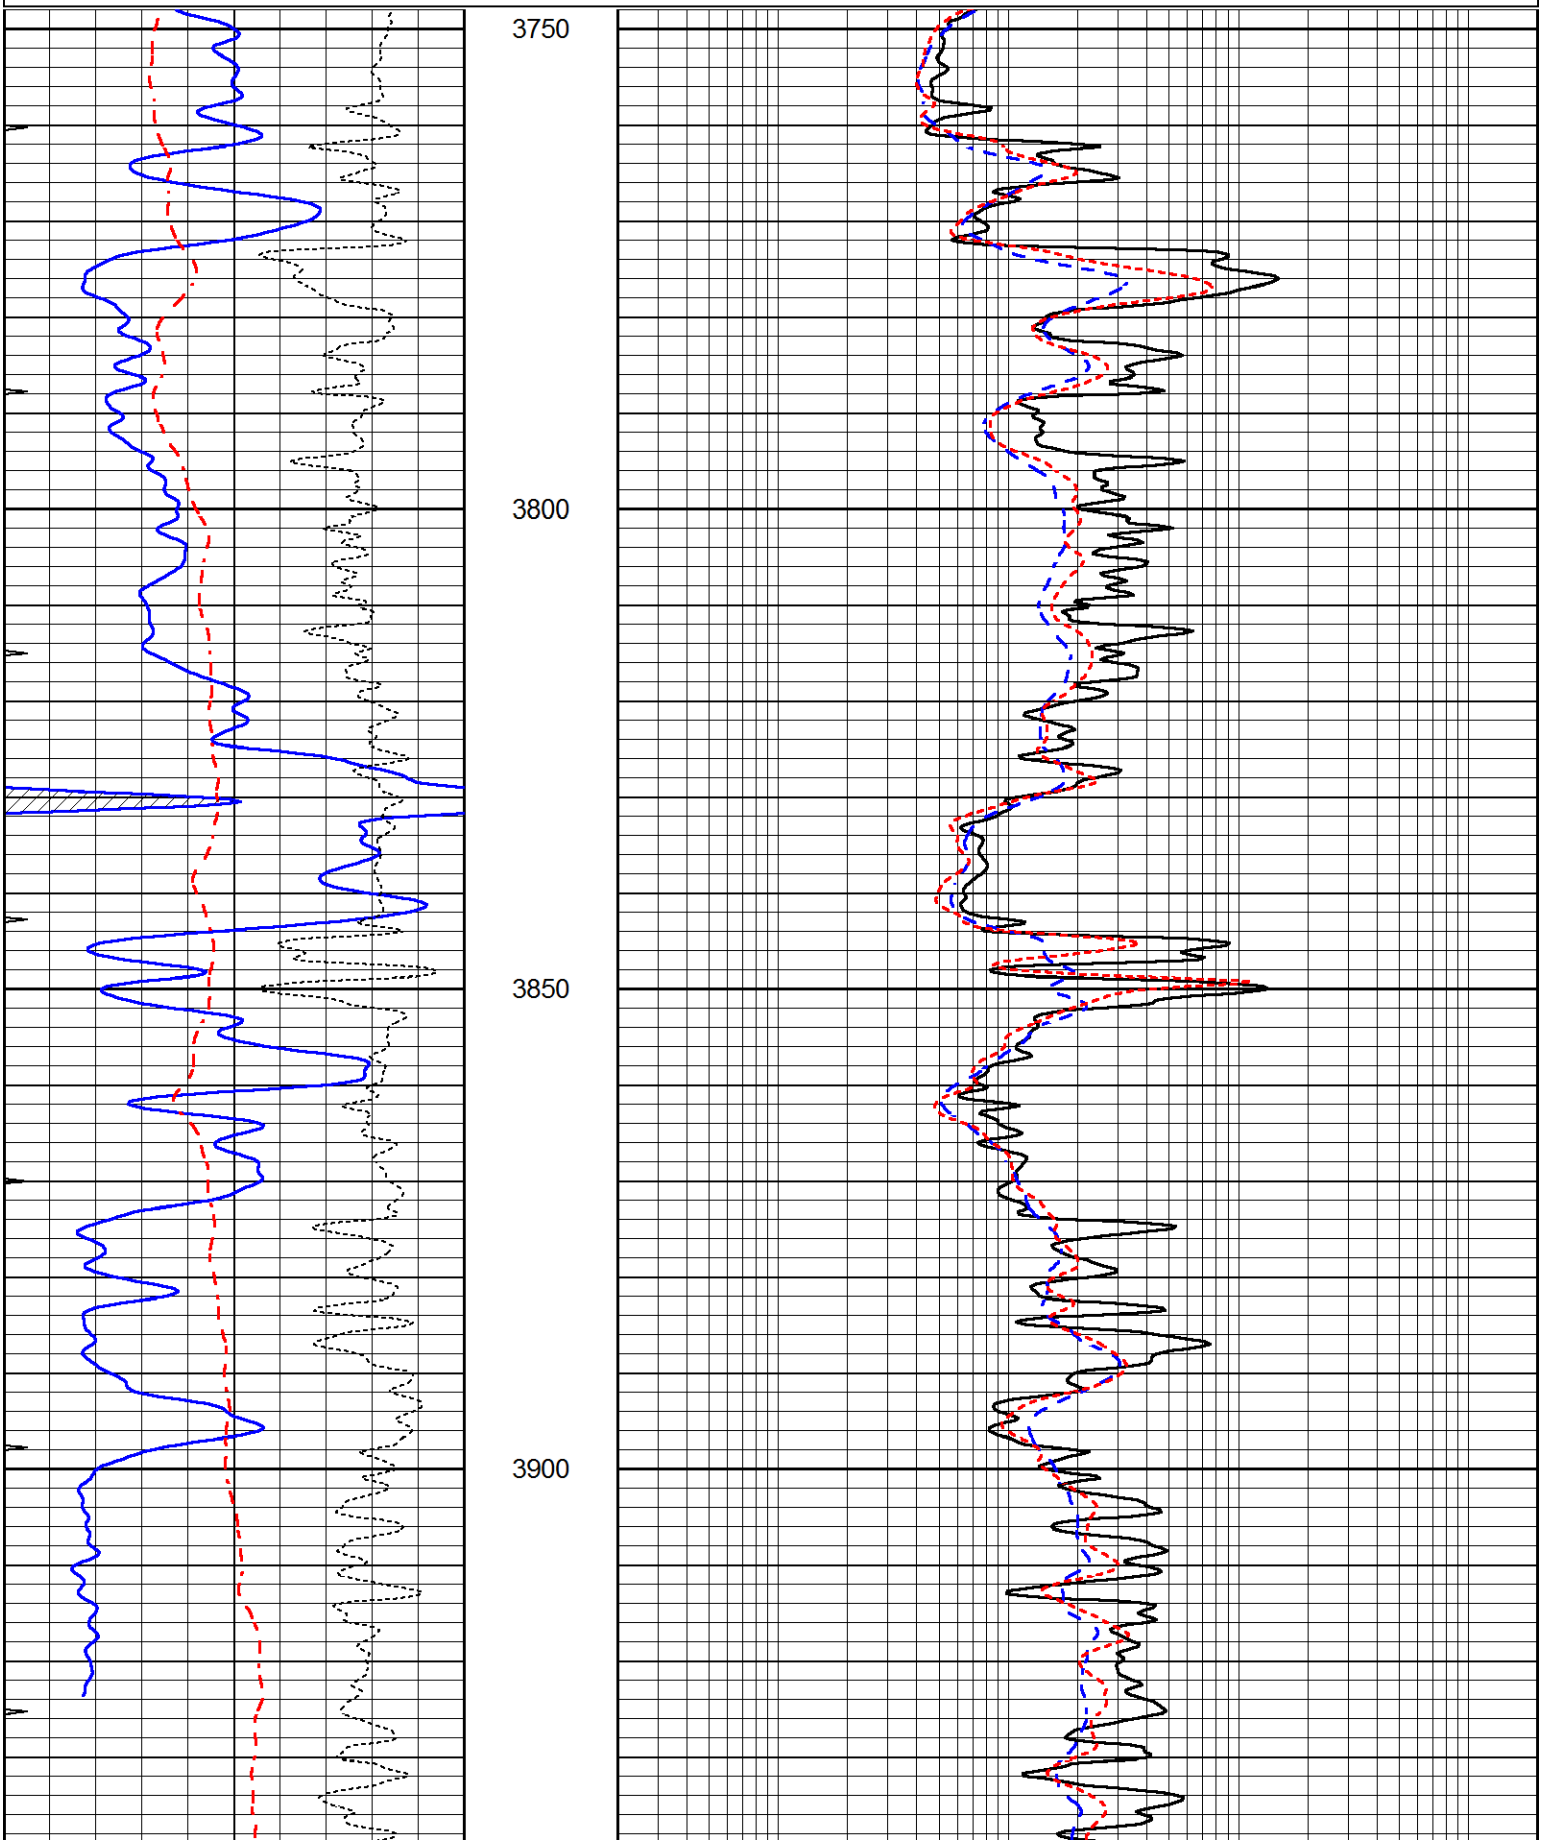

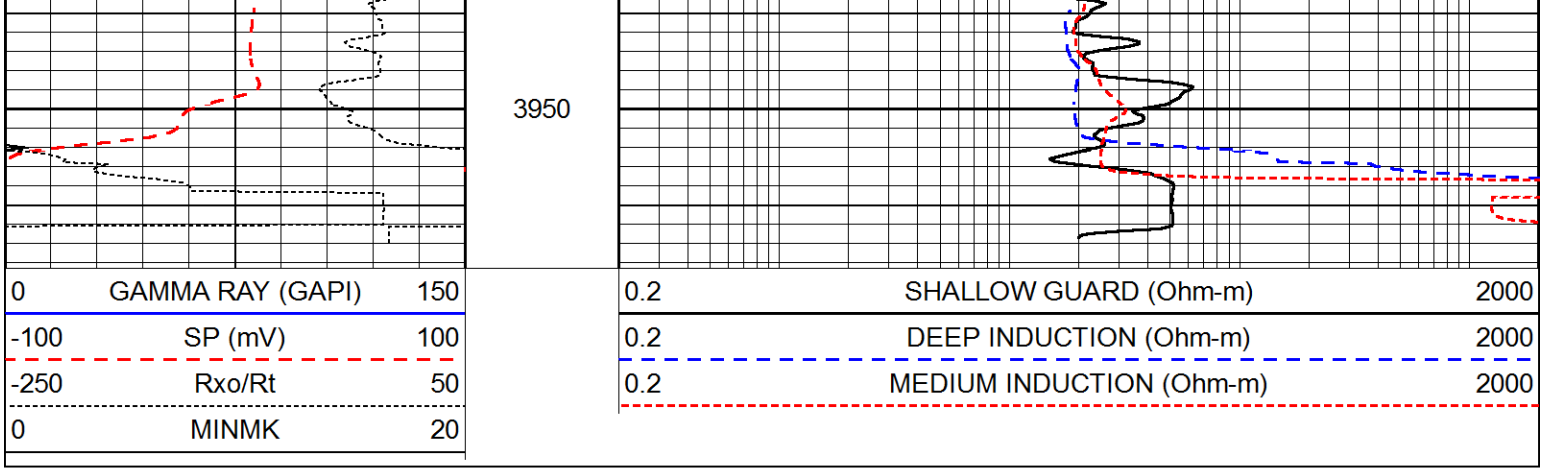

Calibration Report

Database File 6704pe.db
Dataset Pathname pass3.1M
Dataset Creation Sun Jul 03 14:20:46 2022

Dual Induction Calibration Report

Serial-Model: PROBE8-DILG
Surface Cal Performed: Sun Jul 03 13:40:17 2022
Downhole Cal Performed: Mon Sep 10 14:28:38 2018
After Survey Verification Performed: Mon Sep 10 14:28:40 2018

Surface Calibration

	Readings			References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.015	0.648	V	0.000	400.000	mmho/m	620.000	4.000
Medium	0.029	0.796	V	0.000	464.000	mmho/m	600.000	-12.000
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.017	0.657	V	0.000	400.000	mmho/m	625.153	-10.619
Medium	0.016	0.757	V	0.000	464.000	mmho/m	625.992	-9.739

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	2.011	405.777	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	7.590	503.393	mmho/m	1.000	0.000
LL3		7.500	V		1500.000	Ohm-m		
		0.000	V		20.000	Ohm-m		
		-7.200	V		3800.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
Medium	0.000	0.000	mmho/m	0.000	0.000	mmho/m	0.000	0.000
LL3		1.000	Ohm-m		1.000	Ohm-m		
		0.000	Ohm-m		0.000	Ohm-m		
		1.000	mmho-m		1.000	mmho-m		

Litho Density Calibration Report

Serial: 002N Model: PRB

Master Calibration Performed Tue Mar 10 15:08:00 2020

	Background	Magnesium	Aluminum	Aluminum+Fe	
Window 1	780.1	6981.9	2088.6	1871.2	cps
Window 2	718.6	5898.2	1813.8	1664.1	cps
Window 3	580.0	2989.5	1088.0	1039.1	cps
Window 4	172.8	175.7	175.3	173.5	cps
Long Space	0.0	5179.6	1095.2	945.5	cps
Short Space	1.1	1228.6	821.2	690.4	cps
Rho		1.7100	2.5900	0.0000	g/cc
Pe		2.0000	2.7500	5.7900	

Rib Angle	: 45.5	Rib Slope	: 1.016	Density/Spine Ratio	: 0.548
Spine Angle	: 75.5	Spine Slope	: 3.857	Spine Intercept	: -18.9

Before Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

After Survey Verification — Performed Wed Dec 31 18:00:00 1969

Window 1	0.0	0.0	0.0	0.0	cps
Window 2	0.0	0.0	0.0	0.0	cps
Window 3	0.0	0.0	0.0	0.0	cps
Window 4	0.0	0.0	0.0	0.0	cps
Long Space	0.0	0.0	0.0	0.0	cps
Short Space	0.0	0.0	0.0	0.0	cps
Measured Rho		0.0000	0.0000	0.0000	g/cc
Measured Correction		0.0000	0.0000	0.0000	g/cc
Measured Pe			0.0000	0.0000	

Compensated Neutron Calibration Report

Serial Number: 6I
Tool Model: G

CALIBRATION

Detector	Readings		Target		Normalization
Short Space	1.00	cps	1.00	cps	1.0000
Long Space	1.00	cps	1.00	cps	1.0000

PRE-SURVEY VERIFICATION

	Detector	Readings		Measured	Target
1)	Short Space		cps		
	Long Space		cps	pu	pu
2)	Short Space		cps		
	Long Space		cps	pu	

3)	Short Space	cps		
	Long Space	cps	pu	

POST-SURVEY VERIFICATION

	Detector	Readings	Measured	Target
1)	Short Space	cps		
	Long Space	cps	pu	pu
2)	Short Space	cps		
	Long Space	cps	pu	pu
3)	Short Space	cps		
	Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	GR6	
Tool Model:	OPEN	
Performed:	Mon Jun 20 01:31:16 2022	
Calibrator Value:	150.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	276.0	cps
Sensitivity:	0.8500	GAPI/cps