



MICRO LOG

Company	VINCENT OIL CORPORATION	Company	VINCENT OIL CORPORATION
Well	KEOUGH #17-34	Well	KEOUGH #17-34
Field	MULBERRY CREEK	Field	MULBERRY CREEK
County	FORD	County	FORD
State	KANSAS	State	KANSAS
Location:	API # : 15-057-21069-0000 926' FNL & 2180' FWL NW - SE - NE - NW	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	SEC 34 TWP 28S RGE 23W	Elevation	
Log Measured From	GROUND LEVEL	Elevation	2519
Drilling Measured From	KELLY BUSHING 12' A.G.L. KELLY BUSHING	K.B. 2531 D.F. 2529 G.L. 2519	
Date	6/3/22		
Run Number	TWO		
Depth Driller	5288		
Depth Logger	5290		
Bottom Logged Interval	5274		
Top Log Interval	4200		
Casing Driller	8 5/8"@654'		
Casing Logger	654		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES: 11,800 PPM	
Density / Viscosity	9.3/67		
pH / Fluid Loss	11.0/12.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.400@72F		
Rmf @ Meas. Temp	.300@72F		
Rmc @ Meas. Temp	.480@72F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.225@128F		
Time Circulation Stopped	5.5 HOURS		
Time Logger on Bottom	5.15 A.M.		
Maximum Recorded Temperature	128F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	KEN LeBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395
DIRECTIONS:
KINGSDOWN, KS. (HWY 54 & RD. 125) 2N. ON "RD. 125" TO "WILBURN RD.", 3 1/2 E., N. INTO




MAIN SECTION

Database File	6560pe.db
Dataset Pathname	pass6.3
Presentation Format	_micro
Dataset Creation	Fri Jun 03 05:46:17 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

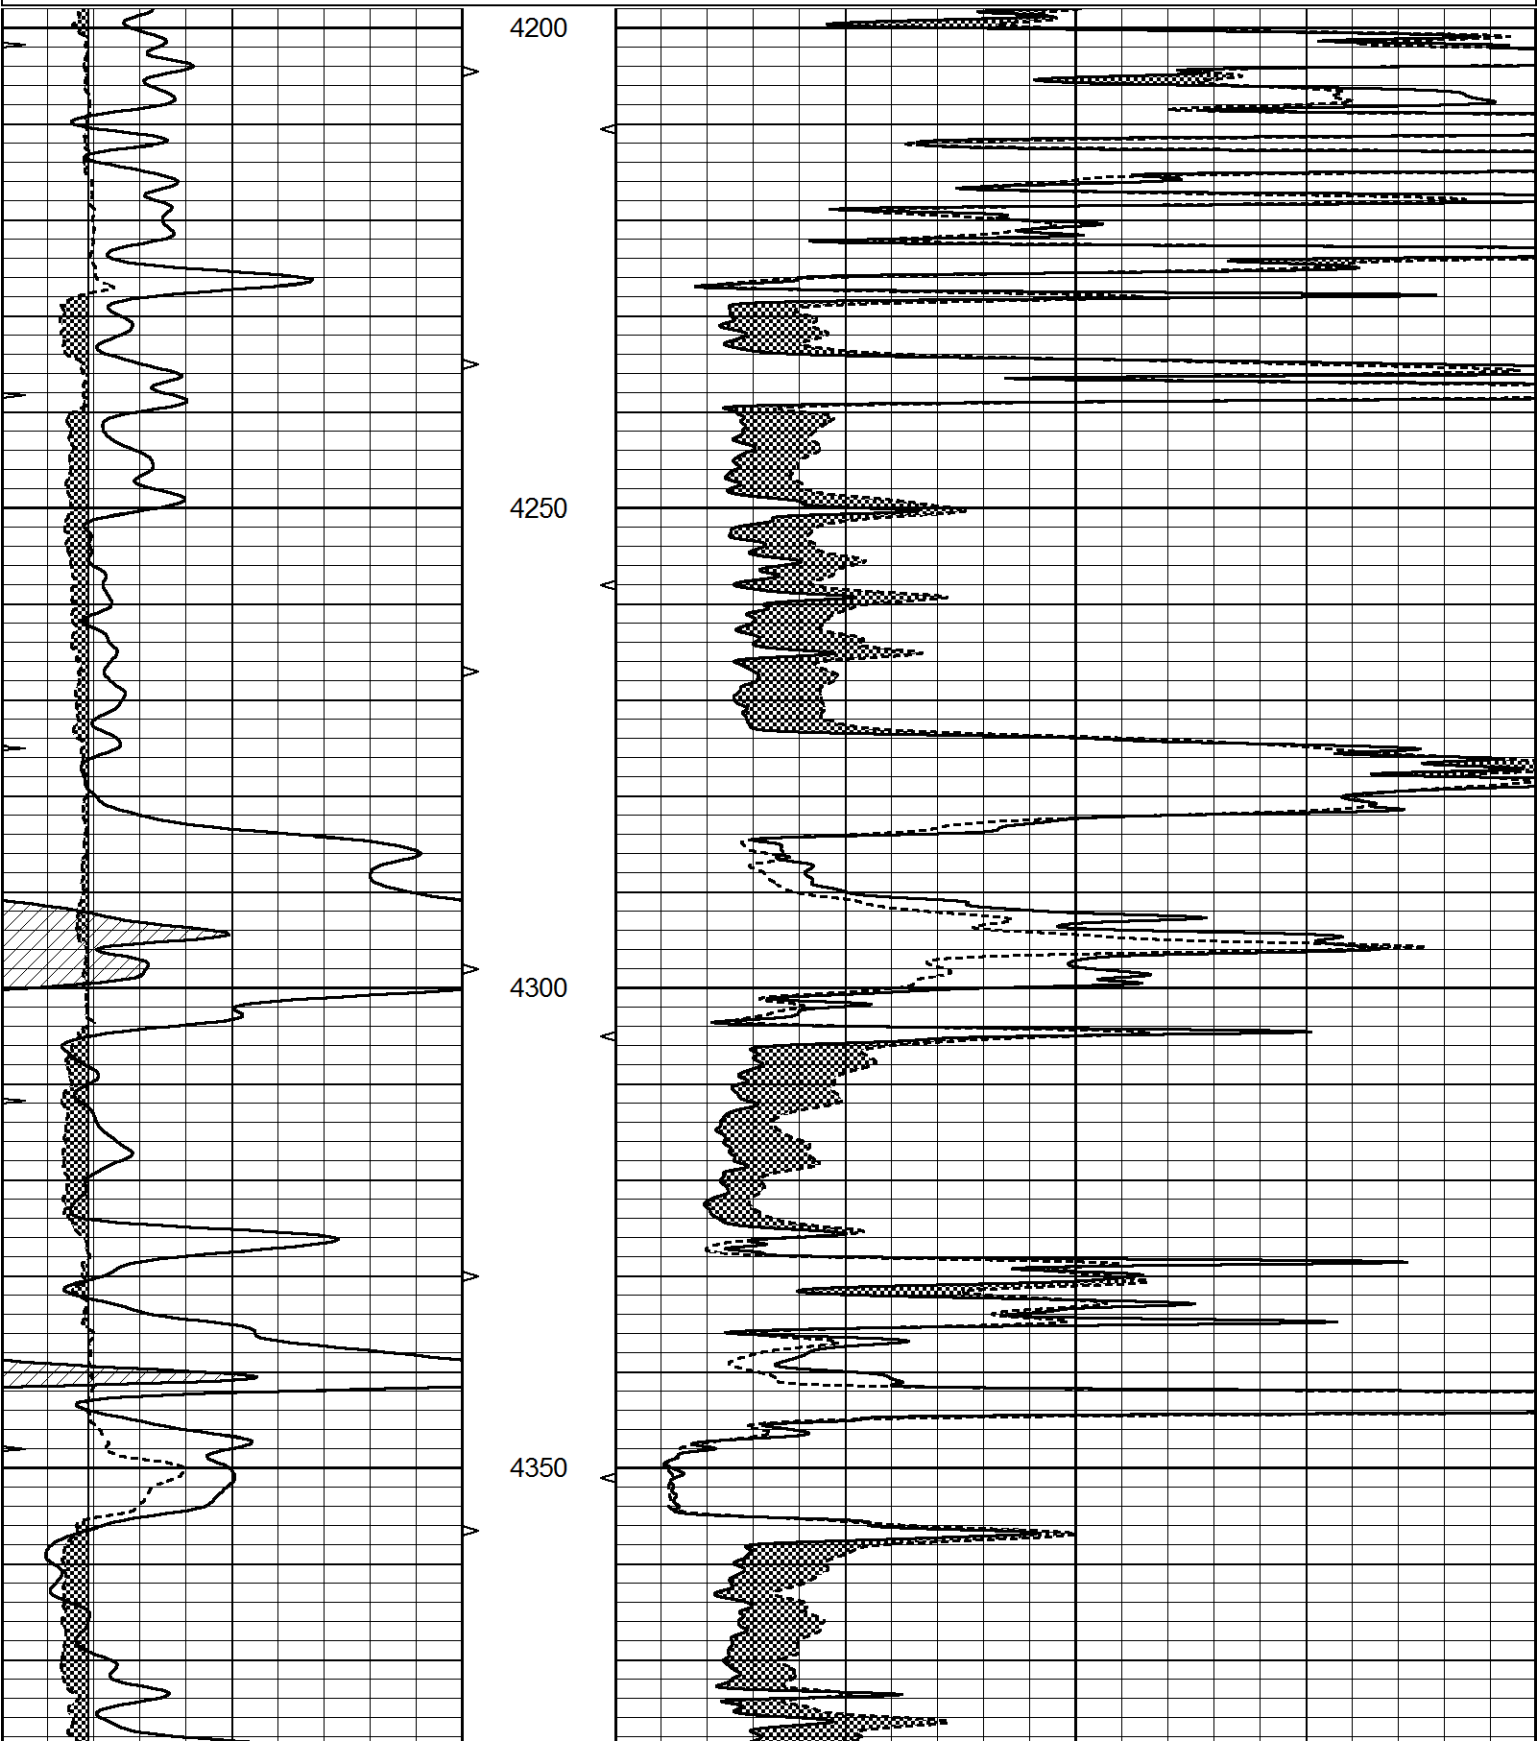

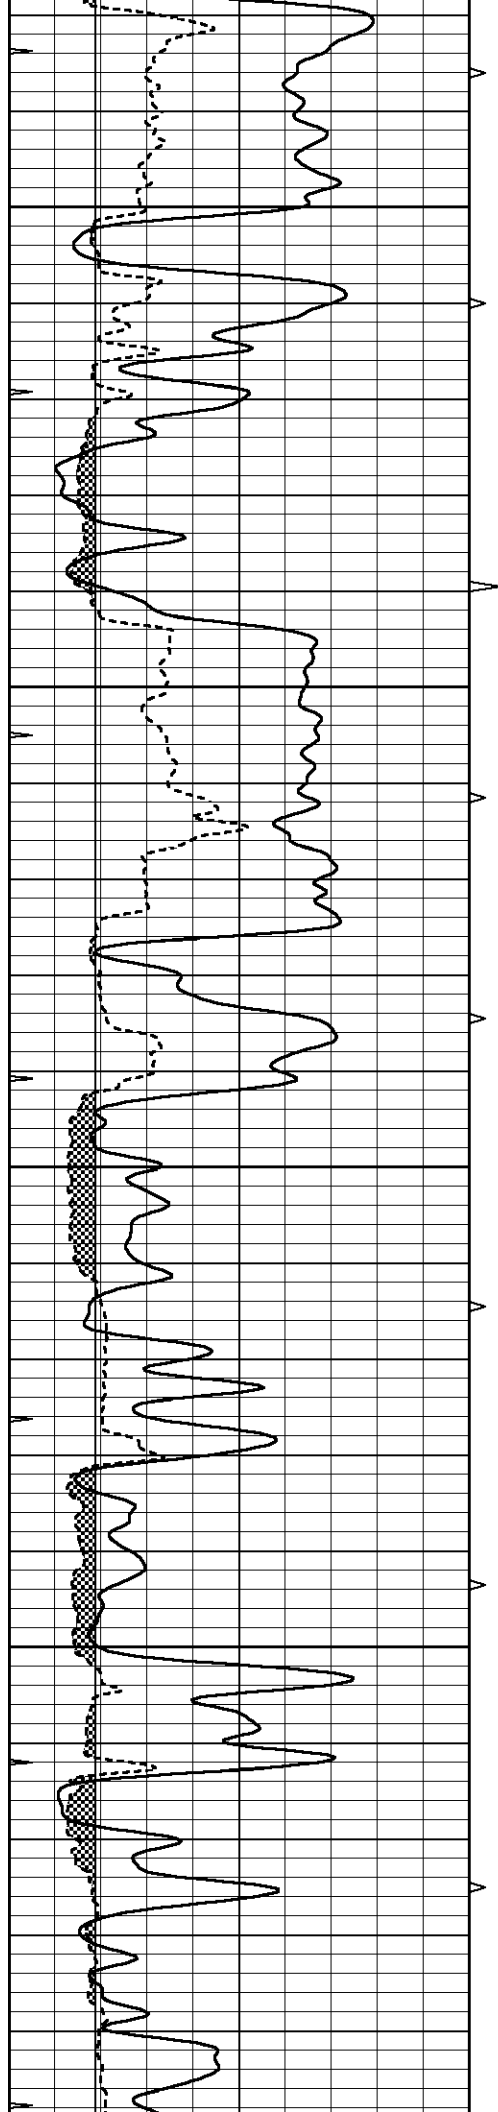



4400

4450

4500

4550

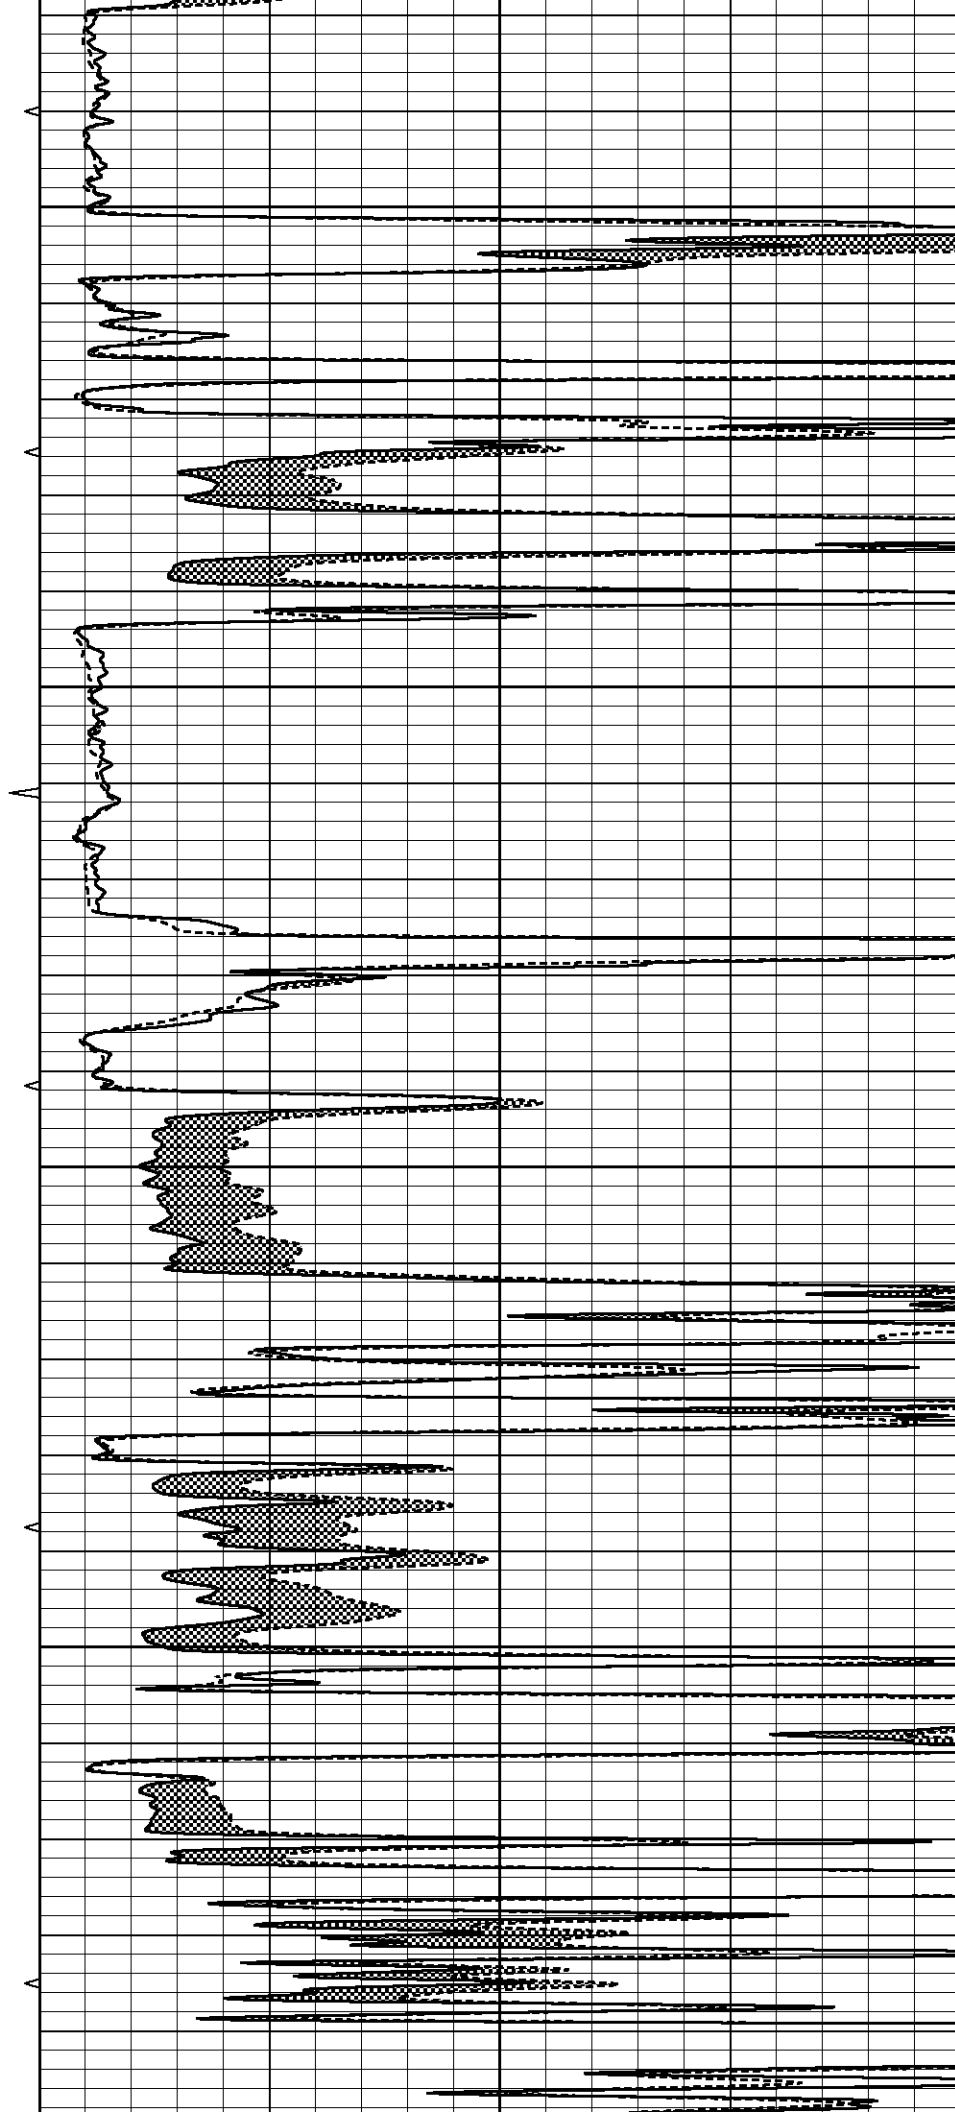

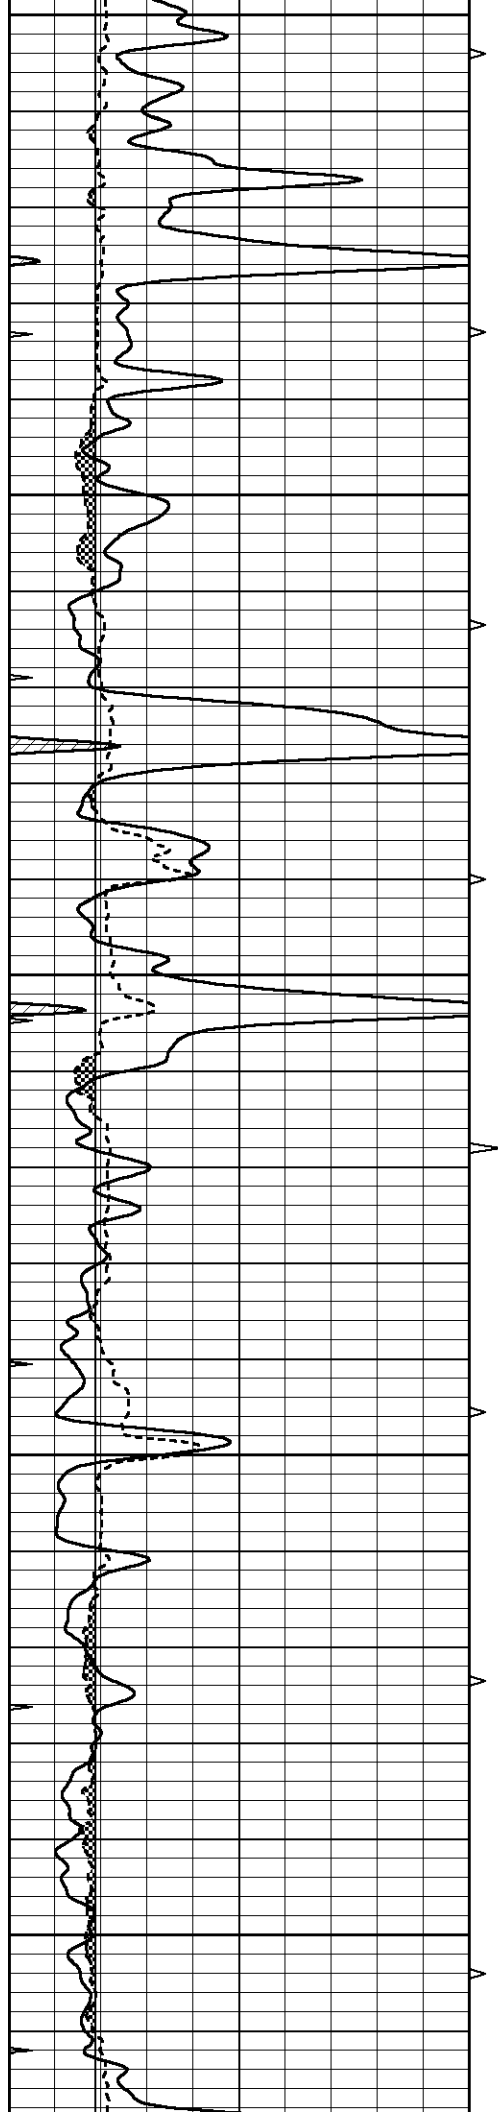


4600


4650

4700

4750

4800

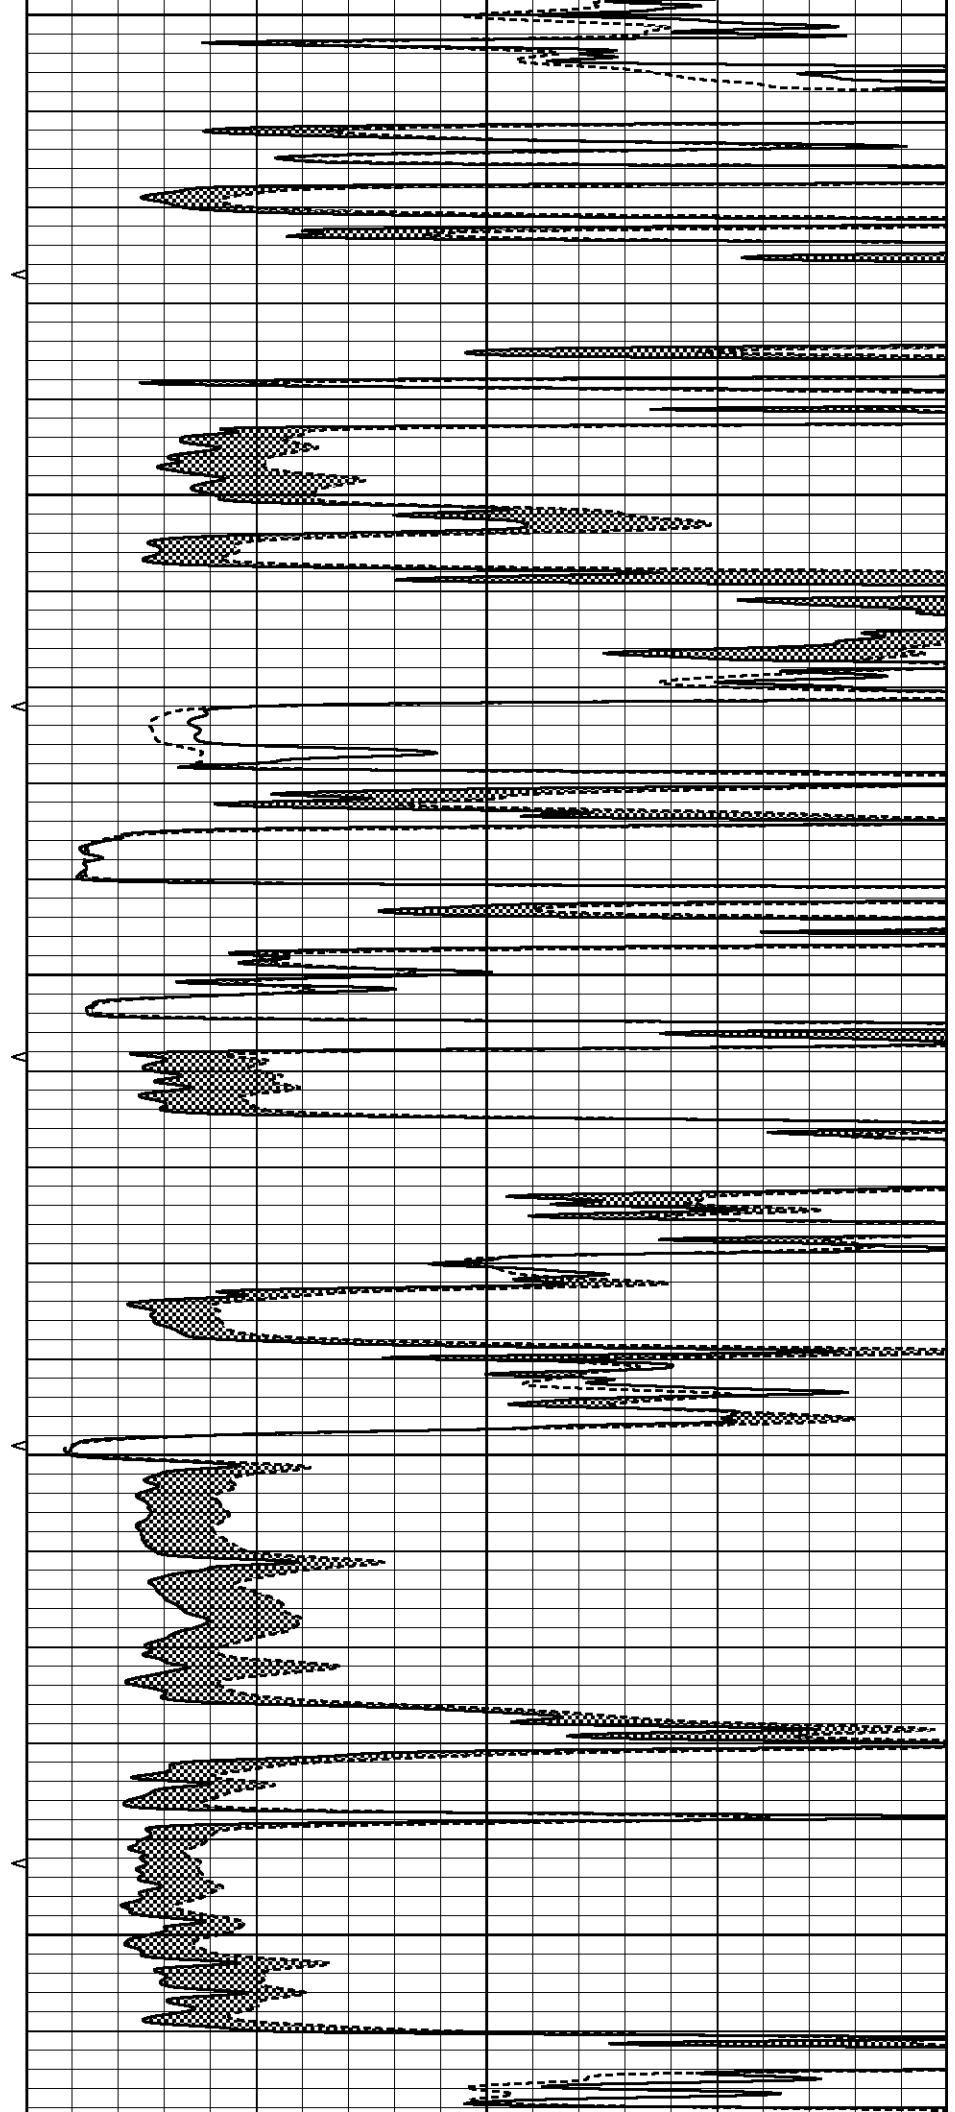

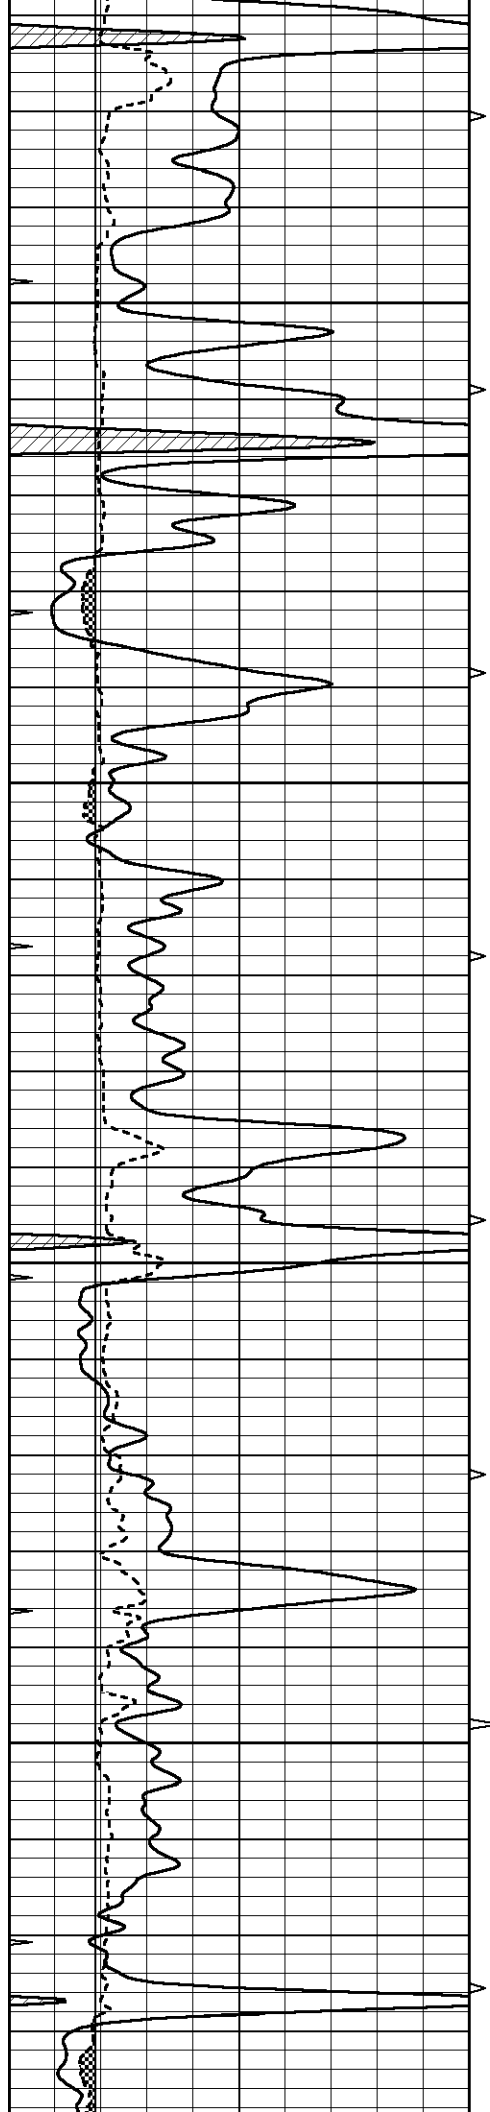



4850

4900

4950

5000

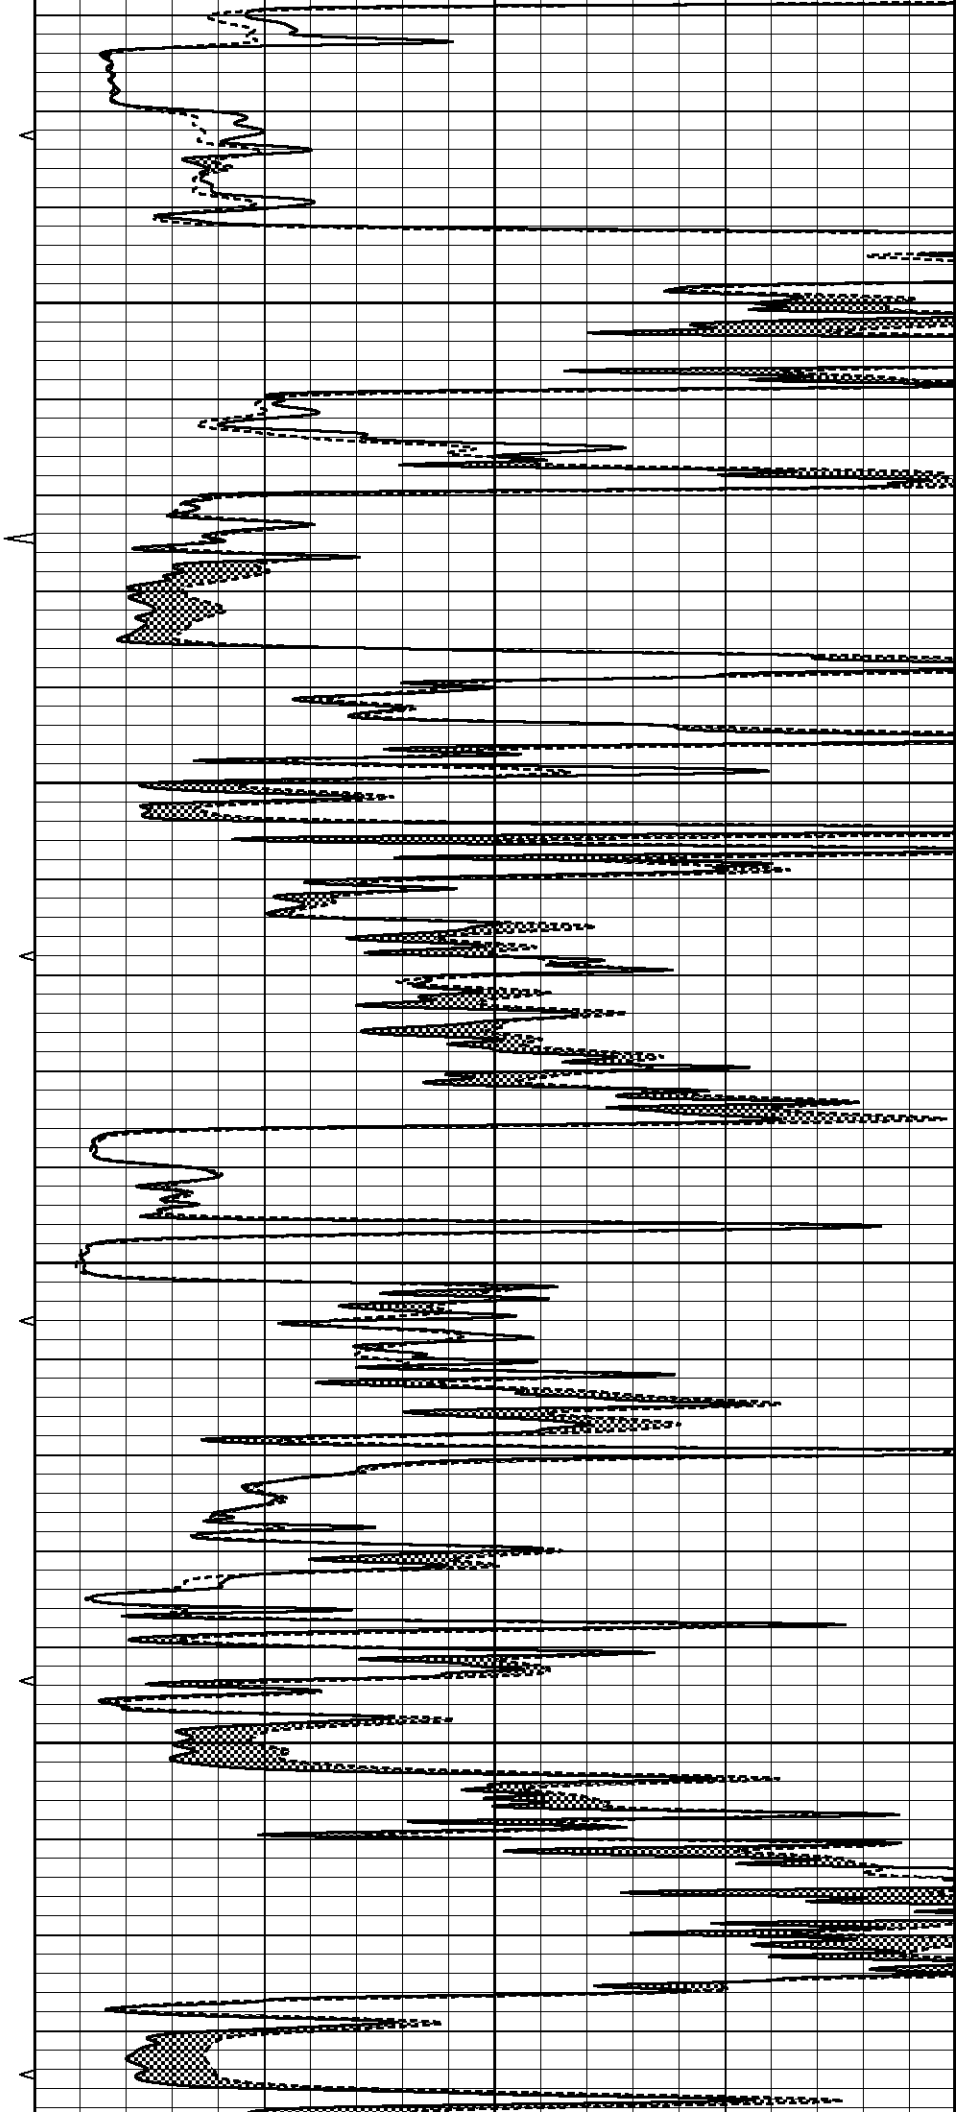

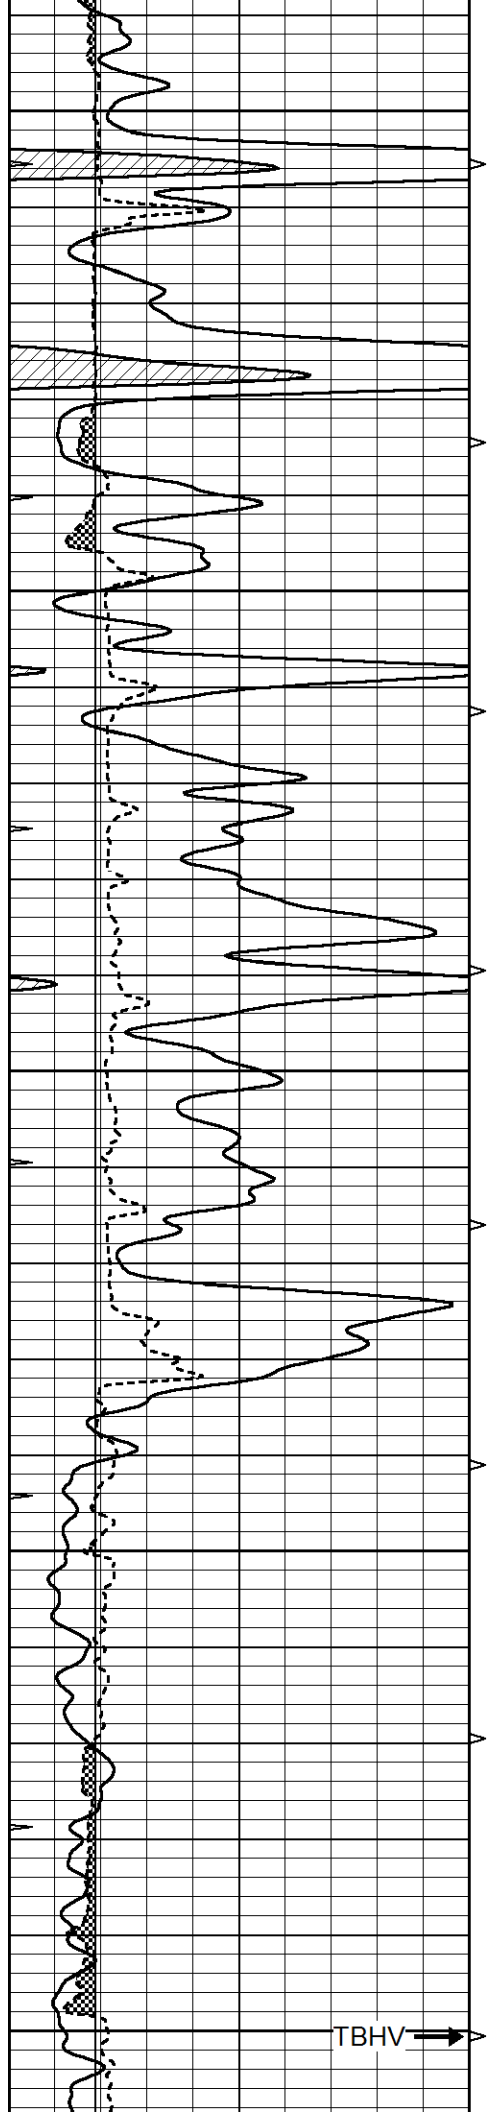

5050


5100


5150

5200

4.5" ABHV

5250

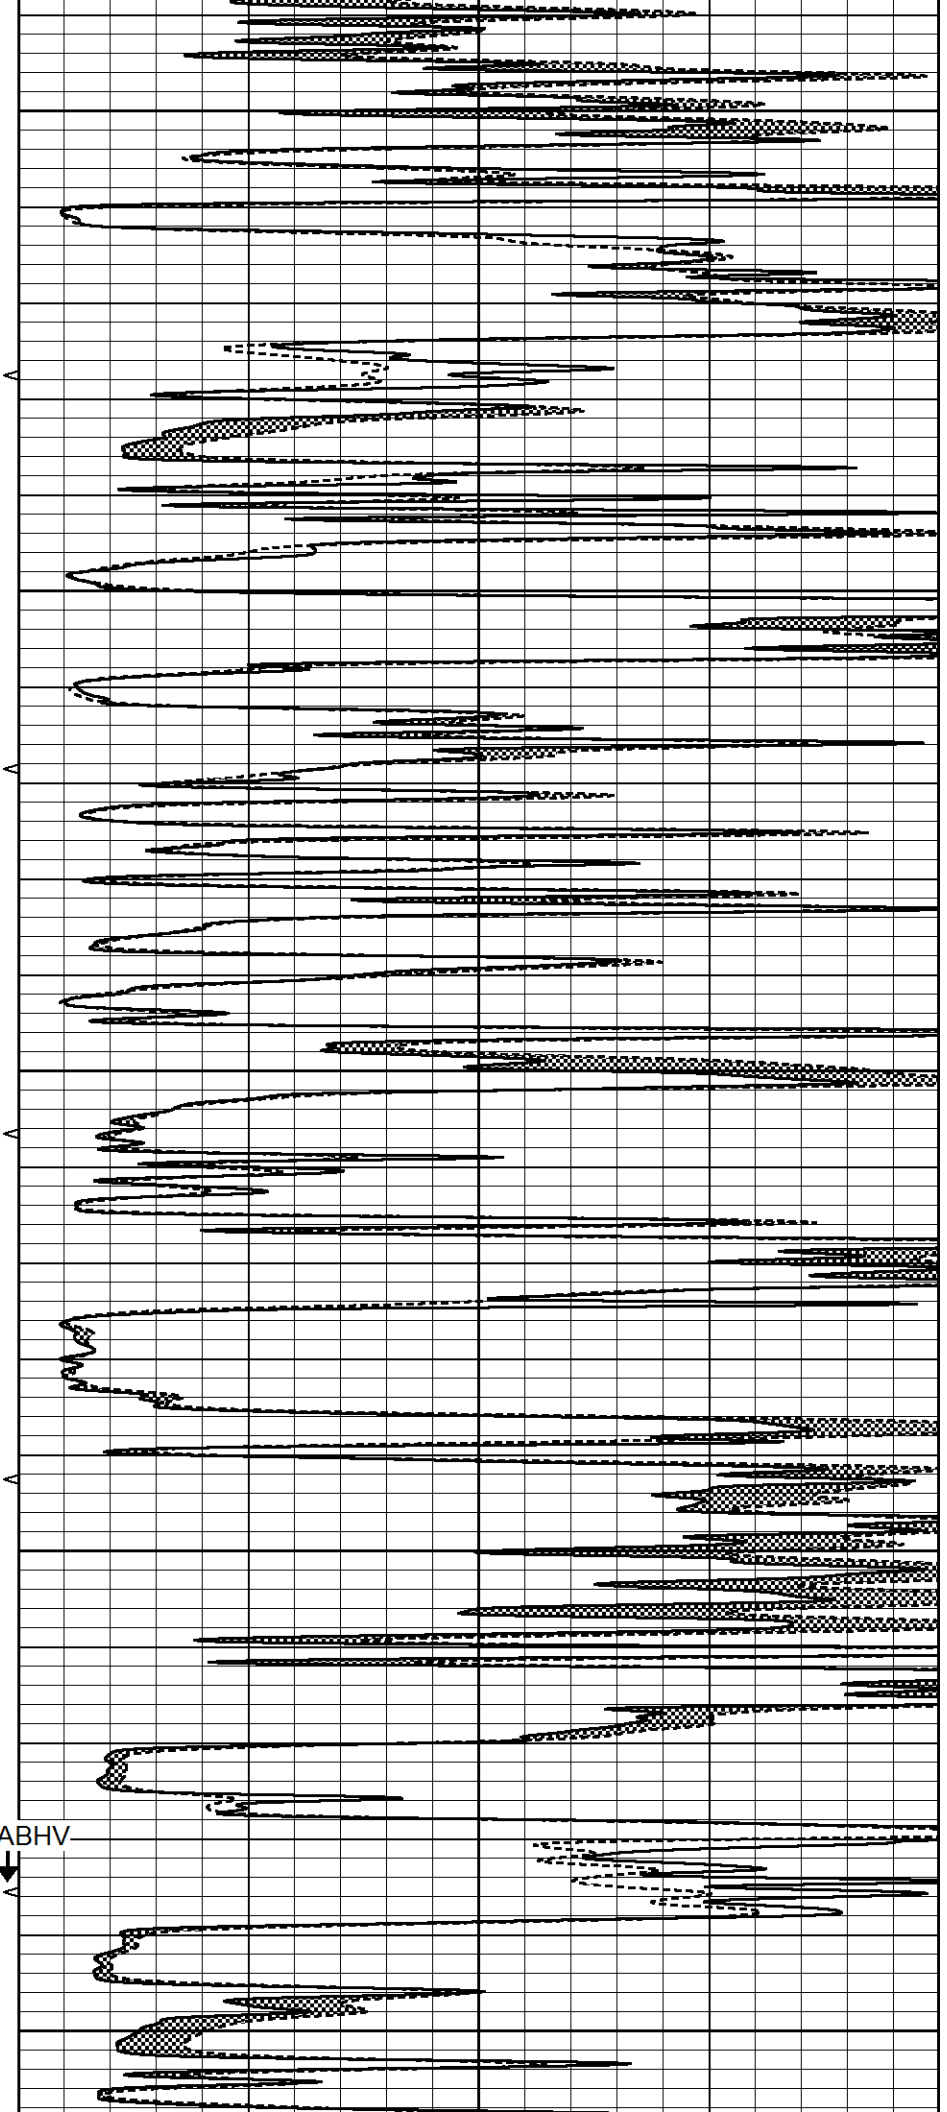


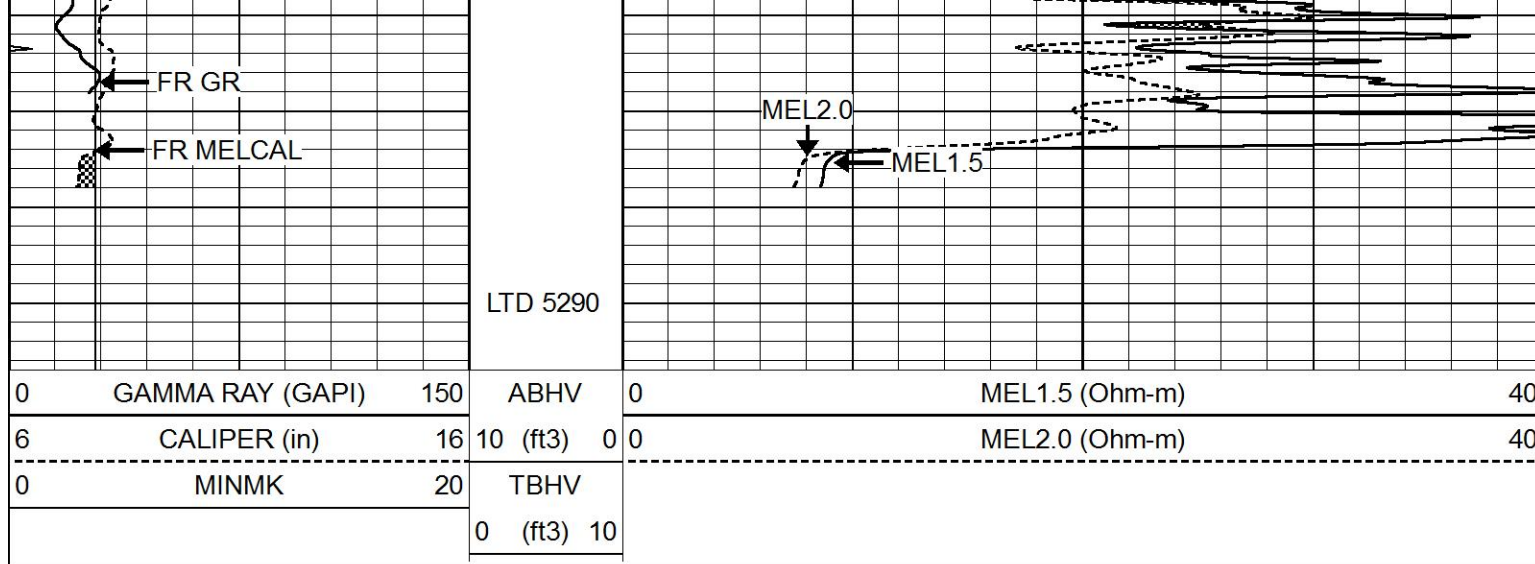


REPEAT SECTION

Database File 6560pe.db
 Dataset Pathname pass5.4
 Presentation Format _micro
 Dataset Creation Fri Jun 03 05:15:54 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

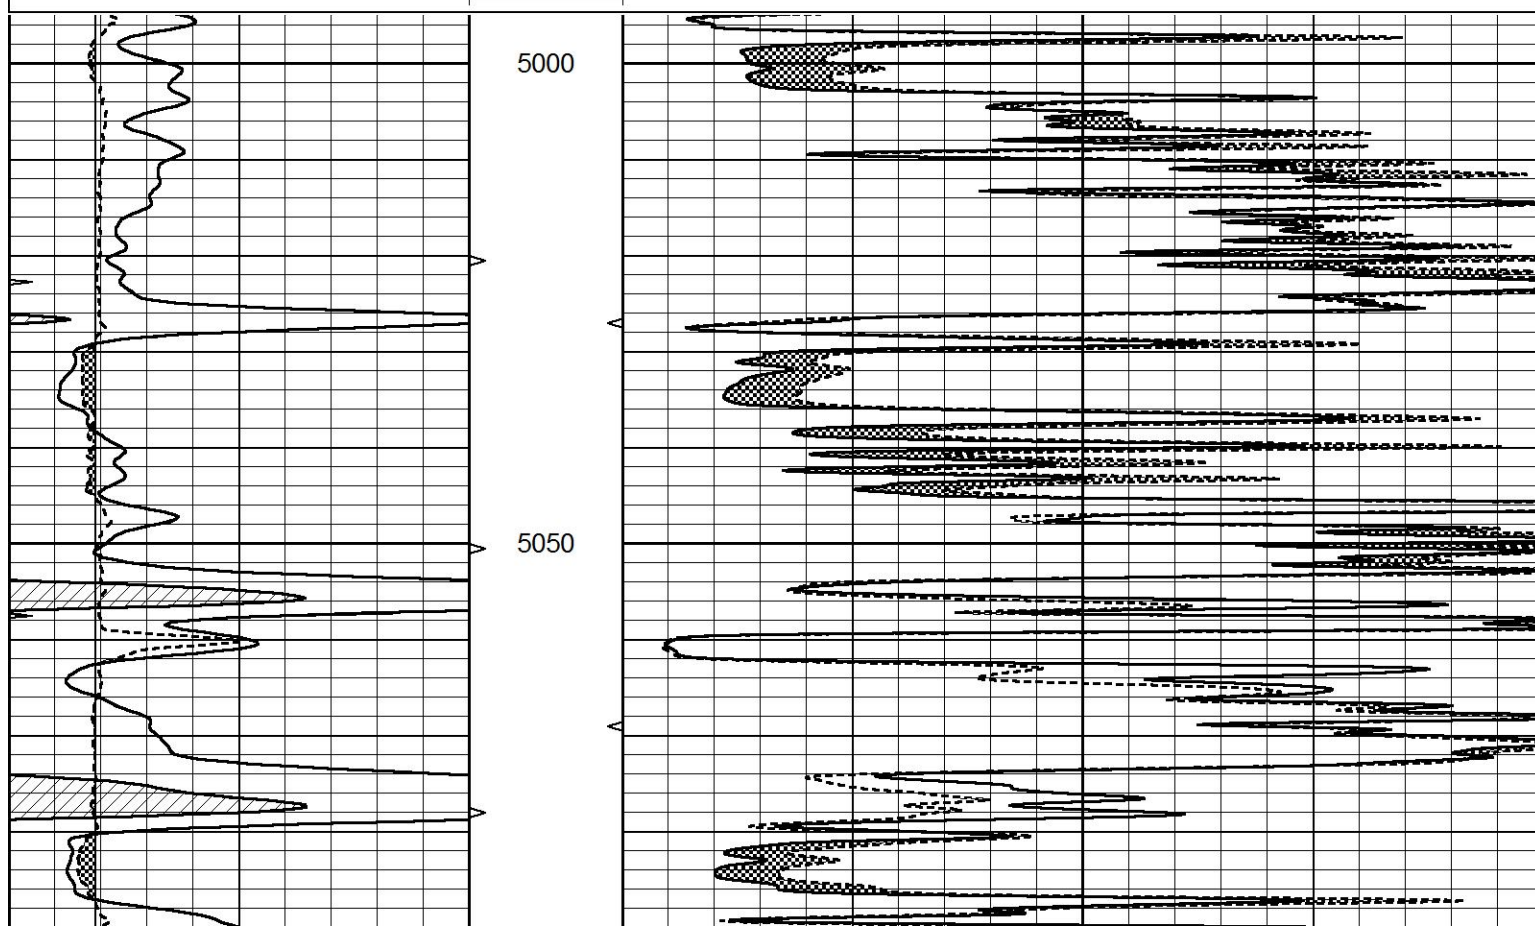

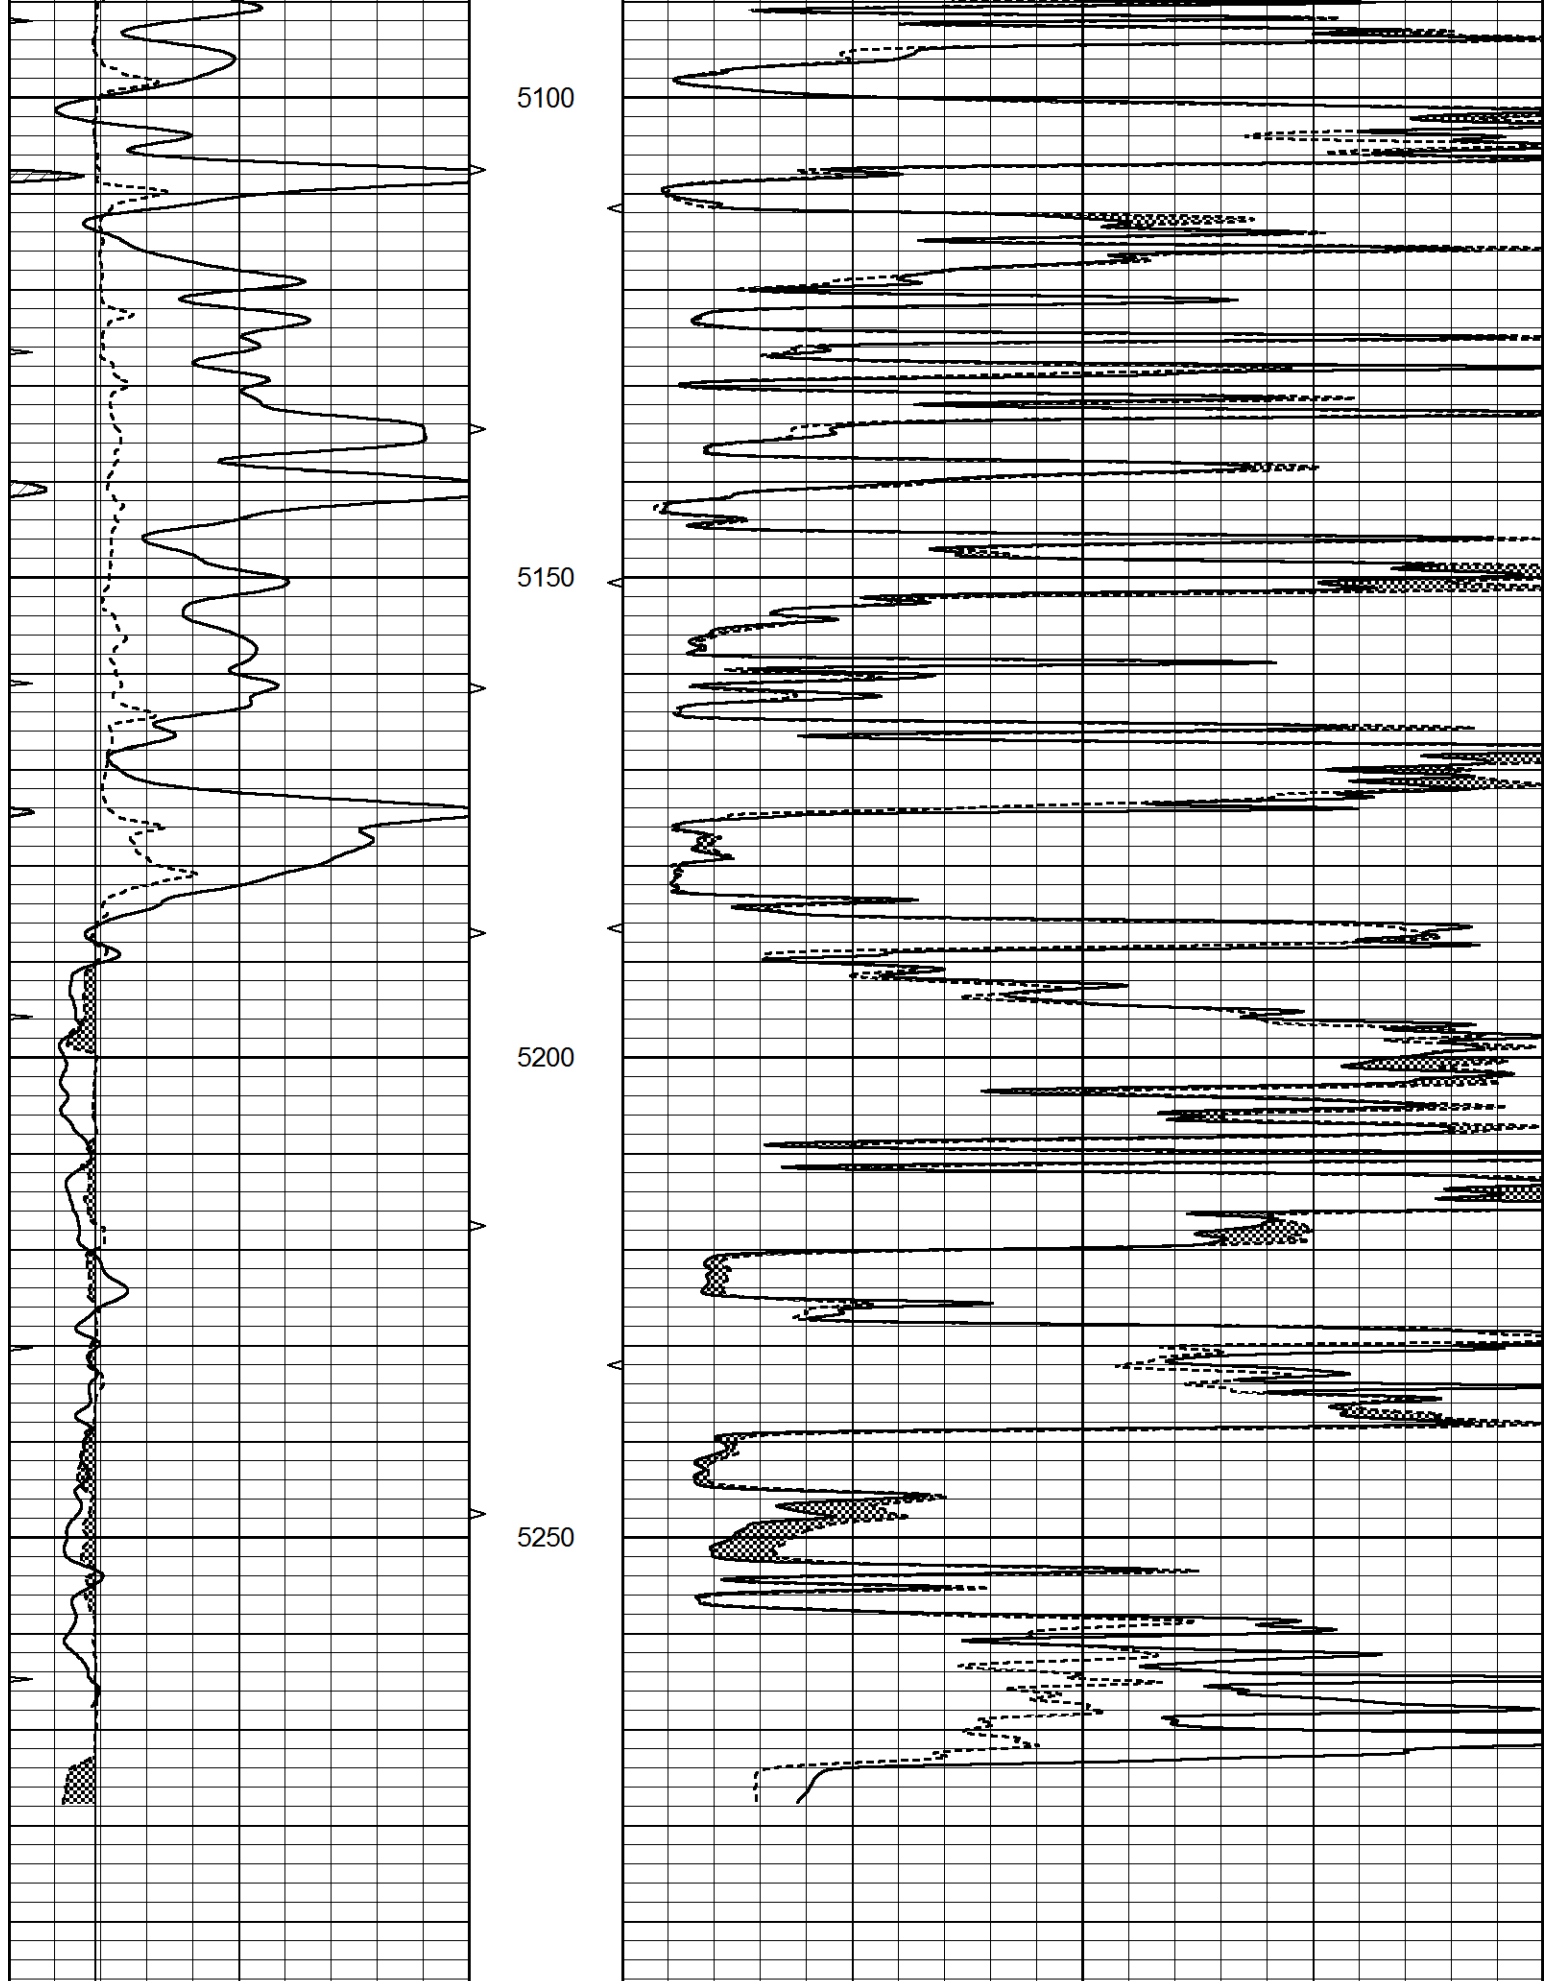

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			

Calibration Report

Database File 6560pe.db
 Dataset Pathname pass6.3
 Dataset Creation Fri Jun 03 05:46:17 2022

MICRO Calibration Report

Serial Number: MICRO5
 Tool Model: PROBE
 Performed: Fri Jun 03 05:02:18 2022

Caliper Calibration: Gain=6.061 Offset=-38.545

	Low Cal	High Cal
References	8.000	16.000
Readings	7.680	9.000

1.5" Calibration: Gain=42.000 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.015	1.007

2" Calibration: Gain=80.000 Offset=-1.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.008	0.908

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Thu May 26 15:25:20 2022

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.5400 GAPI/cps