



TRIPLE COMBO LOG

Company	SCOUT ENERGY PARTNERS		
Well	FEDERAL FARM MORTGAGE B4 ATU 57		
Field	HUGOTON-PANOMA		
County	STANTON	State	KS
Location:	API # : 15-187-21354 SW/SW/SW/SW 170' FSL & 235' FWL		
Permanent Datum	SEC 19 TWP 30S RGE 39W	Ground Level	Elevation 3223
Log Measured From	KB 5' AGL		
Drilling Measured From	KB		
Other Services CDNL DIL		Elevation K.B. 3228 D.F. 3226 G.L. 3223	
Date	7/13/22		
Run Number	TWO		
Depth Driller	2875		
Depth Logger	2875		
Bottom Logged Interval	2873		
Top Log Interval	700		
Casing Driller	8 5/8" @ 7'14"		
Casing Logger	714		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.1/38		
pH / Fluid Loss	8.9/7.8		
Source of Sample	Pit		
Rm @ Meas. Temp	1.1@70degf		
Rmf @ Meas. Temp	.83@70degf		
Rmc @ Meas. Temp	1.32@70degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.78@98degf		
Time Circulation Stopped	4:00 A.M.		
Time Logger on Bottom	7:45 A.M		
Maximum Recorded Temperature	98degf		
Equipment Number	T605		
Location	Hays, KS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	JORDAN NORET		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

BIG BOW SOUTH TO 23 RD. 2 WEST.


Thank You for using Gemini Wireline LLC
785-625-1182




MAIN PASS

Database File	sefederalfarmmortgageb4atu57oh.db
Dataset Pathname	pass1LAS
Presentation Format	obrcomp
Dataset Creation	Wed Jul 13 10:33:42 2022
Charted by	Depth in Feet scaled 1:240

0	Gamma Ray (GAPI)	150	0.2	Deep Resistivity (Ohm-m)	200	30	Sonic Porosity (pu)	-10
-100	SP (mV)	100	0.2	Medium Resistivity (Ohm-m)	200	30	NPOR (pu)	-10
6	DCAL (in)	16	0.2	Shallow Resistivity (Ohm-m)	200	30	Density Porosity (pu)	-10
						0	PE (barn)	20
						RHOC		
						-0.25 (g/cc)	0.25	

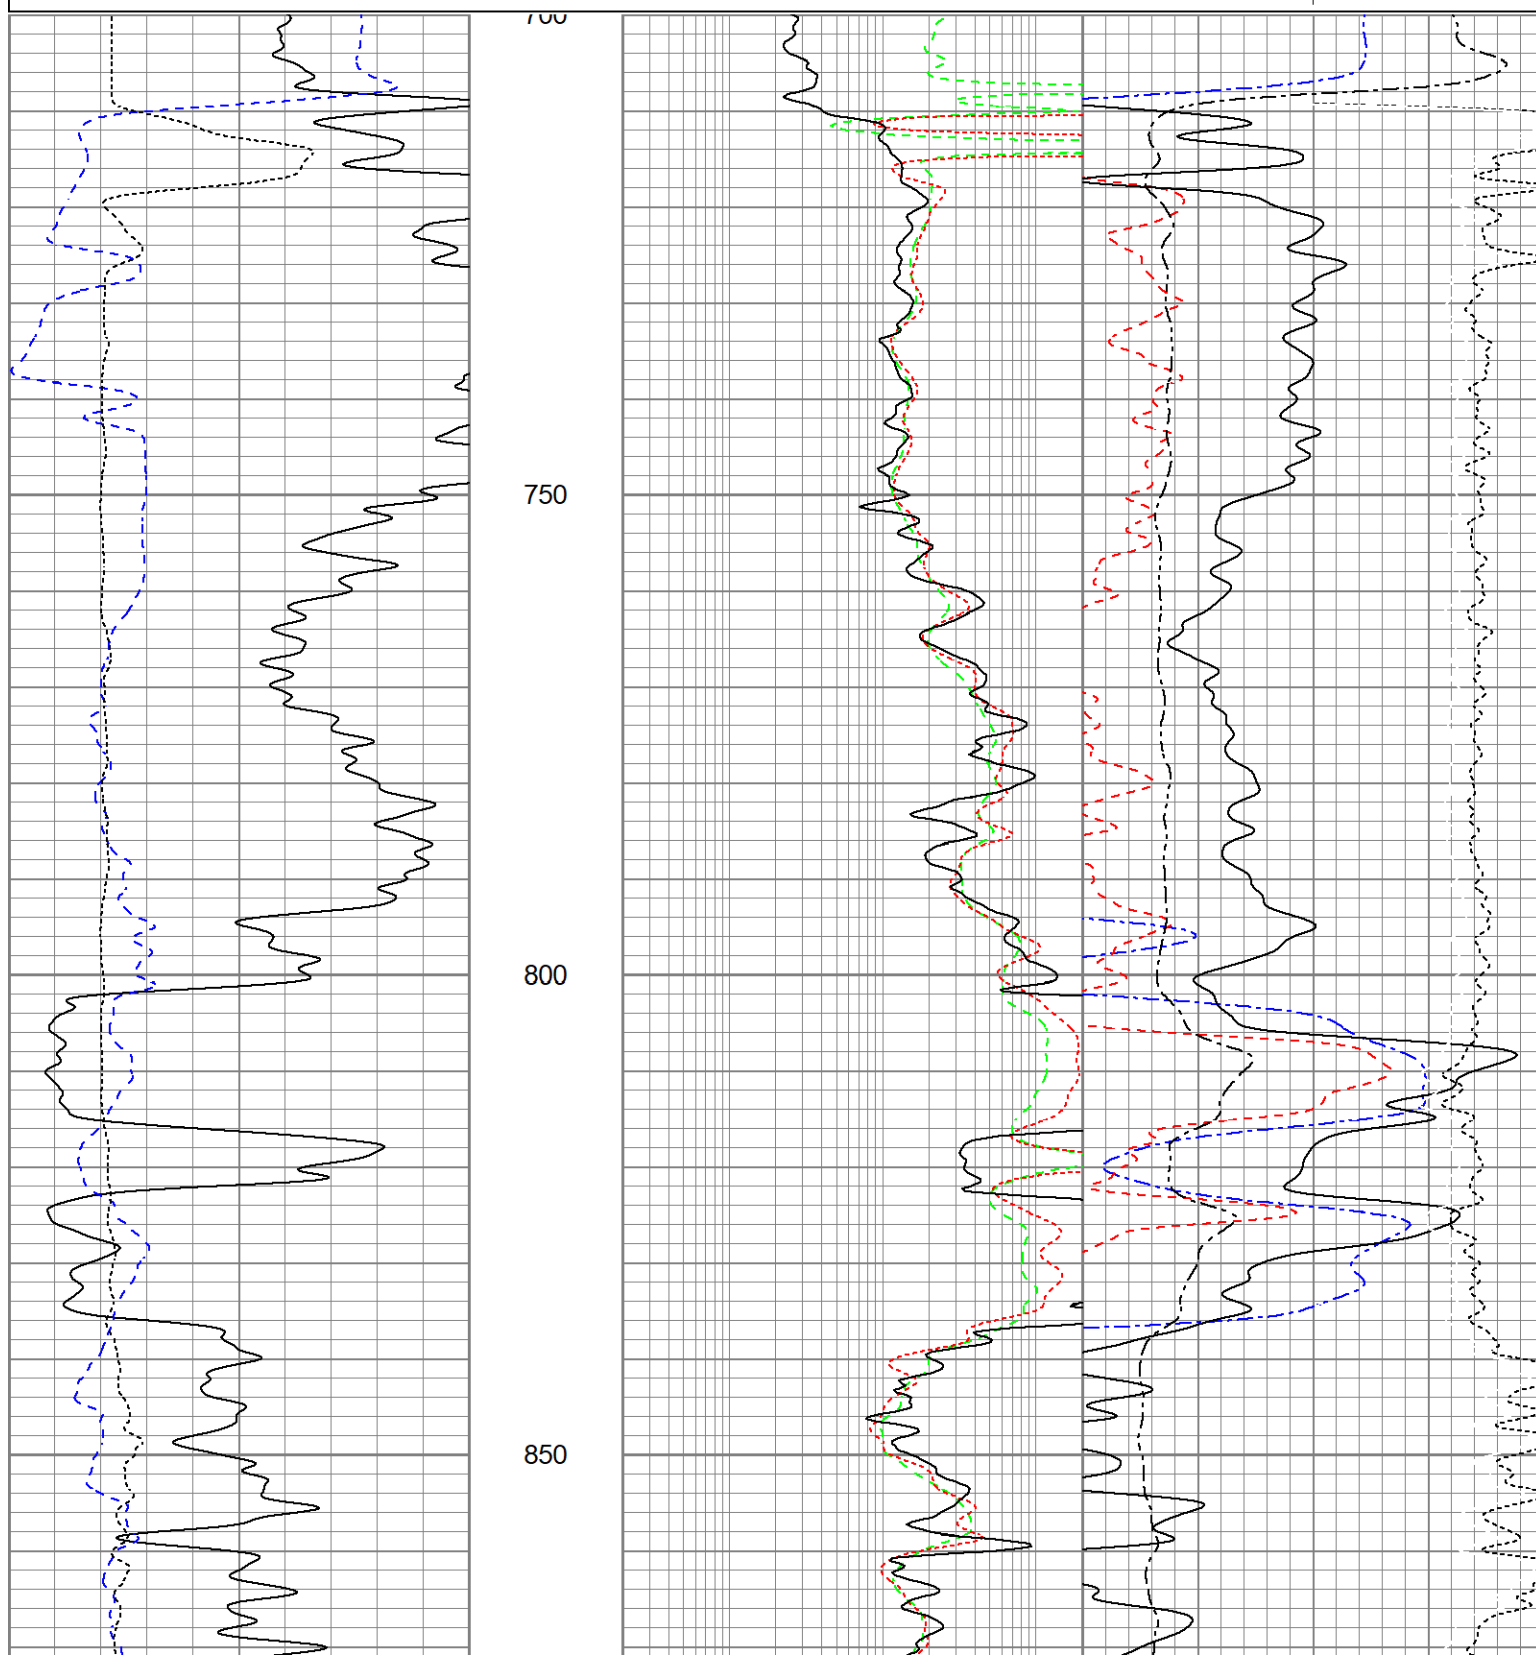

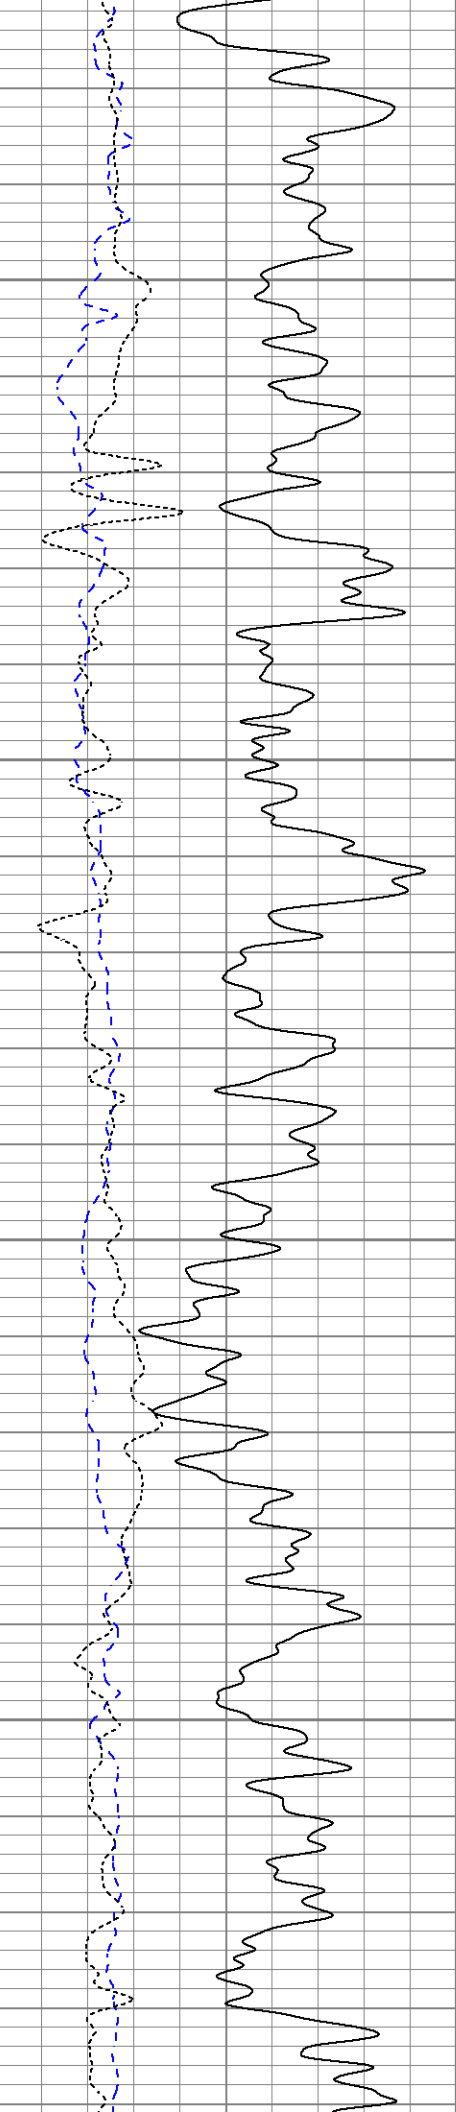



900

950

1000

1050

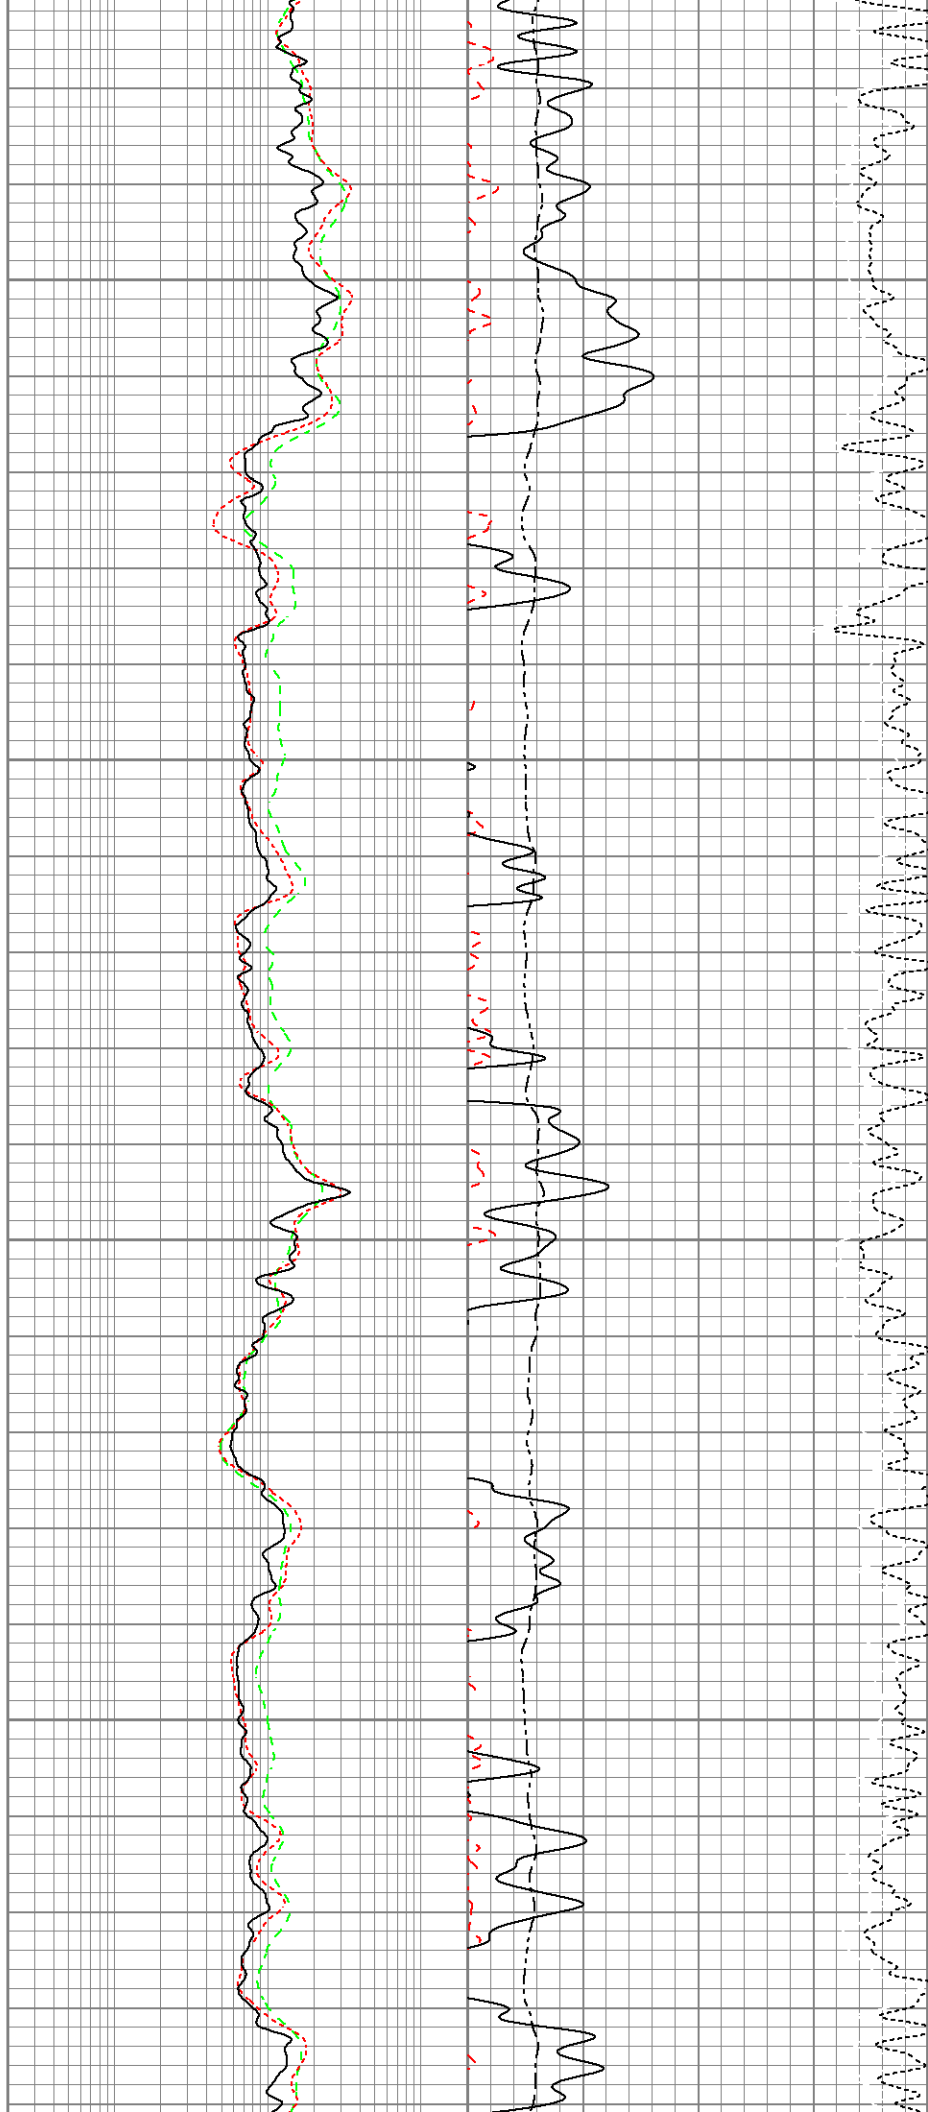

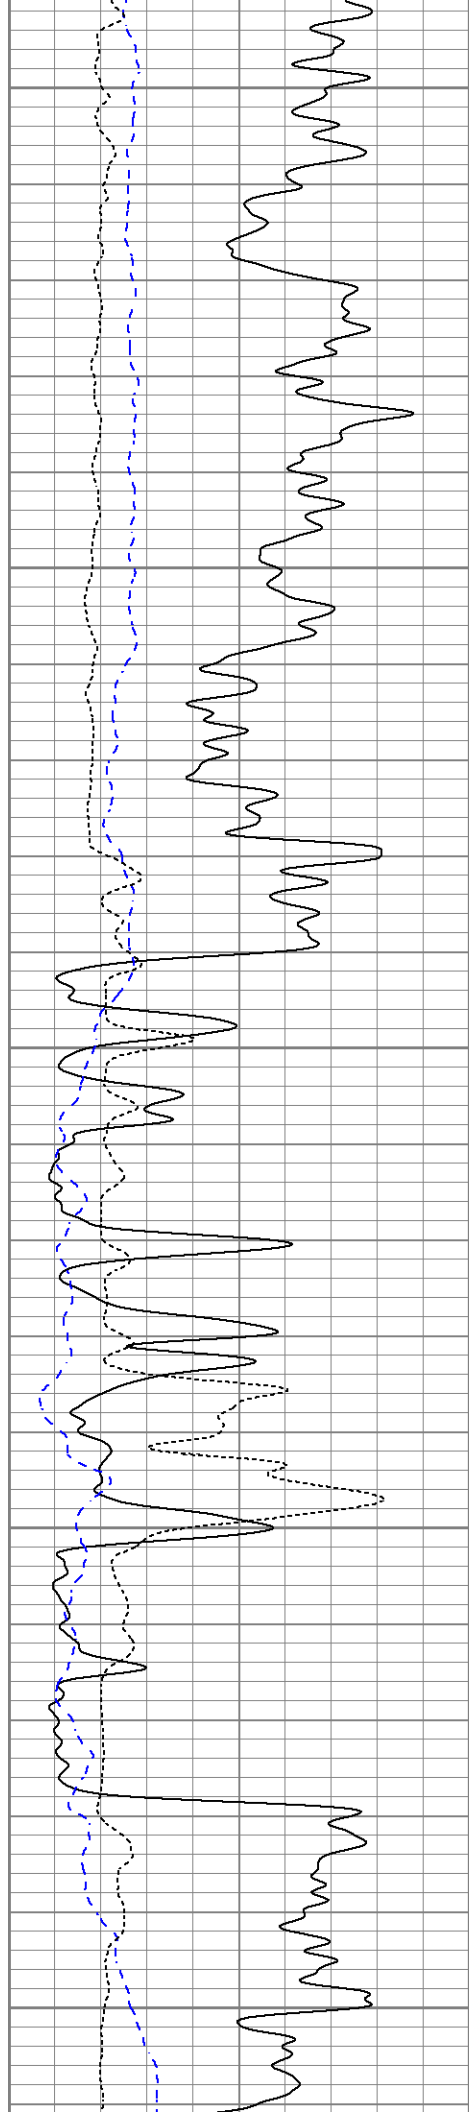


1100


1150

1200

1250

1300

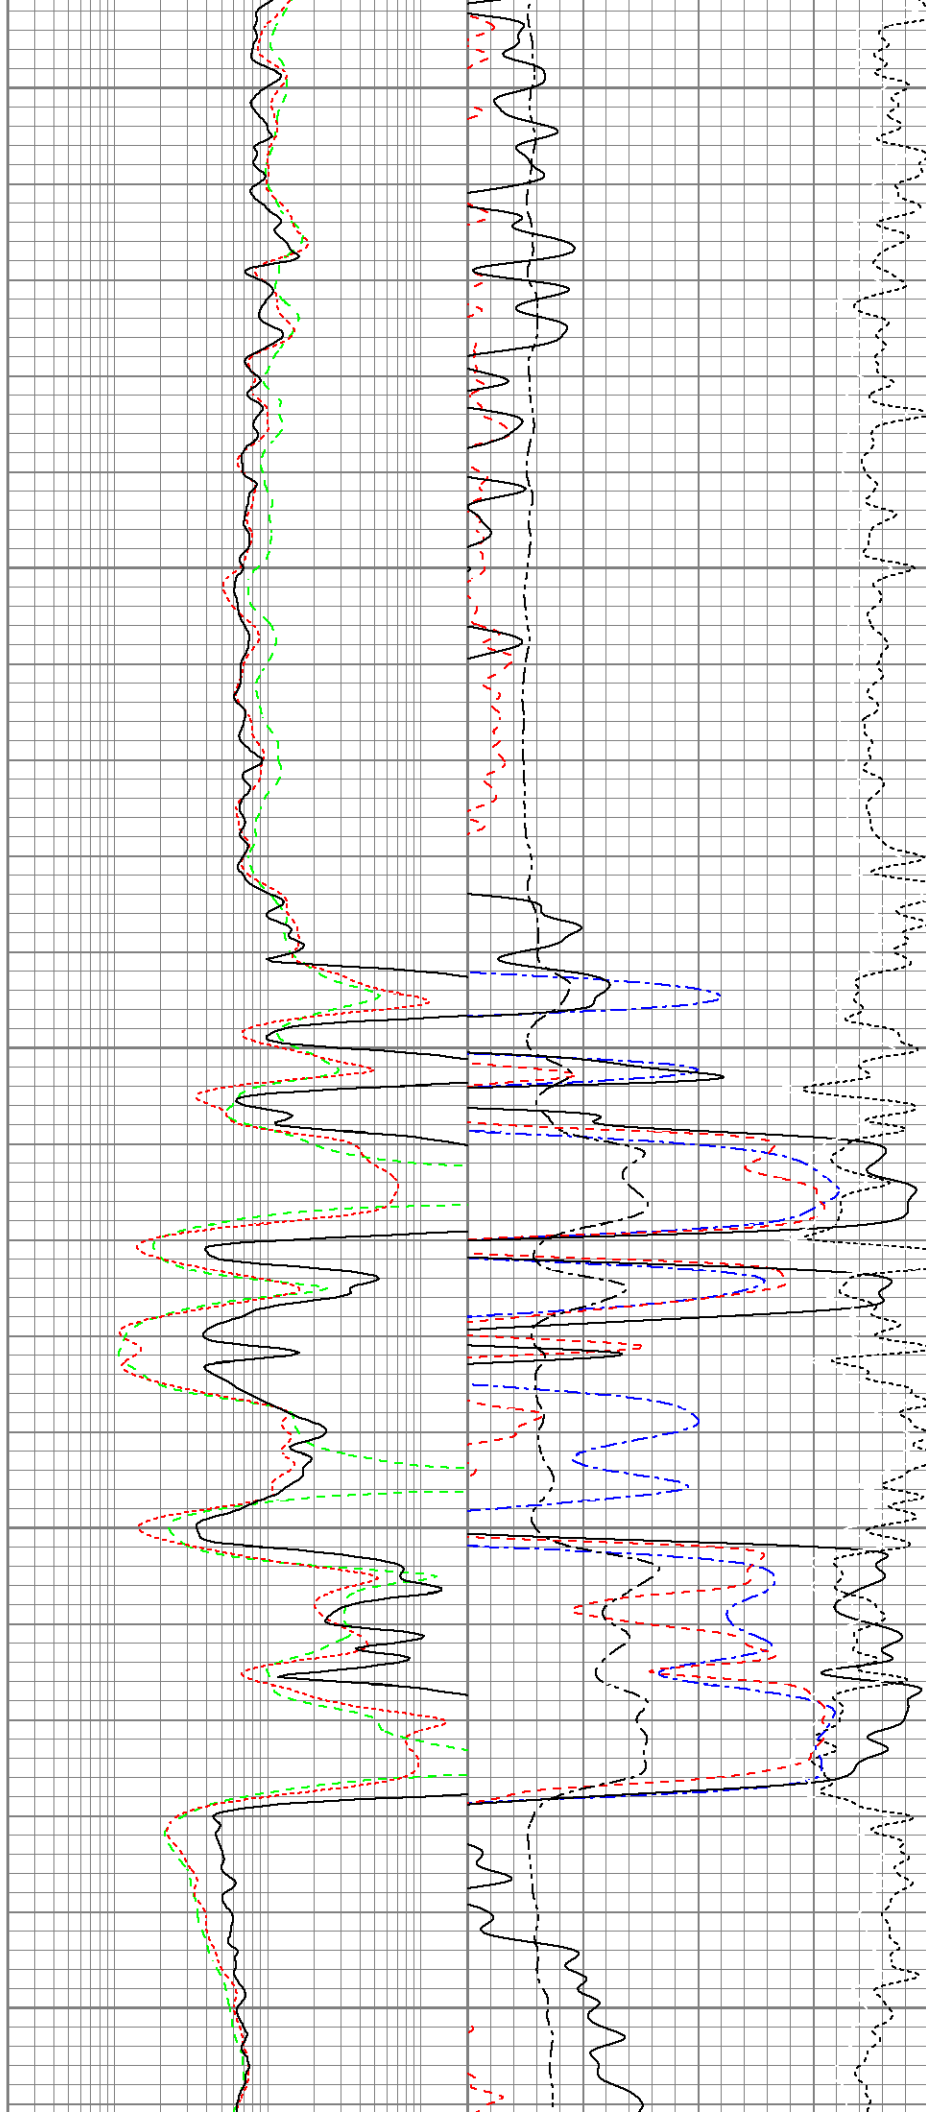

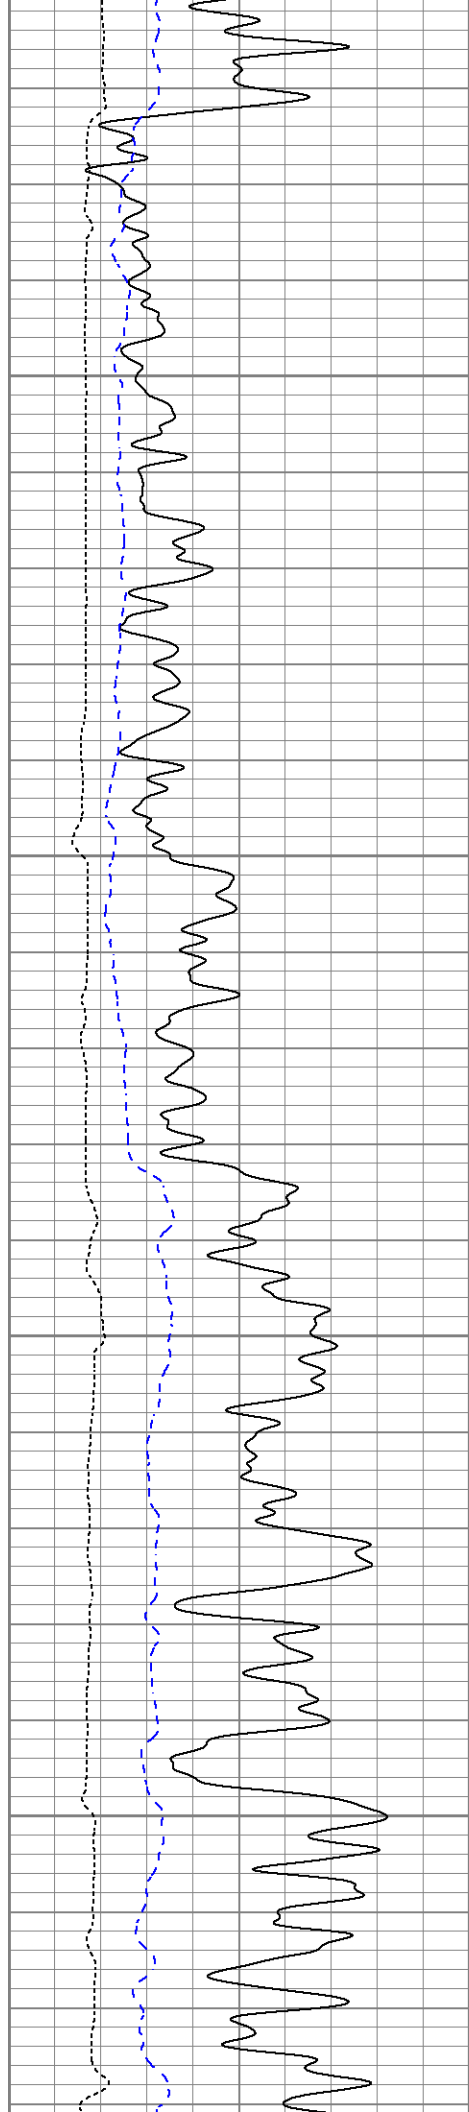



1350

1400

1450

1500

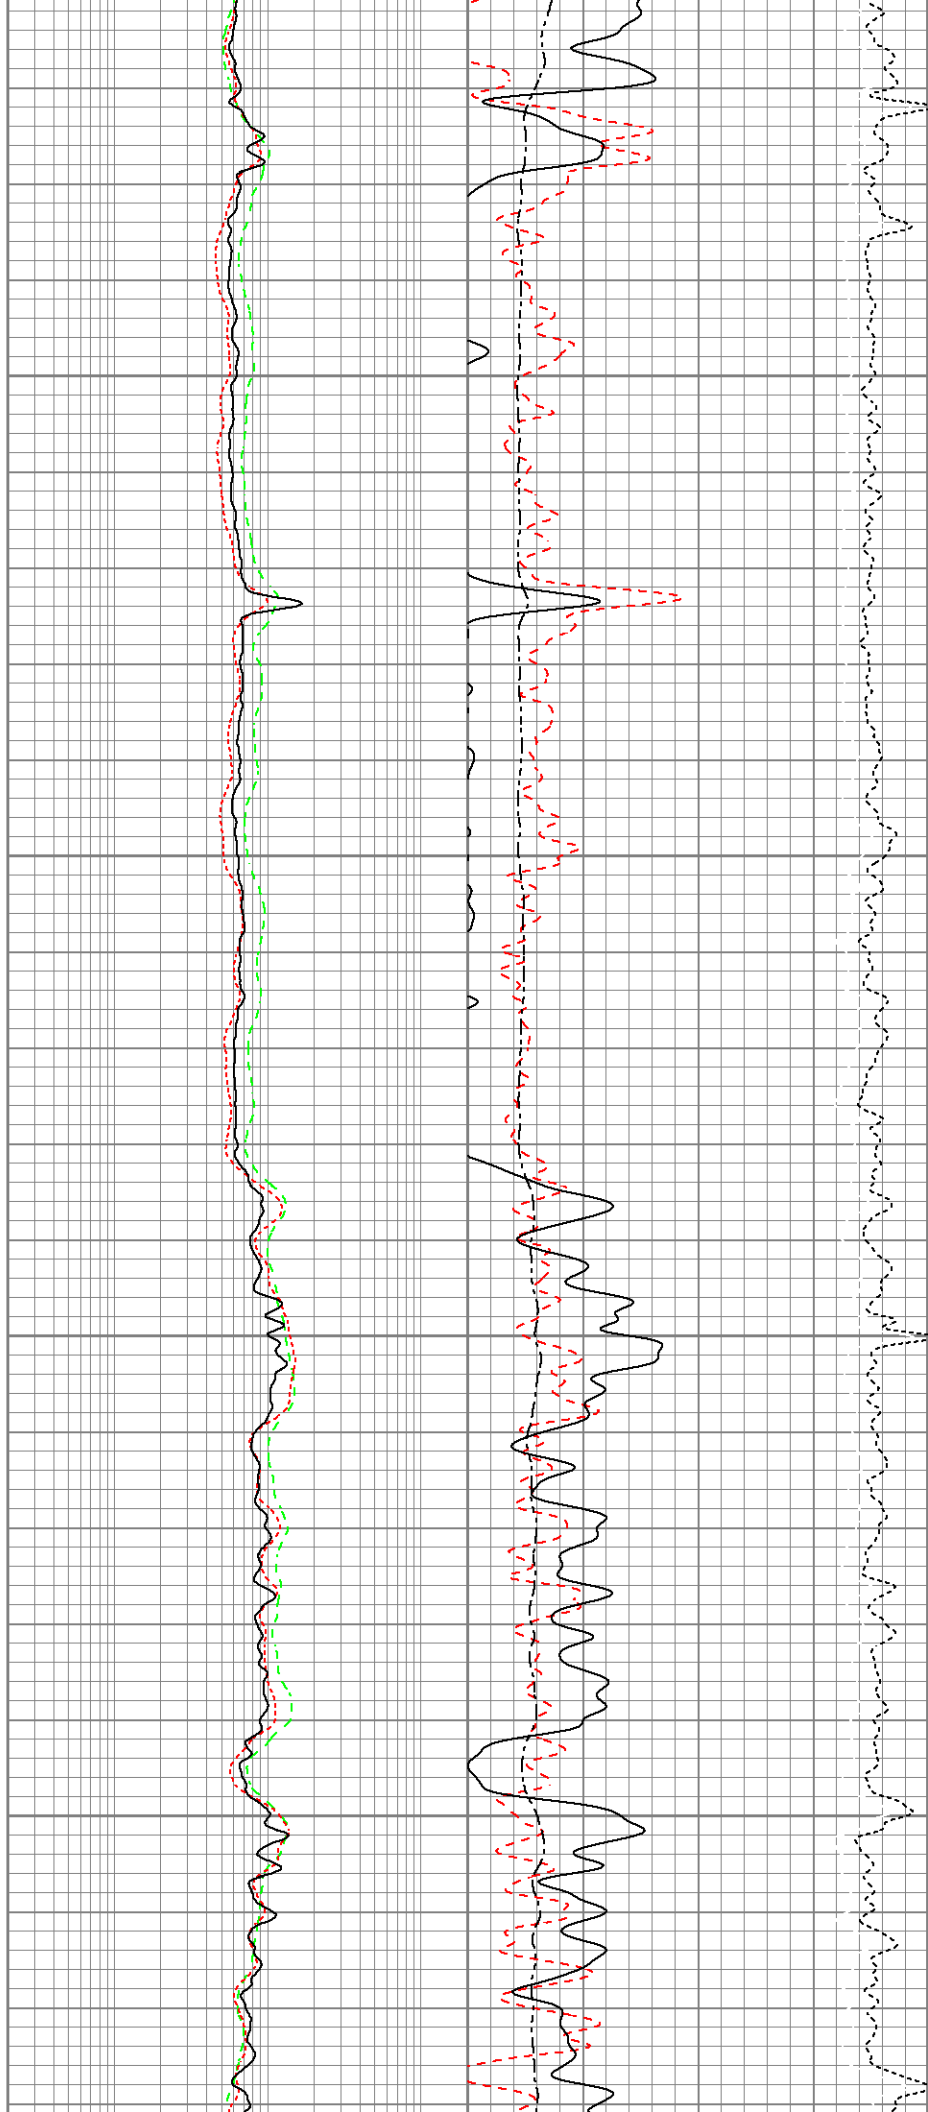

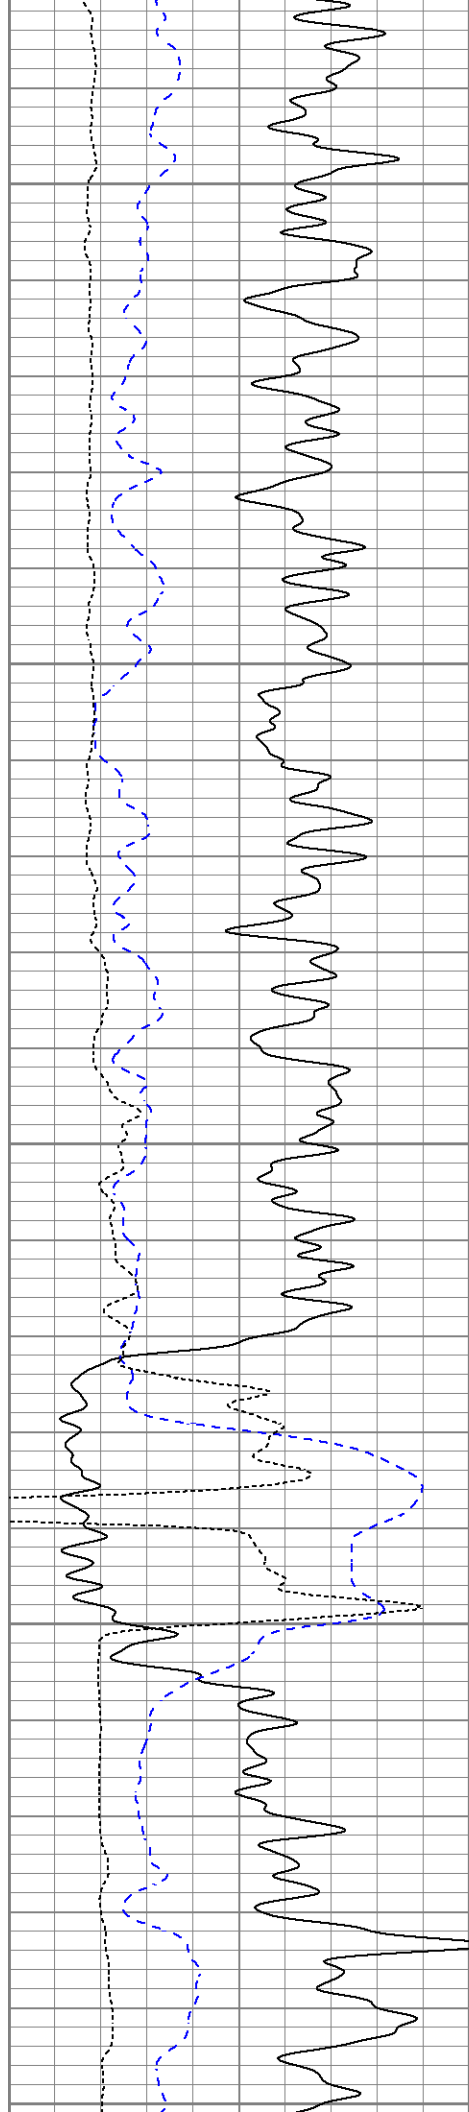


1550


1600

1650

1700

1750

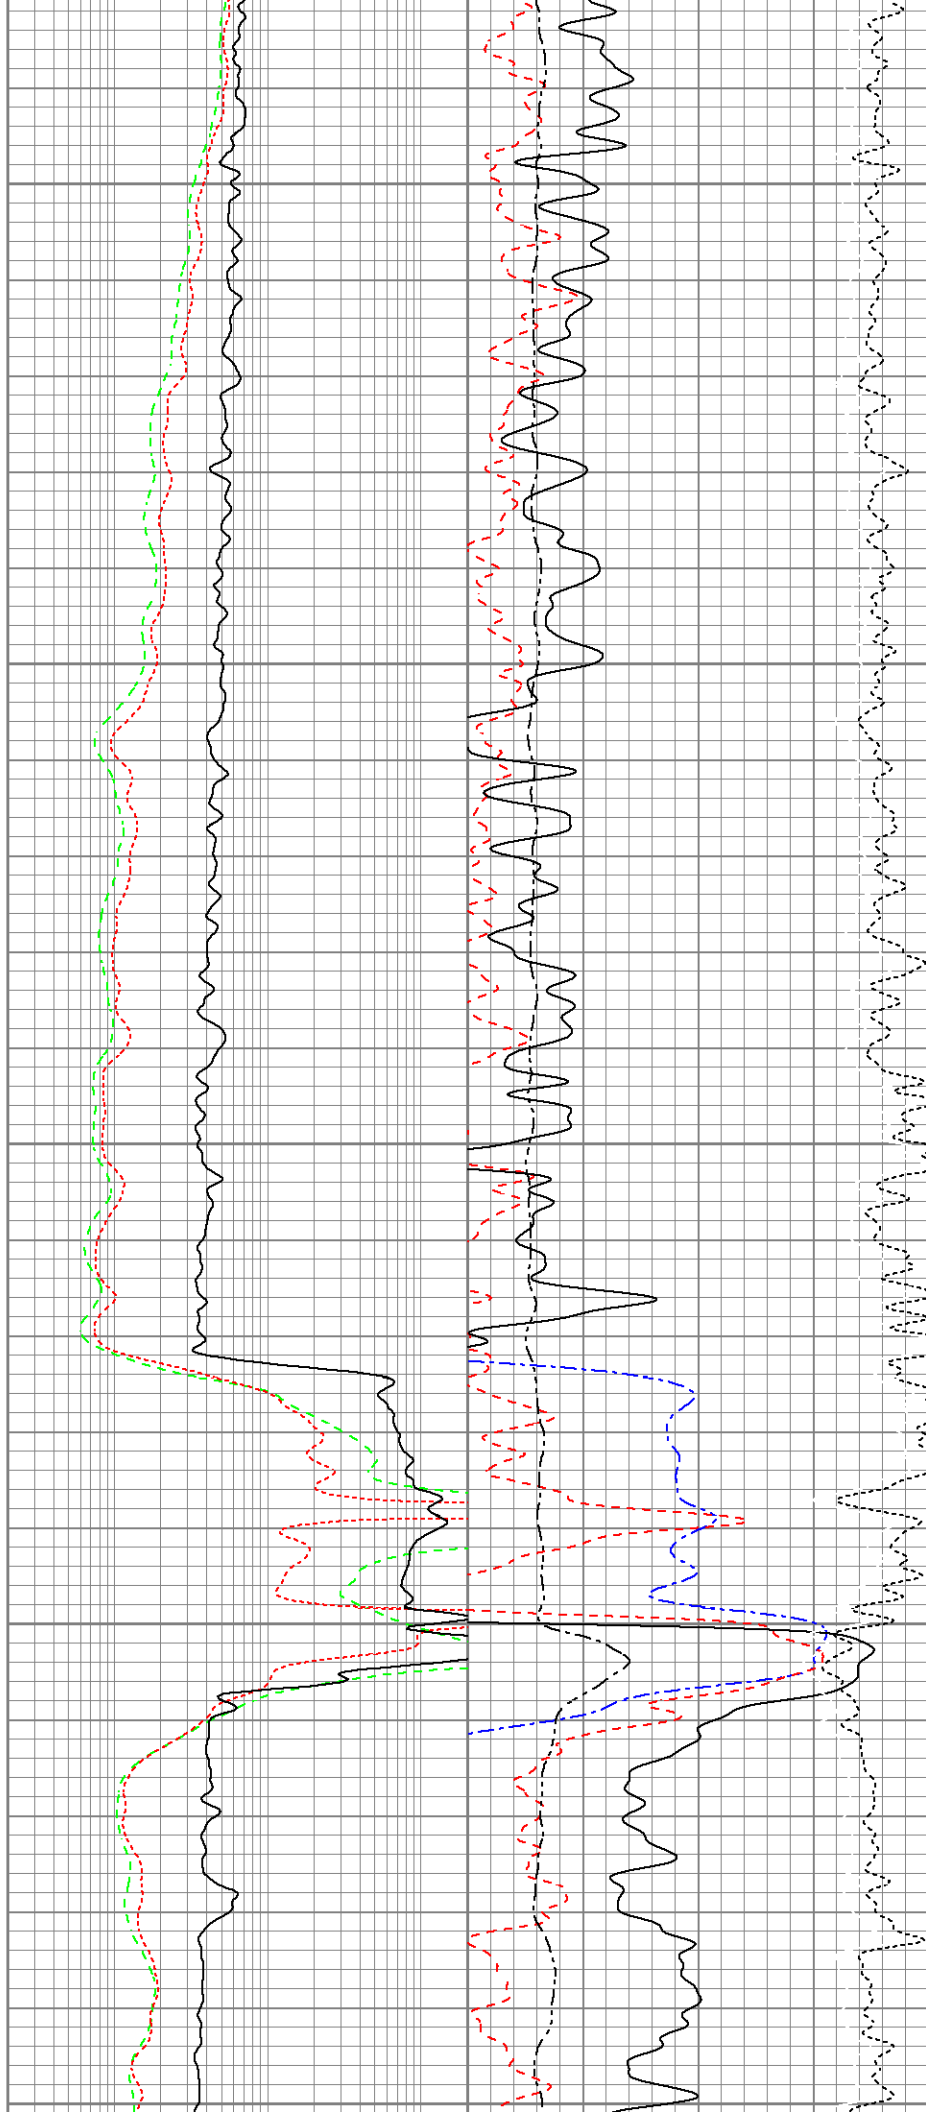



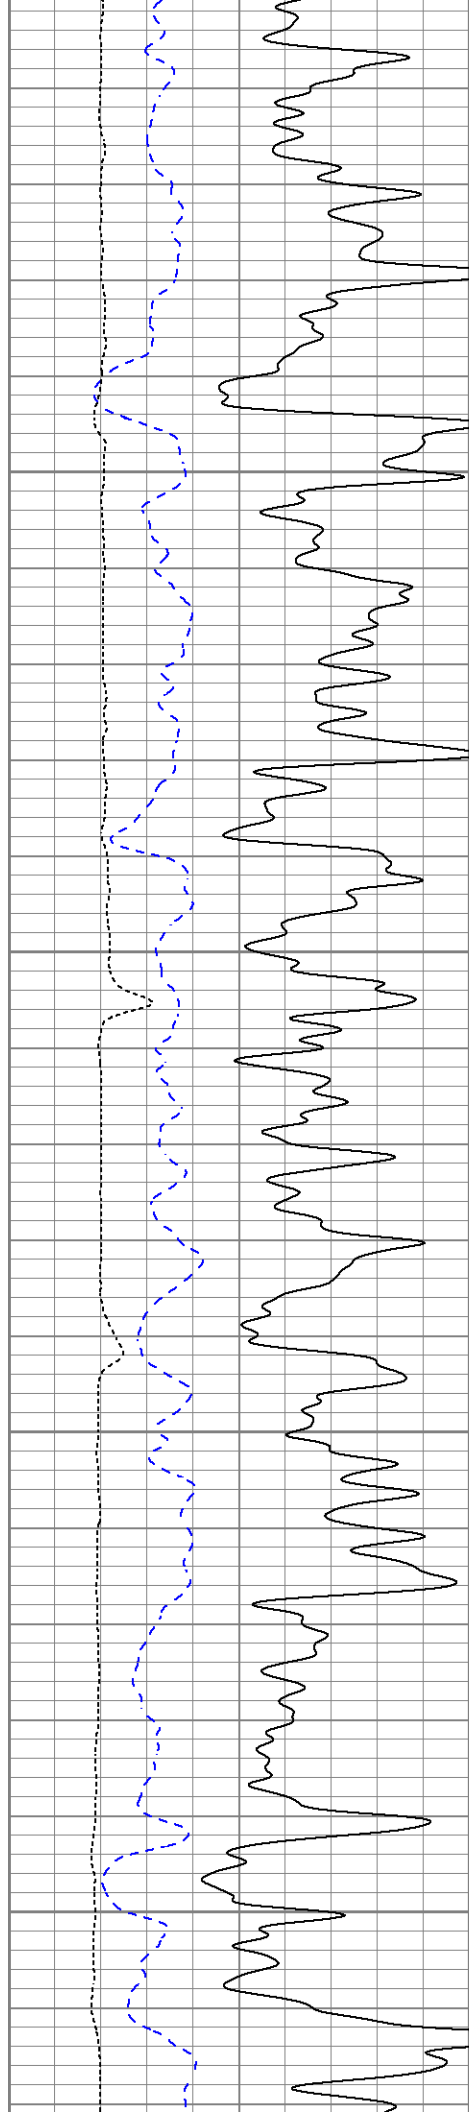



1800

1850

1900

1950

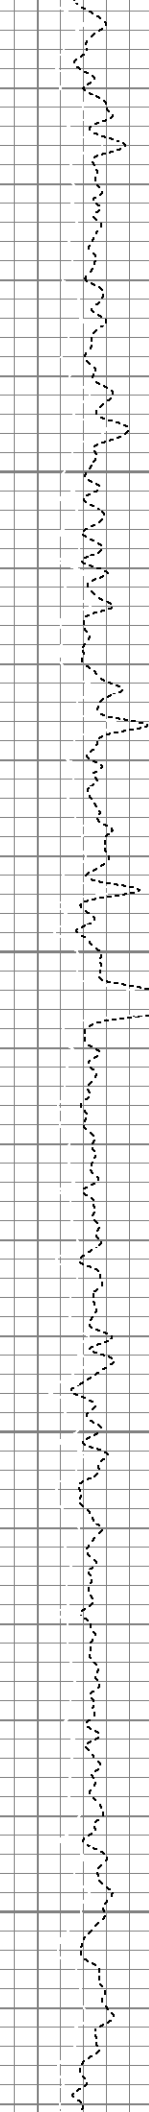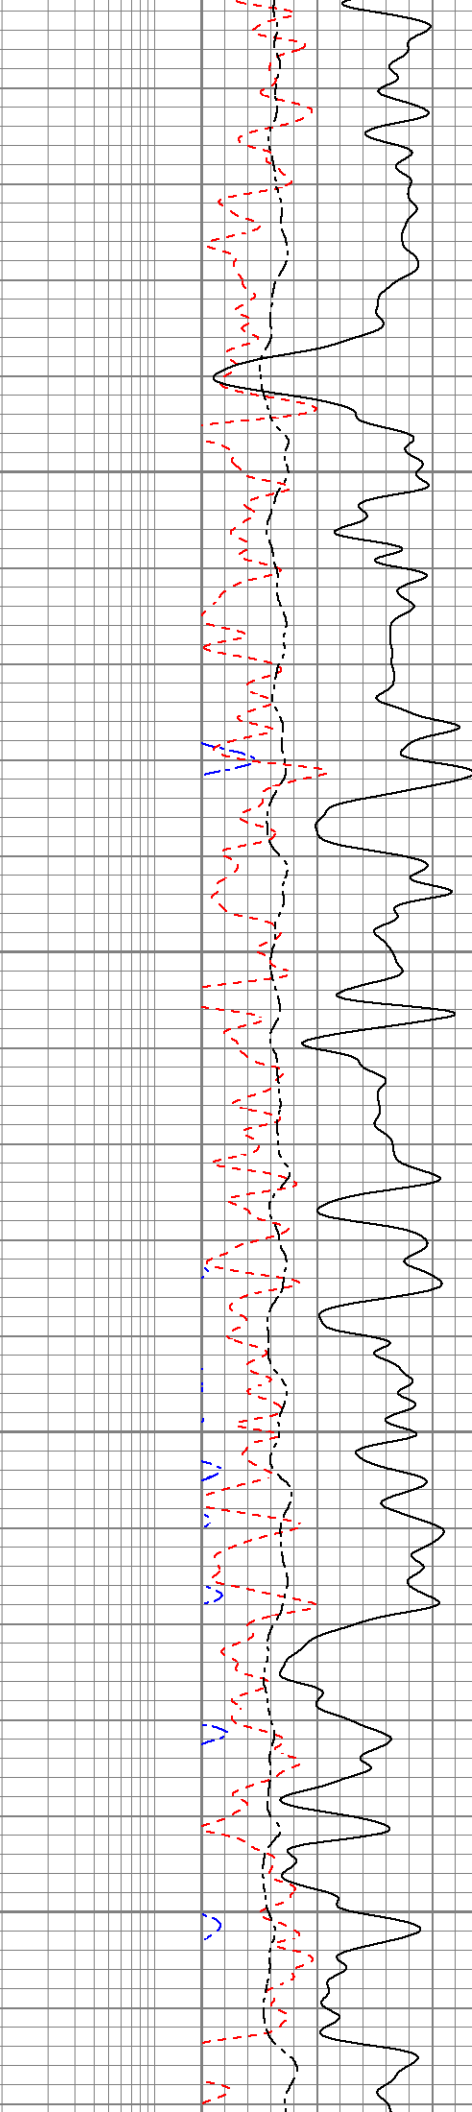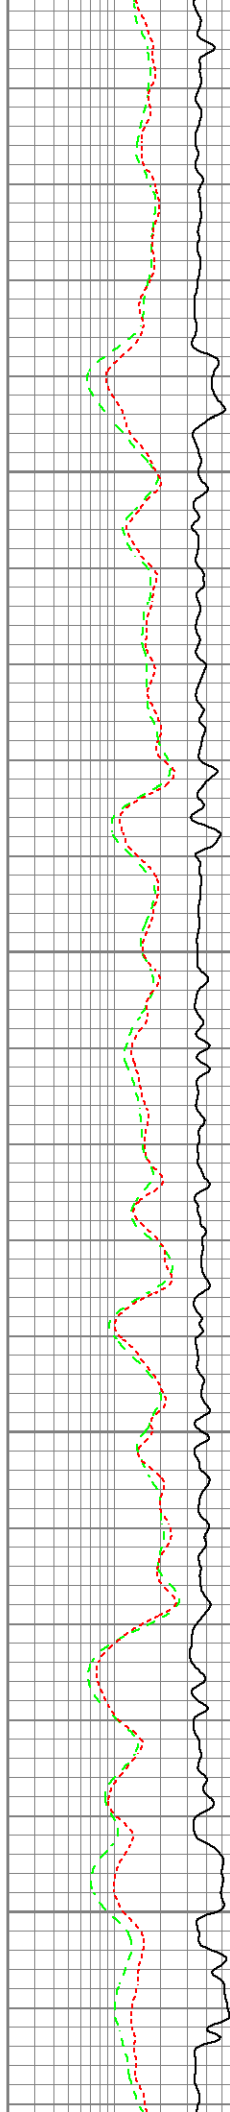


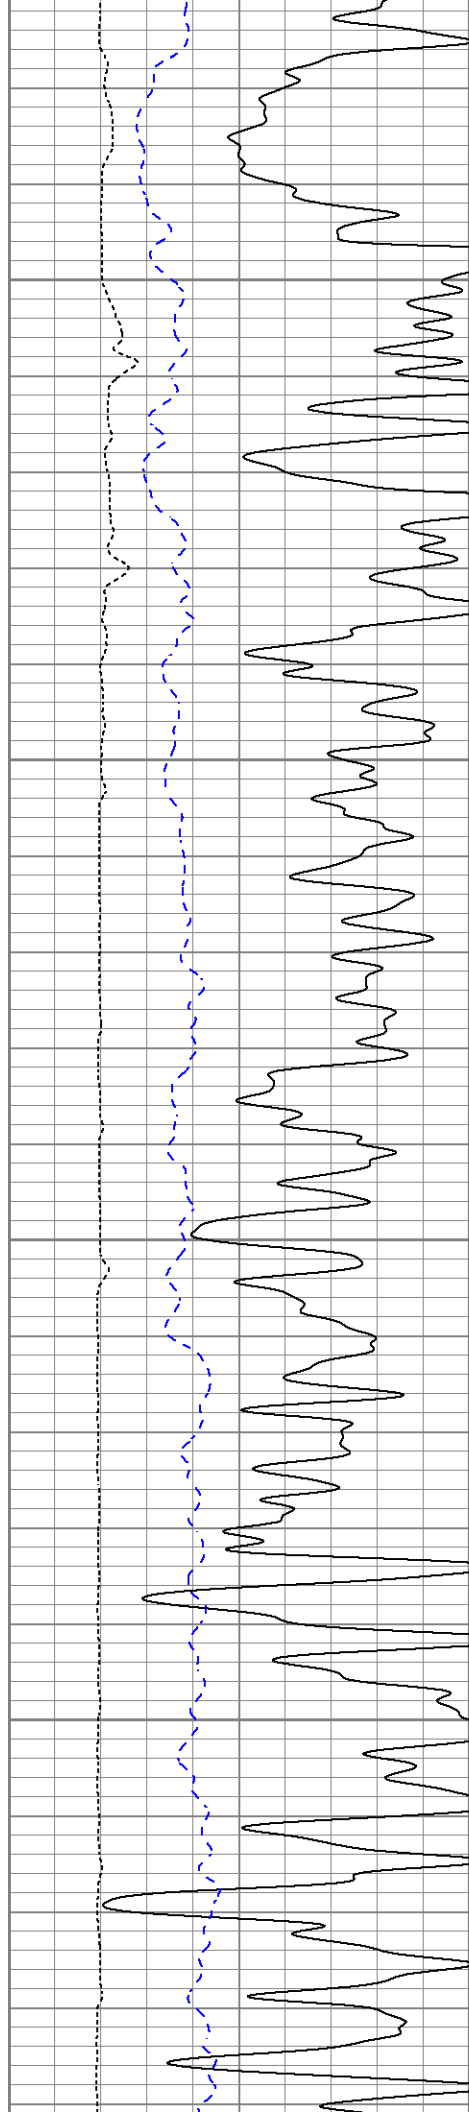



2000

2050

2100

2150

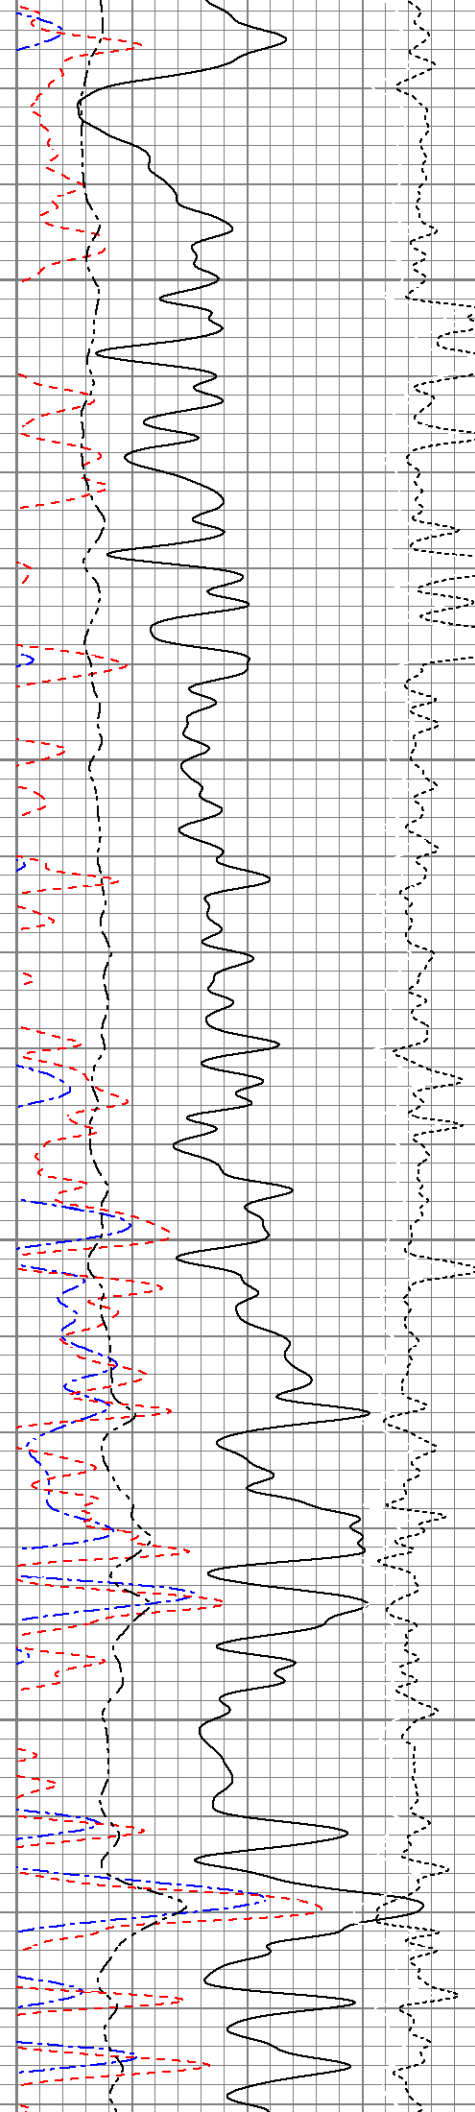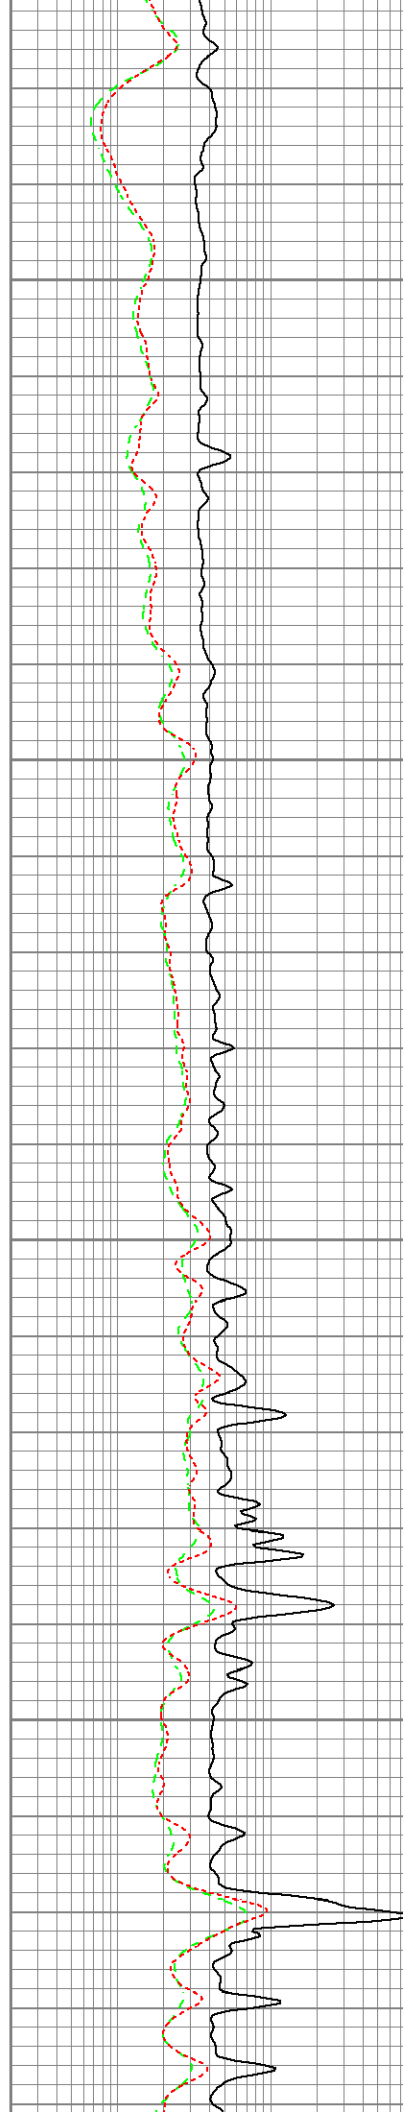

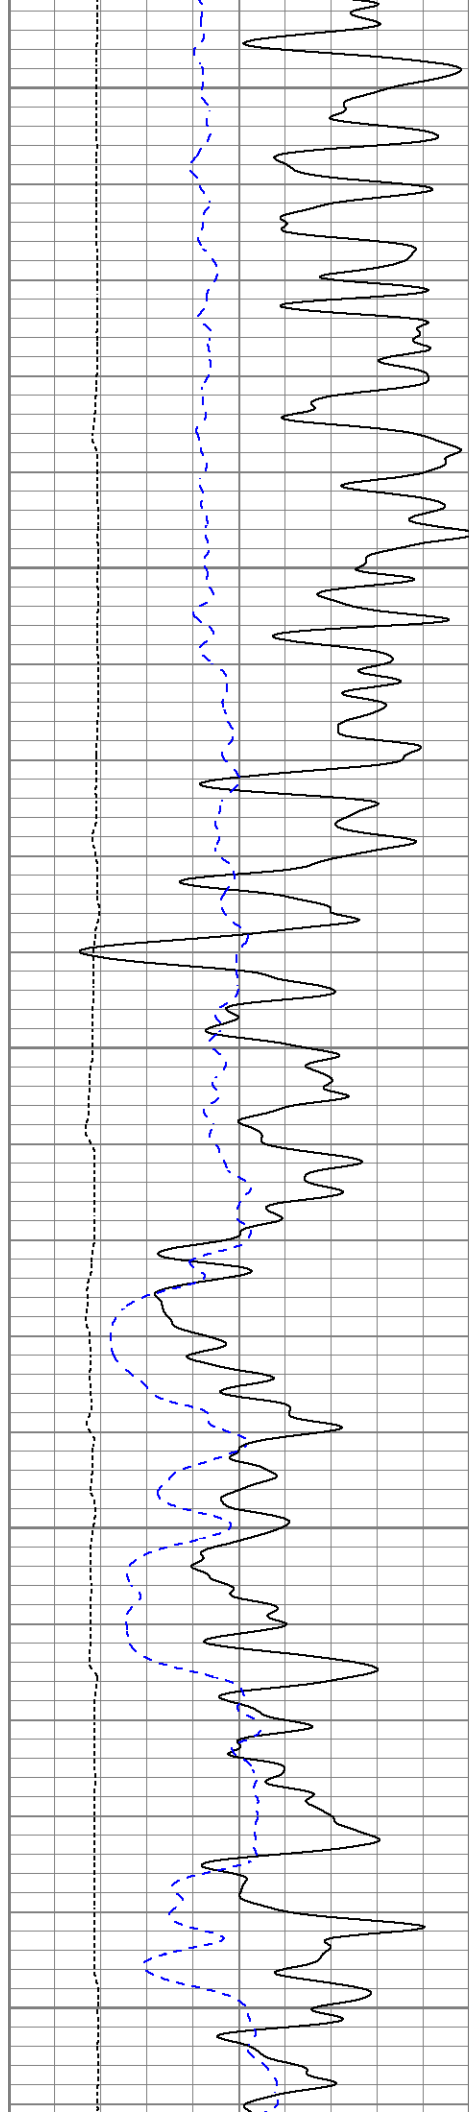


2200


2250

2300

2350

2400

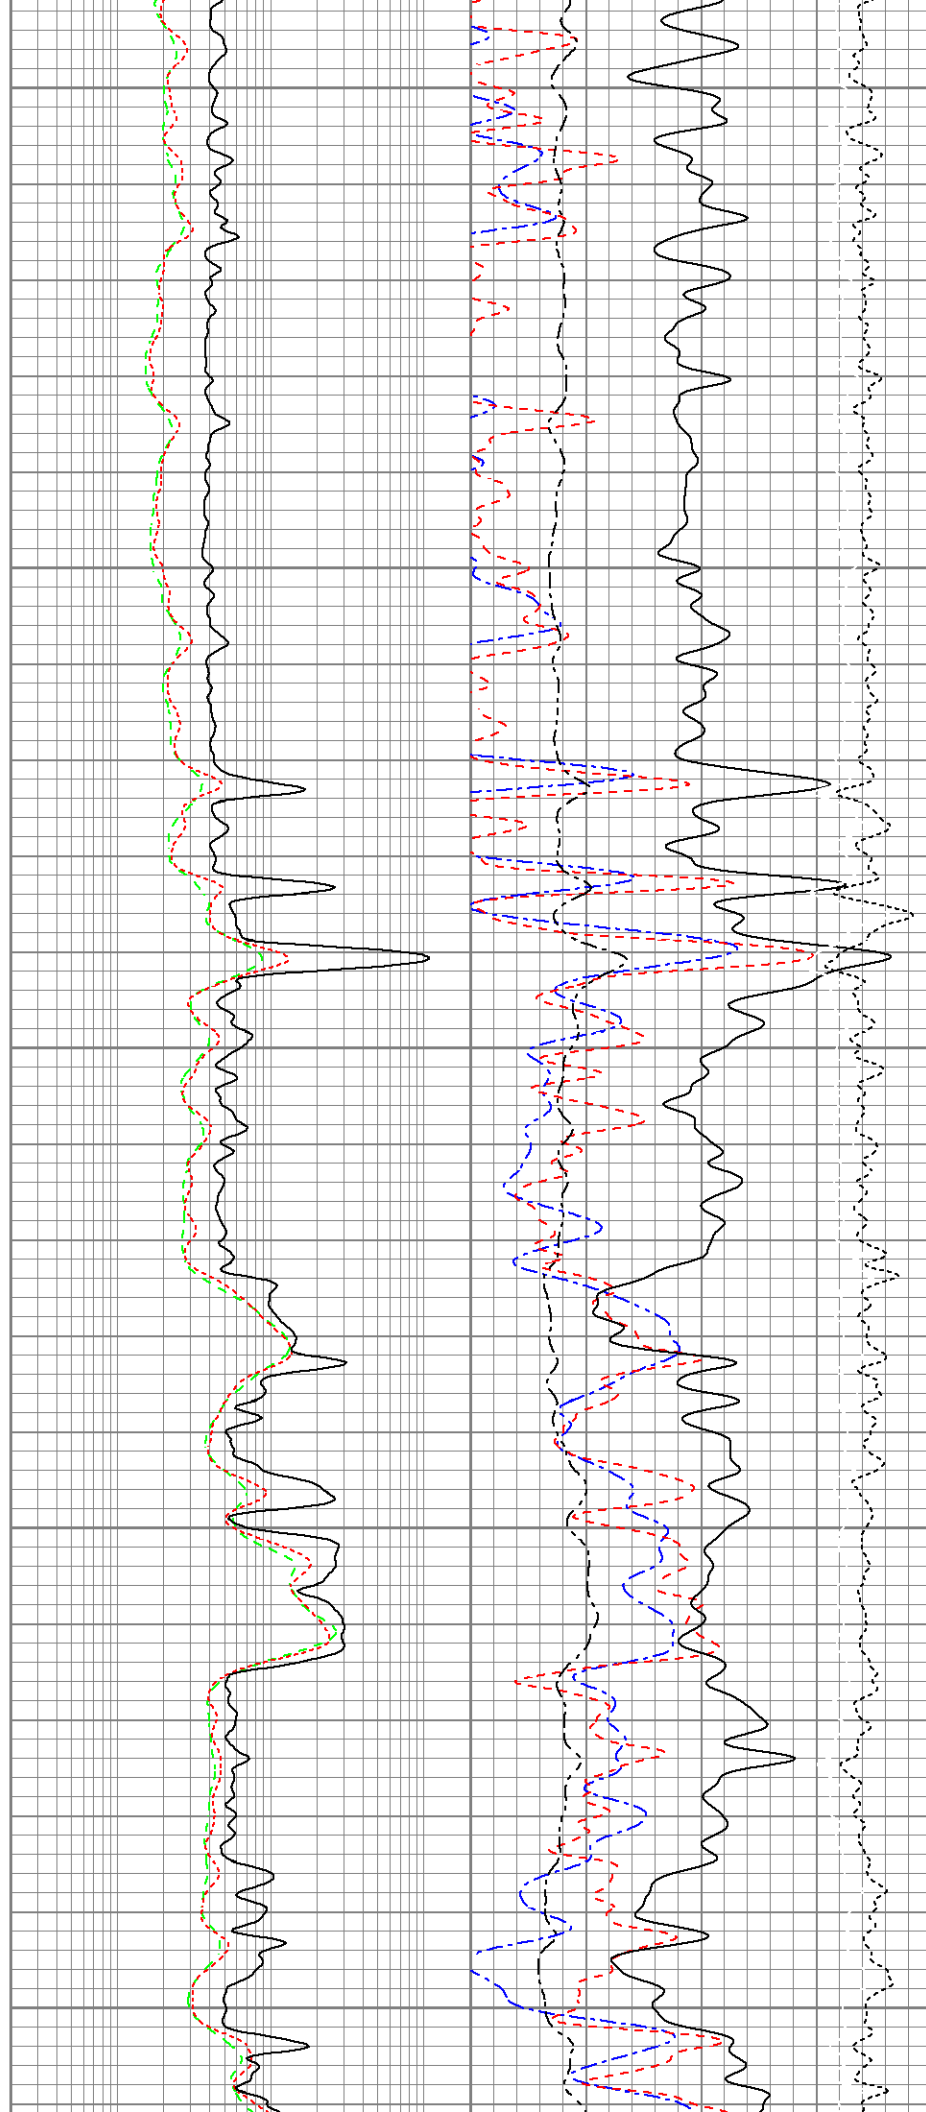


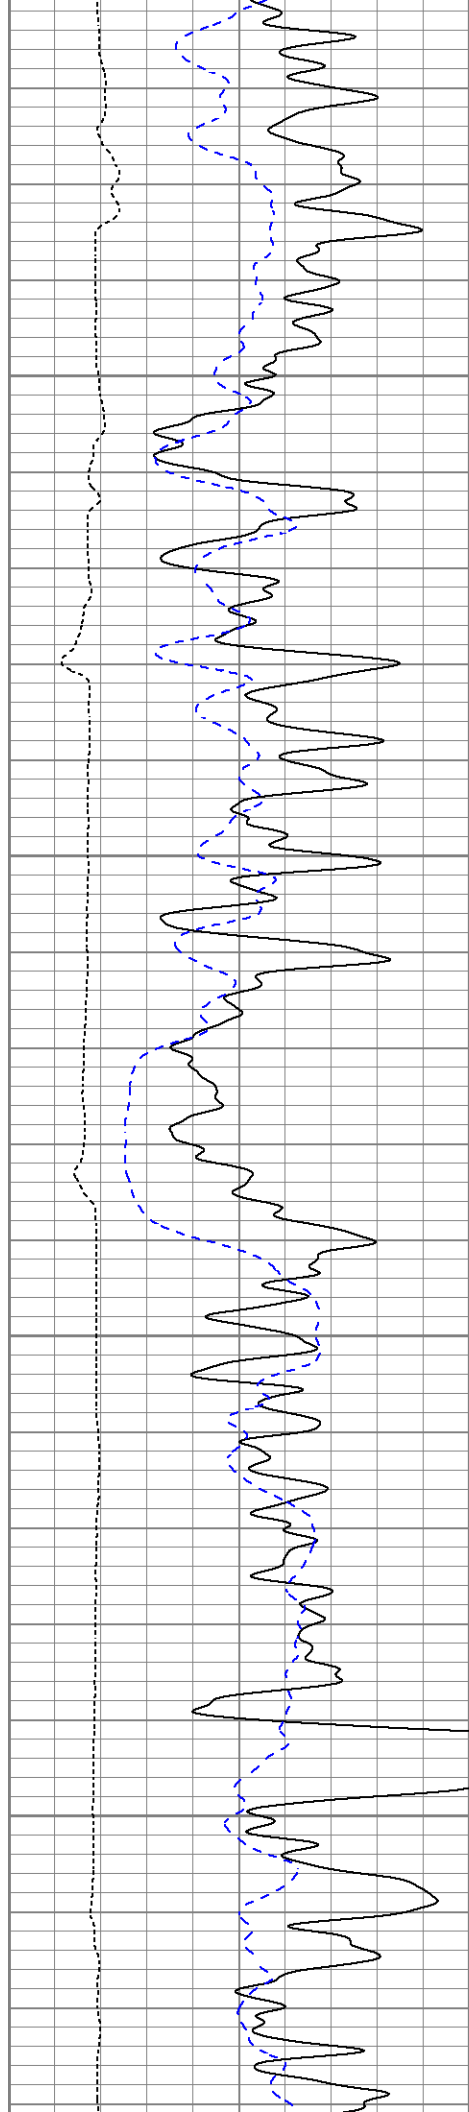



2450

2500

2550

2600

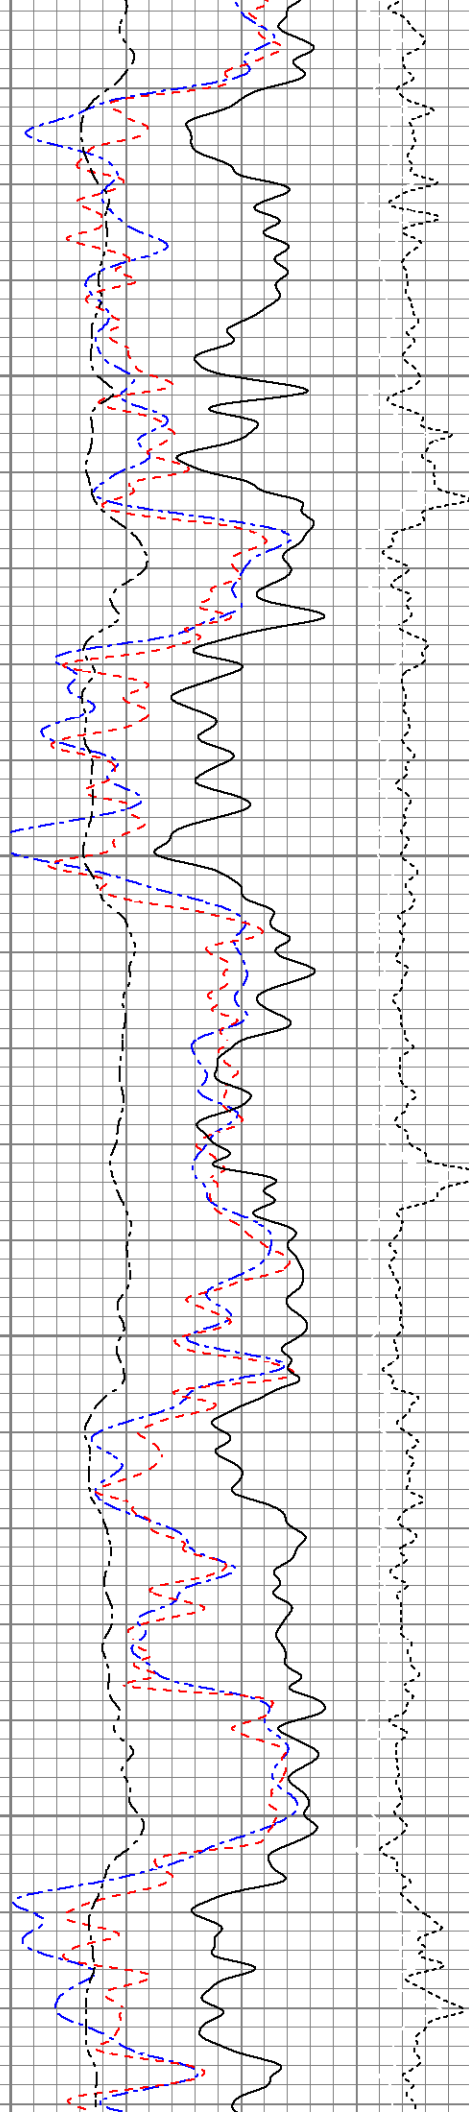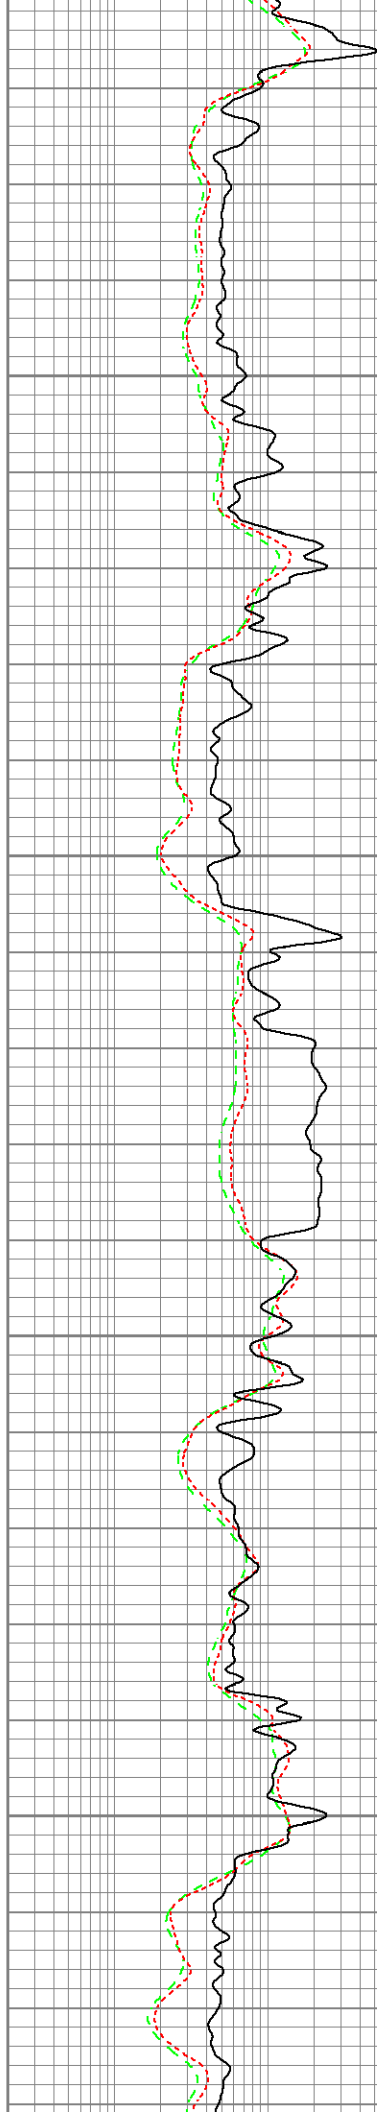

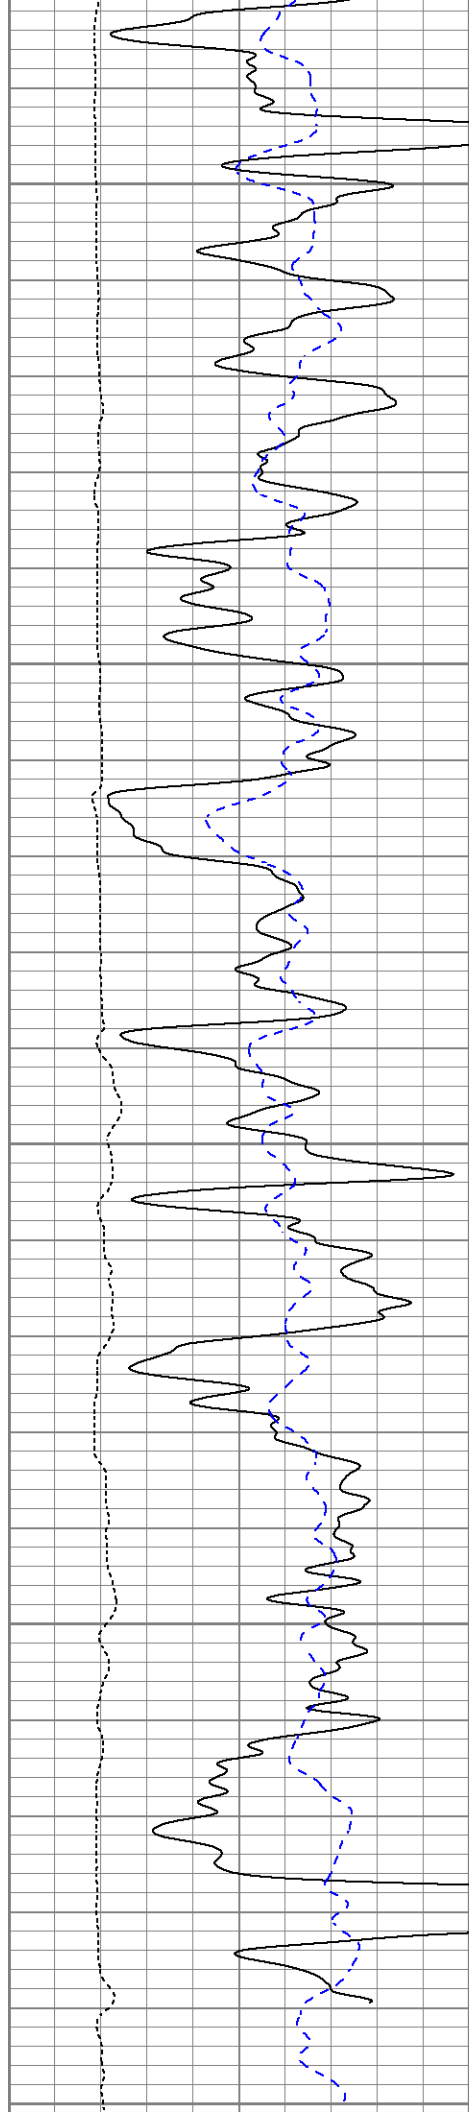


2650


2700

2750


2800

2850

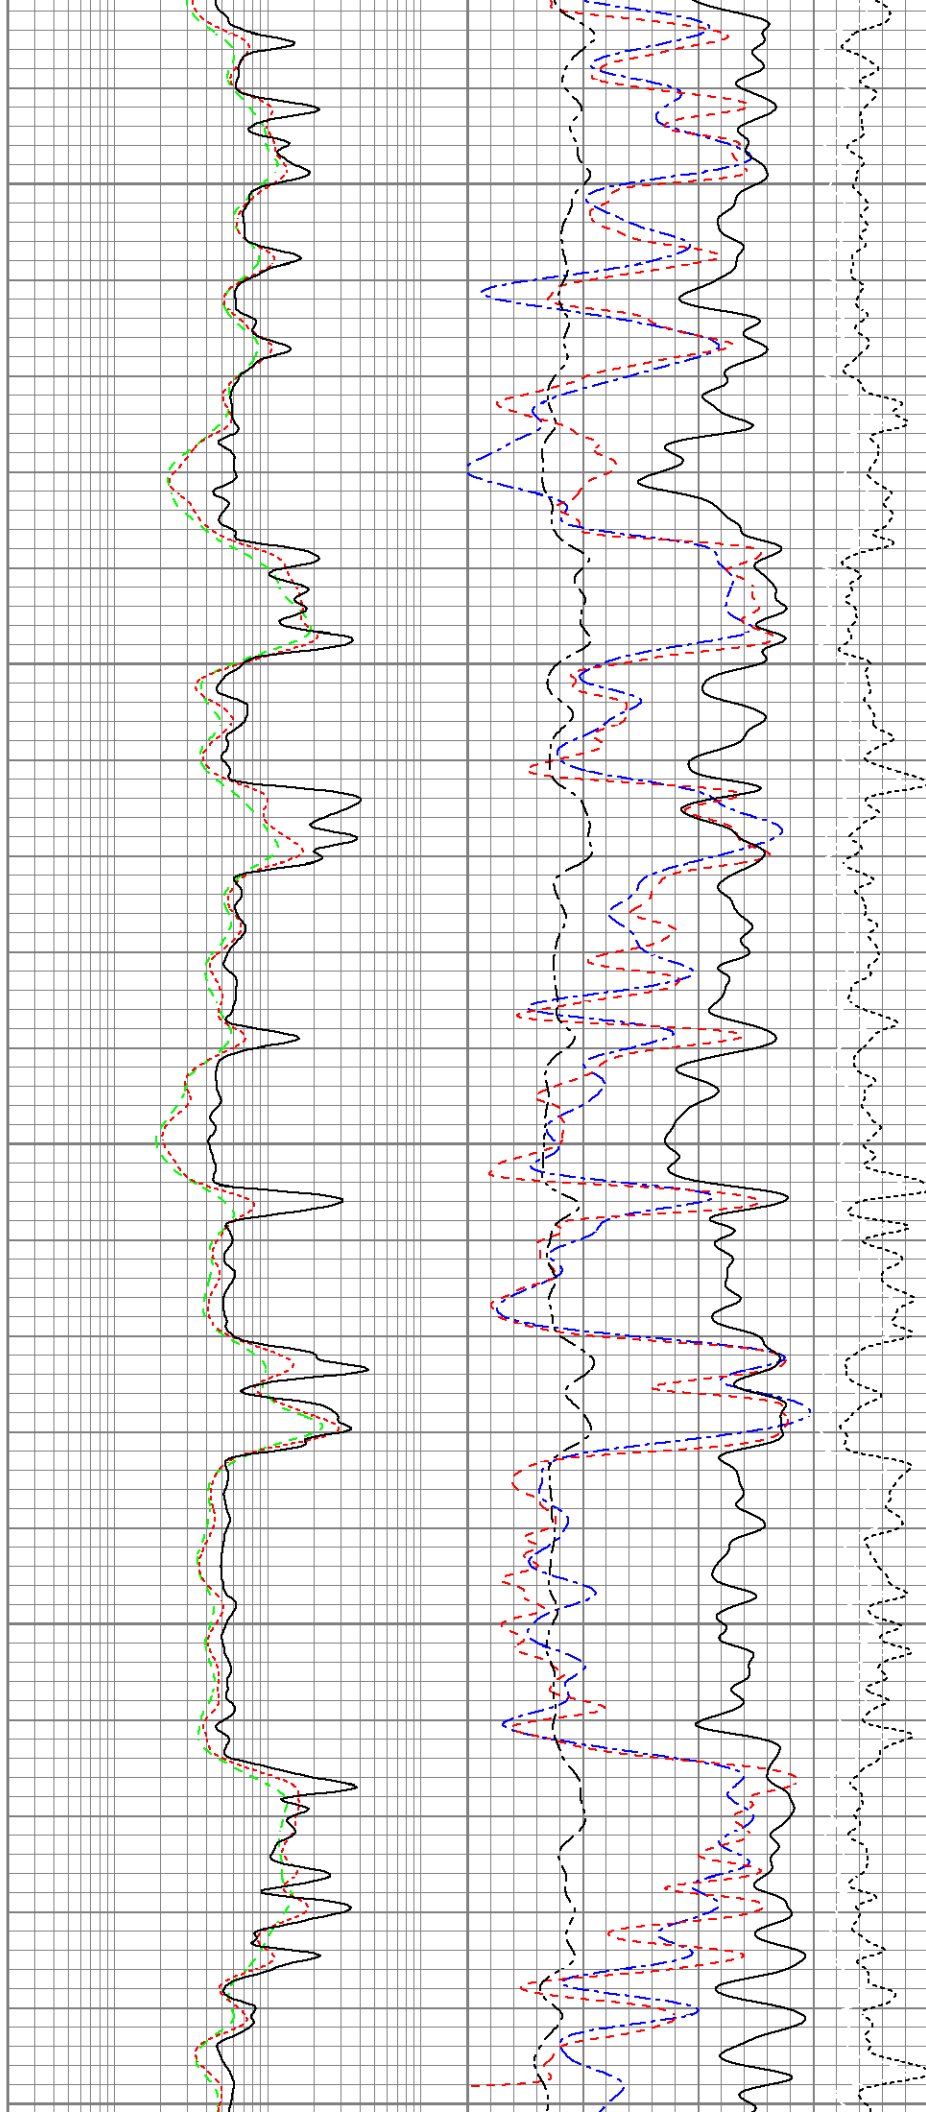


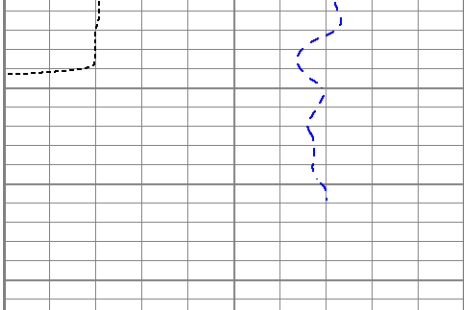

0	Gamma Ray (GAPI)	150
-100	SP (mV)	100
6	DCAL (in)	16

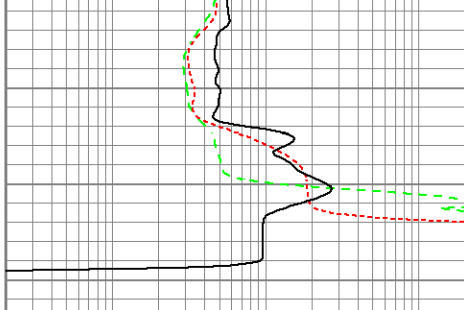

0.2	Deep Resistivity (Ohm-m)	200
0.2	Medium Resistivity (Ohm-m)	200
0.2	Shallow Resistivity (Ohm-m)	200

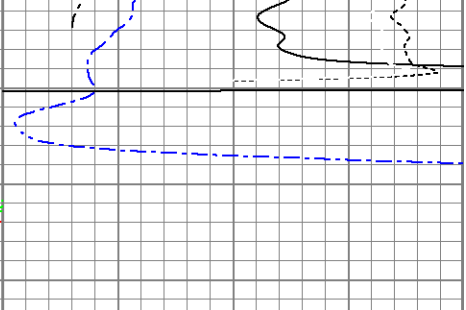

30	Sonic Porosity (pu)	-10
30	NPOR (pu)	-10
30	Density Porosity (pu)	-10
0	PE (barn)	20
RHOC		
-0.25	(g/cc)	0.25