

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

15-105-00007-00-00

Lincoln County, Sec. 29 Twp. 10 Rge. 111111 (E) 10 (W)

Location as "NE/CNW 1/4 SW 1/4" or footage from lines NW. 1/4, NE. 1/4, NE. 1/4

Lease Owner Harbar Drilling Co., Etal.

Lease Name Rassmussen Well No. 1

Office Address 1019 Central Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Rotary Dry Hole

Date well completed 4/20/1950 19

Application for plugging filed 4/20/50 Verbal 19

Application for plugging approved 4/20/50 Verbal 19


Plugging commenced 4/21/50 4/21/50 19

Plugging completed 4/21/50 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production X 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

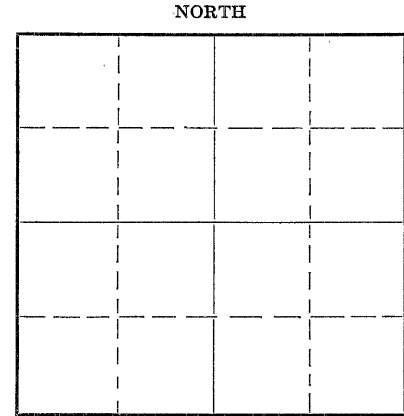

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation None Depth to top X Bottom X Total Depth of Well 3933 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Surface sands & shales	Fresh water	70 to 80'				
" " "	Dry	80'	200'	10 3/4"	175'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole from T. D. (3933) to 170' with heavy rotary mud. Set a wooden plug at 170' and dumped 20 sacks cement on plug. Filled surface casing with mud from top cement to within 10' of top hole and set another wooden plug and dumped 5 sacks cement on top of plug which filled surface casing to top and some in bottom of cellar.

Surface casing had cement circulated from top to bottom at time it was set.

04-26-1950

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Harbar Drilling Co.,
Address 1019 Central Bldg., Wichita Kansas.

STATE OF Kansas, COUNTY OF Barton, ss.
I, Roy Cook (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Roy Cook

(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of April, 1950

My commission expires 9-4-50 Notary Public.

PLUGGING
FILE SEC 29T 10 R 29
BOOK PAGE 2 LINE 18

15-105-00007-00-00

WASSMISSEN NO. 1

SW $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$ Sec. 29-10-10W, Lincoln County, Kansas

Rigging up Rotary Tools 3-30-50
Tearing down Rotary Tools 4-21-50

Ran 6 Jts. 10 3/4" surface pipe. Set at 175' and cemented with 150 sx cement.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Sand and rock	0	90
Clay, shell and rock	90	230
Clay and rock	230	370
Shale and shells and sand	370	525
Lime and shale, broken	525	575
Shale and shells	575	778
Lime, shale and sand	778	1095
anhydrite	1095	1185
Shells and shale	1185	1199
Iron and shale	1199	1205
Shale and shells	1205	1250
Sandy shale	1250	1450
Lime and shale, broken	1450	1530
Shale, shells and lime	1530	1625
Sandy shale and lime	1625	1760
Shale and lime	1760	1865
Sandy shale and lime	1865	2050
Sandy shale and broken lime	2050	2230
Sandy shale and lime	2230	2355
Shale and shells	2355	2490
Shale and lime	2490	2880
Lime	2880	3140
Lime and shale	3140	3225
Lime	3225	3295
Lime and chert	3295	3440
Lime	3440	3933 Total Depth

I, Don B. Packer, hereby certify that the above Log is true and correct to the best of my knowledge and belief.

Don B. Packer

Subscribed and sworn to before me this 25th day of April, 1950.

William Kelly
Notary Public

My commission expires: March 22, 1952.

04-20-1950

PLUGGING
WELL SEC 29 T 10 R 9 W
BOOK PAGE 2 LINE 18