

COMPENSATED  
DENSITY/NEUTRON  
PE LOG

|                              |                                                                        |                                  |                               |
|------------------------------|------------------------------------------------------------------------|----------------------------------|-------------------------------|
| Company                      | PLATEAU OPERATING CORPORATION                                          | Company                          | PLATEAU OPERATING CORPORATION |
| Well                         | WEAVER #1-15                                                           | Well                             | WEAVER #1-15                  |
| Field                        | NA                                                                     | Field                            | NA                            |
| County                       | HAMILTON                                                               | County                           | HAMILTON                      |
| State                        | KANSAS                                                                 | State                            | KANSAS                        |
| Location:                    | API # : 15-075-20910-0000                                              | Other Services<br>DIL/MEL<br>SON |                               |
| Permanent Datum              | 1320' FNL & 1320' FWL                                                  | Elevation                        |                               |
| Log Measured From            | SEC 15 TWP 25S RGE 40W                                                 | K.B. 3358                        |                               |
| Drilling Measured From       | GROUND LEVEL Elevation 3351<br>KELLY BUSHING 7' A.G.L<br>KELLY BUSHING | D.F. 3356                        |                               |
|                              |                                                                        | G.L. 3351                        |                               |
| Date                         | 2/15/22                                                                |                                  |                               |
| Run Number                   | ONE                                                                    |                                  |                               |
| Depth Driller                | 2675                                                                   |                                  |                               |
| Depth Logger                 | 2673                                                                   |                                  |                               |
| Bottom Logged Interval       | 2649                                                                   |                                  |                               |
| Top Log Interval             | 800                                                                    |                                  |                               |
| Casing Driller               | 8 5/8" @ 822                                                           |                                  |                               |
| Casing Logger                | 822                                                                    |                                  |                               |
| Bit Size                     | 7 7/8                                                                  |                                  |                               |
| Type Fluid in Hole           | CHEMICAL MUD                                                           |                                  |                               |
| Density / Viscosity          | 9.0/38                                                                 |                                  |                               |
| pH / Fluid Loss              | 7.6/6.4                                                                |                                  |                               |
| Source of Sample             | FLOWLINE                                                               |                                  |                               |
| Rm @ Meas. Temp              | .75@70F                                                                |                                  |                               |
| Rmf @ Meas. Temp             | .56@70F                                                                |                                  |                               |
| Rmc @ Meas. Temp             | .9@70F                                                                 |                                  |                               |
| Source of Rmf / Rmc          | MEASUREMENT                                                            |                                  |                               |
| Rm @ BHT                     | .50@104                                                                |                                  |                               |
| Time Circulation Stopped     | 2 HOURS                                                                |                                  |                               |
| Time Logger on Bottom        | ////                                                                   |                                  |                               |
| Maximum Recorded Temperature | 104F                                                                   |                                  |                               |
| Equipment Number             | 3802                                                                   |                                  |                               |
| Location                     | HAYS, KANSAS                                                           |                                  |                               |
| Recorded By                  | JASON CAPPELLUCCI                                                      | TJ DREILING                      |                               |
| Witnessed By                 | JIM WELCH                                                              |                                  |                               |


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. ( 785 ) 628-6395  
DIRECTIONS


SYRACUSE, KS. - 5 SOUTH TO RD. 27 - 2 MILES EAST - SOUTH INTO

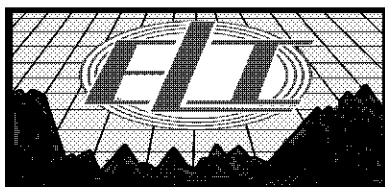



MAIN SECTION


|                     |                            |
|---------------------|----------------------------|
| Database File       | 6240pe.db                  |
| Dataset Pathname    | pass3.1                    |
| Presentation Format | _ldt_neu                   |
| Dataset Creation    | Tue Feb 15 22:11:46 2022   |
| Charted by          | Depth in Feet scaled 1:240 |


|   |                  |     |          |    |                          |           |
|---|------------------|-----|----------|----|--------------------------|-----------|
| 0 | GAMMA RAY (GAPI) | 150 | ABHV     | 30 | COMPENSATED DENSITY (pu) | -10       |
| 6 | CALIPER (in)     | 16  | 10 (ft3) | 0  | COMPENSATED NEUTRON (pu) | -10       |
|   |                  |     | TBHV     | 0  | PE                       | 10        |
|   |                  |     | 0 (ft3)  | 10 | CORRECTION (g/cc)        | 0.25      |
|   |                  |     |          |    | 0                        | LTEN (lb) |
|   |                  |     |          |    | 5000                     |           |

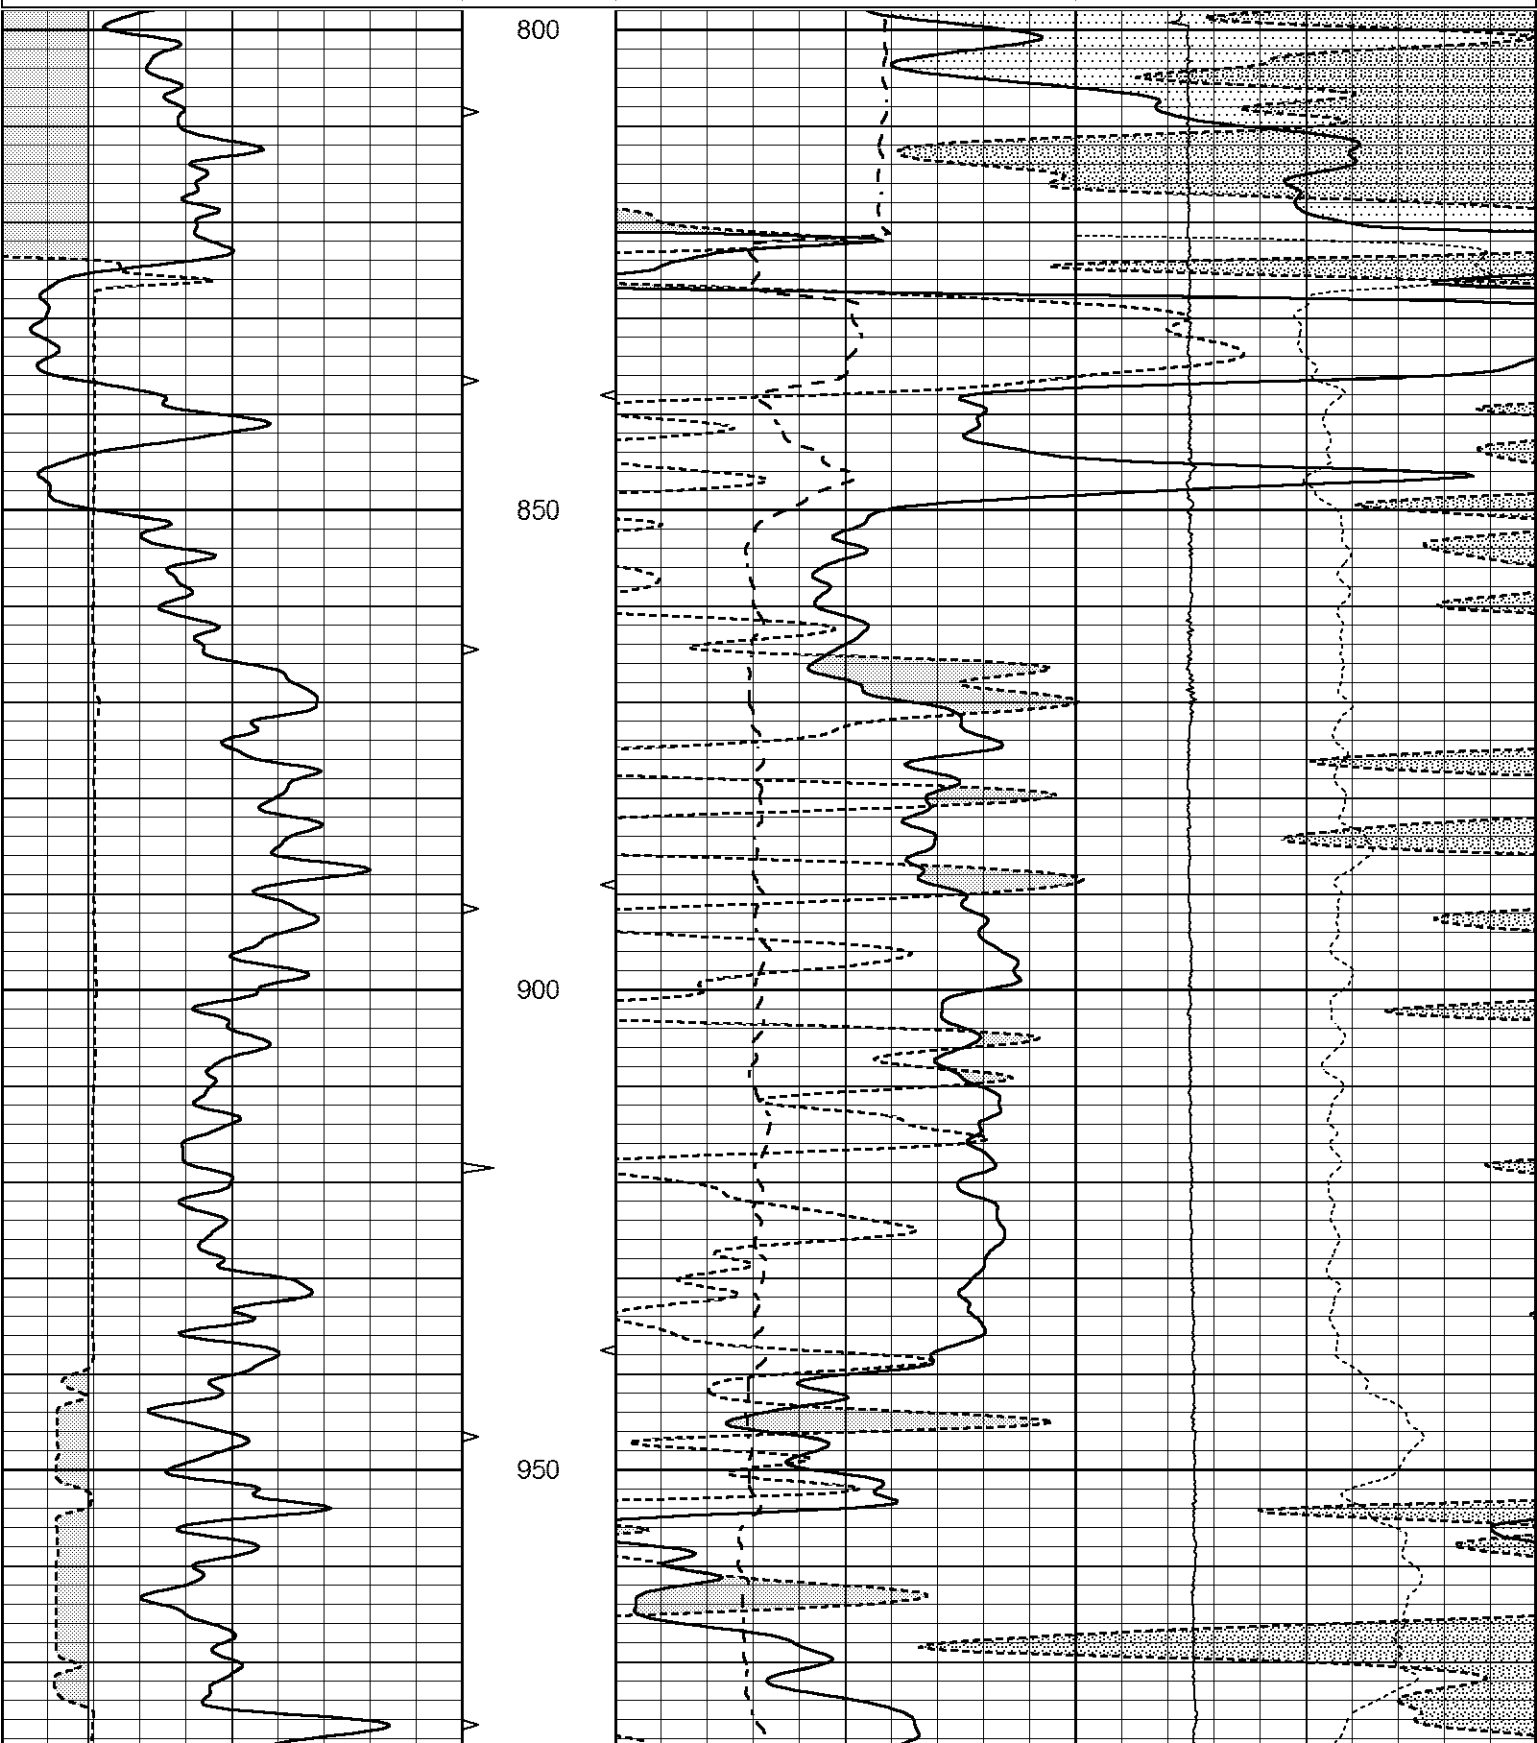


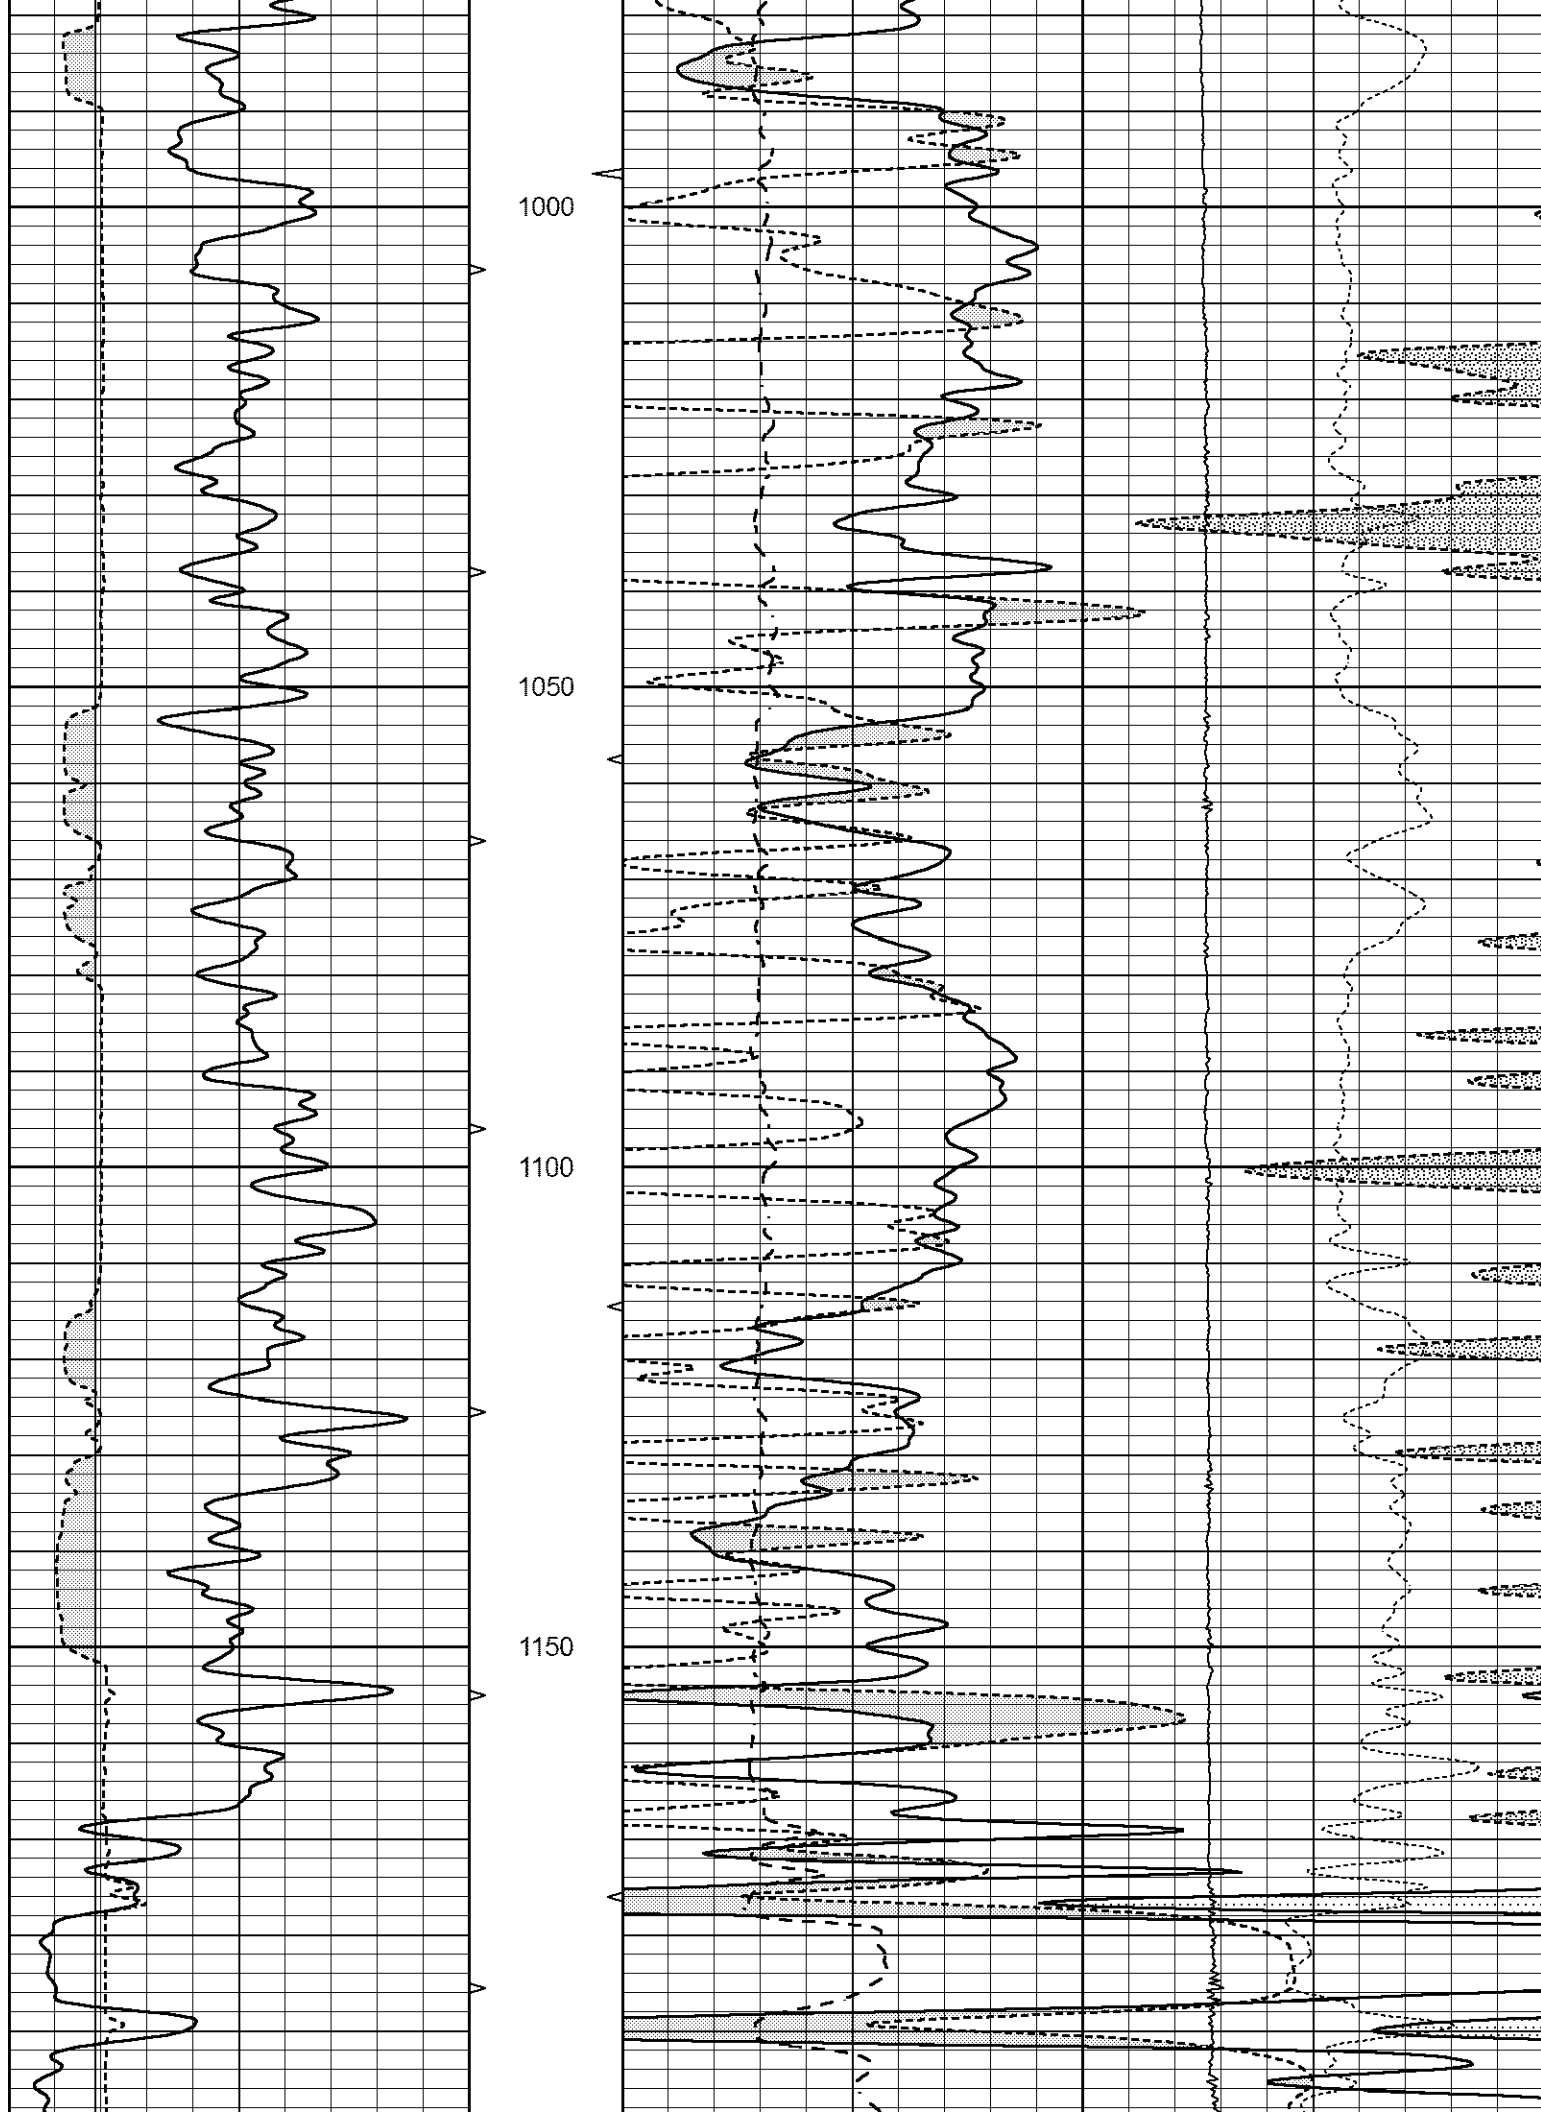


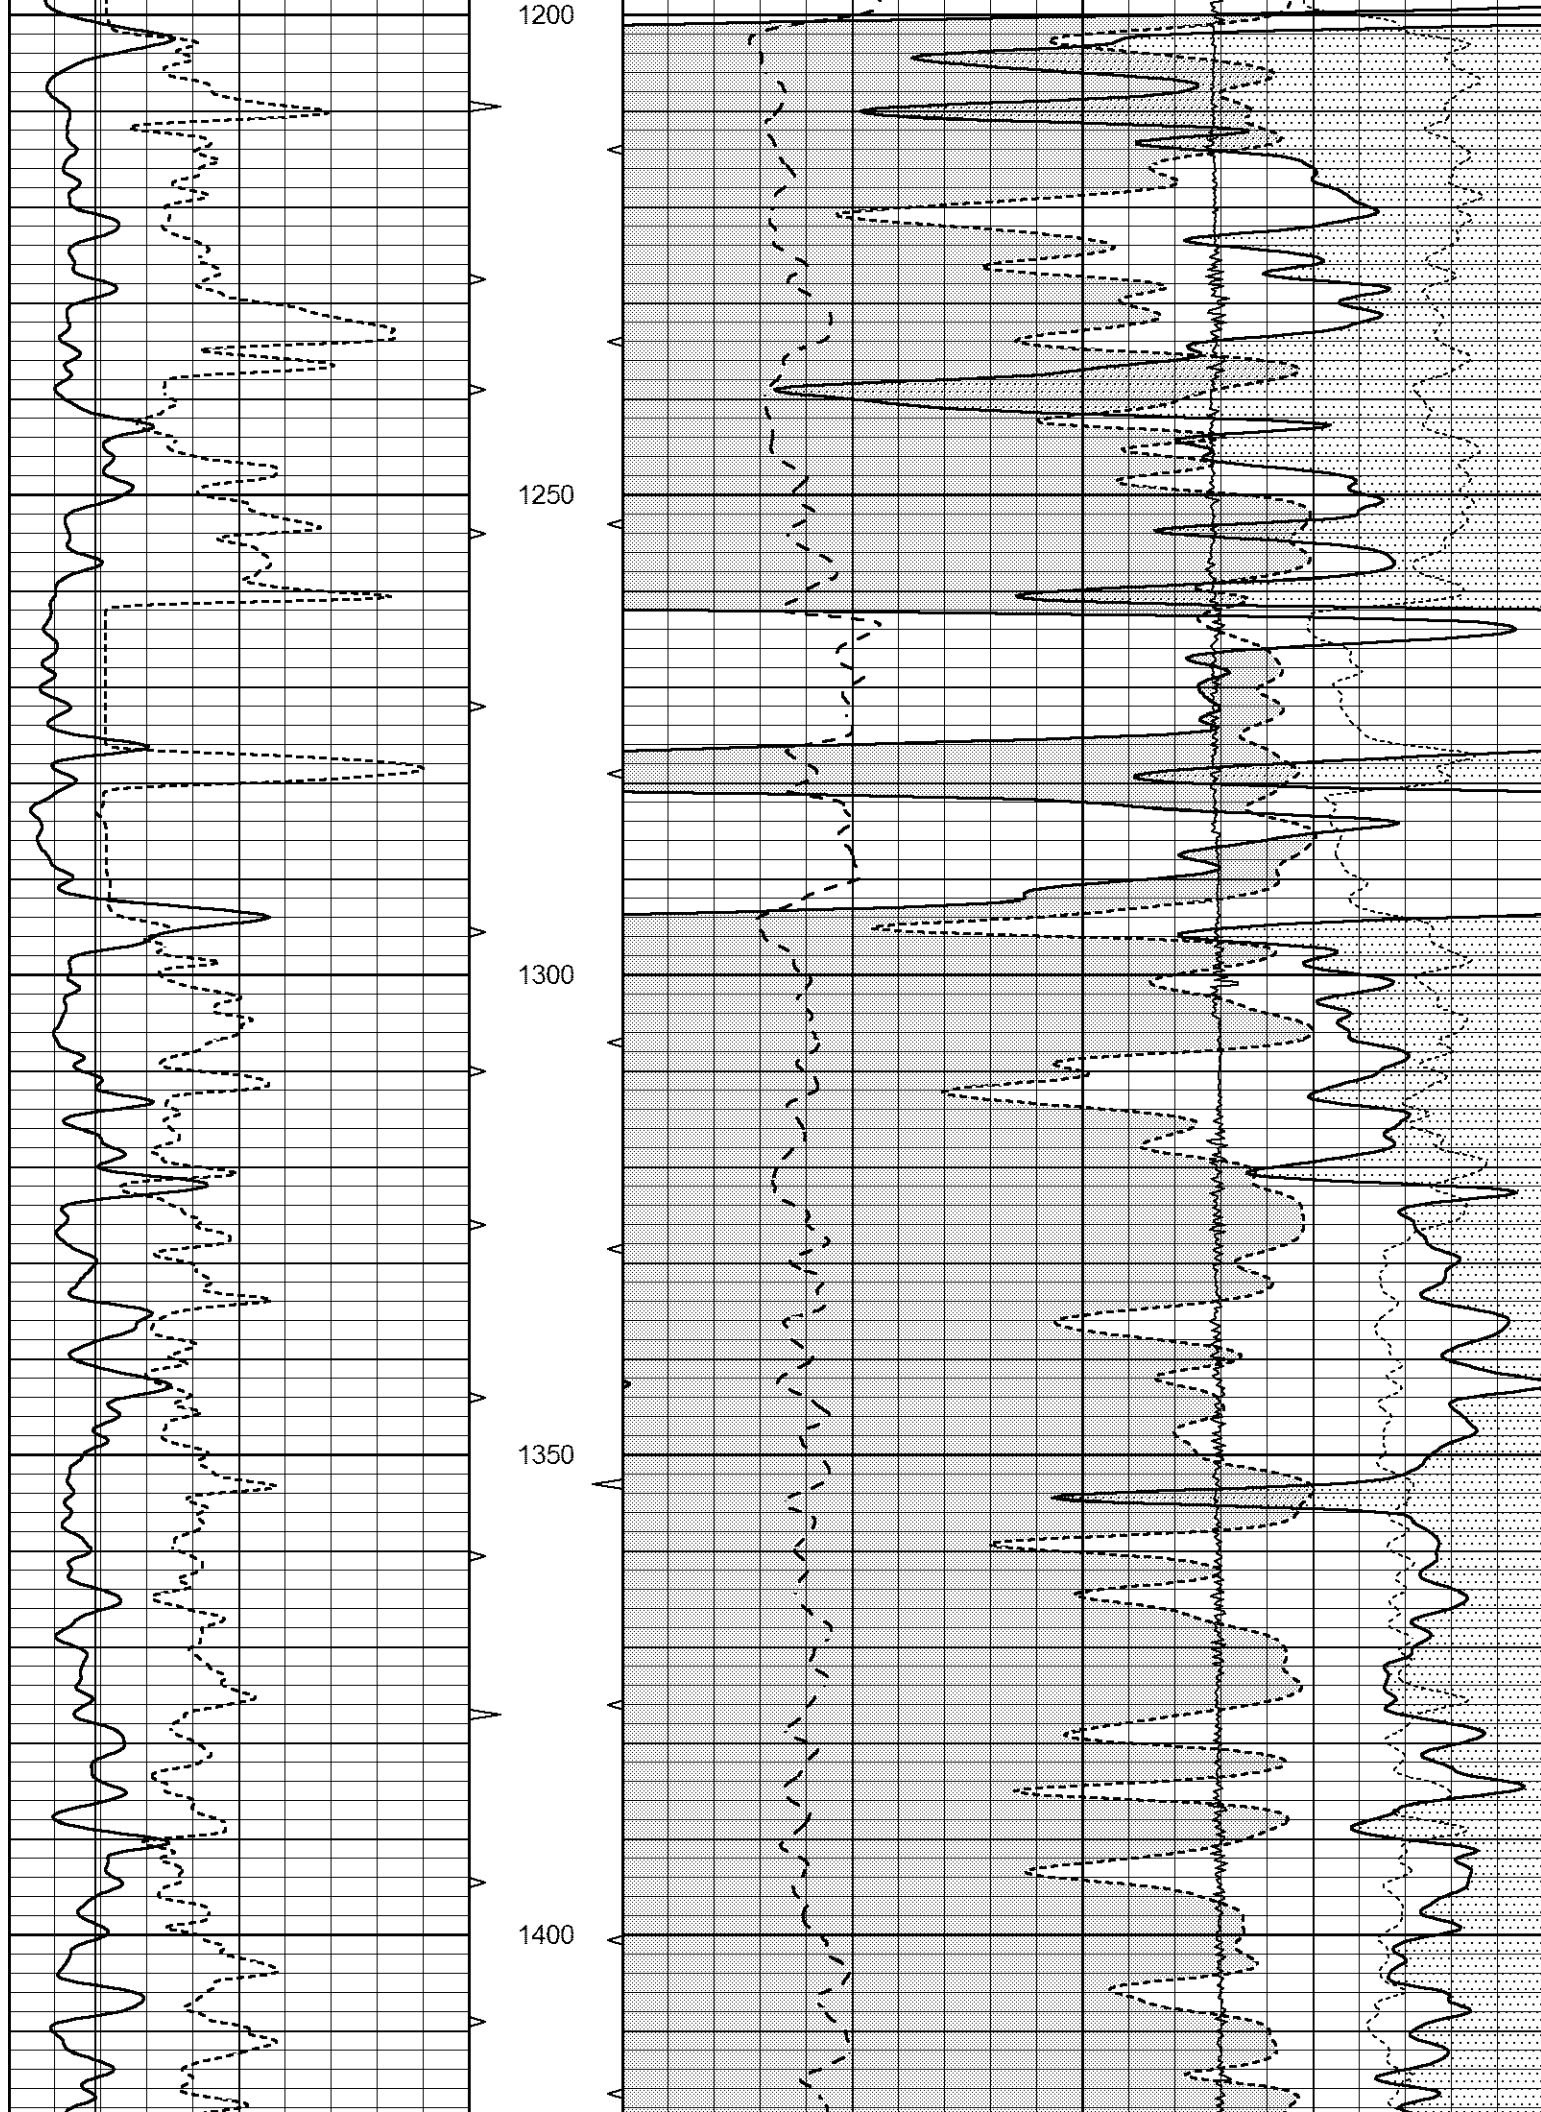


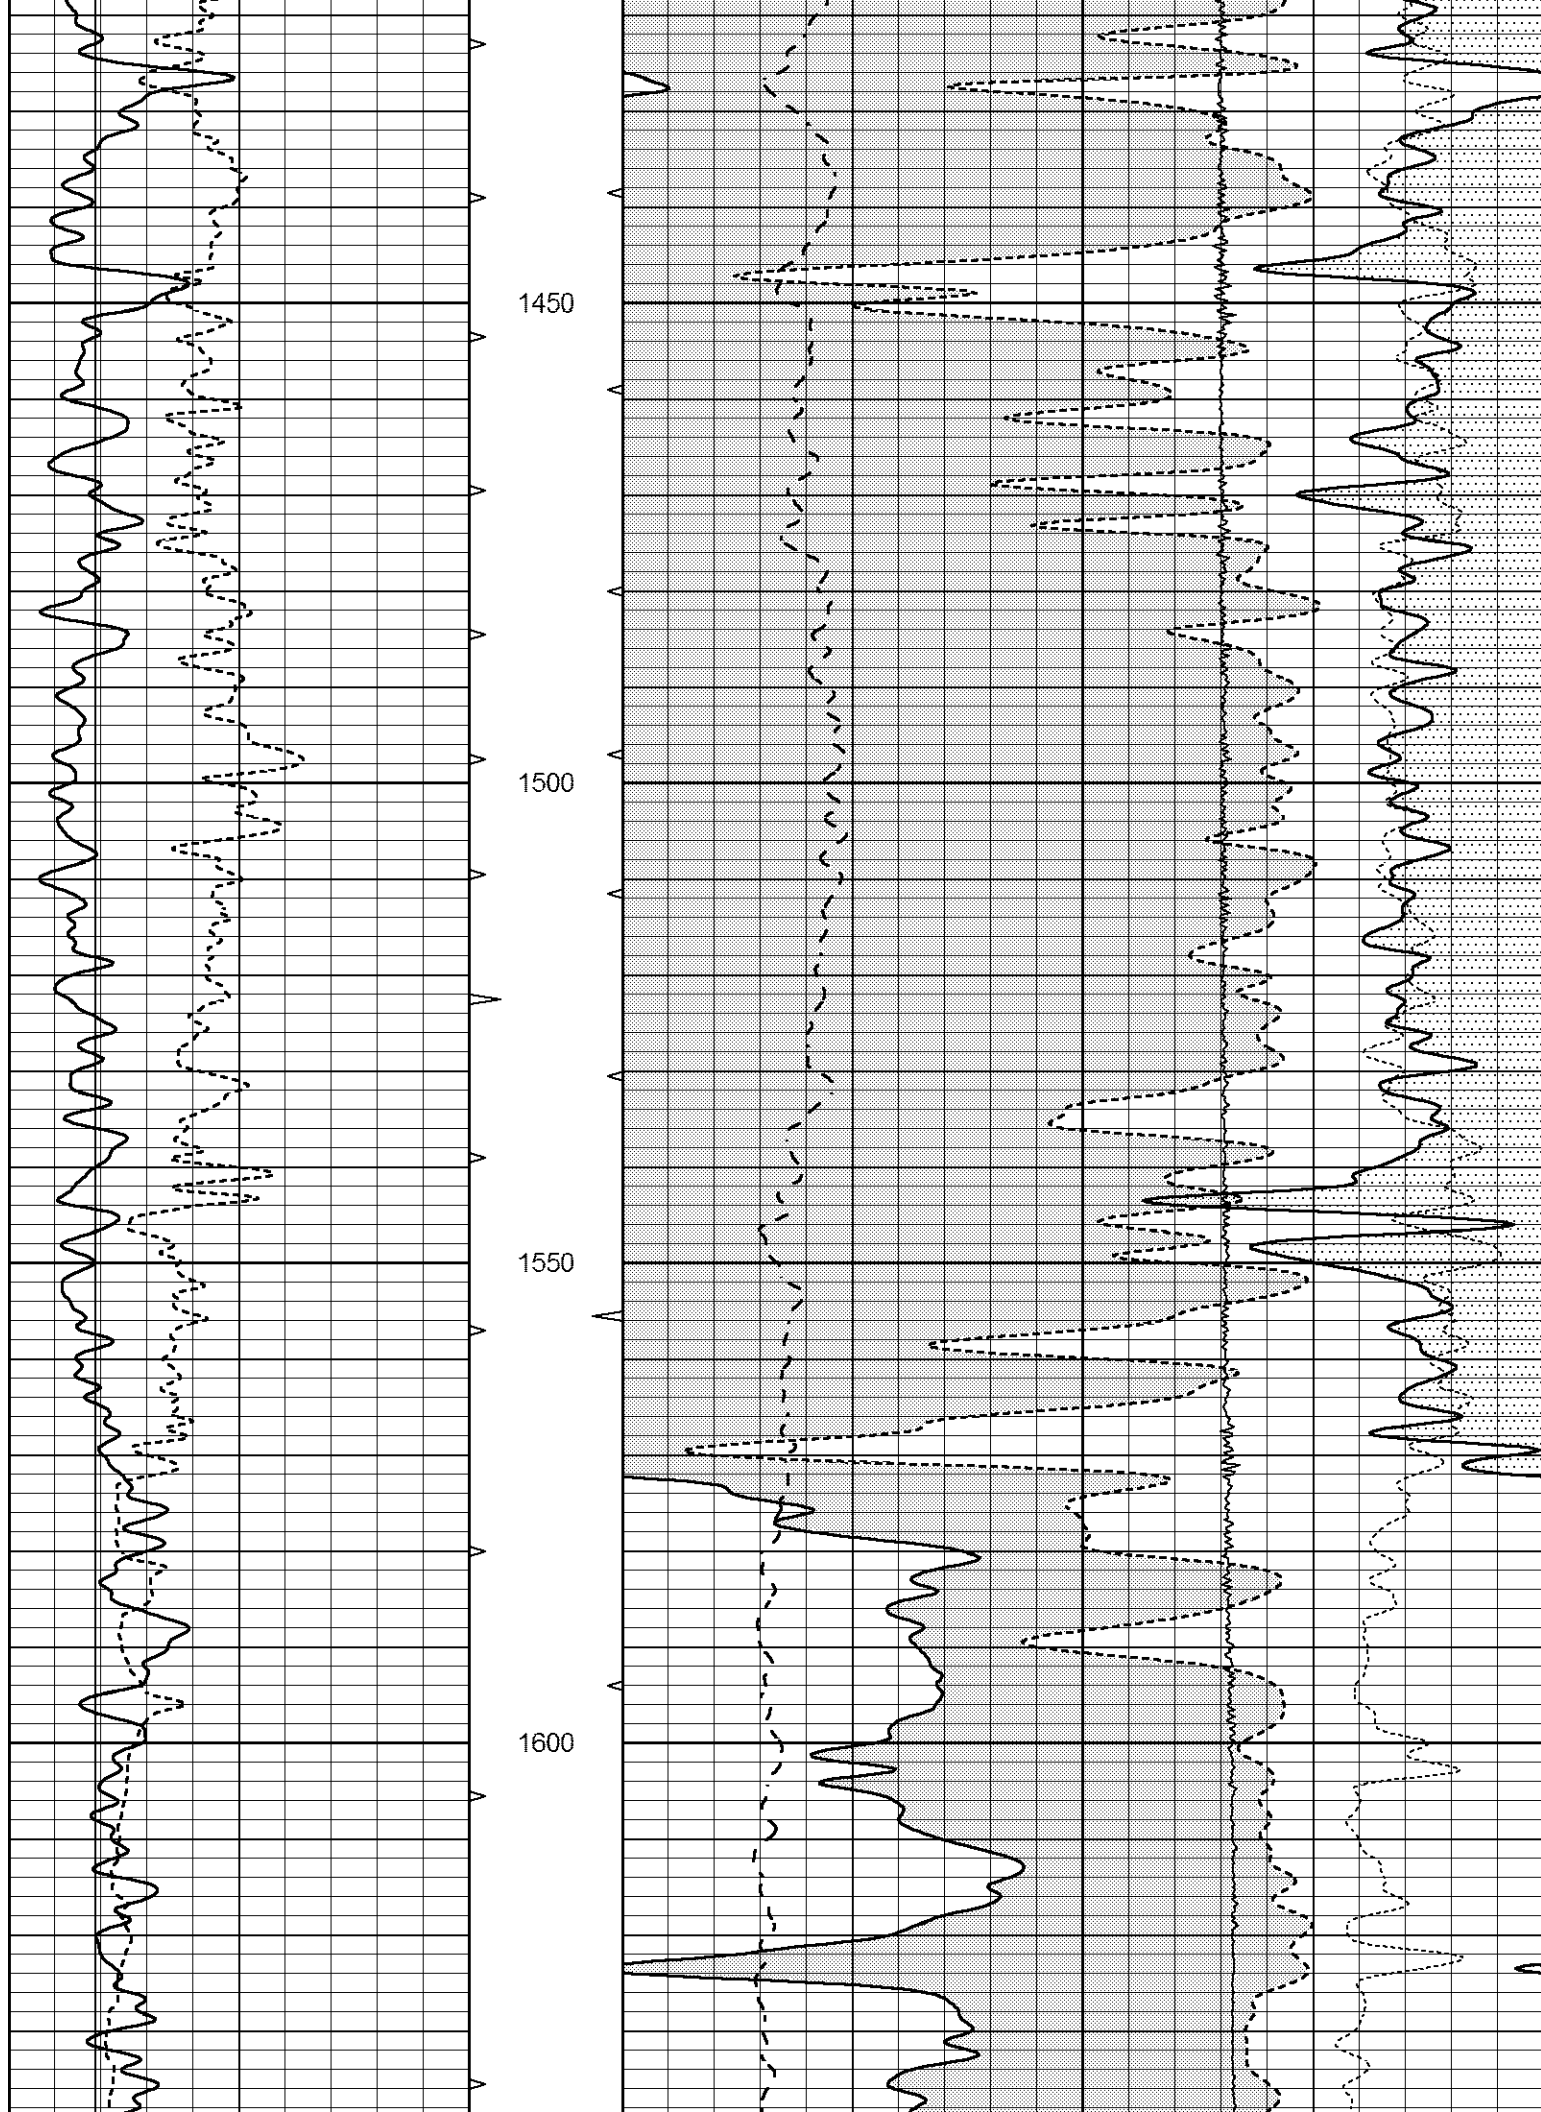


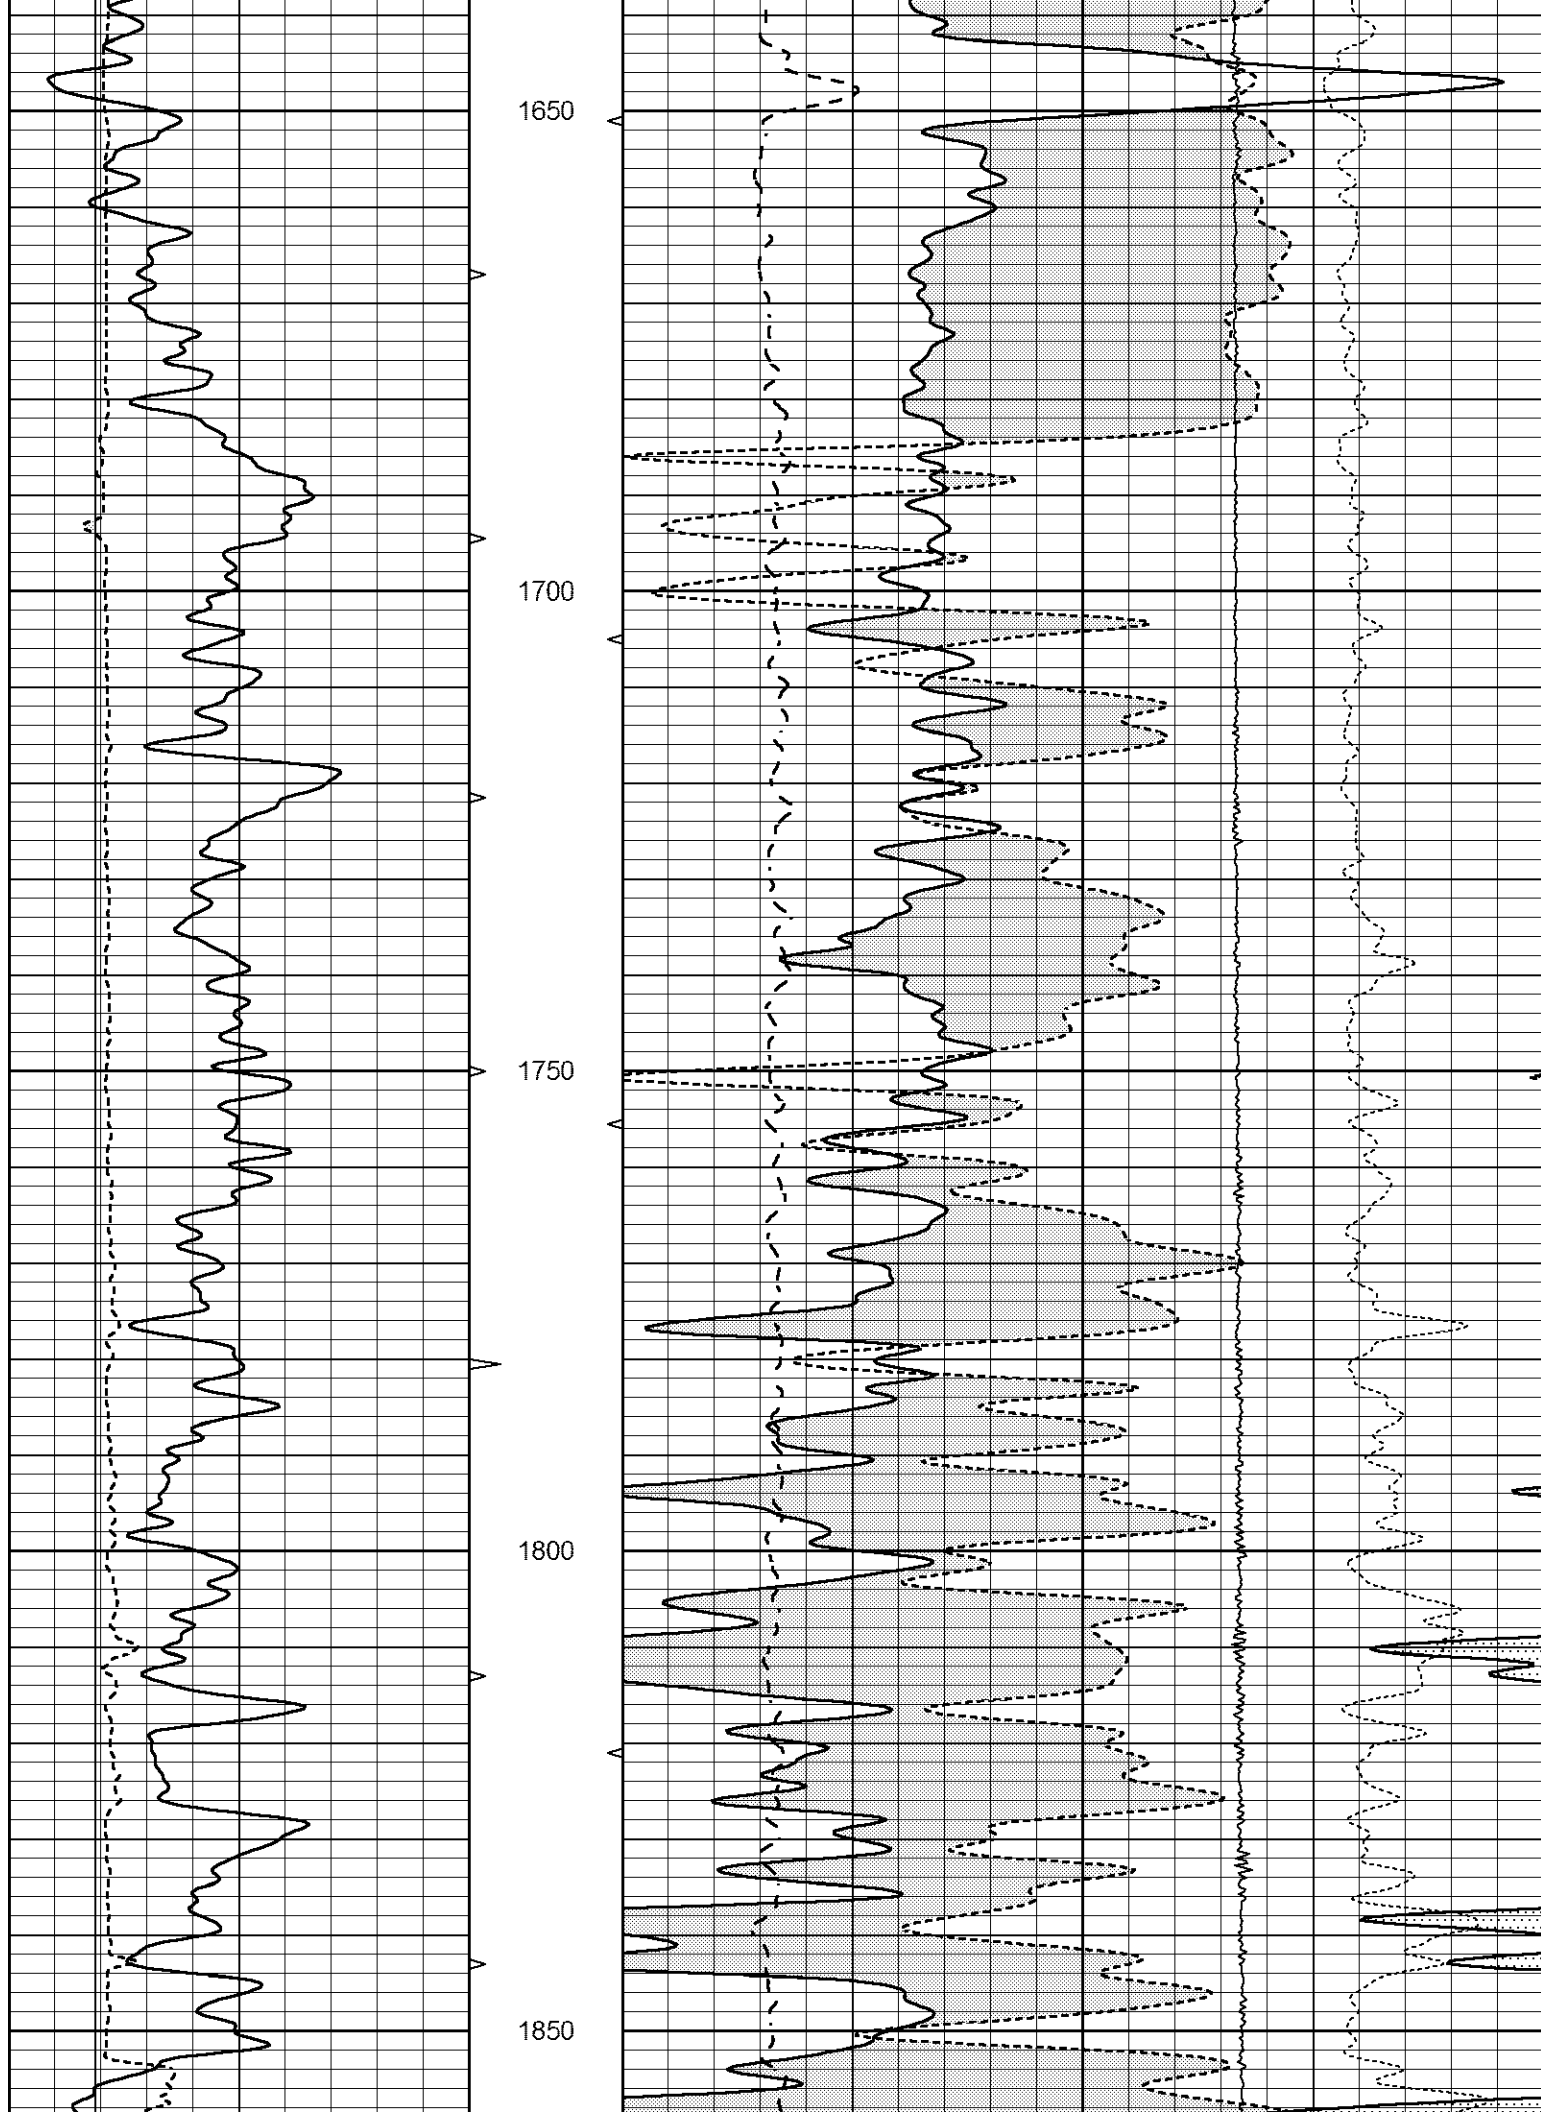


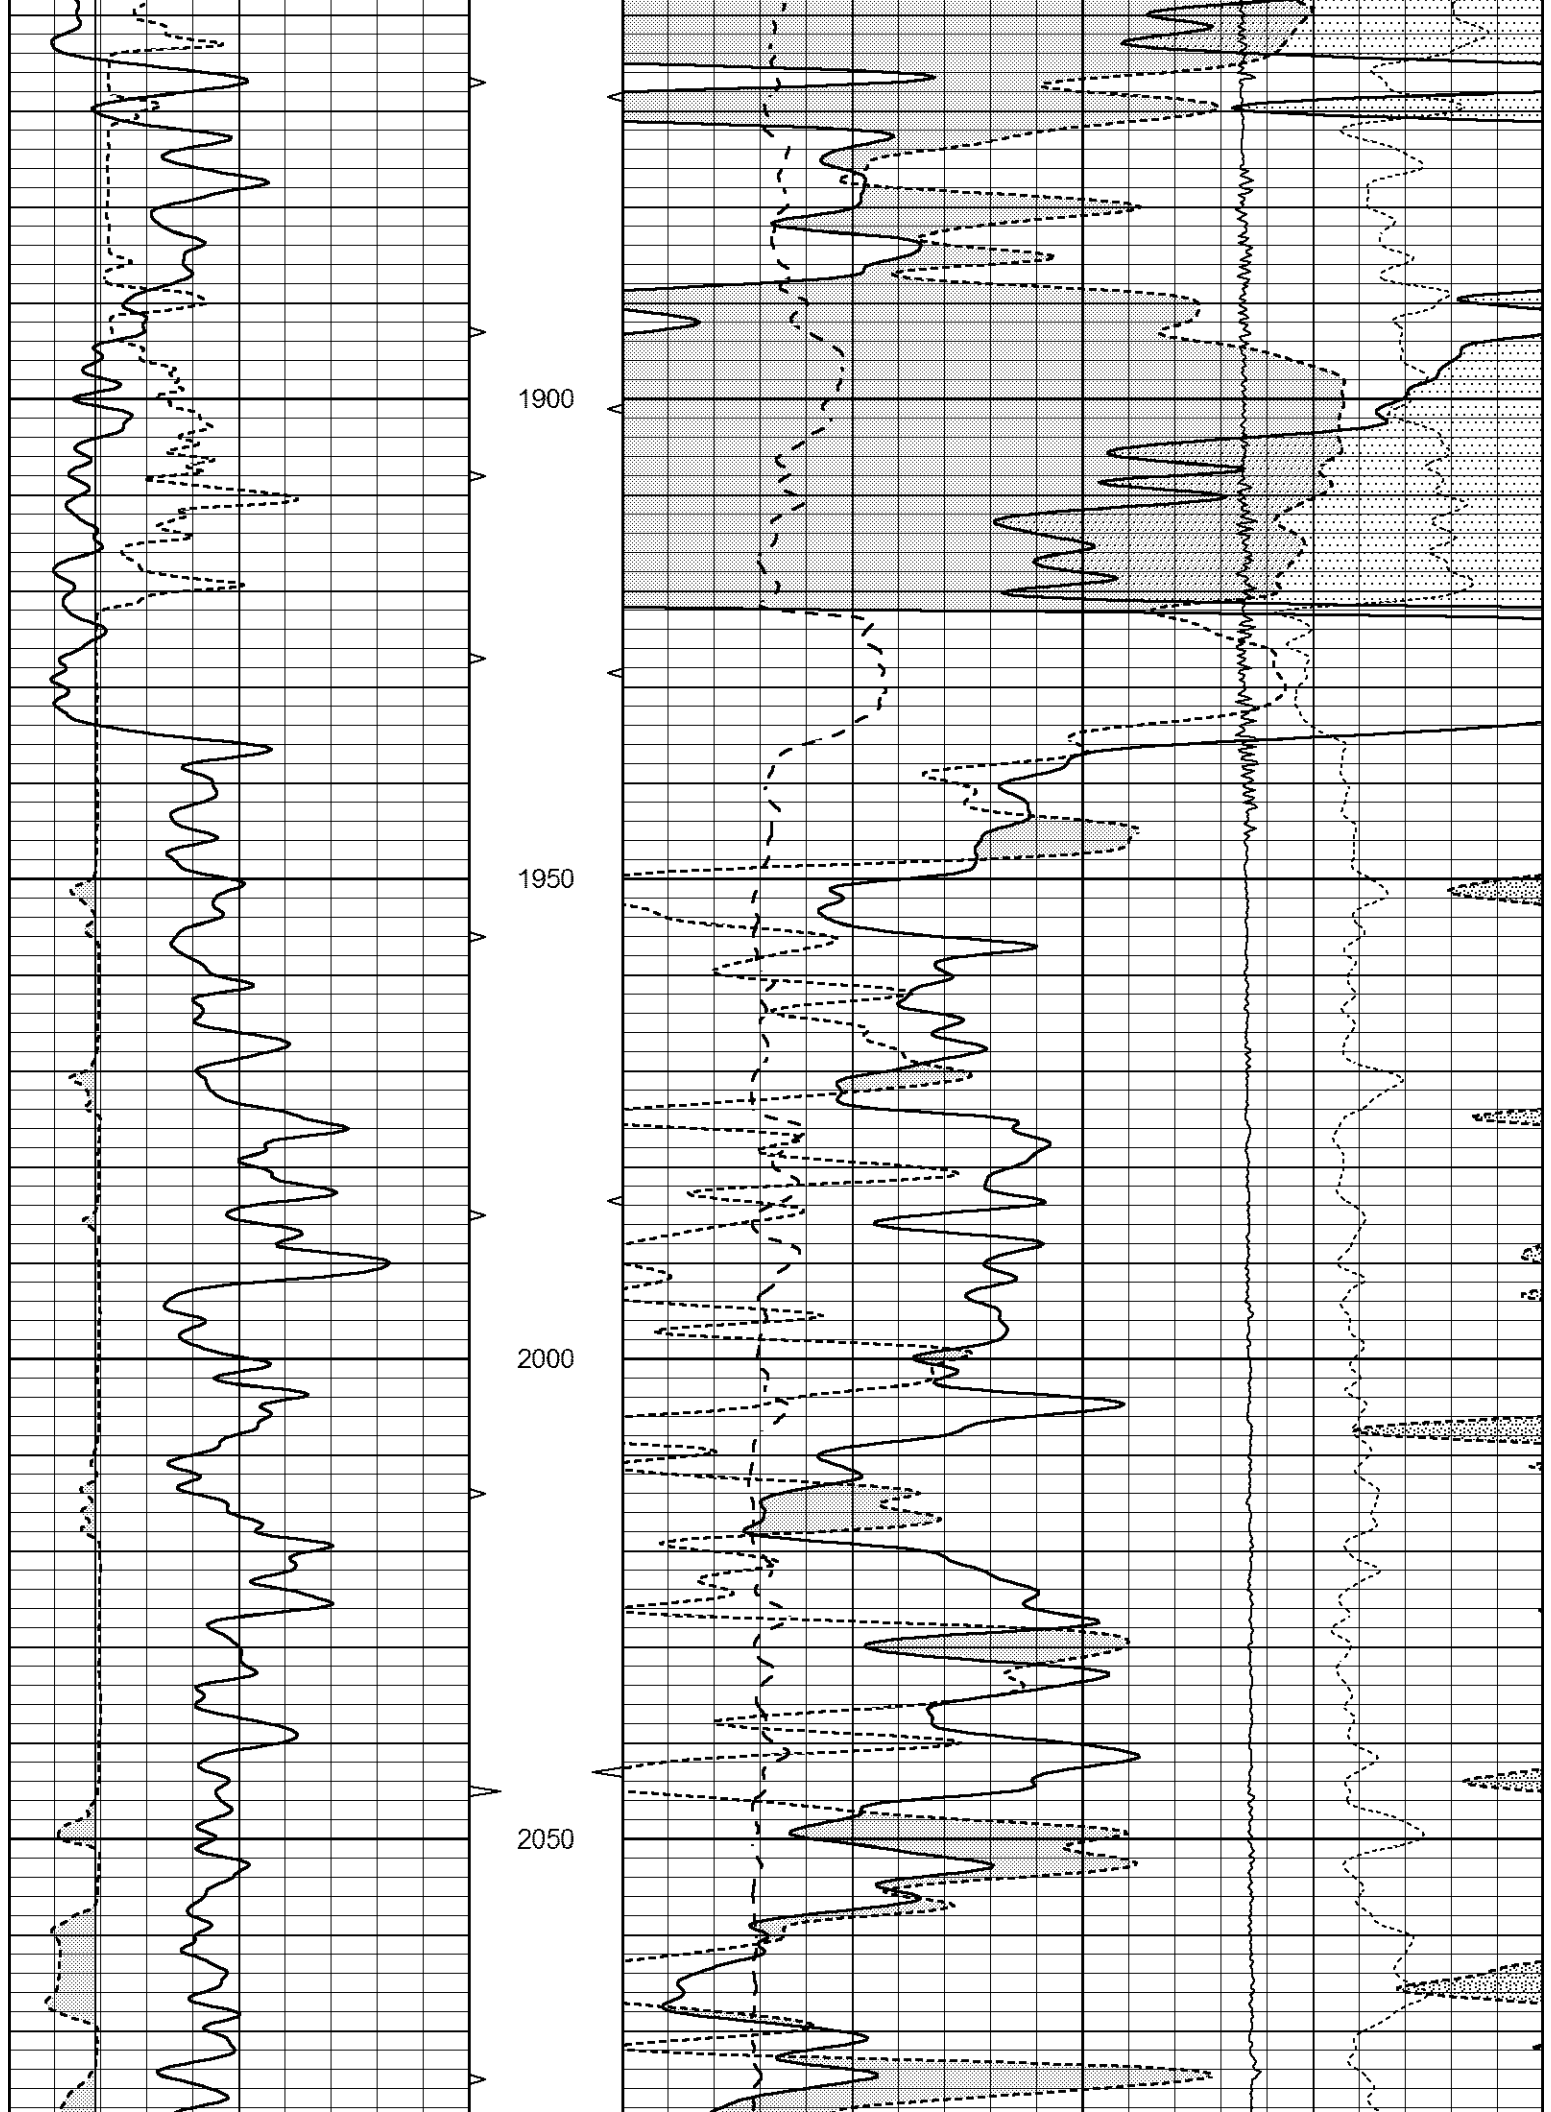

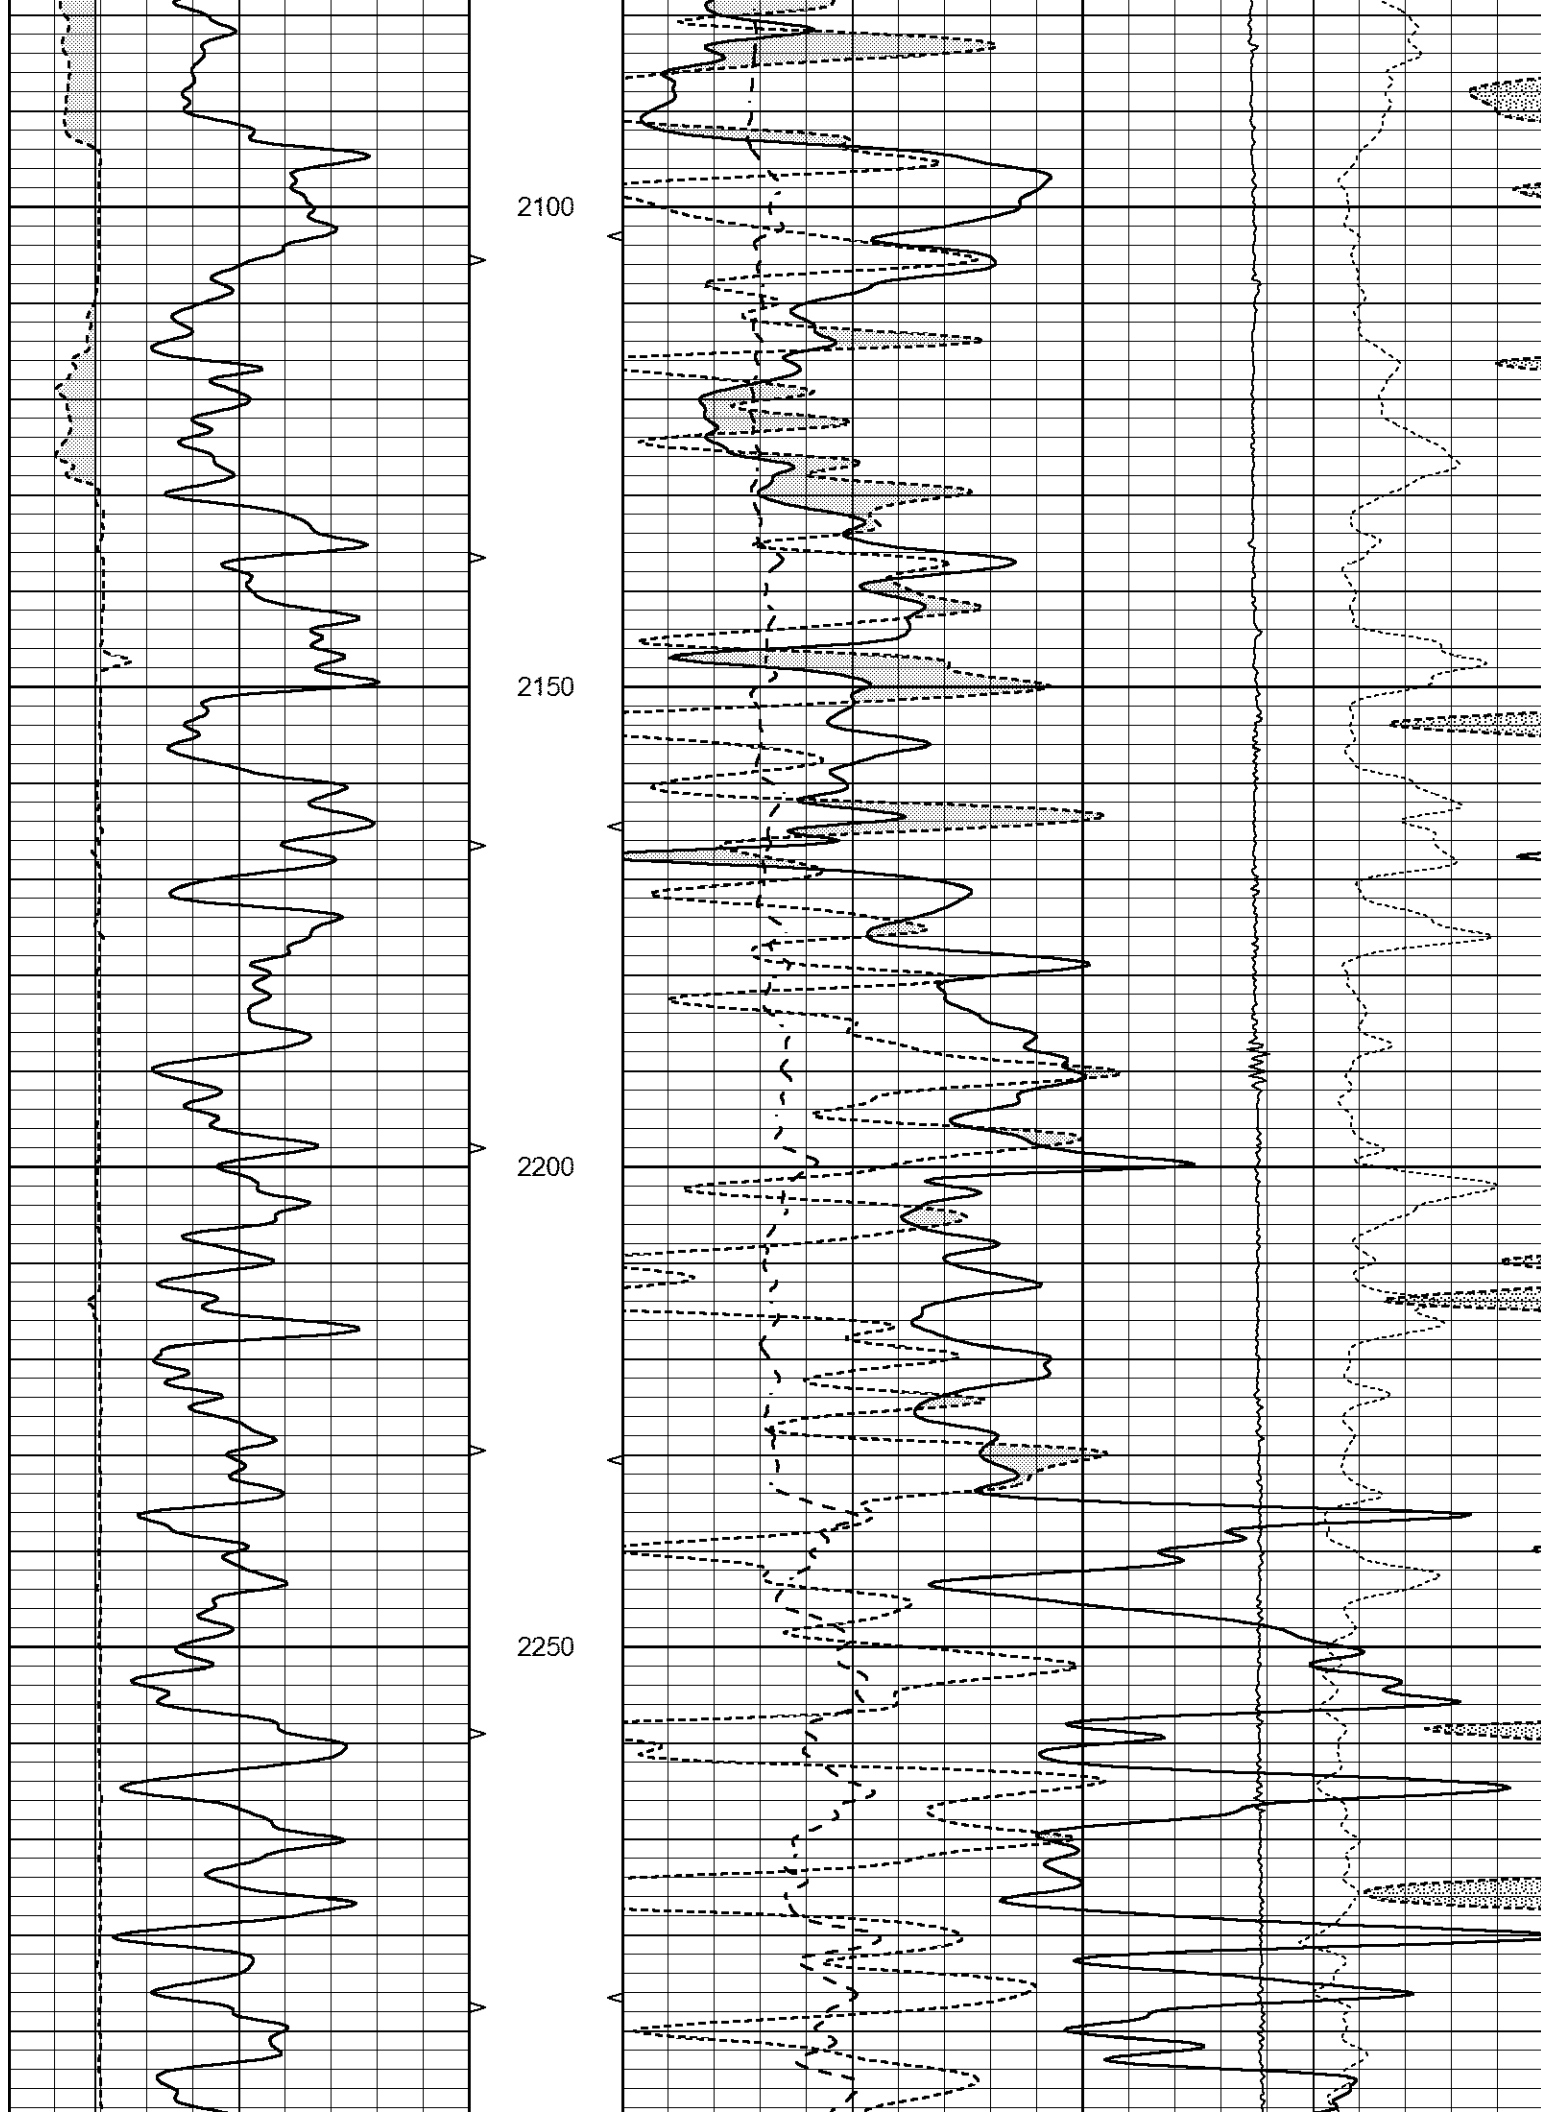




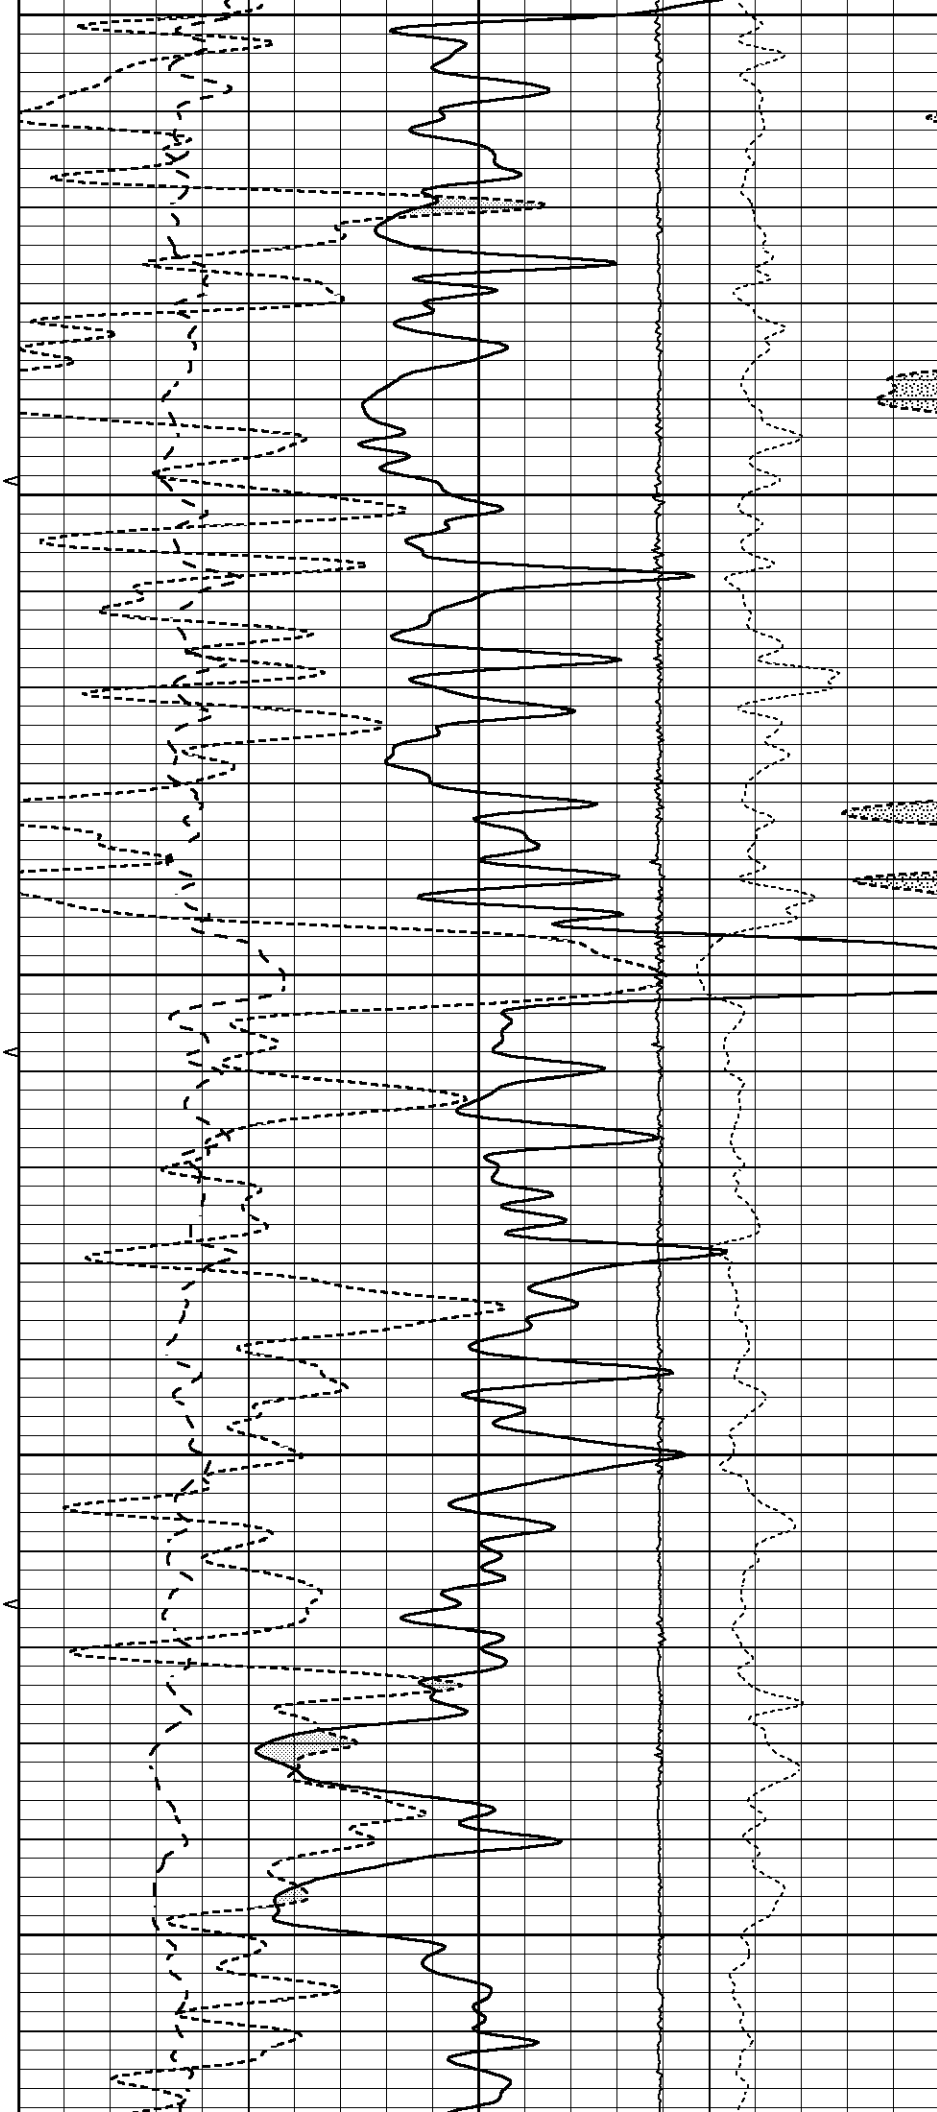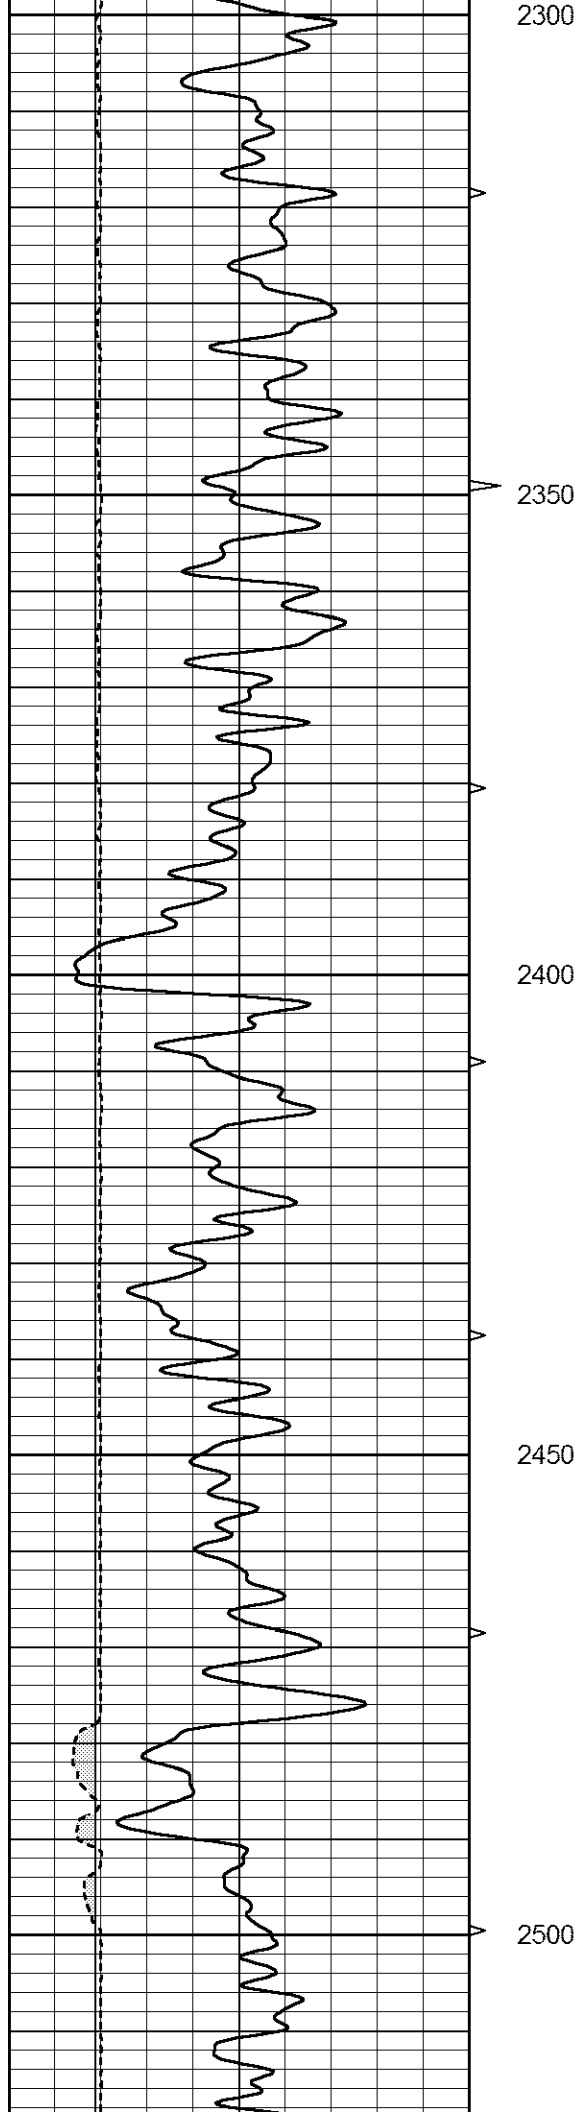


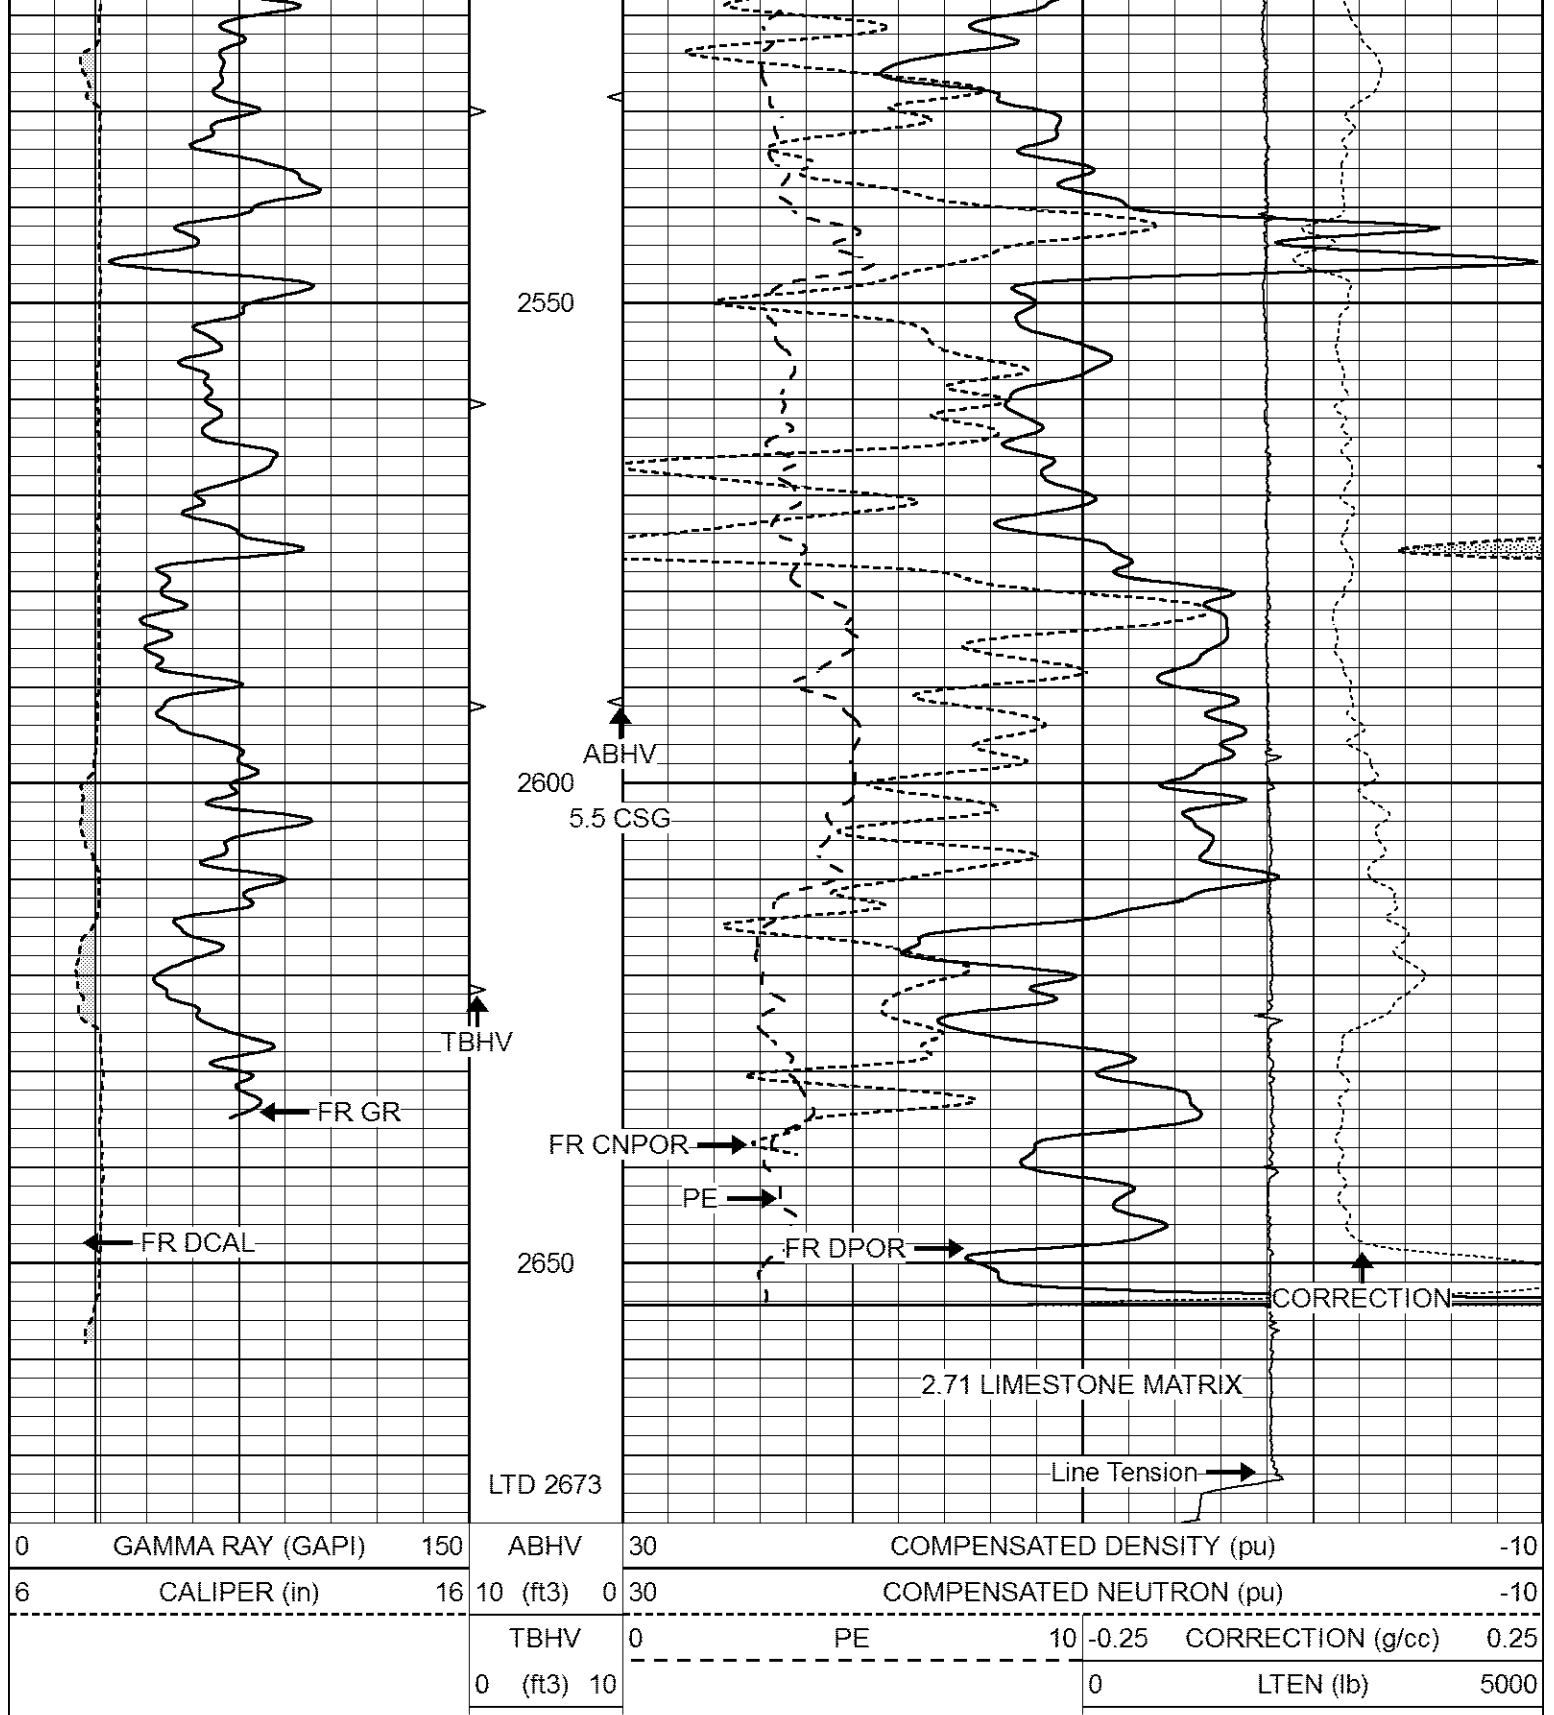

# REPEAT SECTION

|   |                  |     |            |                  |                          |                                 |
|---|------------------|-----|------------|------------------|--------------------------|---------------------------------|
| 0 | GAMMA RAY (GAPI) | 150 | ABHV       | 30               | COMPENSATED DENSITY (pu) | -10                             |
| 6 | CALIPER (in)     | 16  | 10 (ft3) 0 | 30               | COMPENSATED NEUTRON (pu) | -10                             |
|   |                  |     | TBHV       | 0                | PE                       | 10 -0.25 CORRECTION (g/cc) 0.25 |
|   |                  |     | 0 (ft3) 10 | 0 LTEN (lb) 5000 |                          |                                 |

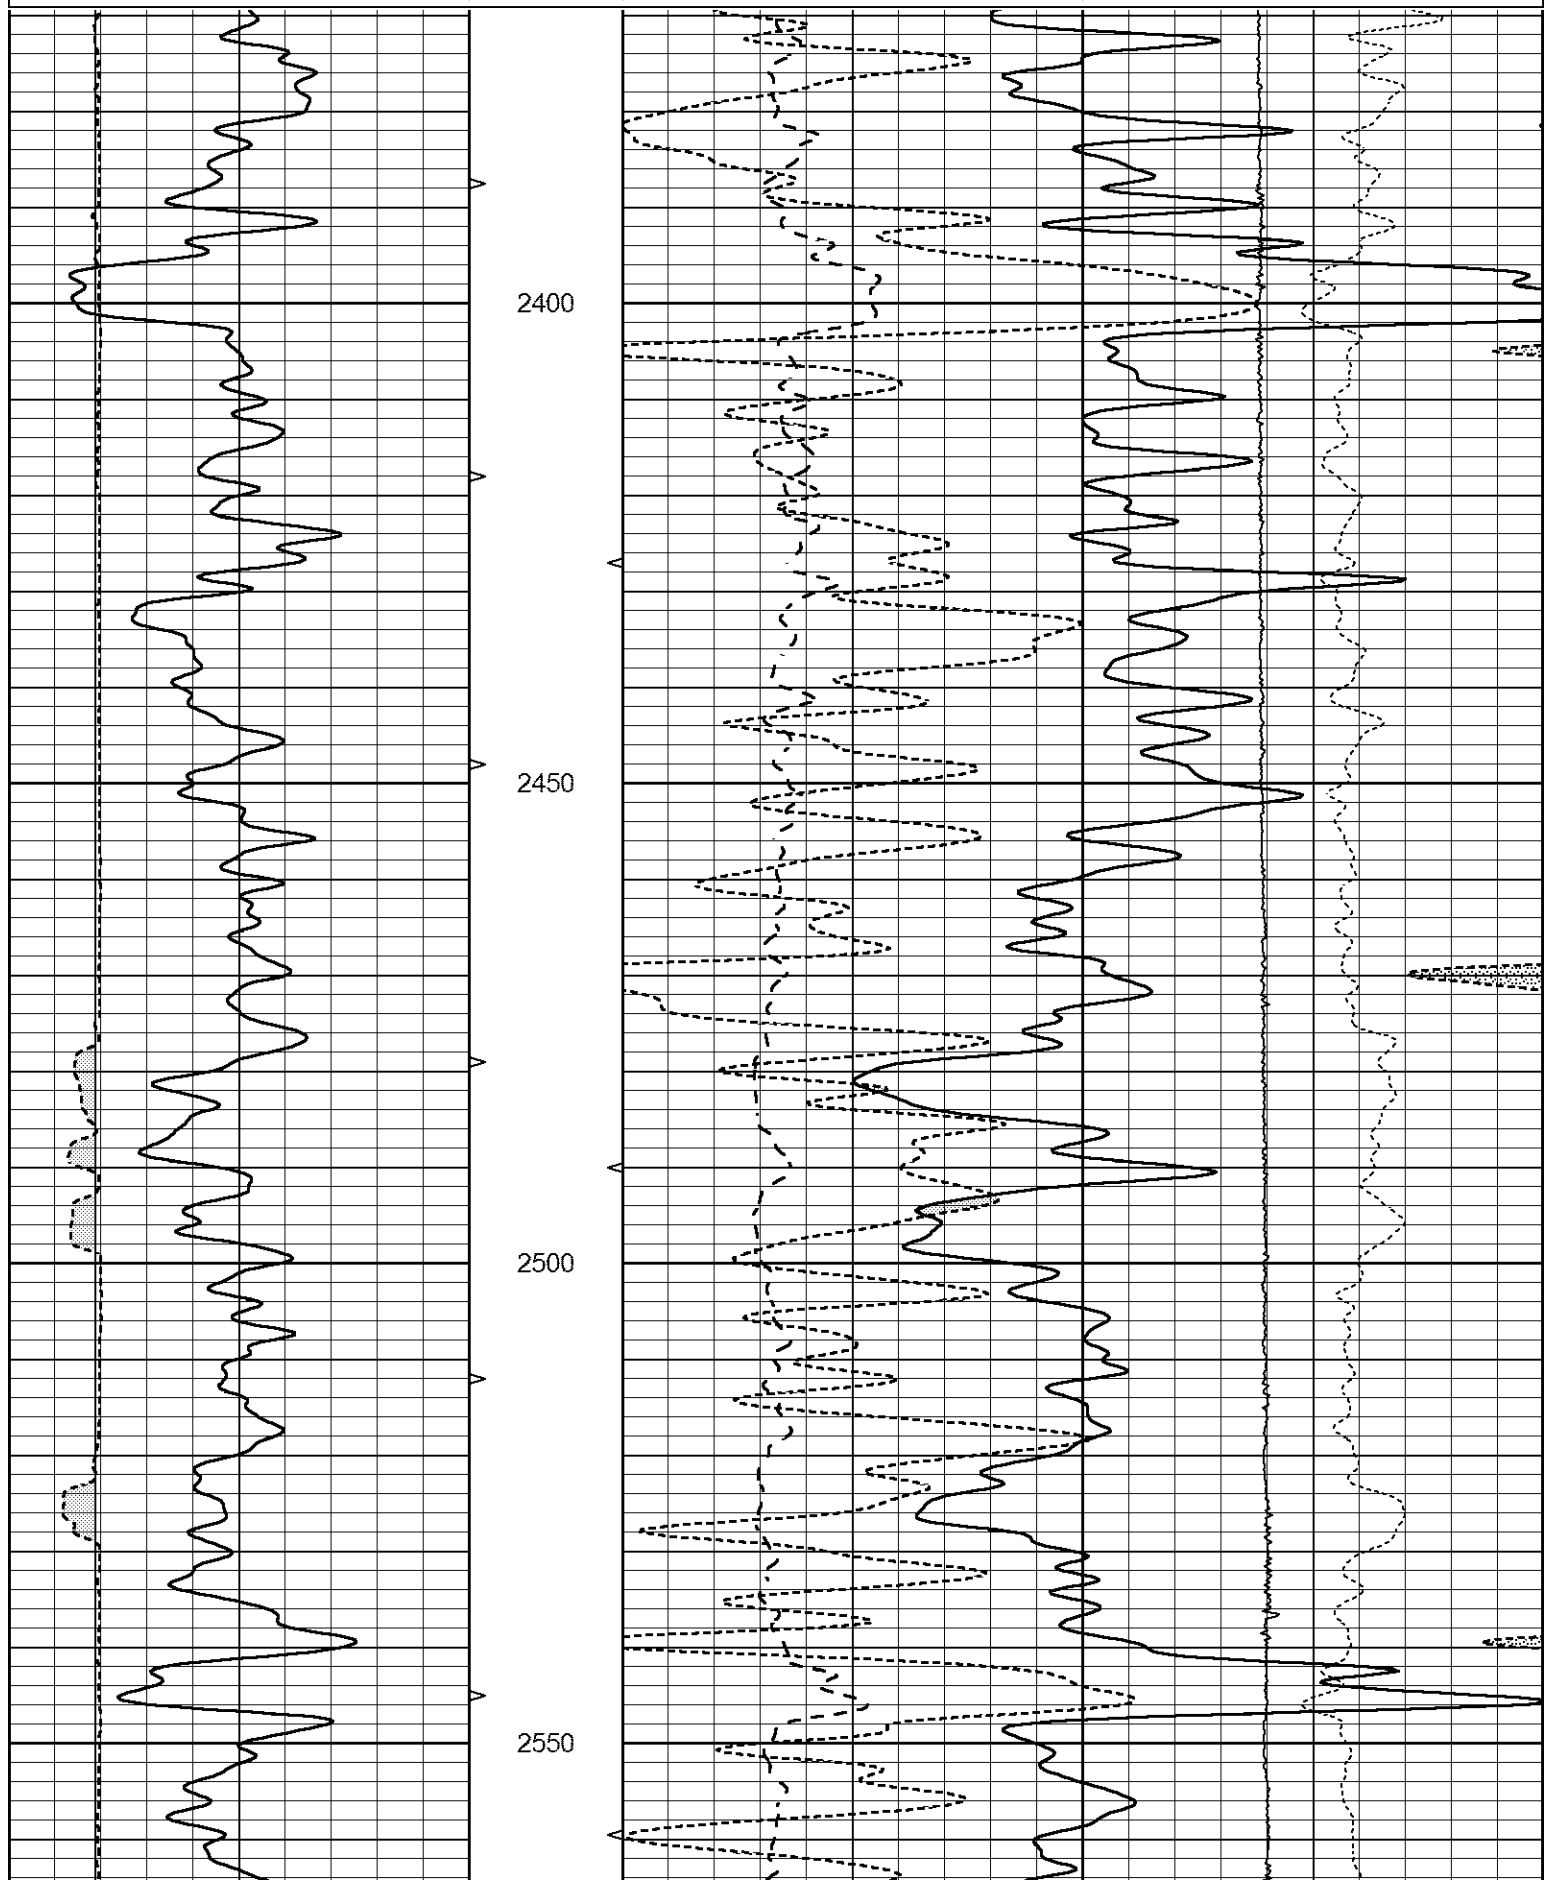

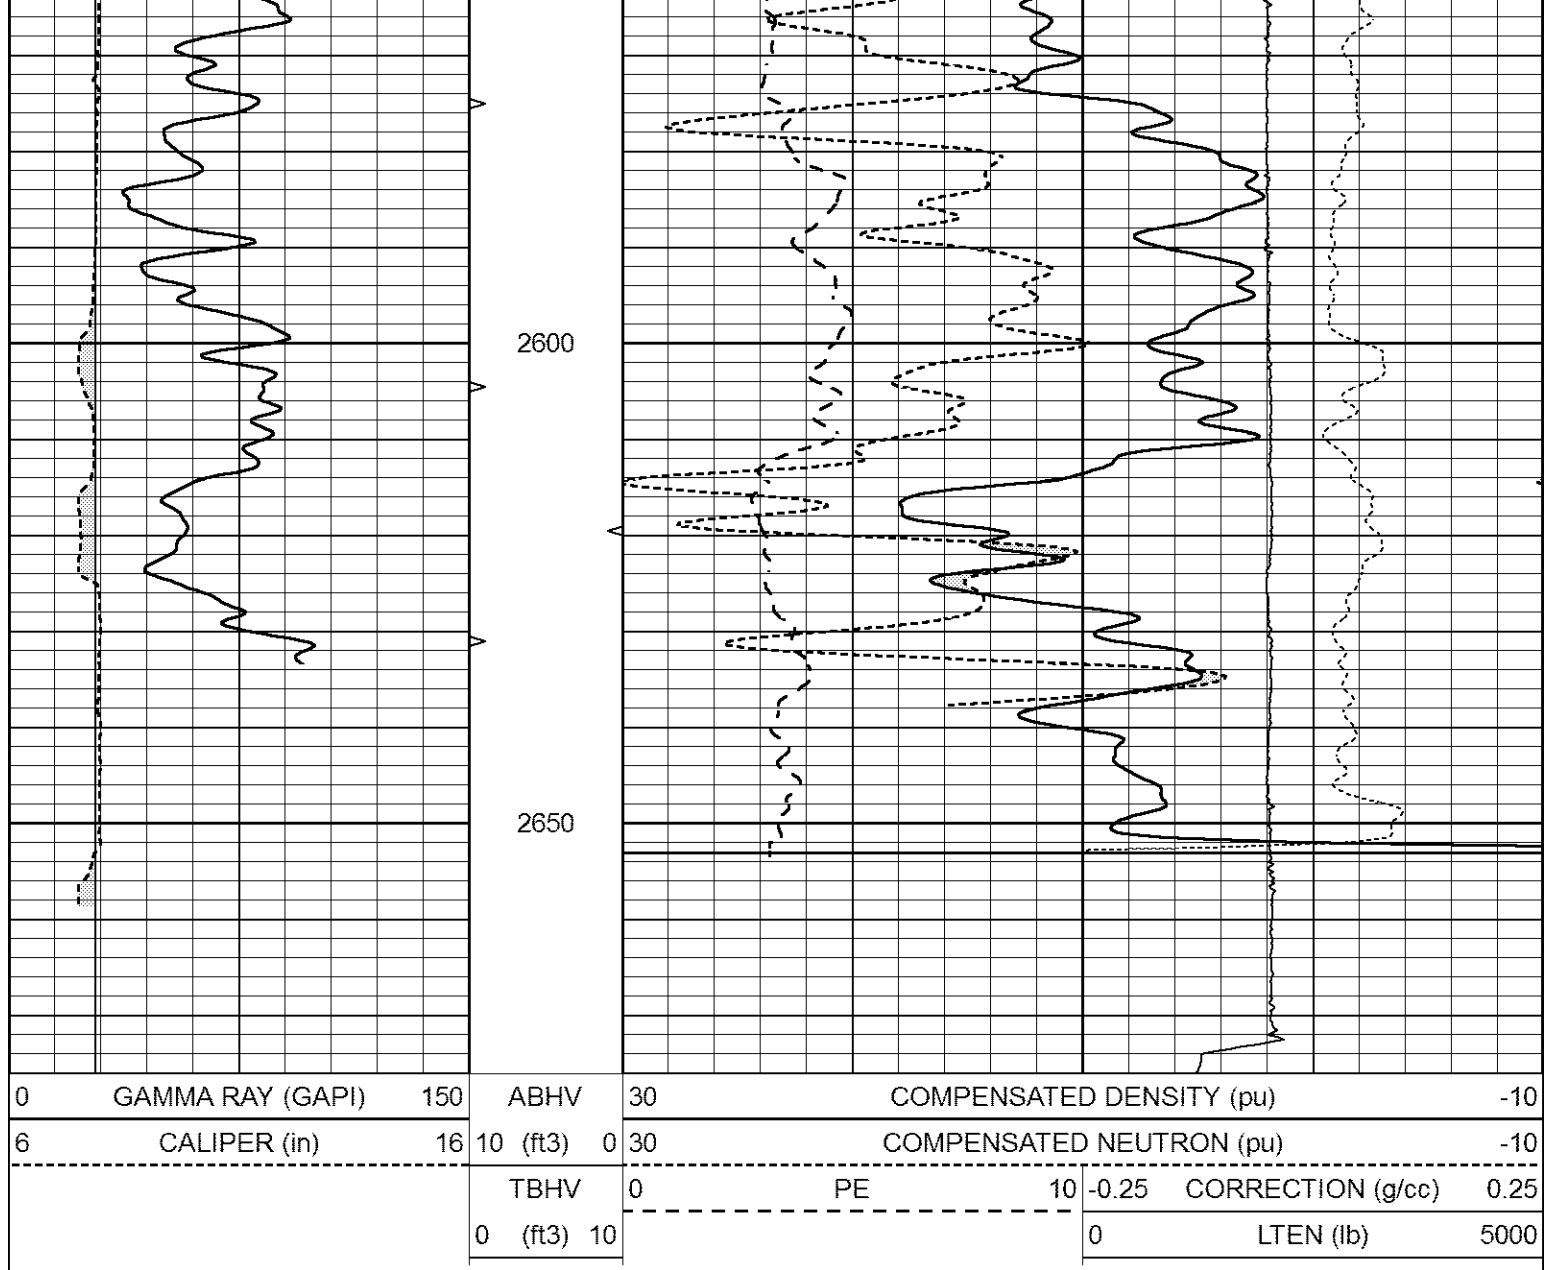

| Calibration Report           |                          |              |  |
|------------------------------|--------------------------|--------------|--|
| Database File                | 6240pe.db                |              |  |
| Dataset Pathname             | pass6.1                  |              |  |
| Dataset Creation             | Tue Feb 15 23:14:53 2022 |              |  |
| MICRO_USR Calibration Report |                          |              |  |
| Serial Number:               | 070911                   |              |  |
| Tool Model:                  | ProbeL                   |              |  |
| Performed:                   | Tue Dec 21 16:59:08 2021 |              |  |
| Caliper Calibration:         | Gain=3.755               | Offset=1.950 |  |
| References                   | Low Cal                  | High Cal     |  |
| Readings                     | 8.000                    | 14.000       |  |
|                              | 1.451                    | 3.049        |  |
| 1.5" Calibration:            | Gain=55.000              | Offset=0.300 |  |
| References                   | Low Cal                  | High Cal     |  |
| Readings                     | 0.000                    | 20.000       |  |
|                              | 0.004                    | 0.843        |  |
| 2" Calibration:              | Gain=50.000              | Offset=1.000 |  |

|                              |                                           |            |          |        |         |       |         |         |
|------------------------------|-------------------------------------------|------------|----------|--------|---------|-------|---------|---------|
| References                   | Low Cal                                   | High Cal   |          |        |         |       |         |         |
| Readings                     | 0.000                                     | 20.000     |          |        |         |       |         |         |
|                              | 0.021                                     | 0.810      |          |        |         |       |         |         |
| Microlog Calibration Report  |                                           |            |          |        |         |       |         |         |
| Serial-Model:<br>Performed:  | 070911-ProbeL<br>Sat Apr 11 01:13:01 2015 |            |          |        |         |       |         |         |
|                              | Readings                                  | References | Results  |        |         |       |         |         |
|                              | Zero                                      | Cal        | Zero     | Cal    | m       | b     |         |         |
| Normal                       | 0.0002                                    | 0.4836     | V        | 0.0000 | 10.0000 | Ohm-m | 20.6908 | -0.0051 |
| Inverse                      | 0.0018                                    | 0.6297     | V        | 0.0000 | 10.0000 | Ohm-m | 15.9263 | -0.0282 |
| Caliper                      | 0.0000                                    | 1.0000     | V        | 0.0000 | 1.0000  | in    | 1.0000  | 0.0000  |
| Gamma Ray Calibration Report |                                           |            |          |        |         |       |         |         |
| Serial Number:               | 070558                                    |            |          |        |         |       |         |         |
| Tool Model:                  | Probe1                                    |            |          |        |         |       |         |         |
| Performed:                   | Fri Oct 30 21:32:56 2020                  |            |          |        |         |       |         |         |
| Calibrator Value:            | 1.0                                       |            | GAPI     |        |         |       |         |         |
| Background Reading:          | 0.0                                       |            | cps      |        |         |       |         |         |
| Calibrator Reading:          | 1.0                                       |            | cps      |        |         |       |         |         |
| Sensitivity:                 | 0.2700                                    |            | GAPI/cps |        |         |       |         |         |