



MICRO LOG

Company	PLATEAU OPERATING CORPORATION	Company	PLATEAU OPERATING CORPORATION
Well	WEAVER #1-15	Well	WEAVER #1-15
Field	NA	Field	NA
County	HAMILTON	County	HAMILTON
State	KANSAS	State	KANSAS
Location:	API # : 15-075-20910-0000	Other Services CNL/CDL/PE DIL/SON	
Permanent Datum	1320' FNL & 1320' FWL	Elevation	
Log Measured From	SEC 15 TWP 25S RGE 40W	K.B. 3358	
Drilling Measured From	GROUND LEVEL Elevation 3351 KELLY BUSHING 7' A.G.L KELLY BUSHING	D.F. 3356	
		G.L. 3351	
Date	2/15/22		
Run Number	ONE		
Depth Driller	2675		
Depth Logger	2673		
Bottom Logged Interval	2655		
Top Log Interval	800		
Casing Driller	8 5/8" @ 822		
Casing Logger	822		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.0/38		
pH / Fluid Loss	7.6/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.75@70F		
Rmf @ Meas. Temp	.56@70F		
Rmc @ Meas. Temp	.9@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.50@104		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	104F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI	TJ DREILING	
Witnessed By	JIM WELCH		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


SYRACUSE, KS. - 5 SOUTH TO RD. 27 - 2 MILES EAST - SOUTH INTO

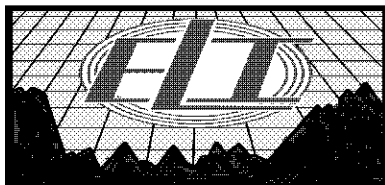


MAIN SECTION

Database File	6240pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Tue Feb 15 23:14:53 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

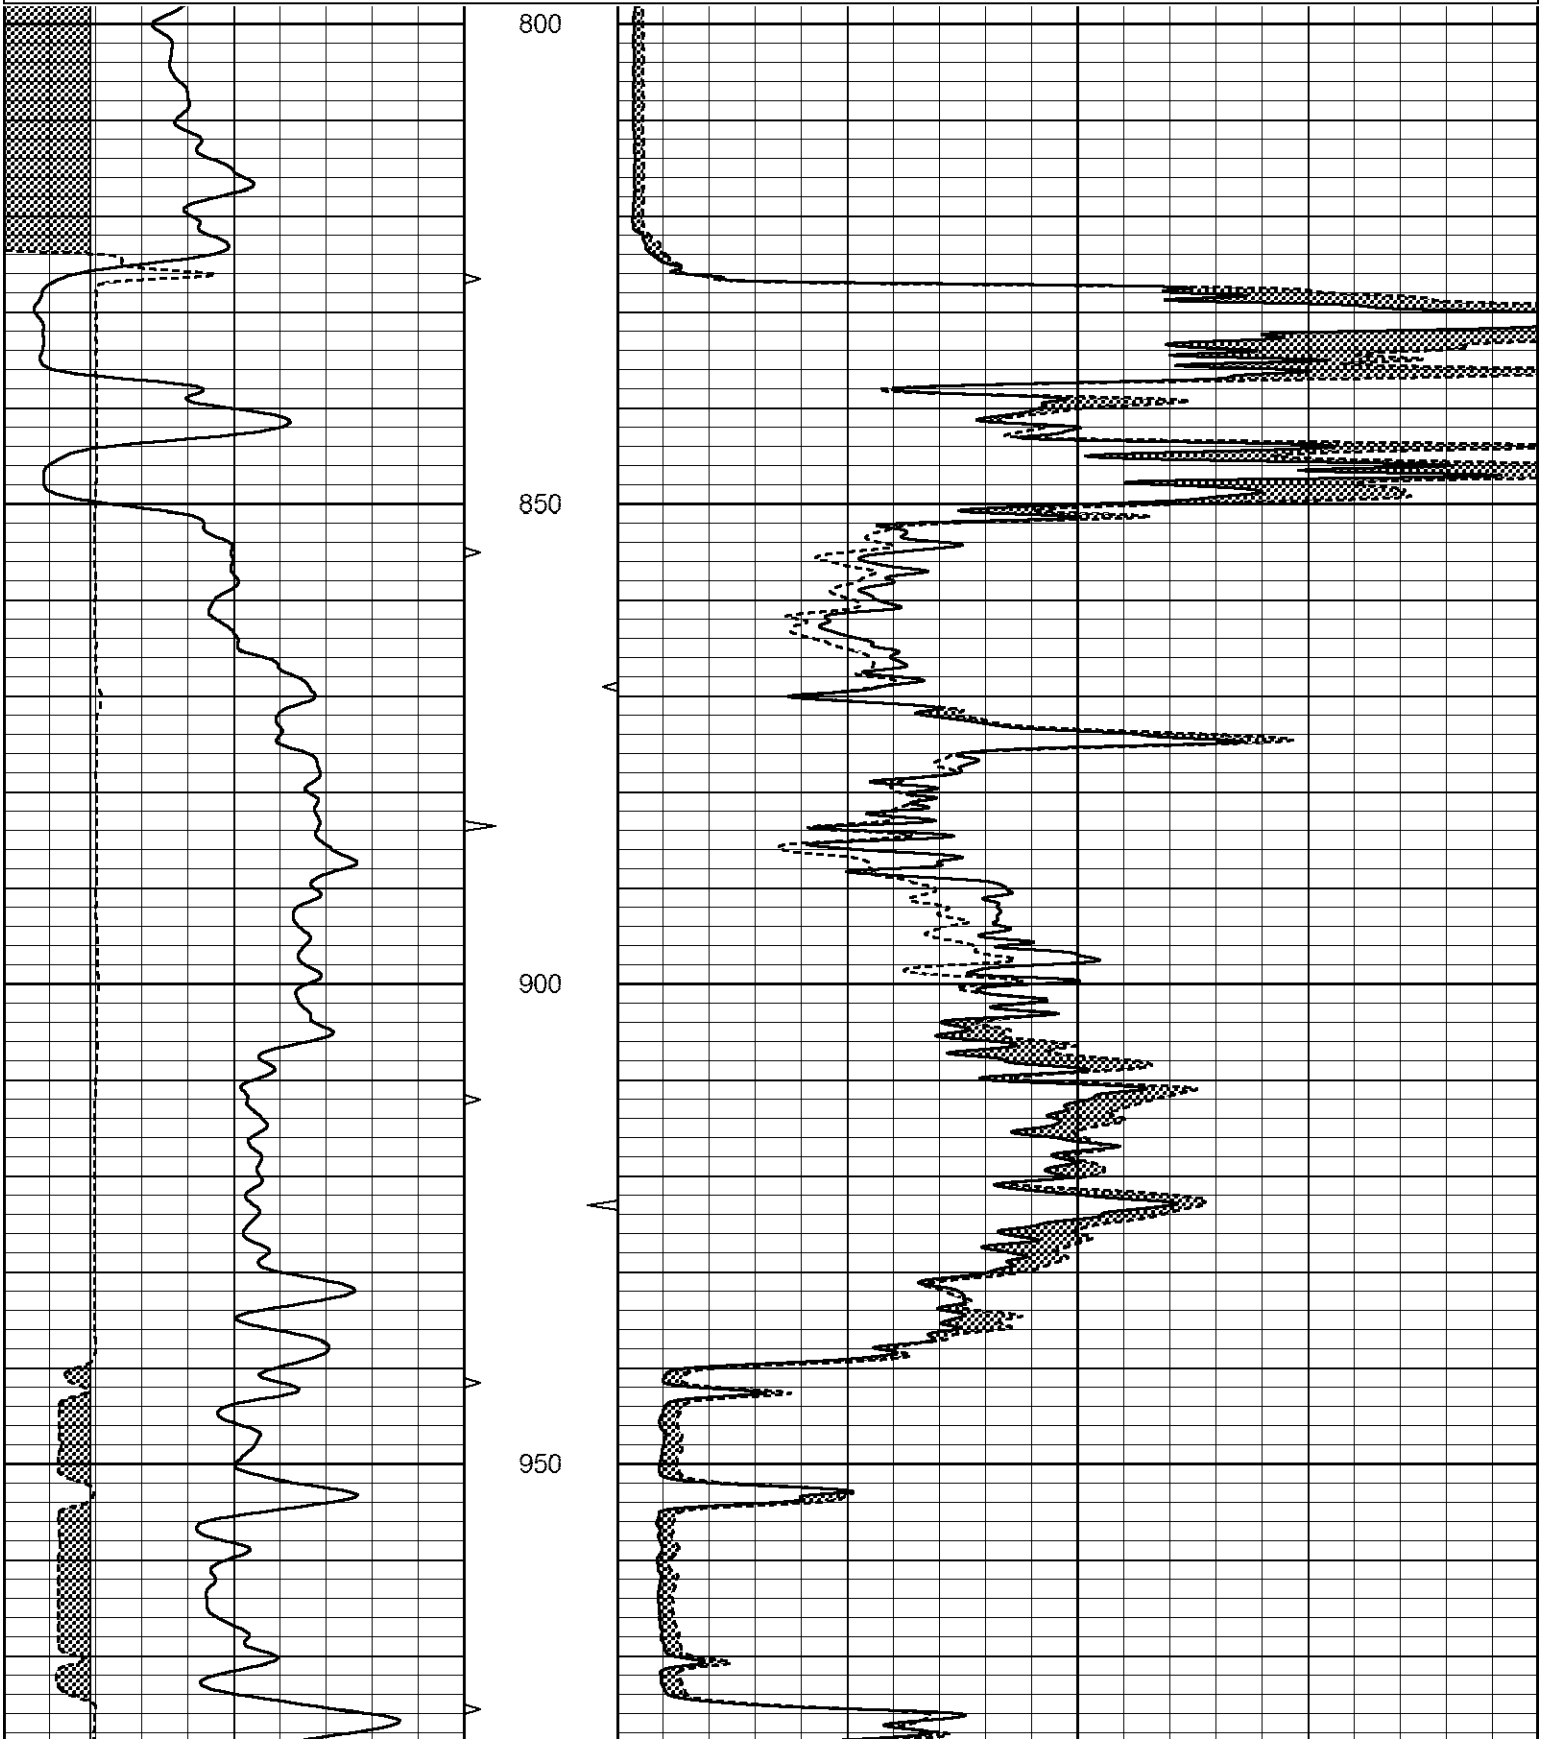

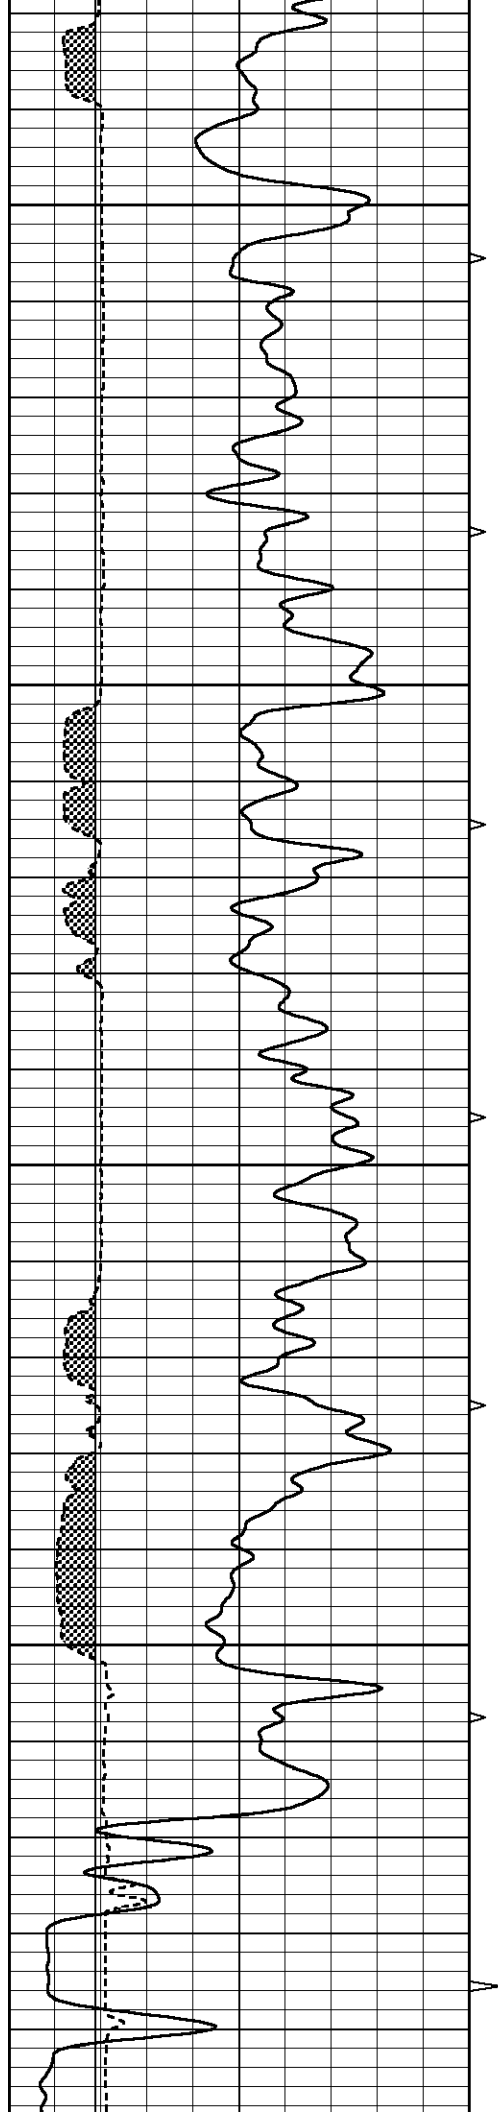



1000


1050


1100


1150

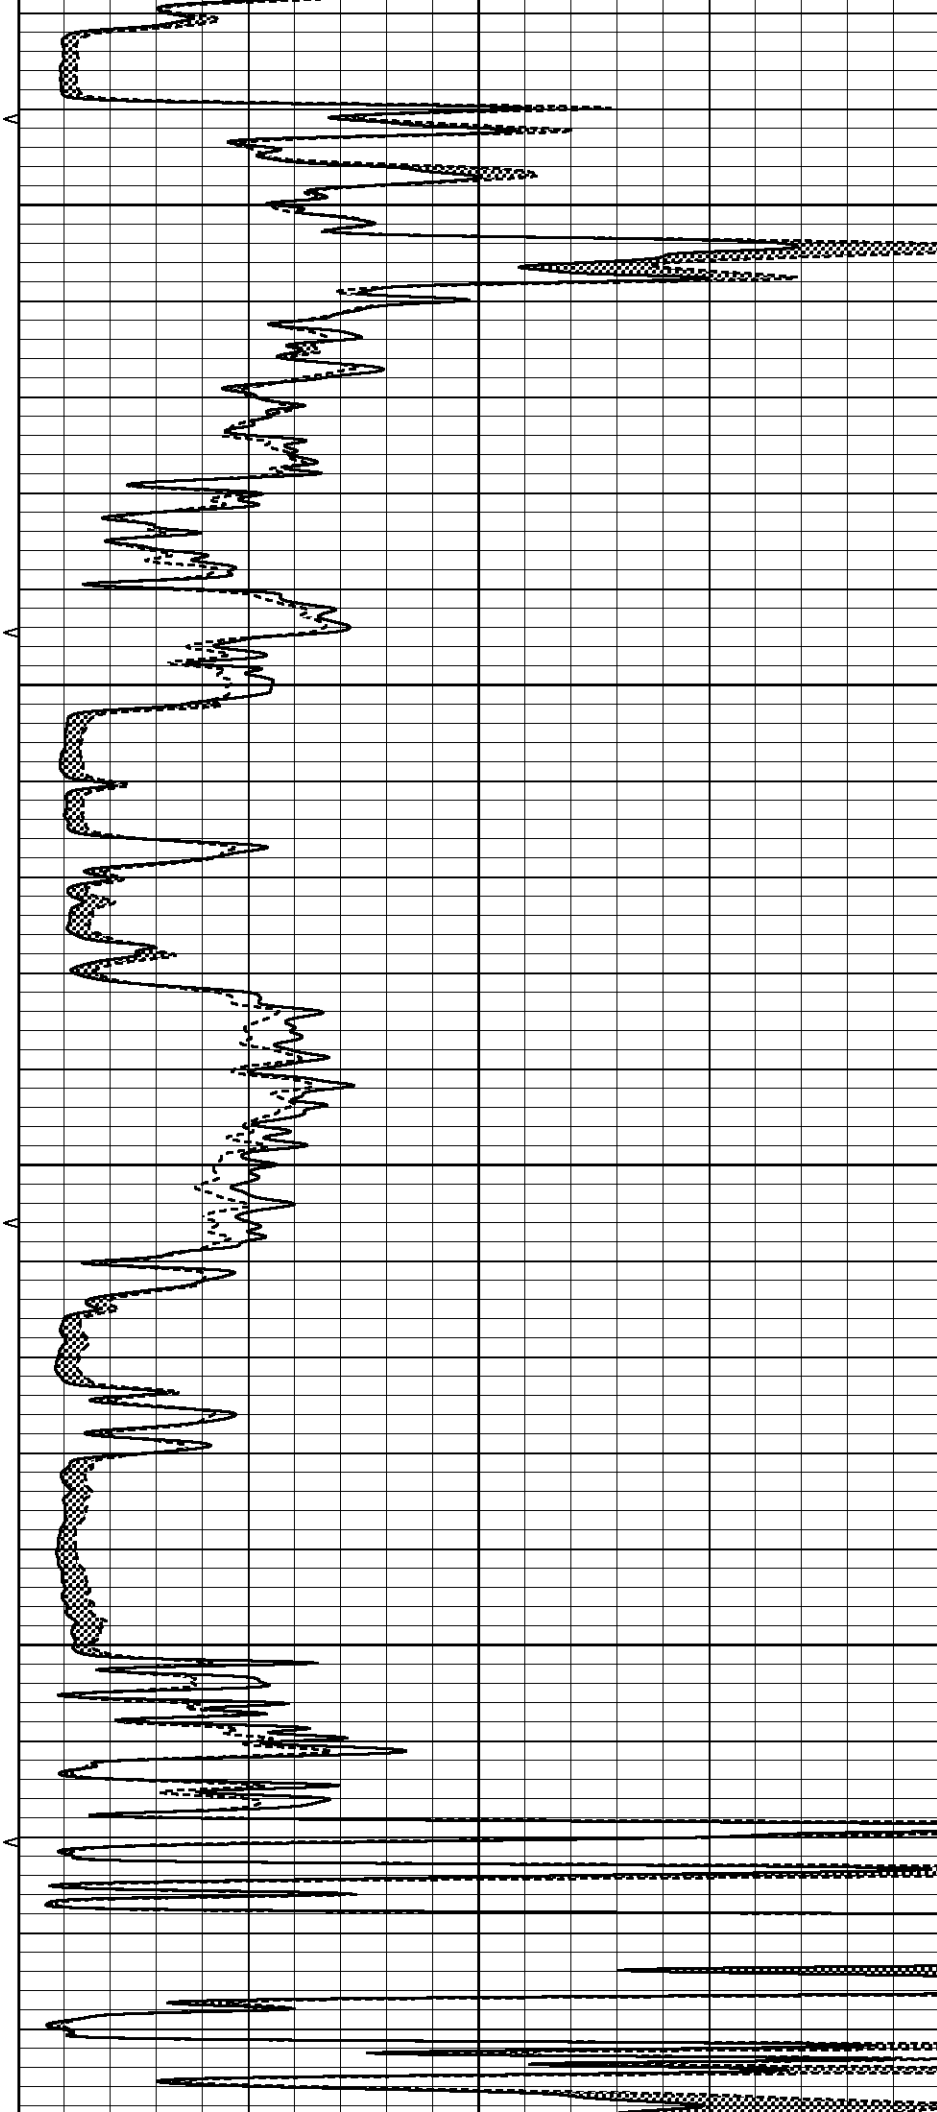

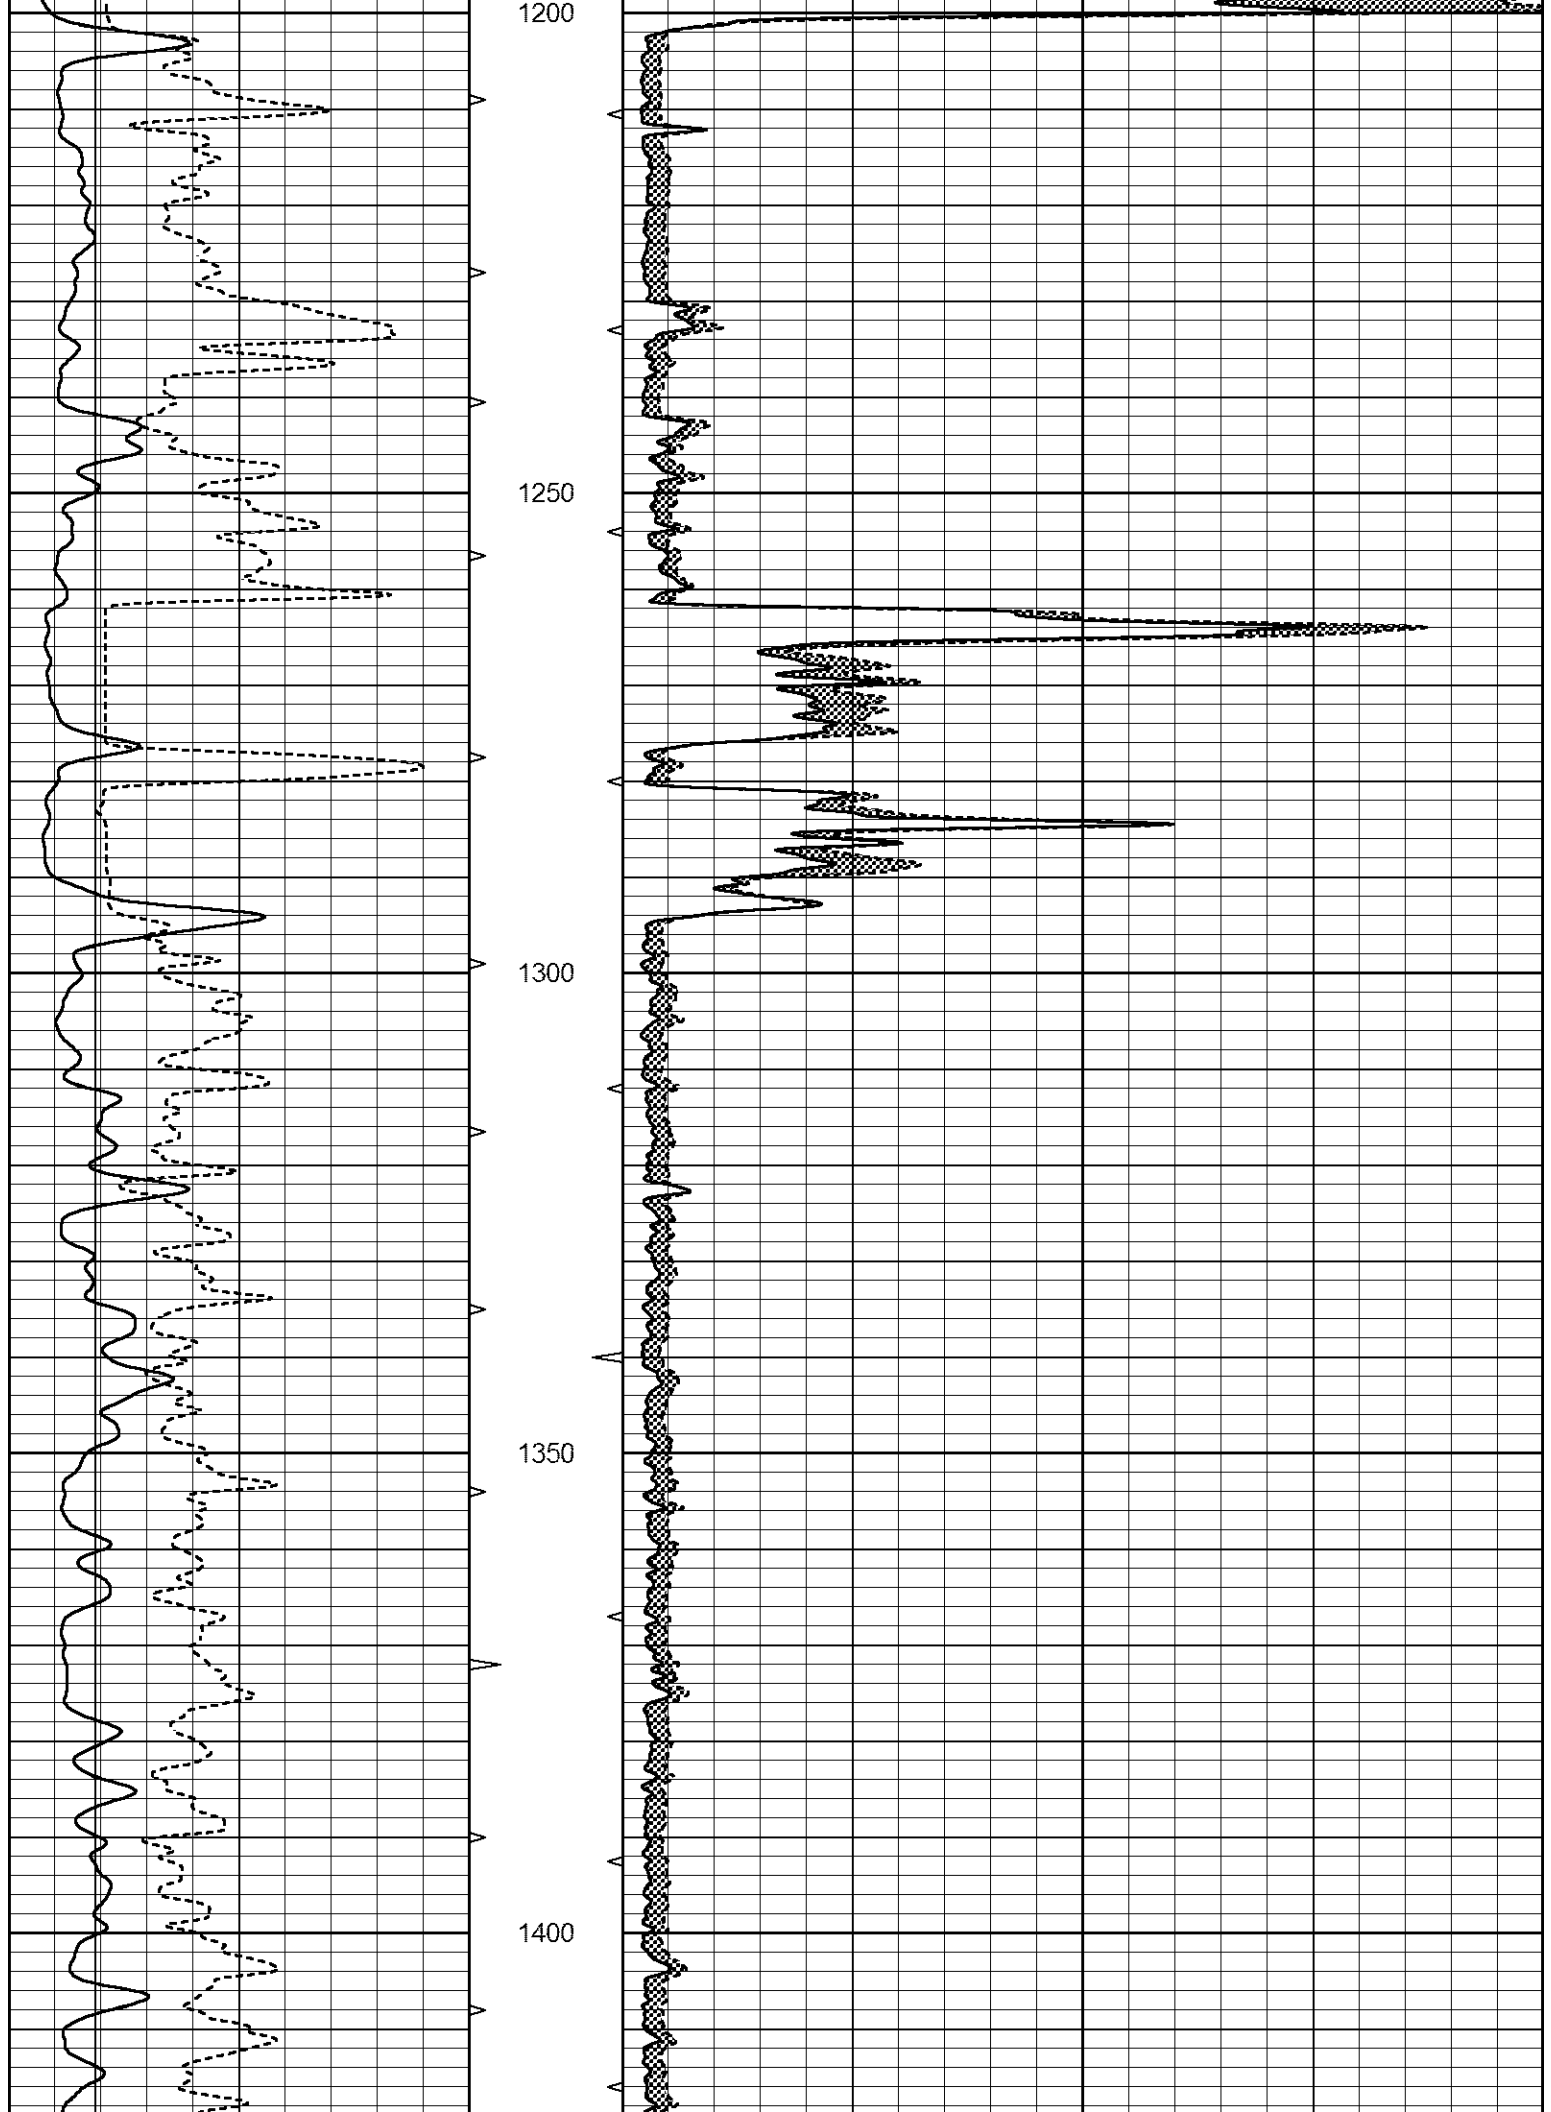

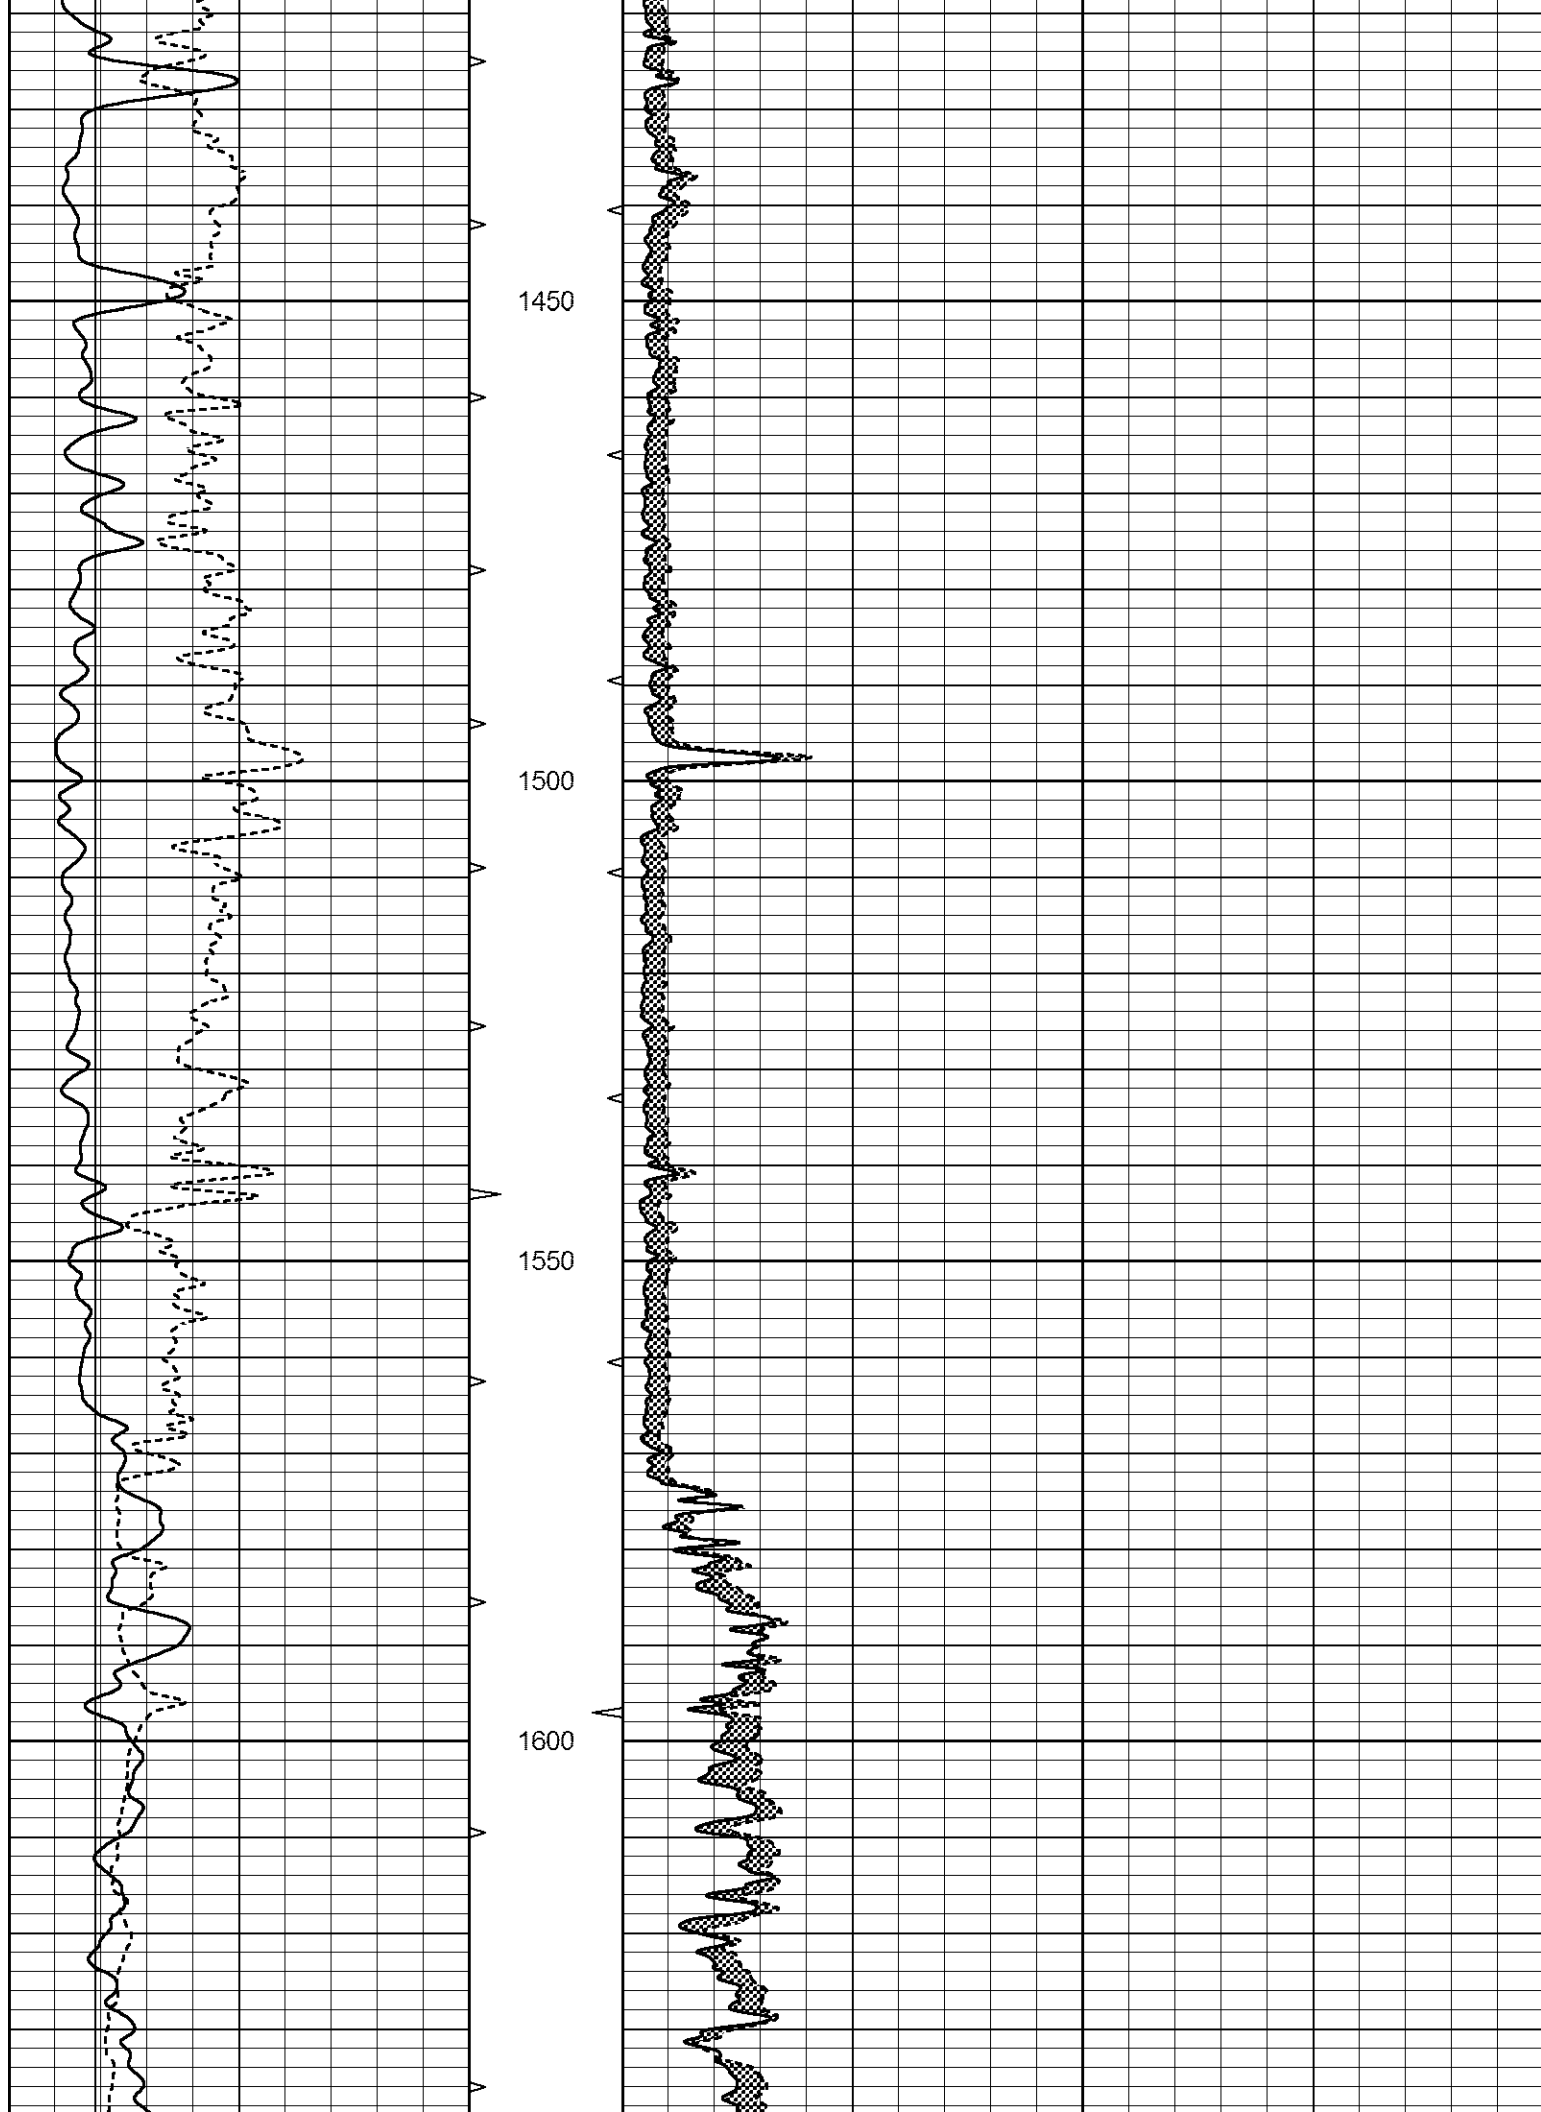

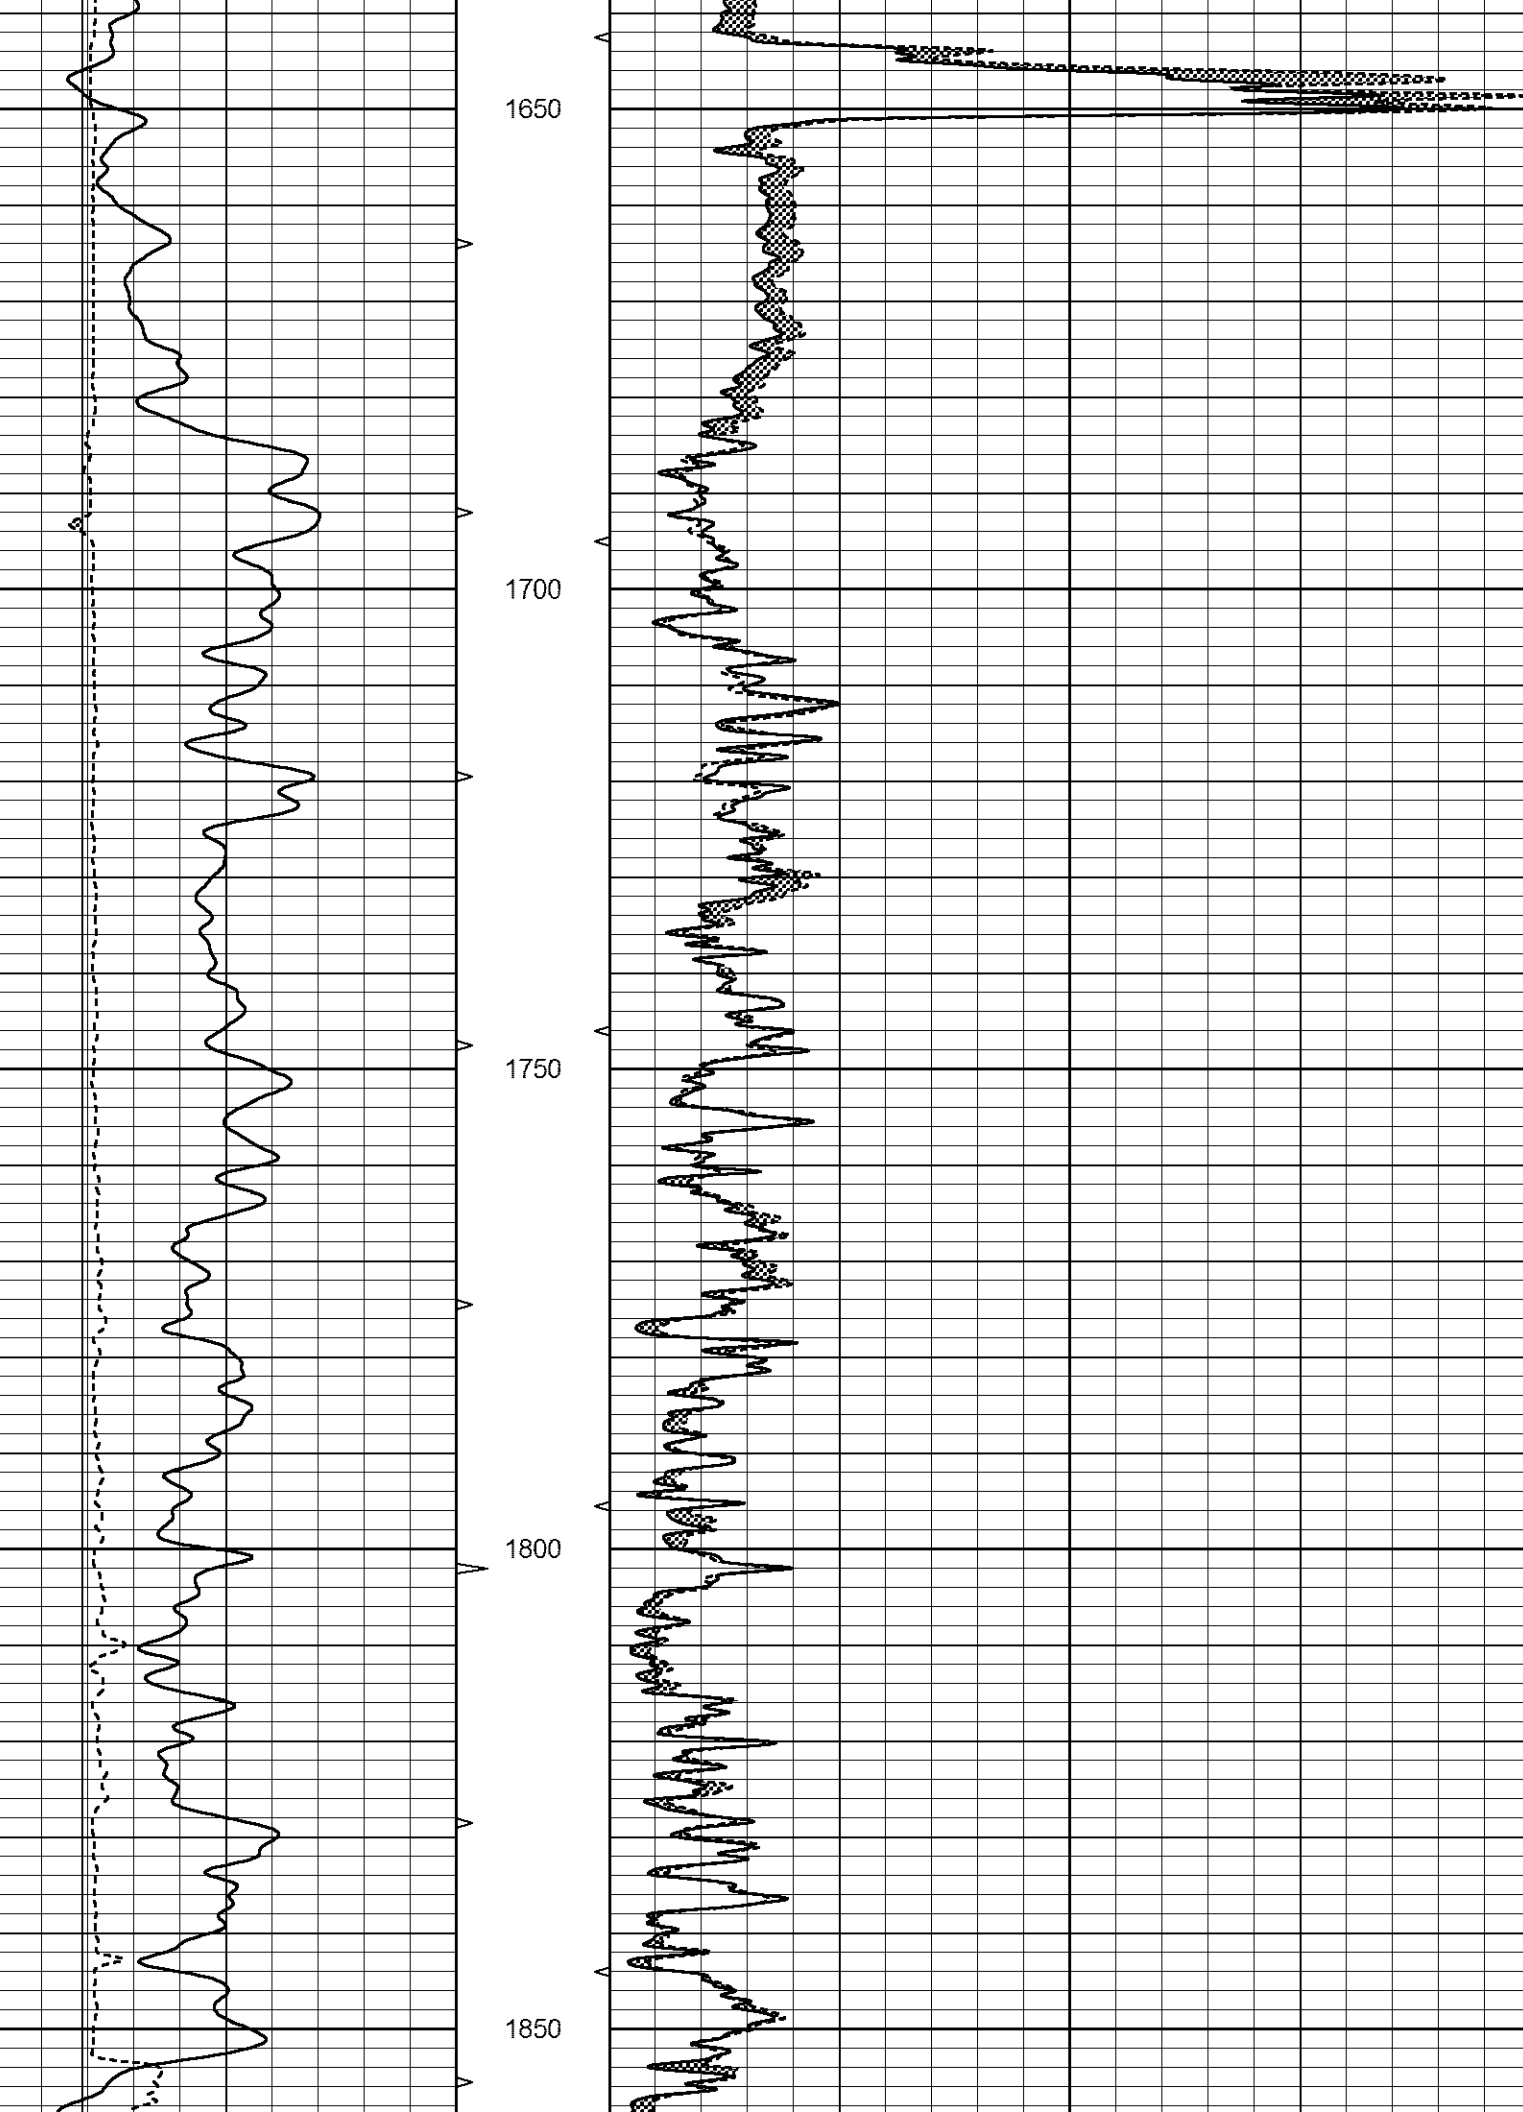

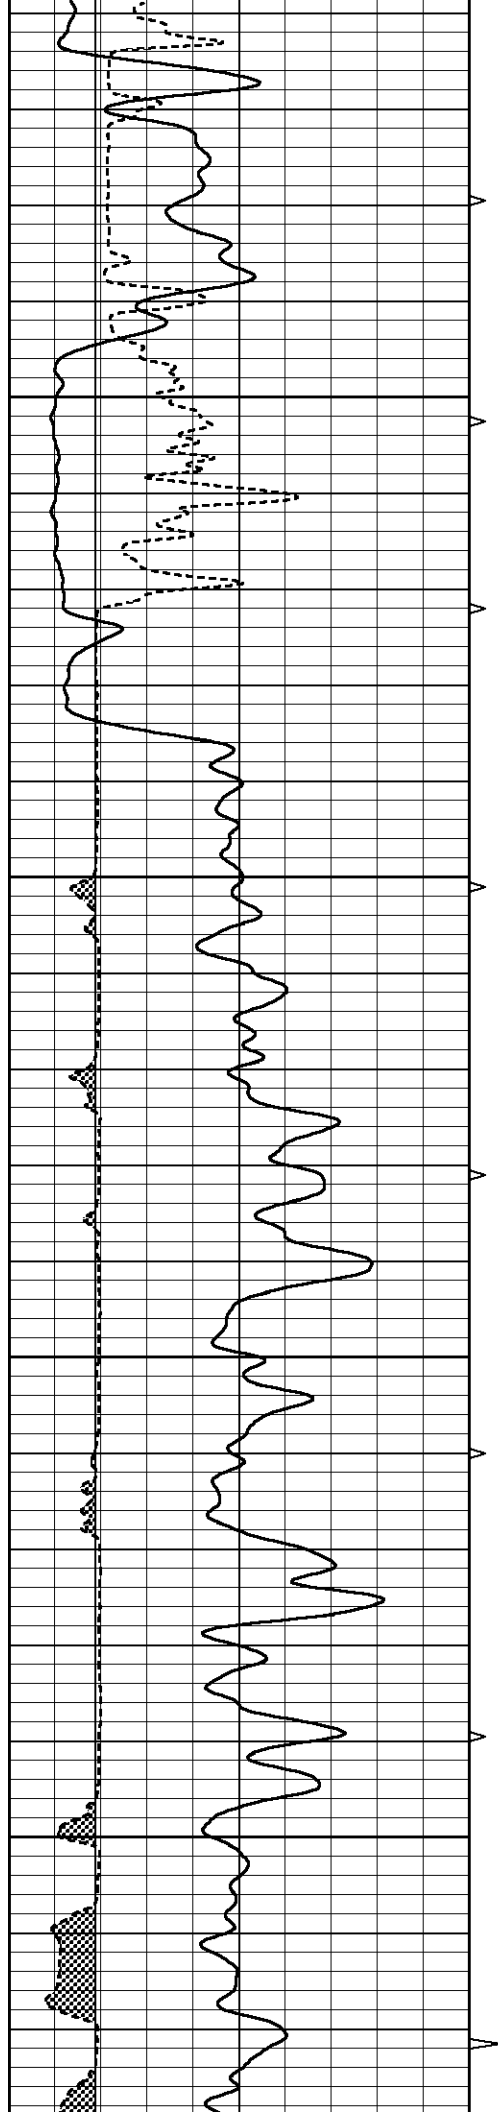



1900

1950

2000

2050

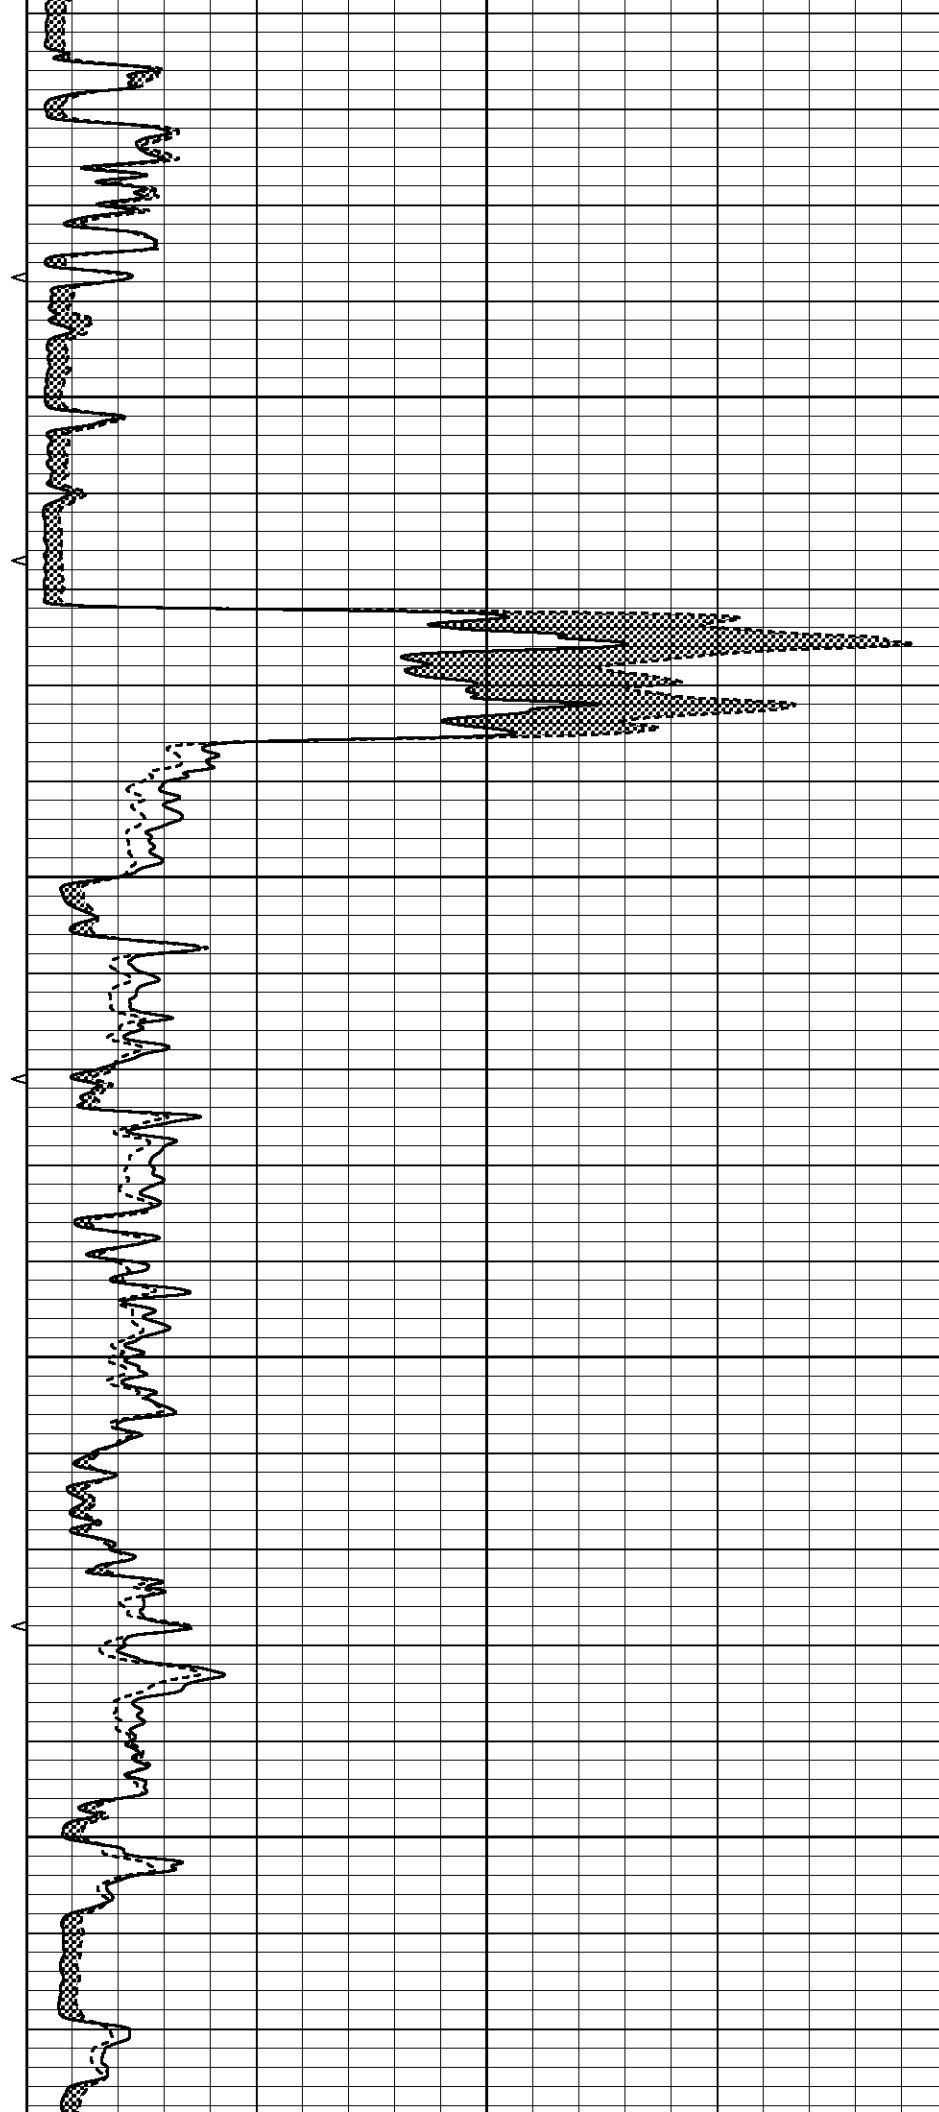

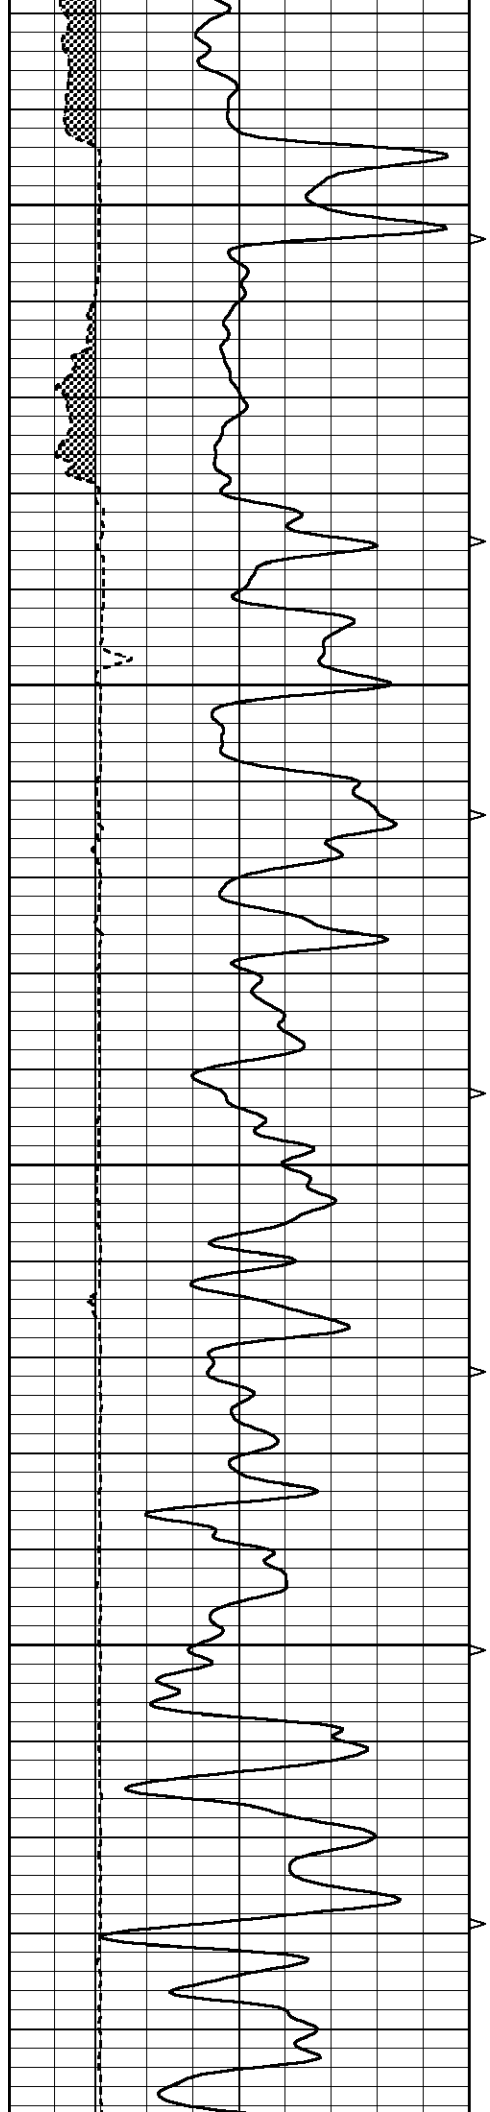




2100


2150

2200

2250

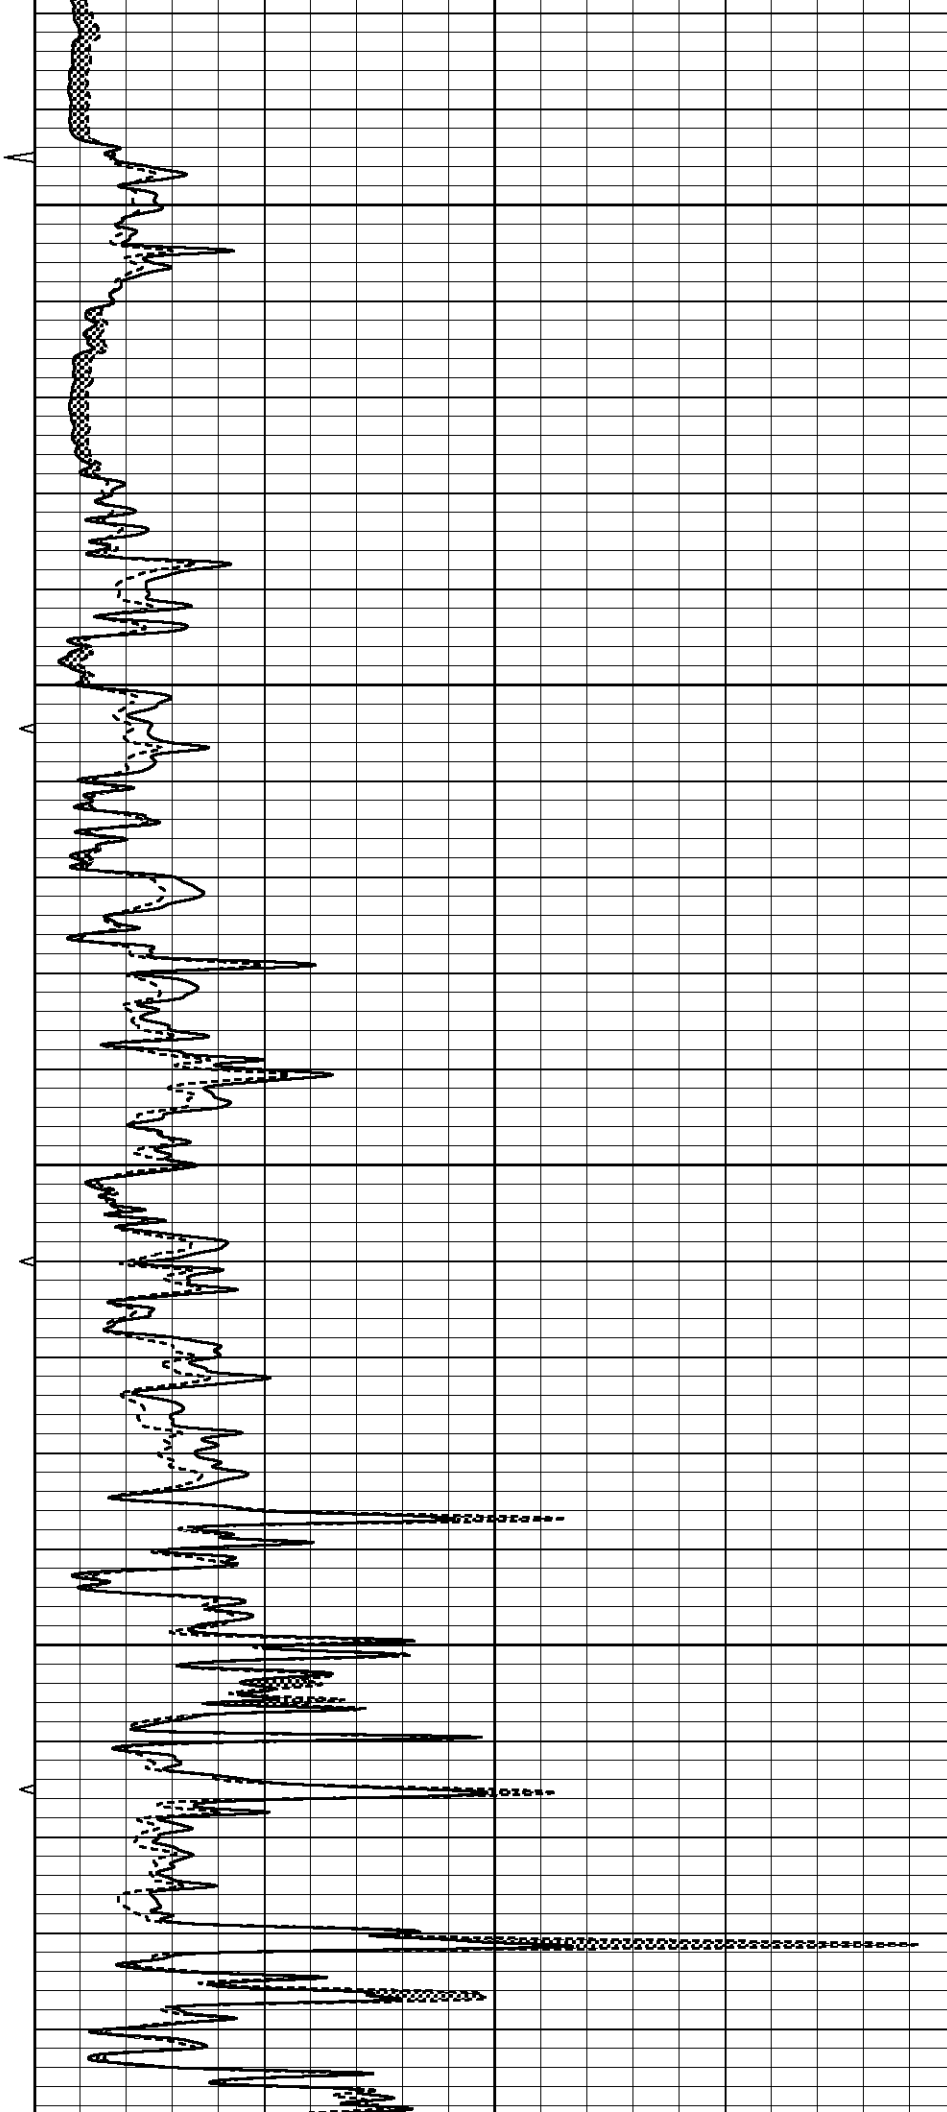

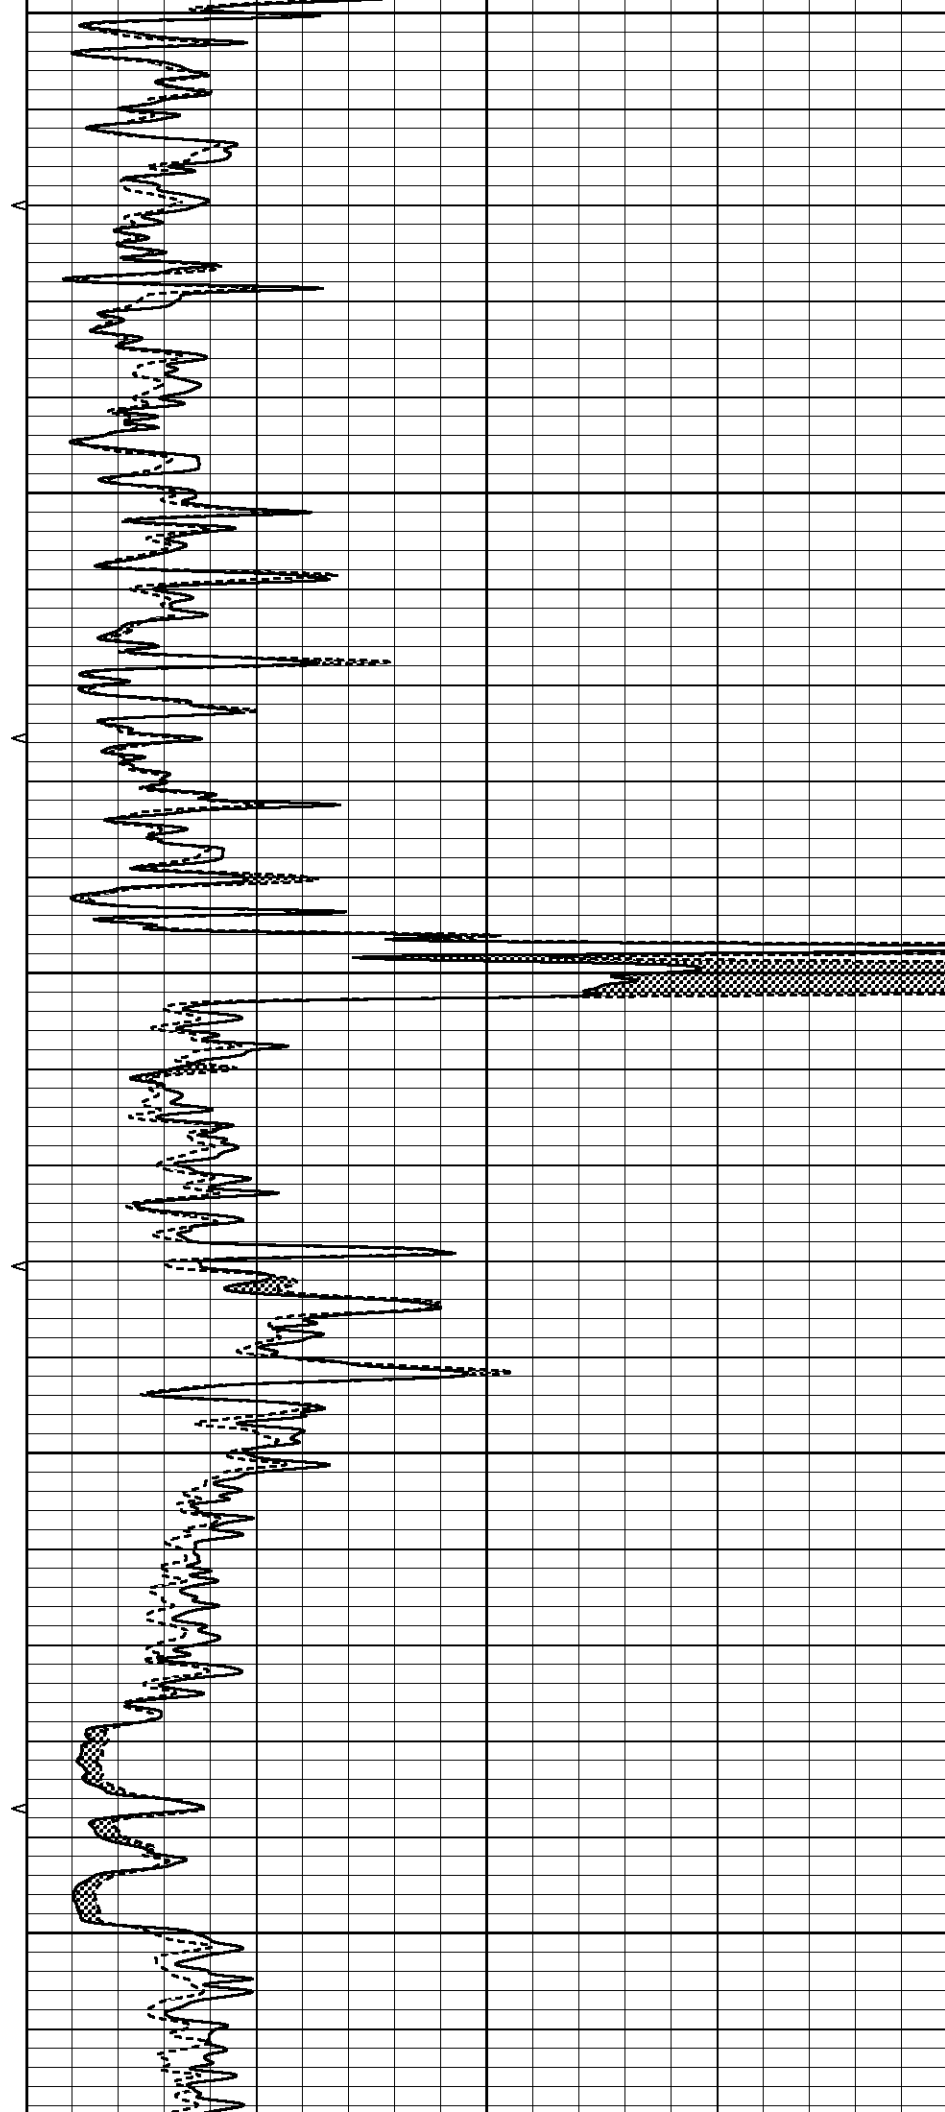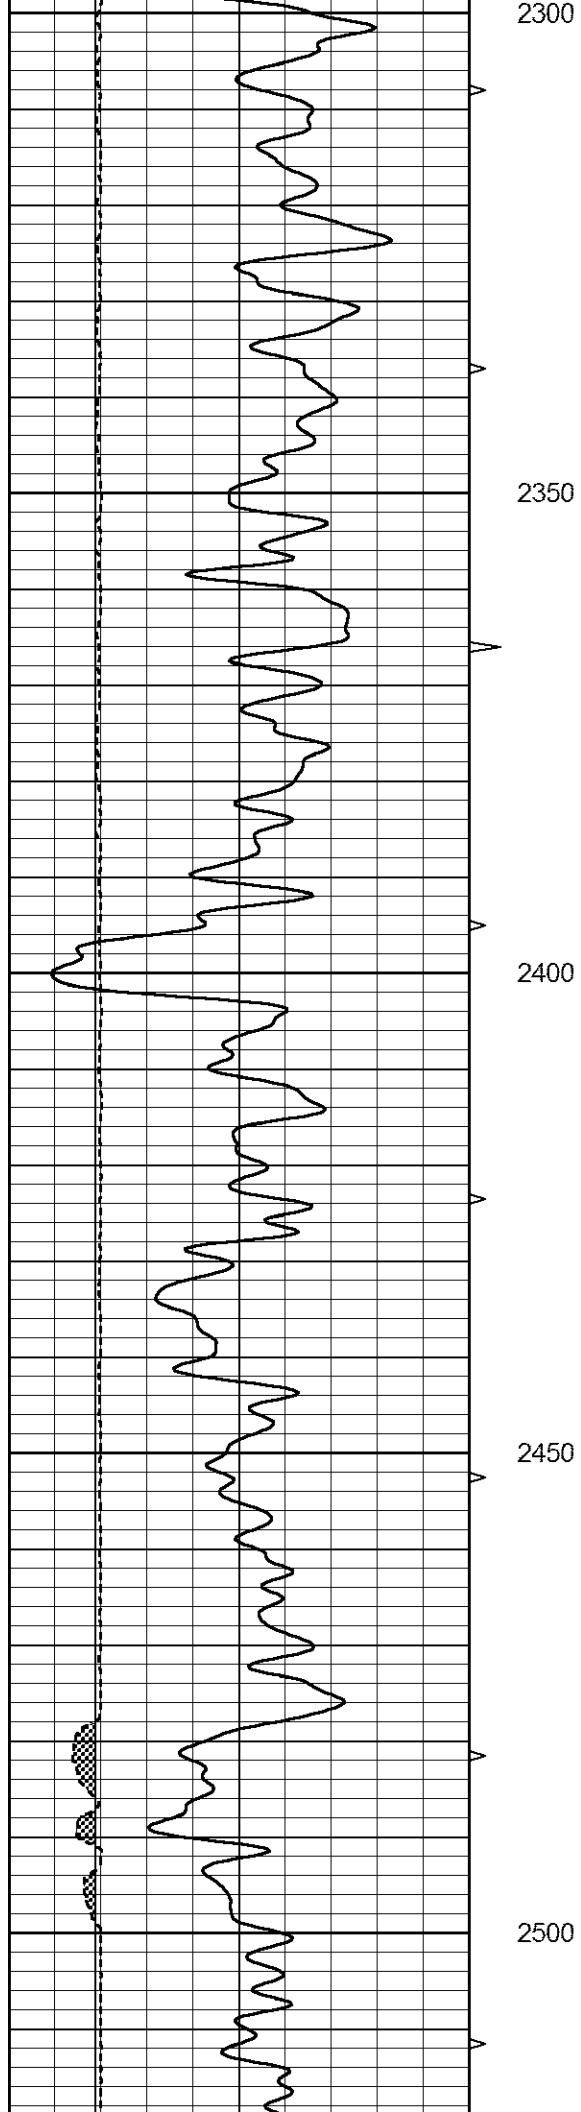


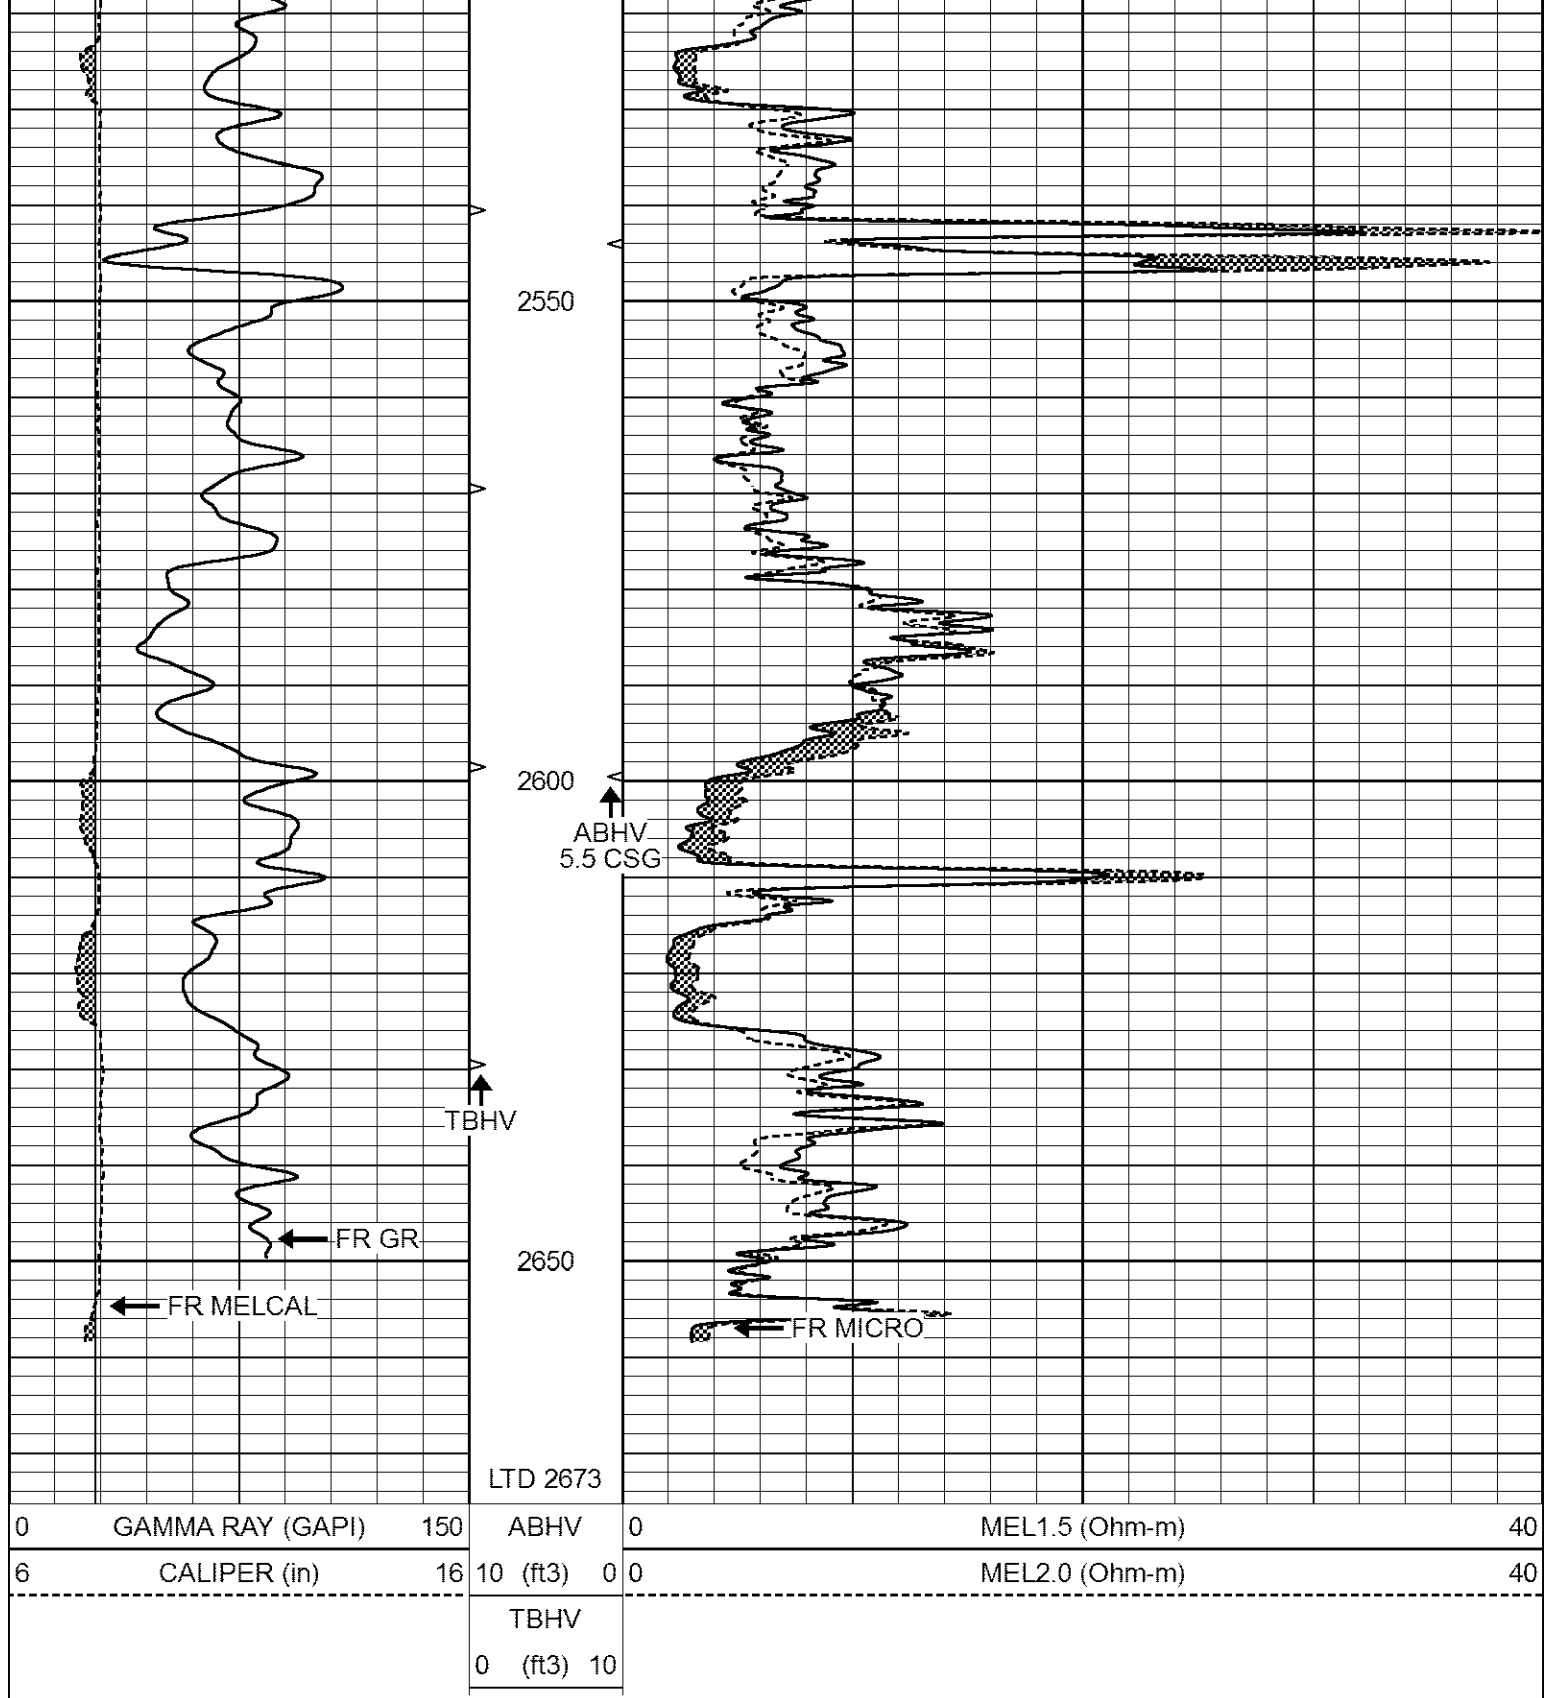


REPEAT SECTION

Database File 6240pe.db
 Dataset Pathname pass5.1
 Presentation Format _micro
 Dataset Creation Tue Feb 15 22:58:29 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

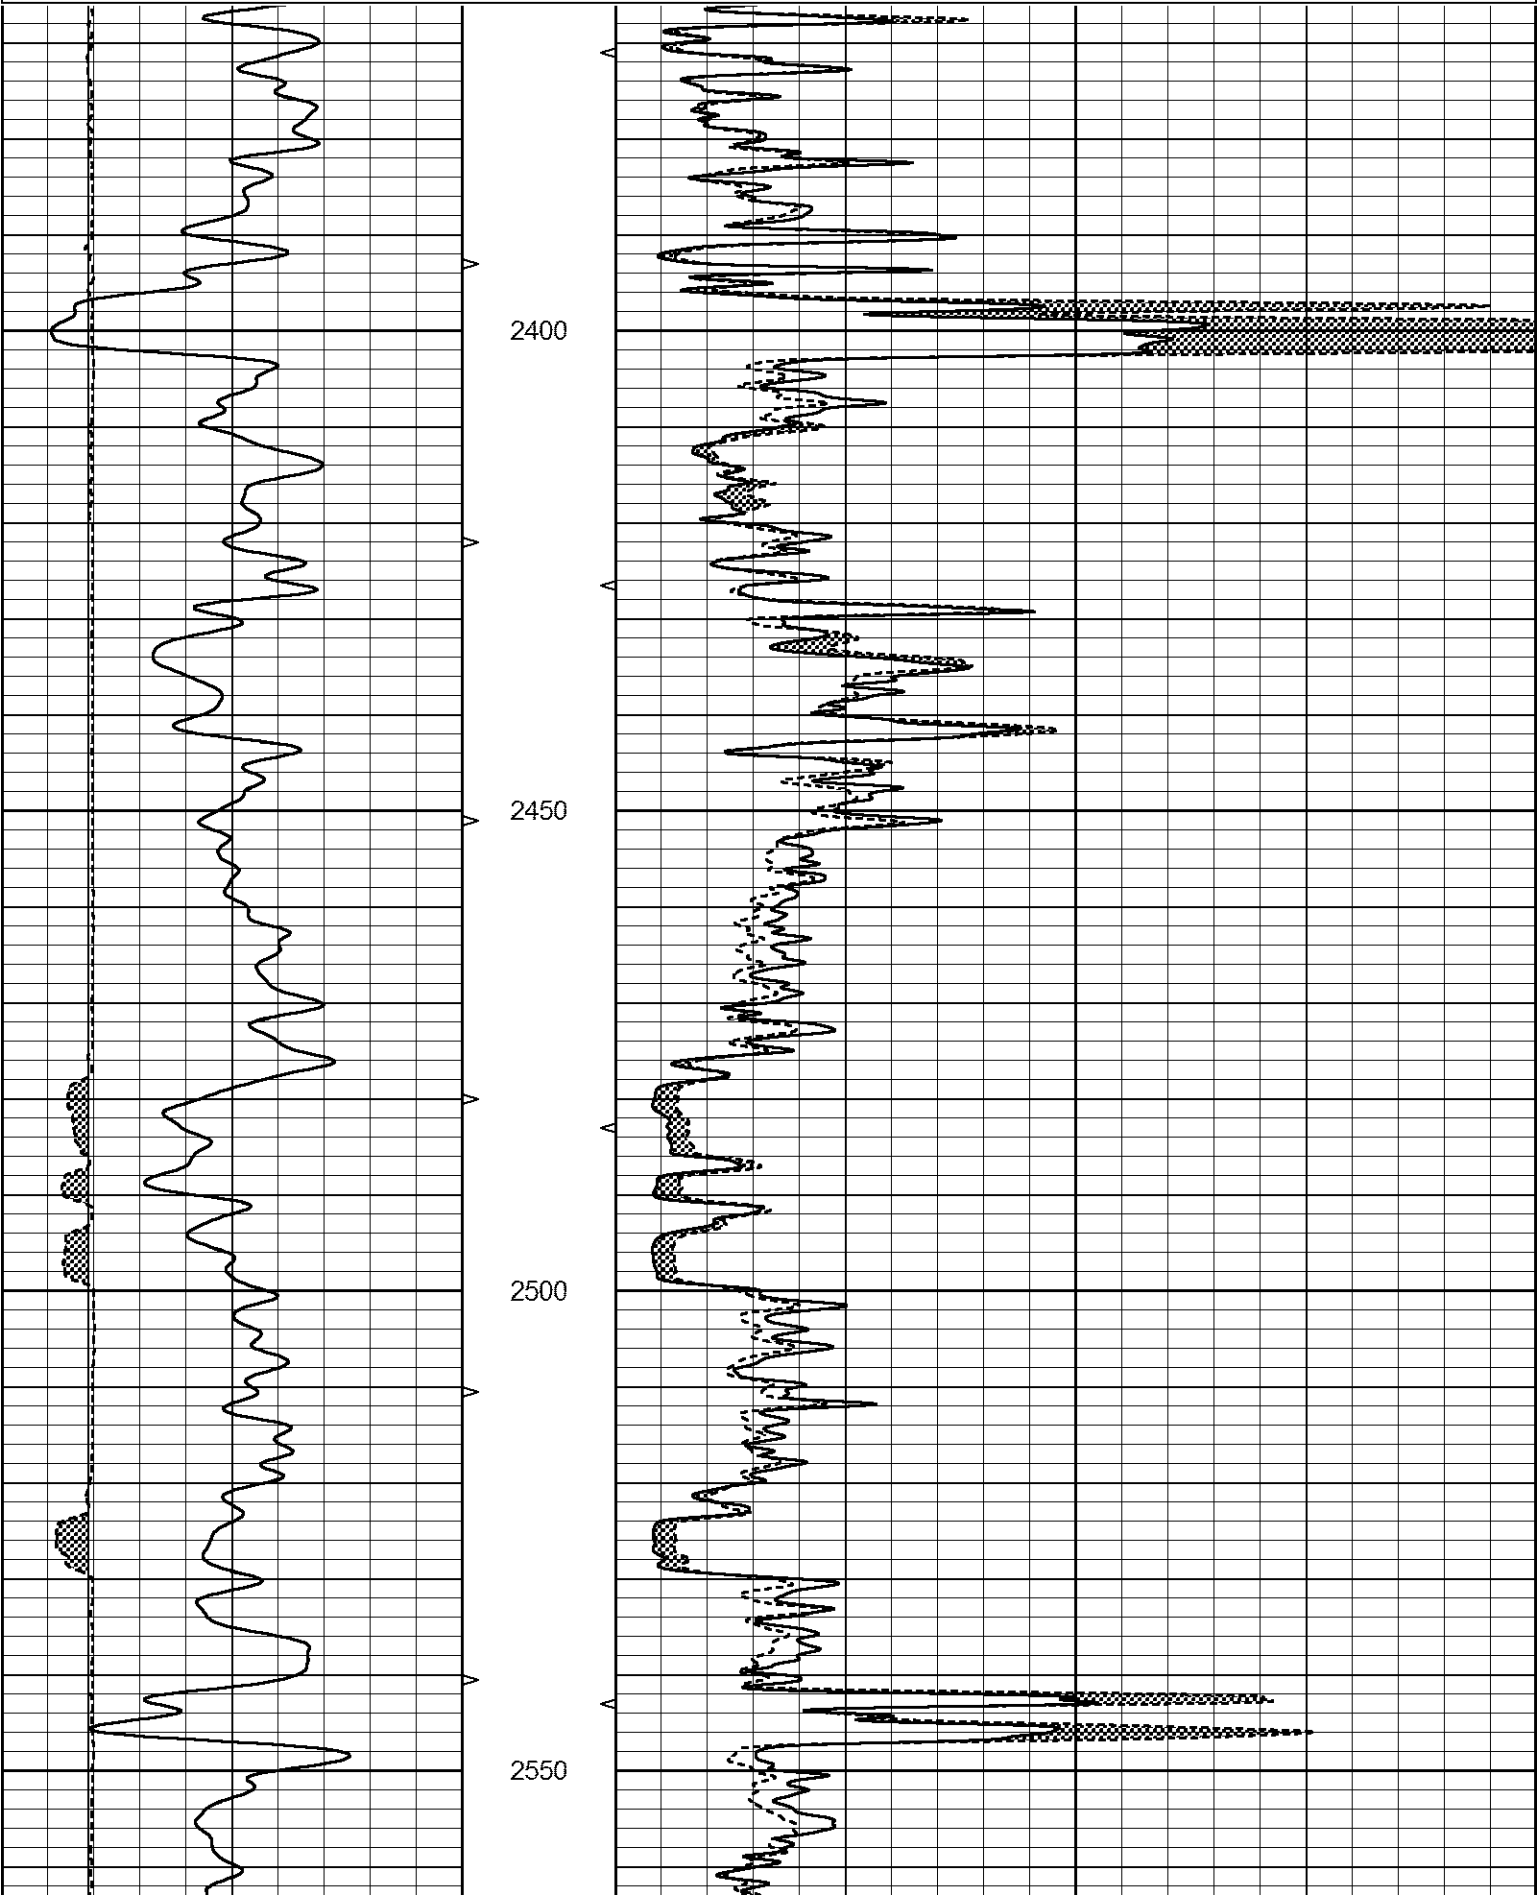

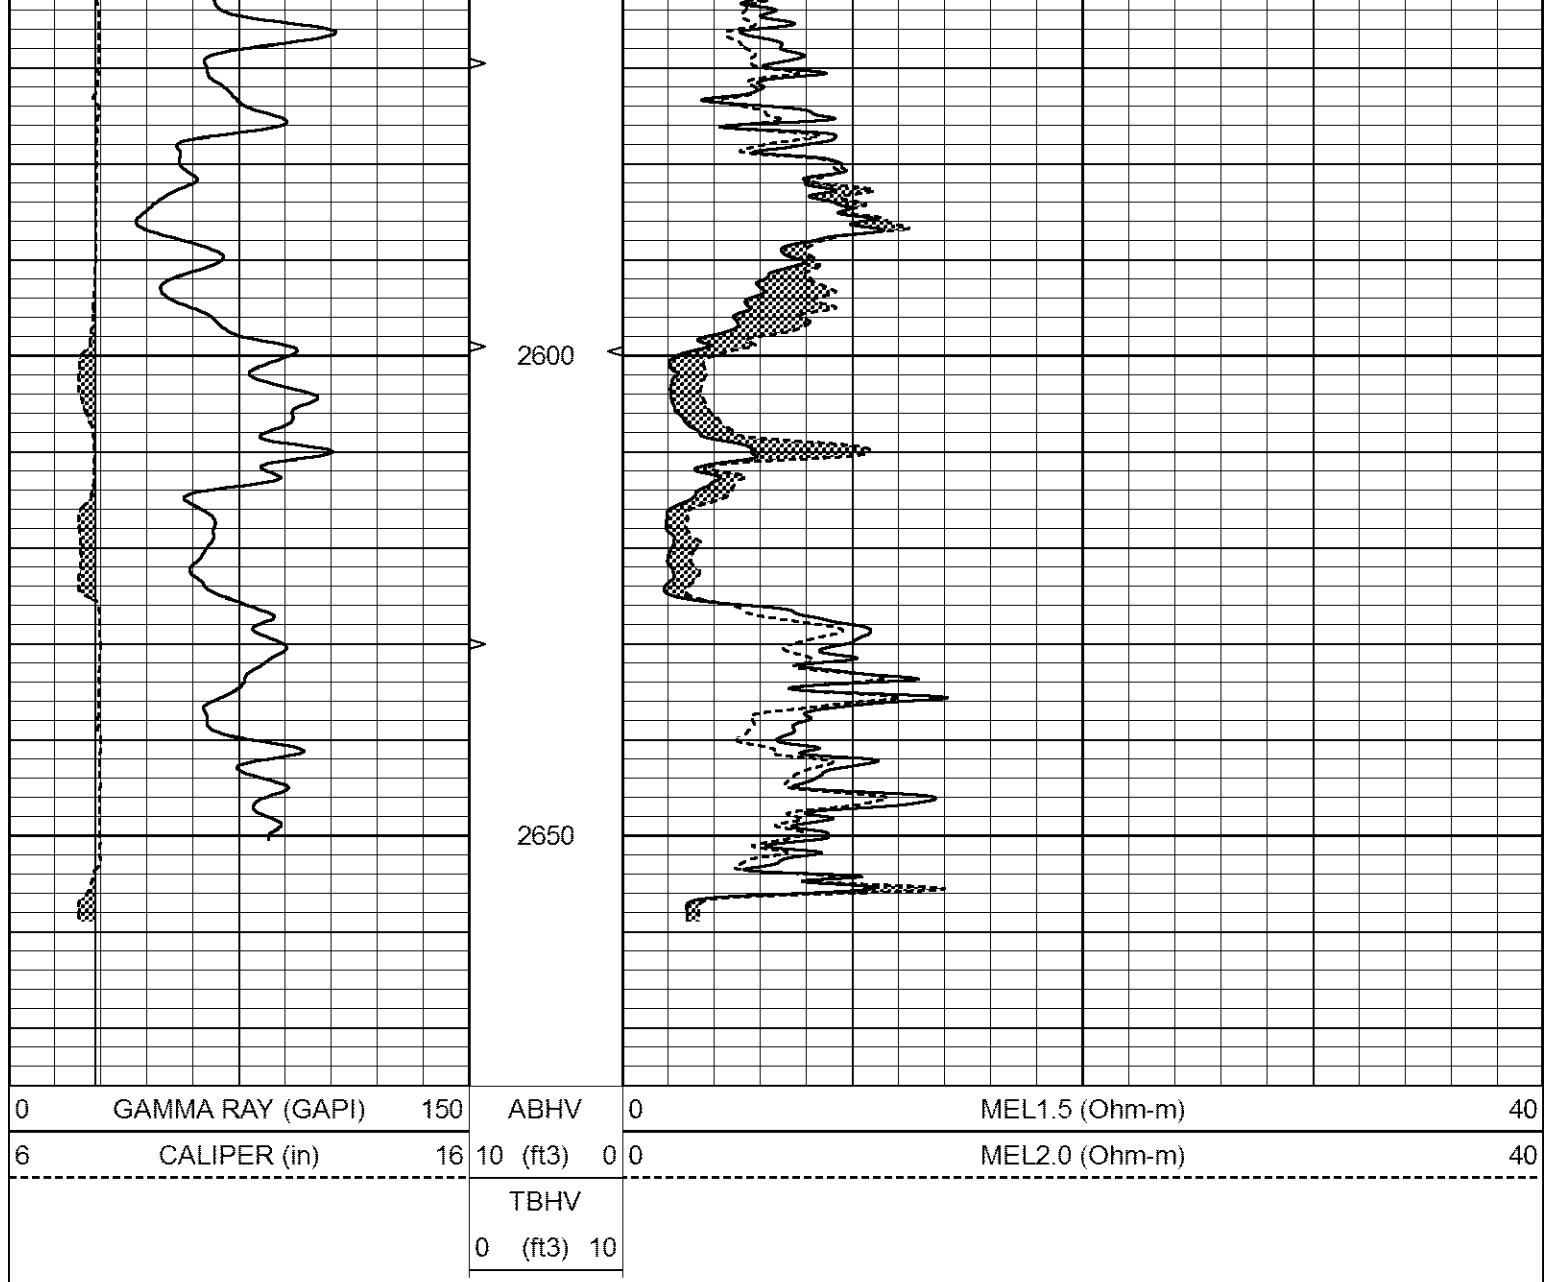

Calibration Report			
Database File	6240pe.db		
Dataset Pathname	pass6.1		
Dataset Creation	Tue Feb 15 23:14:53 2022		
MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Tue Dec 21 16:59:08 2021		
Caliper Calibration:	Gain=3.755	Offset=1.950	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.451	3.049	
1.5" Calibration:	Gain=55.000	Offset=0.300	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=50.000	Offset=1.000	

References	Low Cal	High Cal
Readings	0.000	20.000
	0.021	0.810

Microlog Calibration Report

Serial-Model: Performed:	070911-ProbeL Sat Apr 11 01:13:01 2015
-----------------------------	---

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps