


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Osborne County, Sec. 18 Twp. 10 Rge. 15 E/W
Location as "NE/CNW\SW\1" or footage from lines
SE 1/4 2310 FNL 1320' FEL

Lease Owner Black Diamond Oil
Lease Name Locke Well No. #1
Office Address 217 East 32 nd Hays, Kansas 67601
Character of Well (Completed as Oil, Gas or Dry Hole)

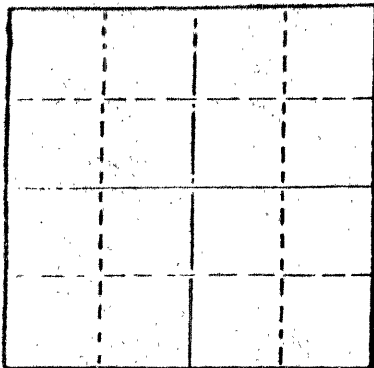

Locate well correctly on above
Section Plat

Dry Hole
Date Well completed 2-5- 1983
Application for plugging filed 2-5- 1983
Application for plugging approved 2-5- 1983
Plugging commenced 2-5- 5:00 am 1983
Plugging completed 2-5- 10:15 am 1983

Reason for abandonment of well or producing formation
Dry hole
If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well David Wann
Producing formation Depth to top Bottom Total Depth of Well 3660
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Filled hole to 1216' with heavy mud and mixed 20 sacks of cement and pumped in hole thru drill
pipe.
Filled hole to 720' with heavy mud and mixed 80 sacks of cement and pumped in hole thru drill
pipe.
Filled hole to 300' with heavy mud and mixed 40 sacks of cement and pumped in hole thru drill
pipe.
Filled hole to 40' built solid bridge and pushed down plug and mixed 10 sacks of cement and
filled to bottom of cellar; mixed 10 sacks and poured into the rat hole.

All cement used was 50-50 Poz Mix 4% Gel 3% CC
(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Revlin Drlg., Inc.

STATE OF Kansas COUNTY OF Russell, ss.
Stanley C. Lingreen (employee of owner) or ~~XXXXXX~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.



(Signature) Stanley C. Lingreen
Box 293 Russell, Kansas 67665
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of February, 1983

My commission expires November 10, 1984

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1983
2-15-83
CONSERVATION DIVISION
Wichita, Kansas