



DUAL
INDUCTION
LOG

Company	PLATEAU OPERATING CORPORATION	Company	PLATEAU OPERATING CORPORATION
Well	WEAVER #1-15	Well	WEAVER #1-15
Field	NA	Field	NA
County	HAMILTON	County	HAMILTON
State	KANSAS	State	KANSAS
Location:	API # : 15-075-20910-0000	Other Services CNL/CDL/PE MEL/SON	
Permanent Datum	1320' FNL & 1320' FWL	Elevation	
Log Measured From	SEC 15 TWP 25S RGE 40W	K.B. 3358	
Drilling Measured From	GROUND LEVEL Elevation 3351 KELLY BUSHING 7' A.G.L KELLY BUSHING	D.F. 3356	
		G.L. 3351	
Date	2/15/22		
Run Number	ONE		
Depth Driller	2675		
Depth Logger	2673		
Bottom Logged Interval	2671		
Top Log Interval	00		
Casing Driller	8 5/8" @ 822		
Casing Logger	822		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.0/38		
pH / Fluid Loss	7.6/6.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.75@70F		
Rmf @ Meas. Temp	.56@70F		
Rmc @ Meas. Temp	.9@70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.50@104		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	104F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI	TJ DREILING	
Witnessed By	JIM WELCH		


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


SYRACUSE, KS. - 5 SOUTH TO RD. 27 - 2 MILES EAST - SOUTH INTO


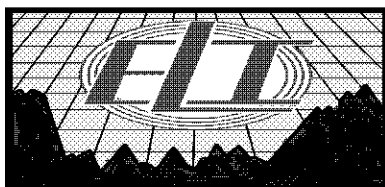



MAIN SECTION

Database File	6240pe.db
Dataset Pathname	pass3.2
Presentation Format	_dil2
Dataset Creation	Tue Feb 15 22:13:45 2022
Charted by	Depth in Feet scaled 1:600

0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

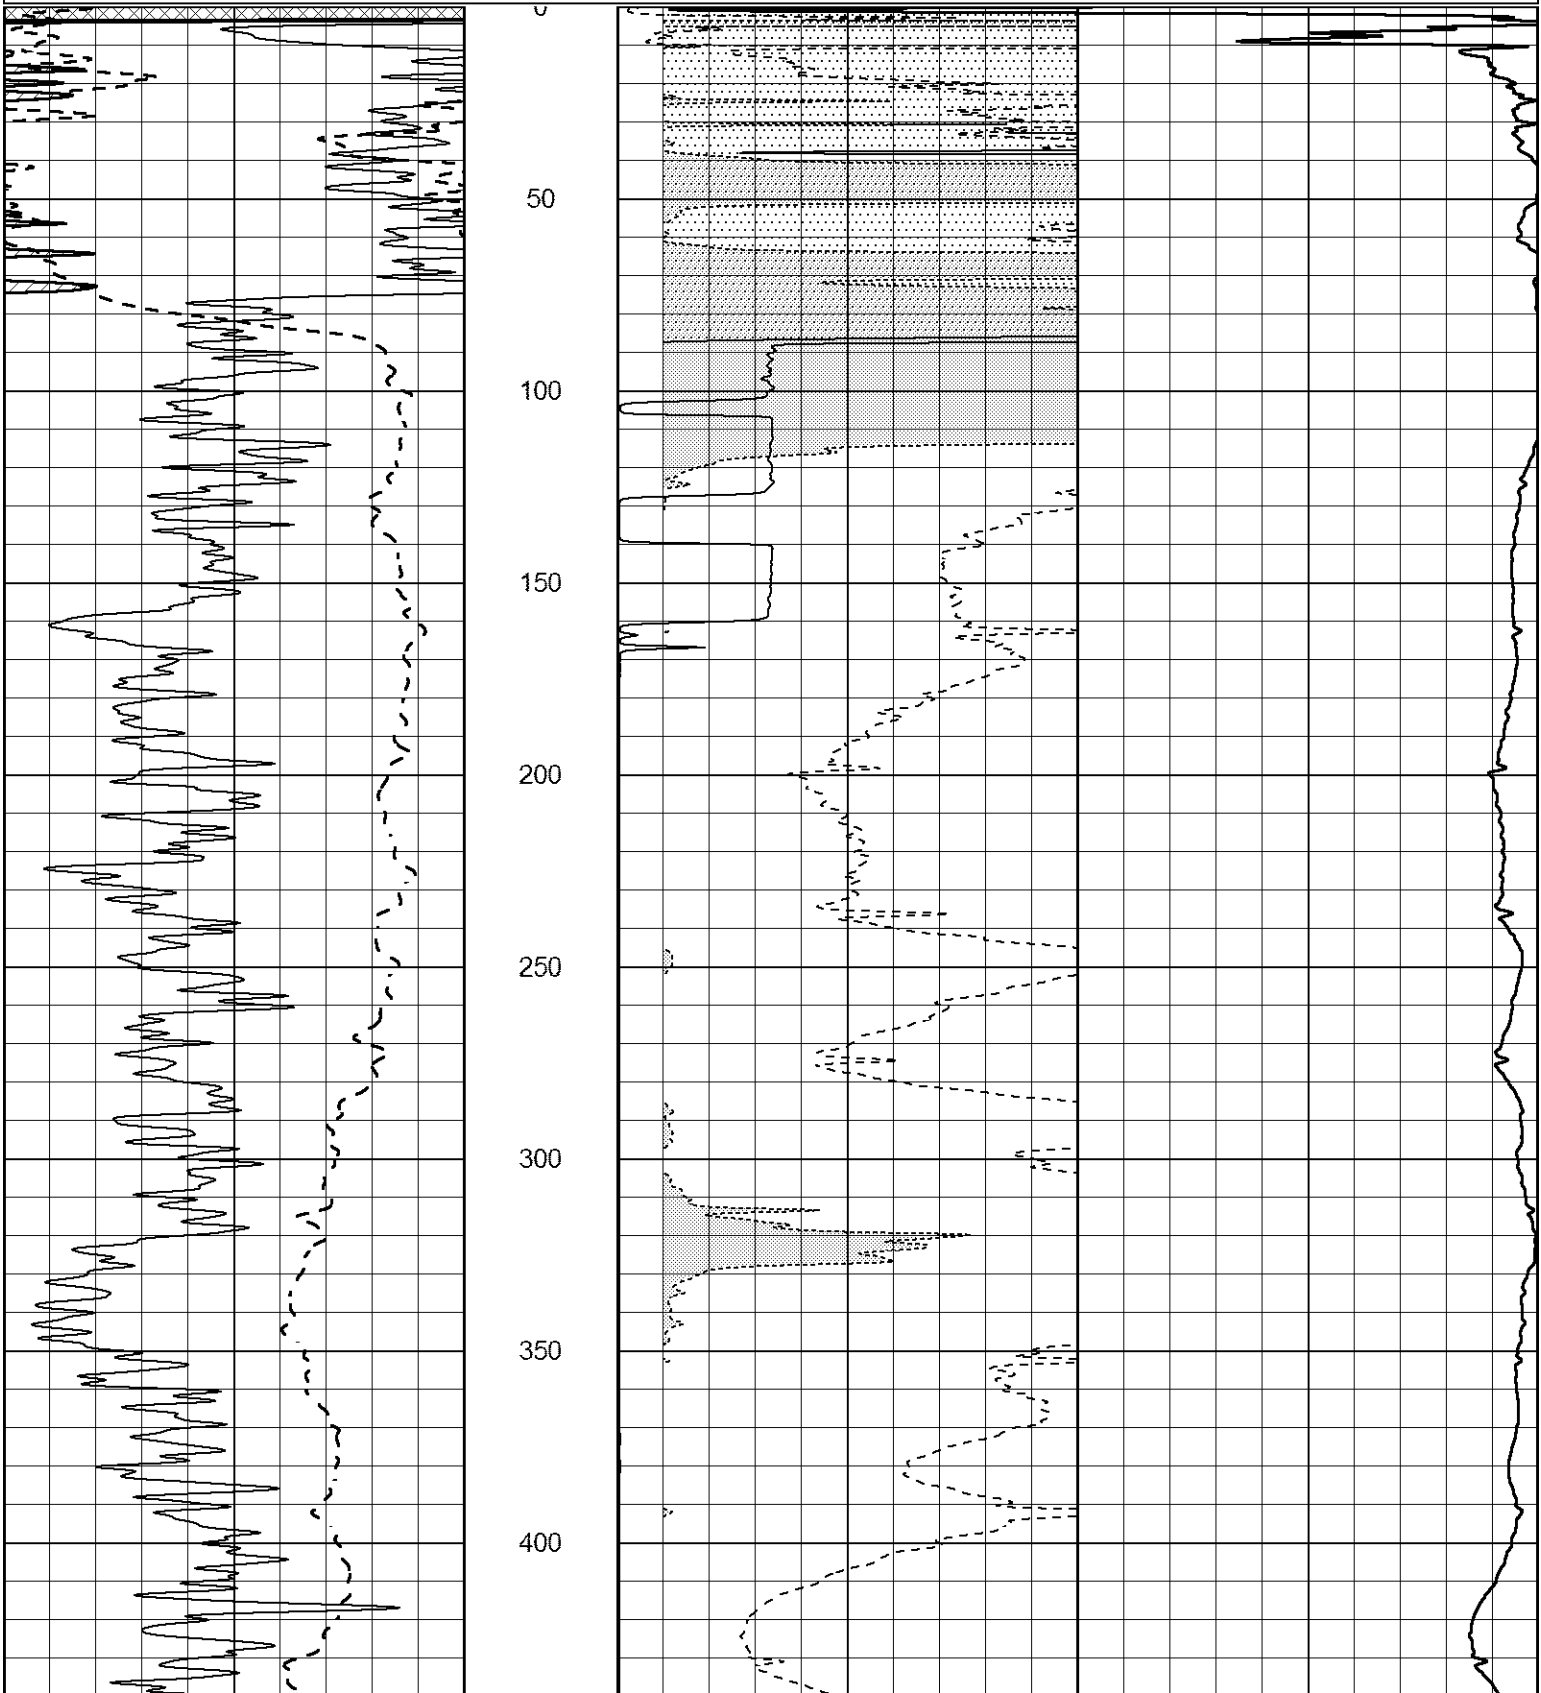

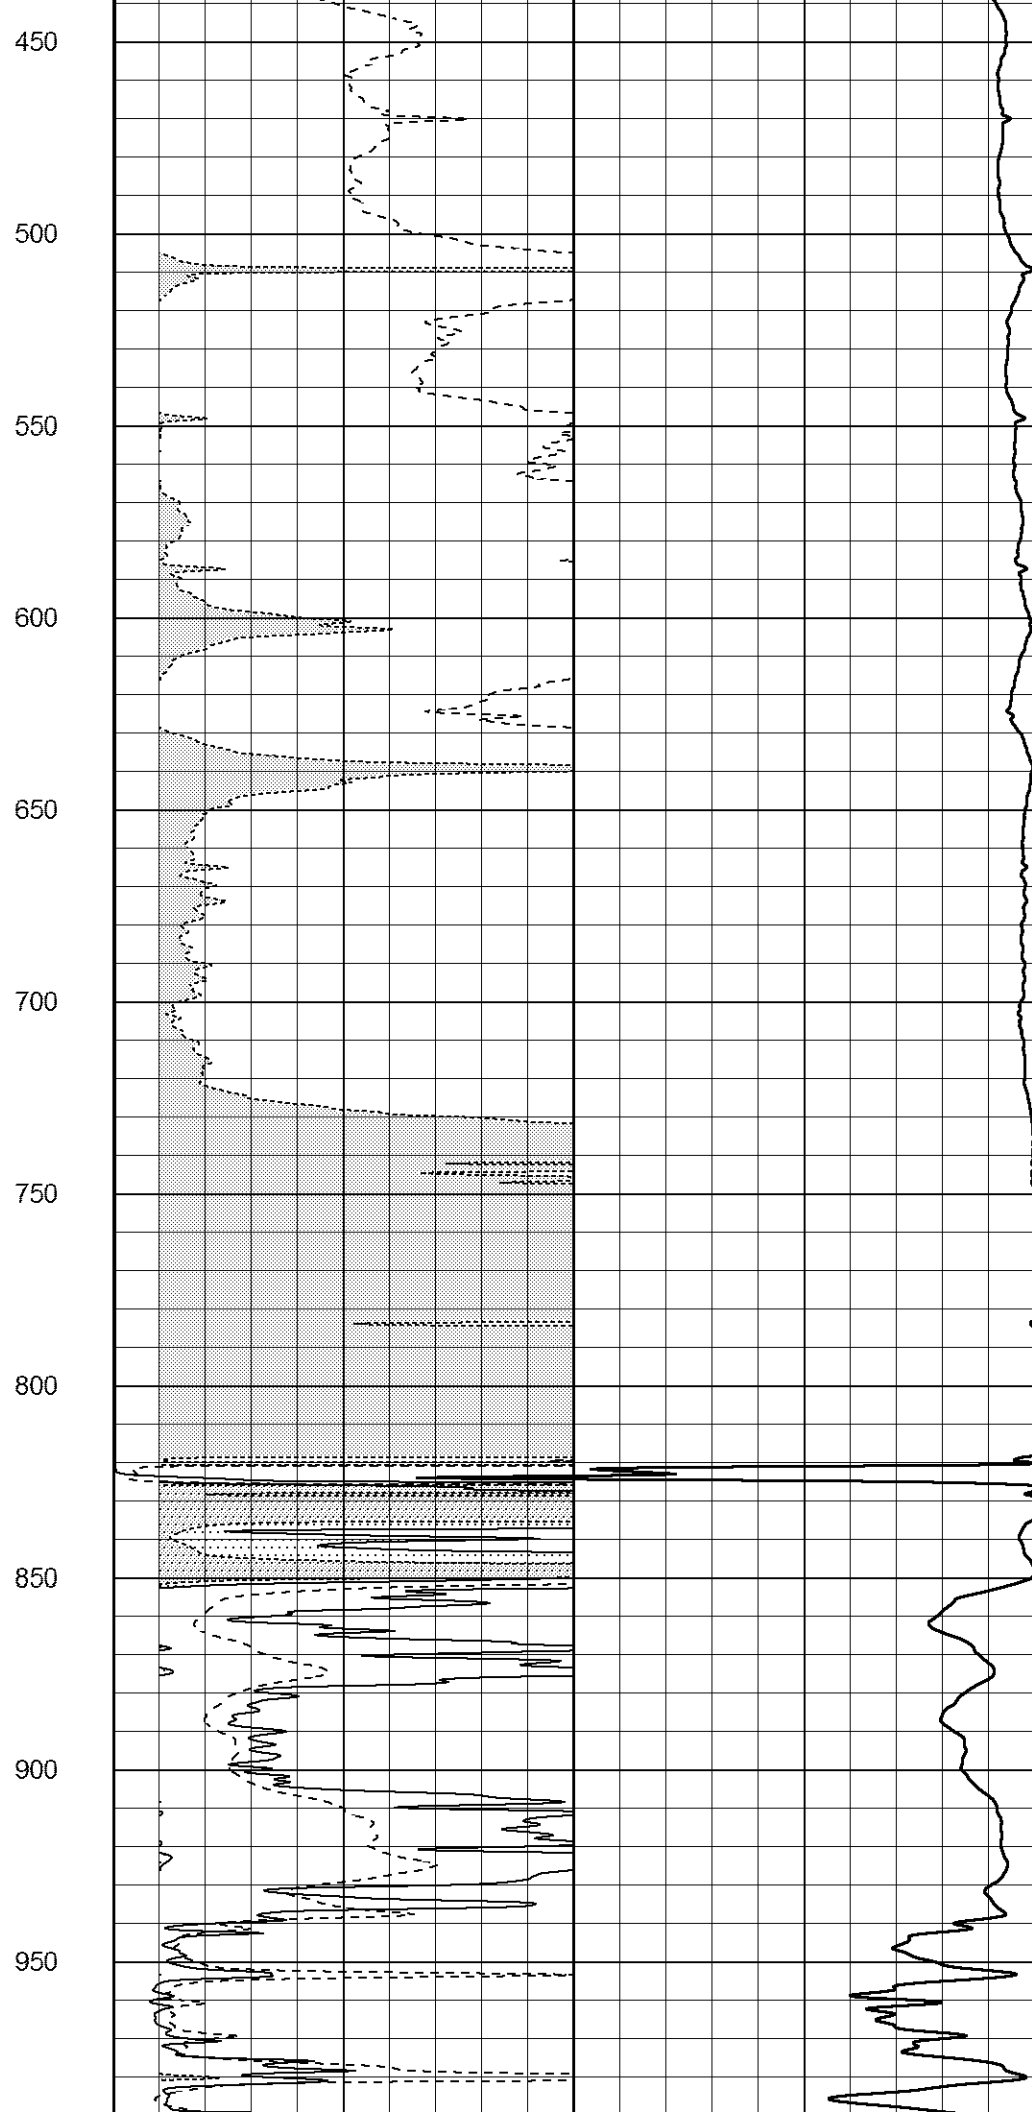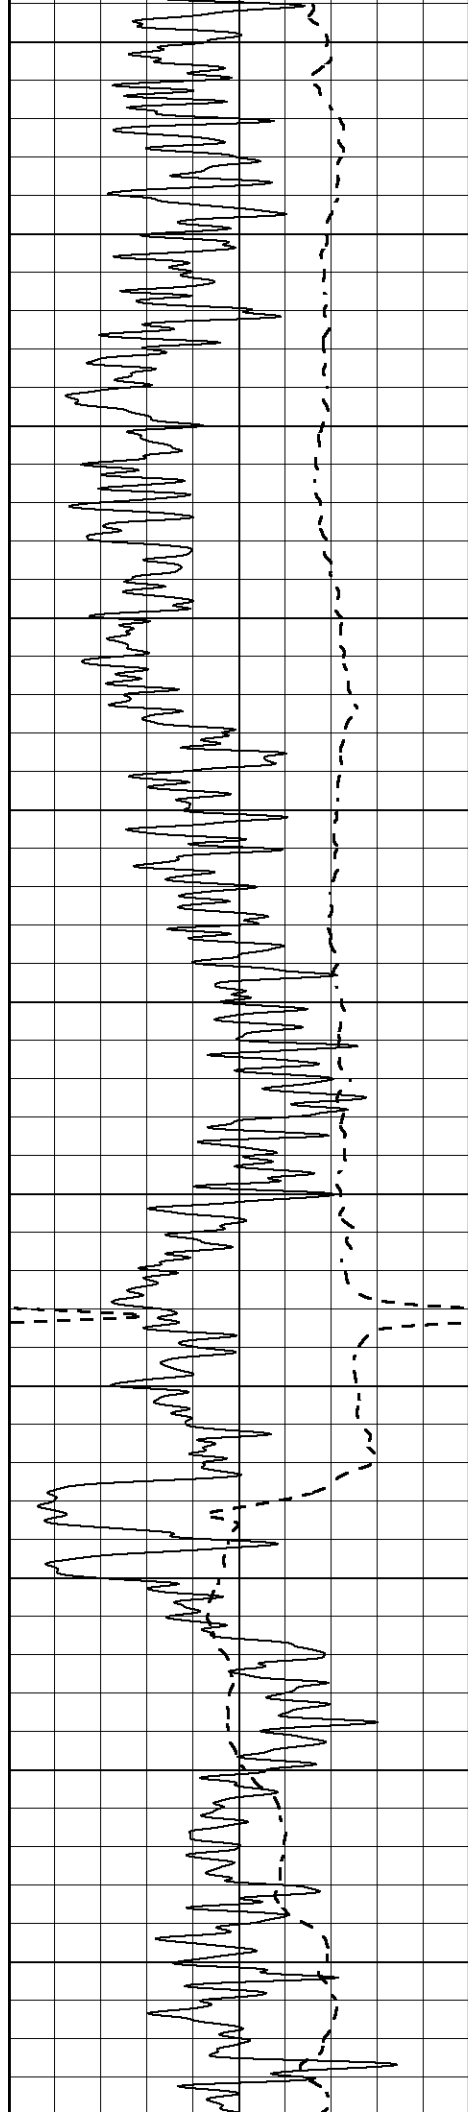

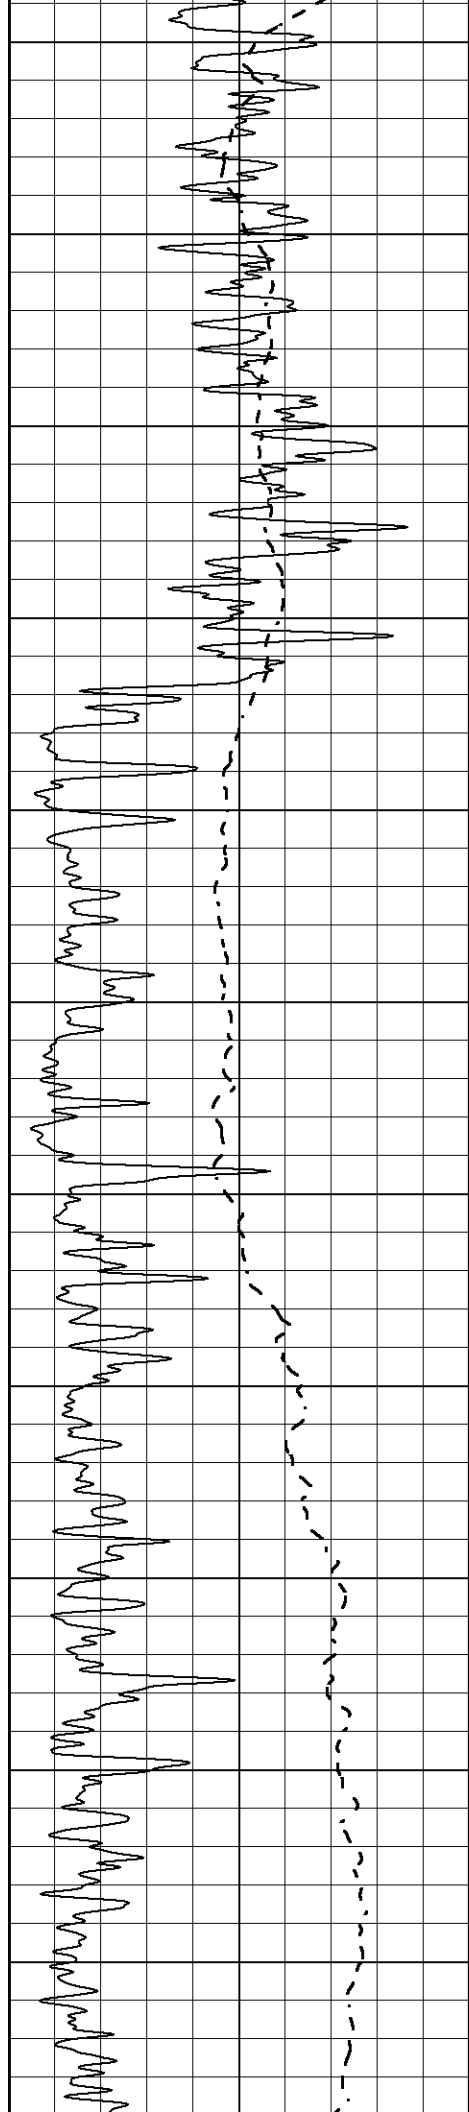

1000

1050

1100

1150

1200

1250



1300



1350



1400


1450

1500

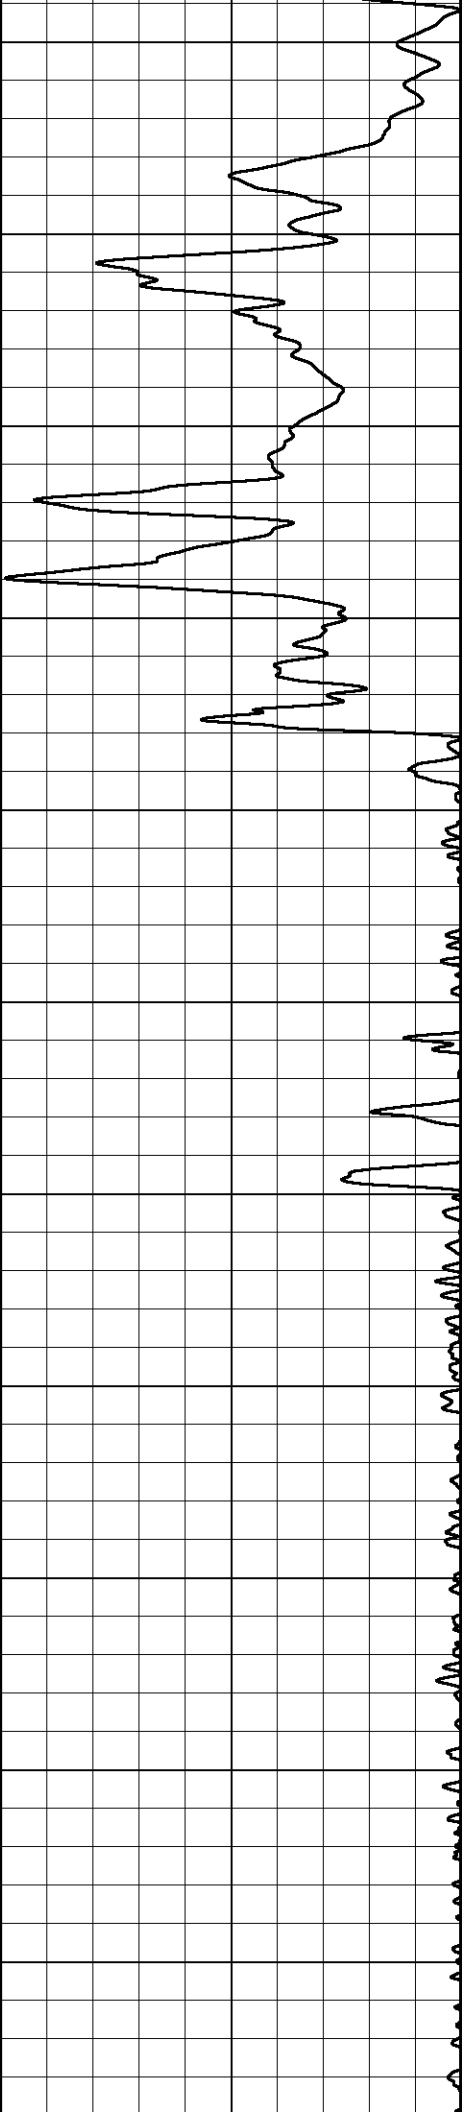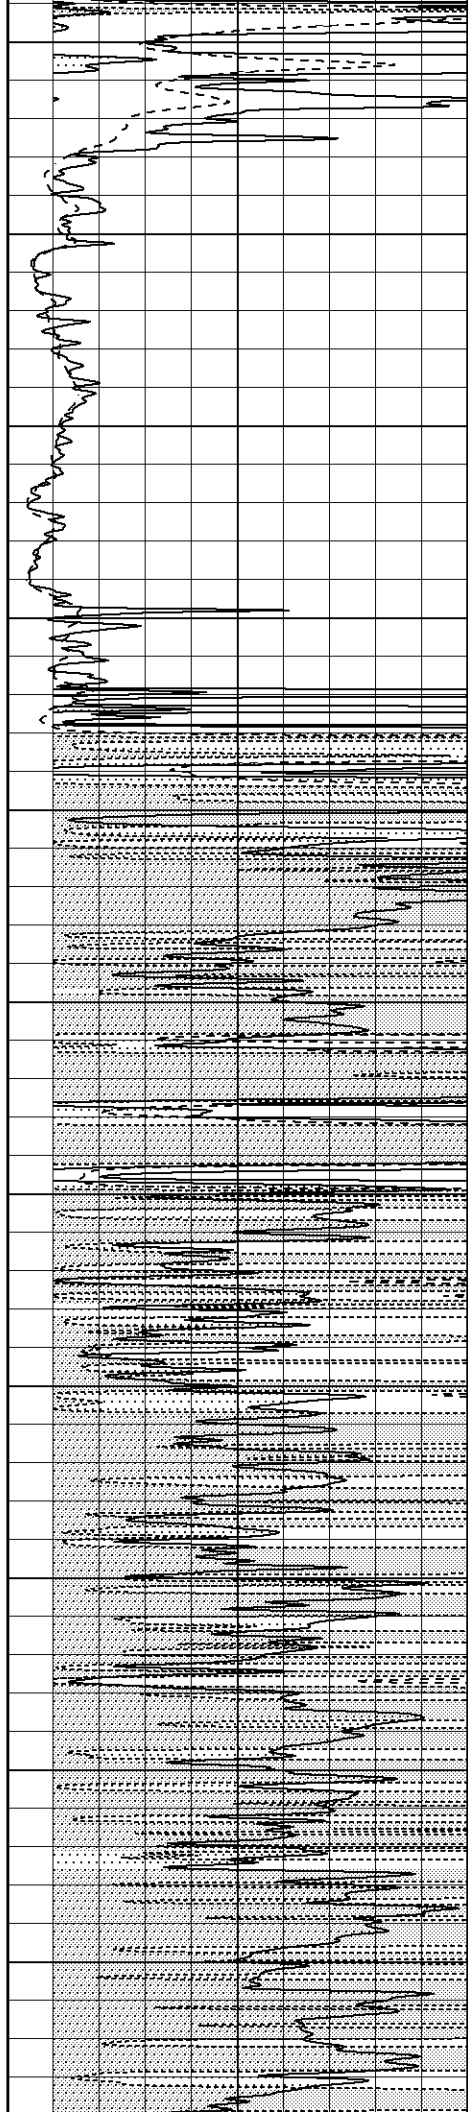

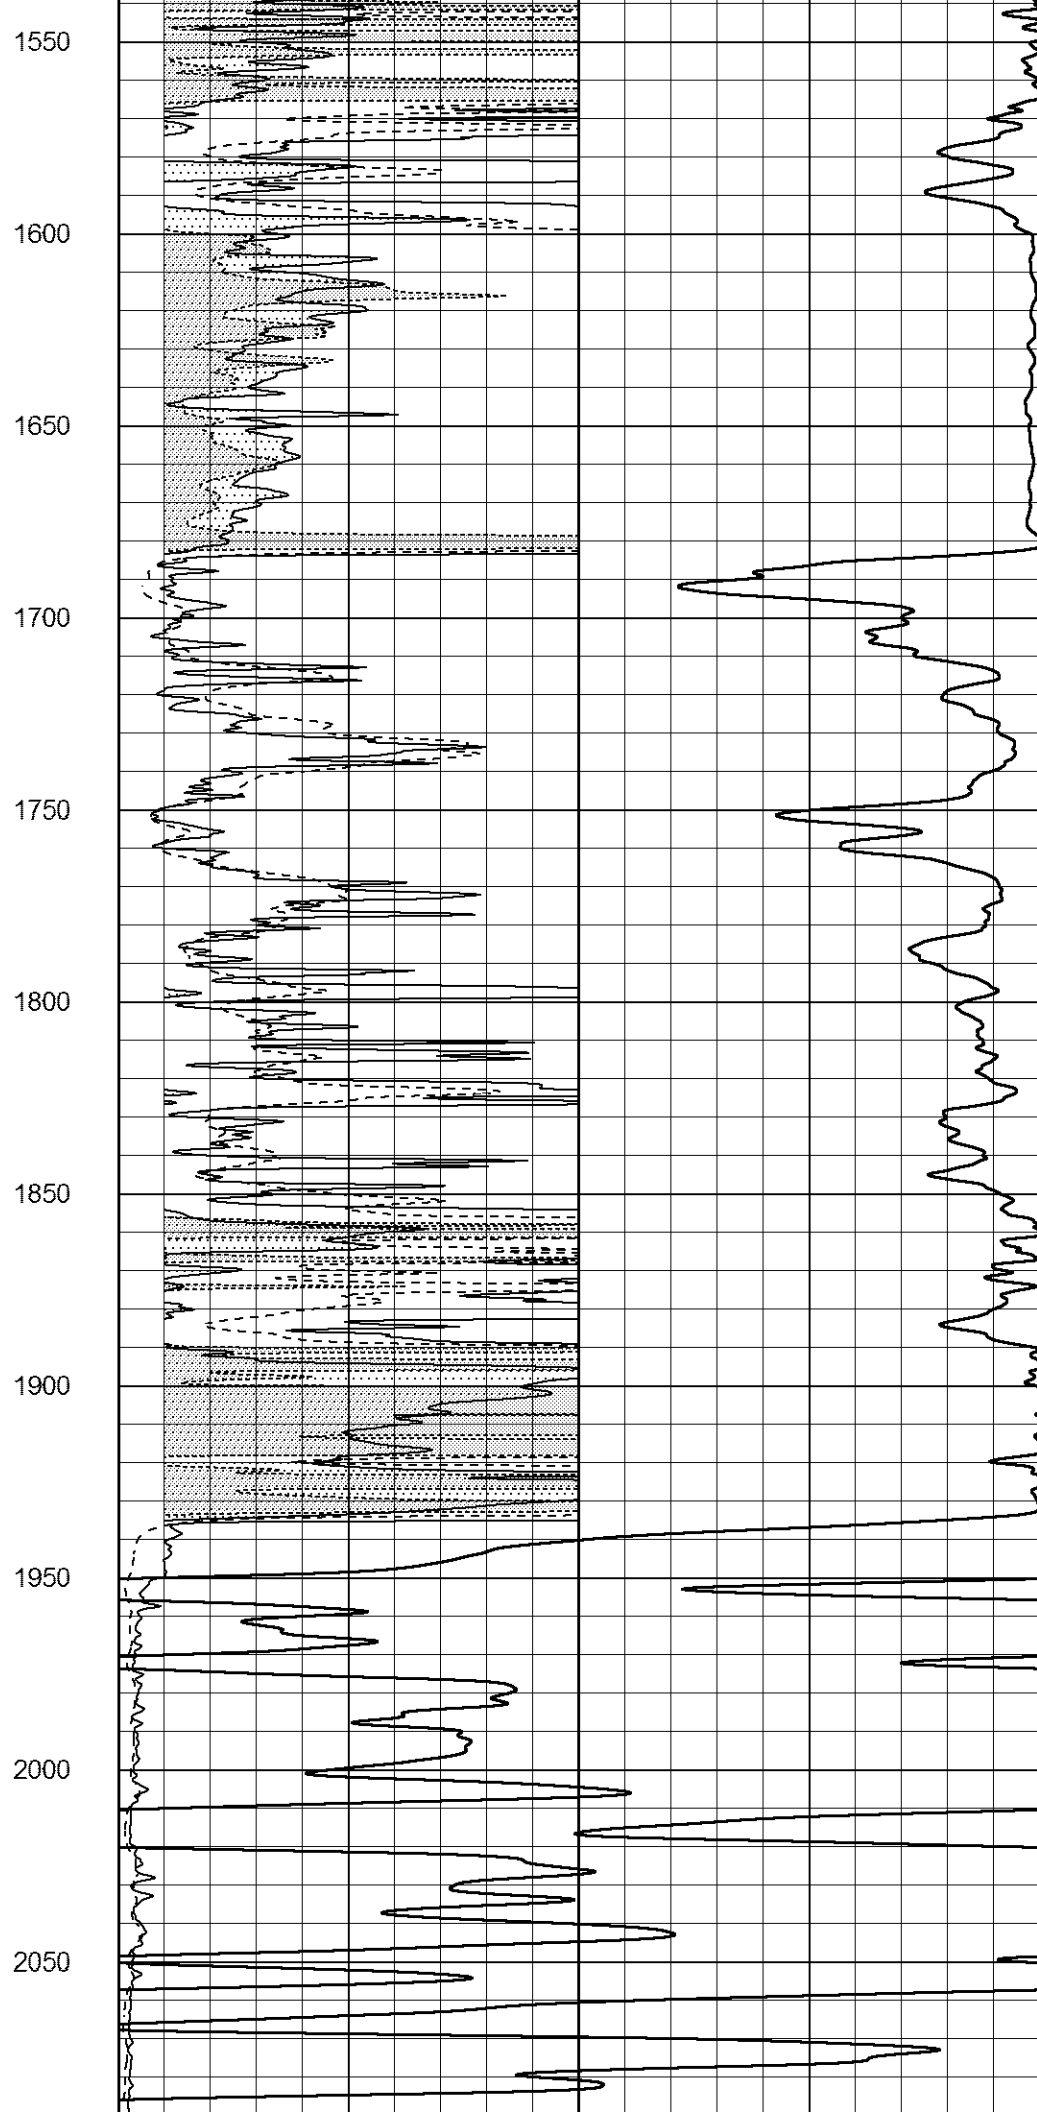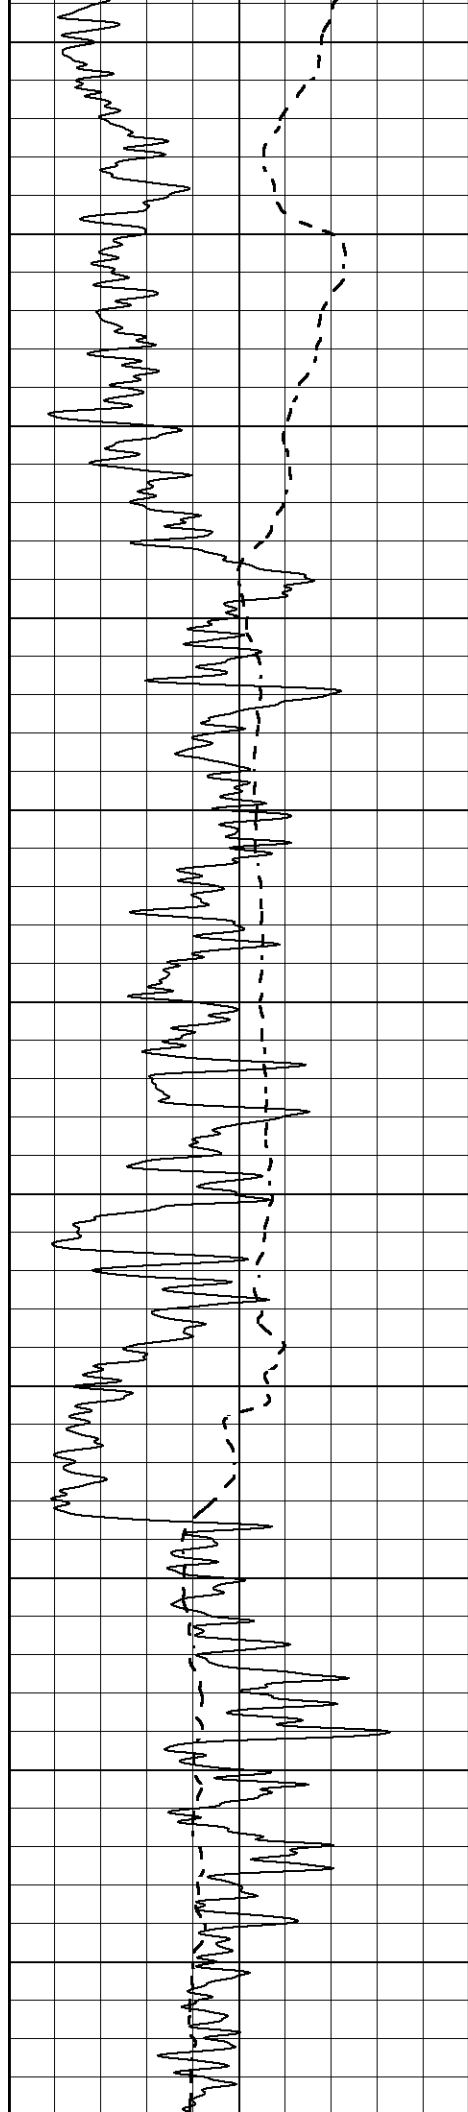


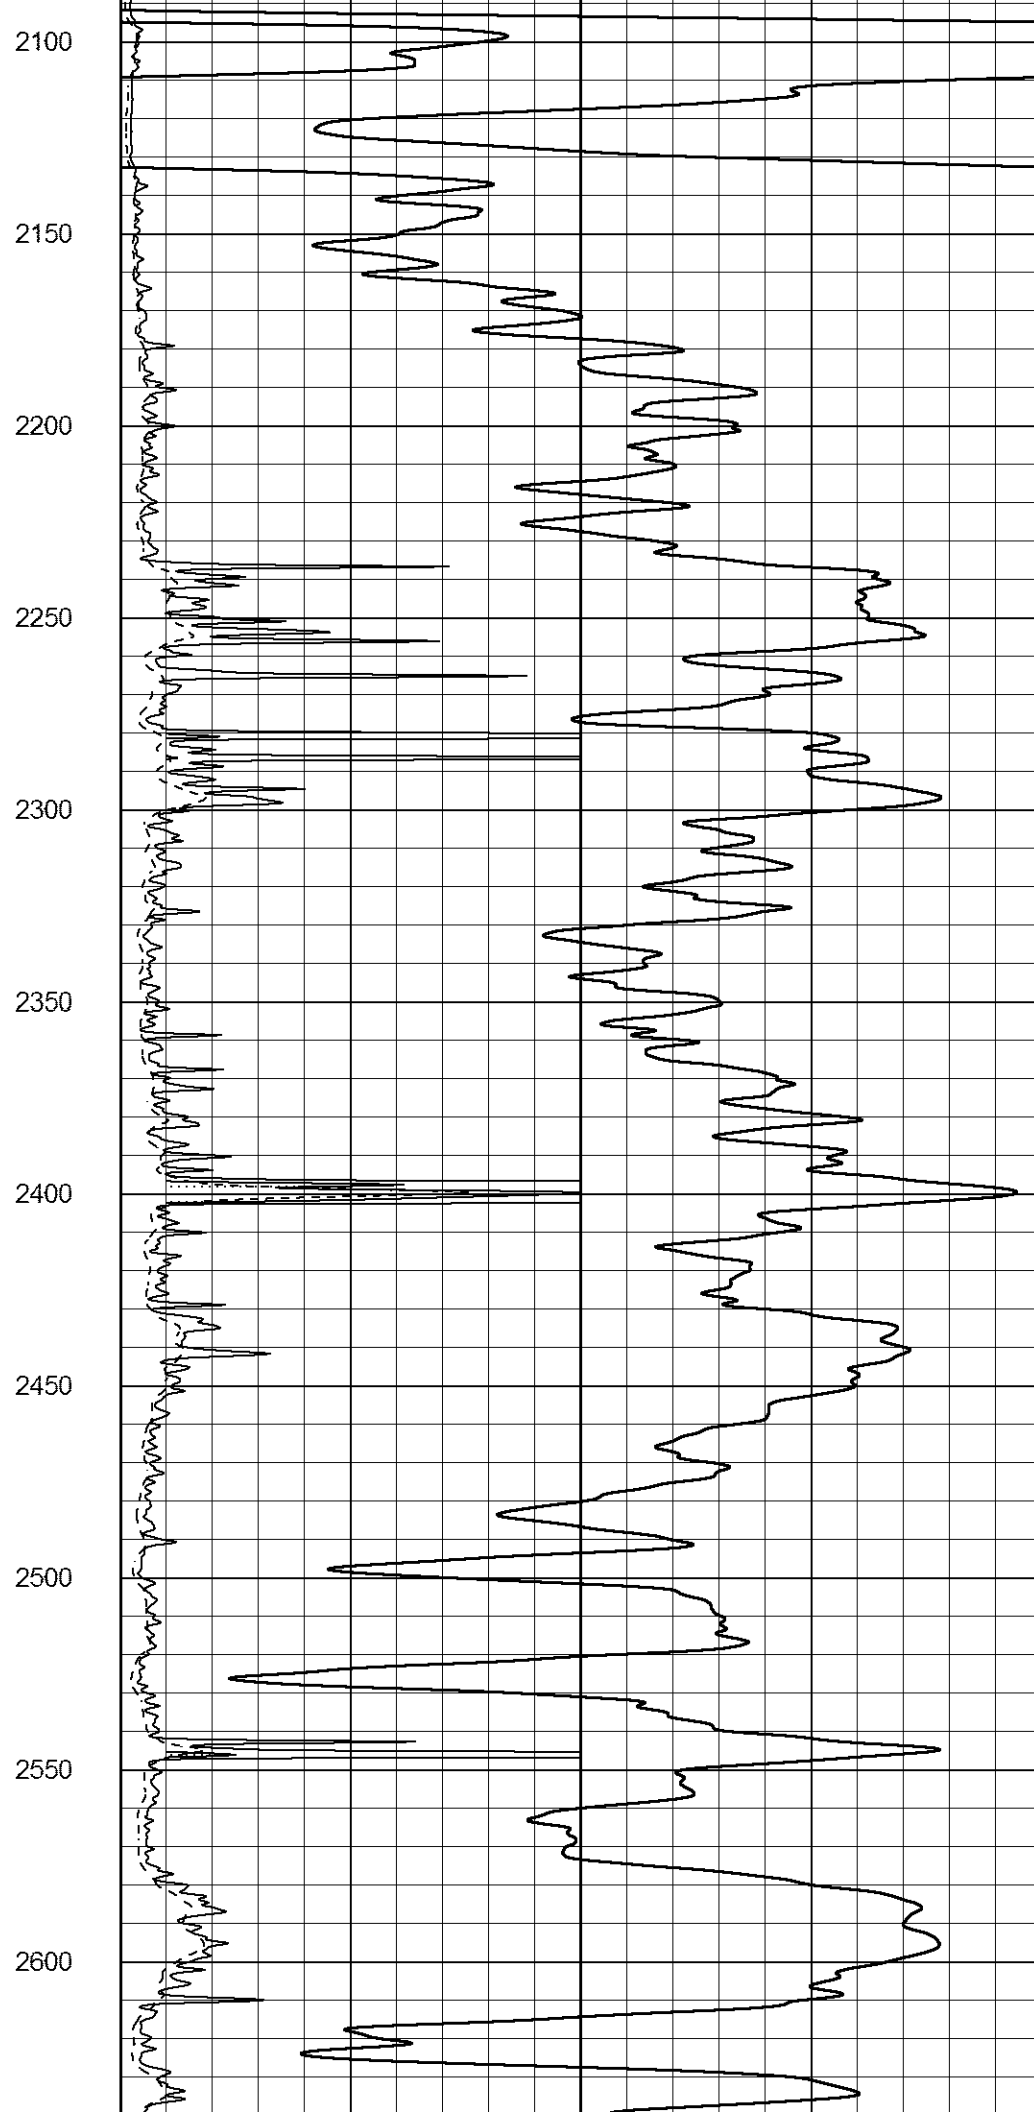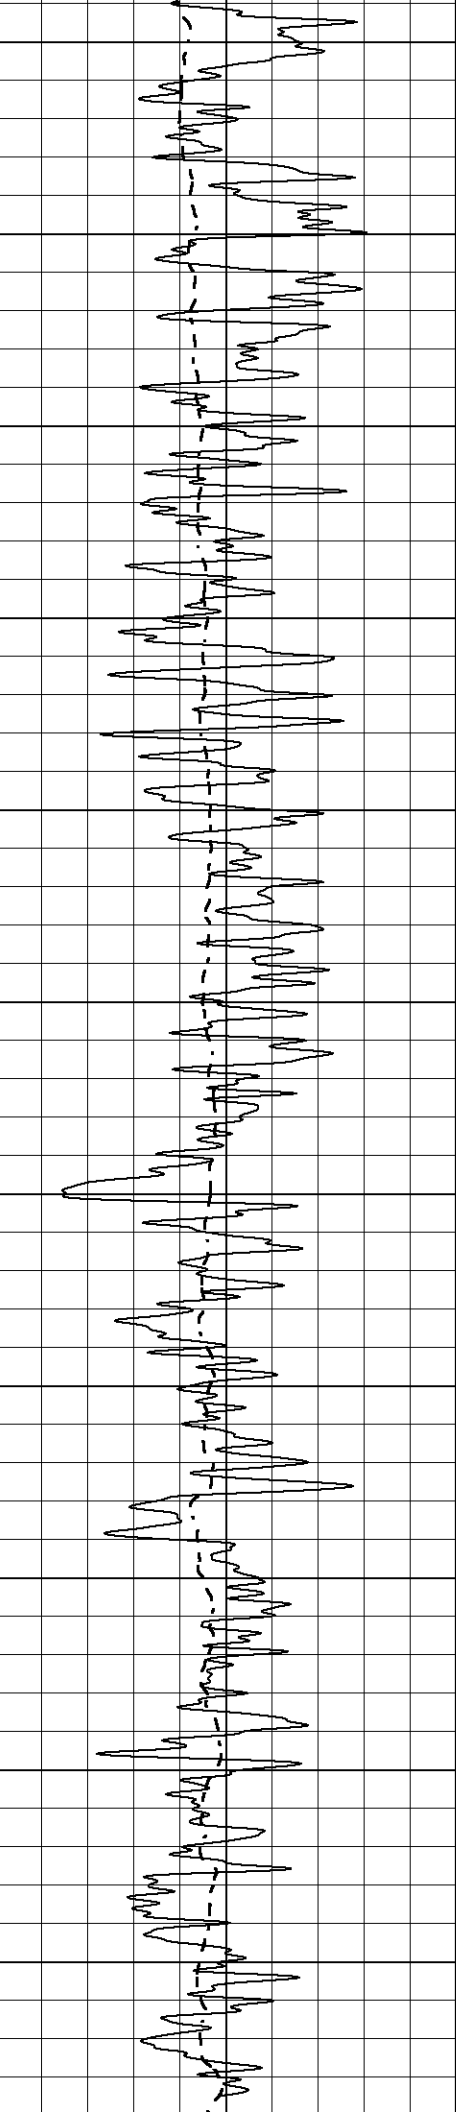


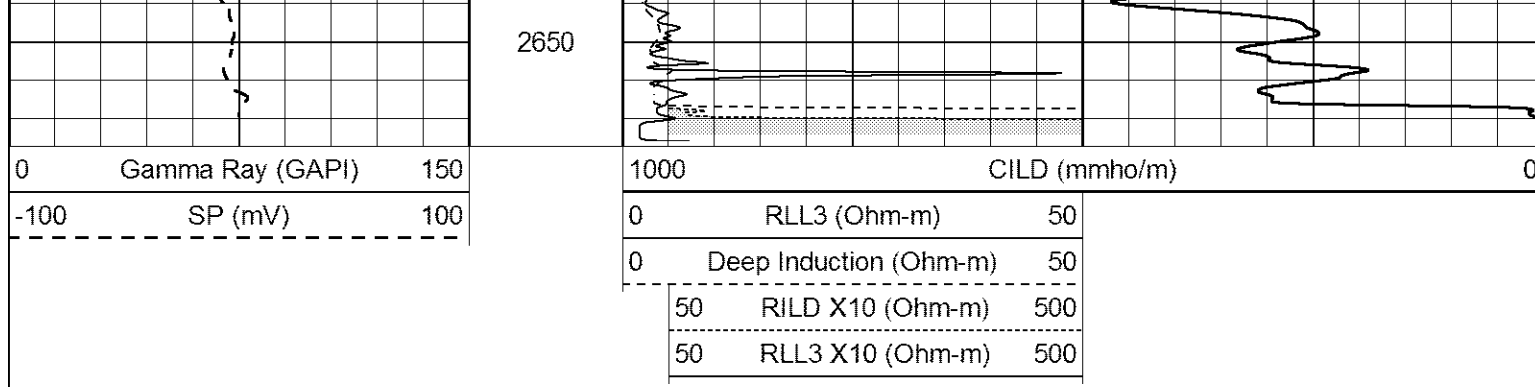

MAIN SECTION

Database File 6240pe.db
 Dataset Pathname pass3.1
 Presentation Format _dil
 Dataset Creation Tue Feb 15 22:11:46 2022
 Charted by Depth in Feet scaled 1:240

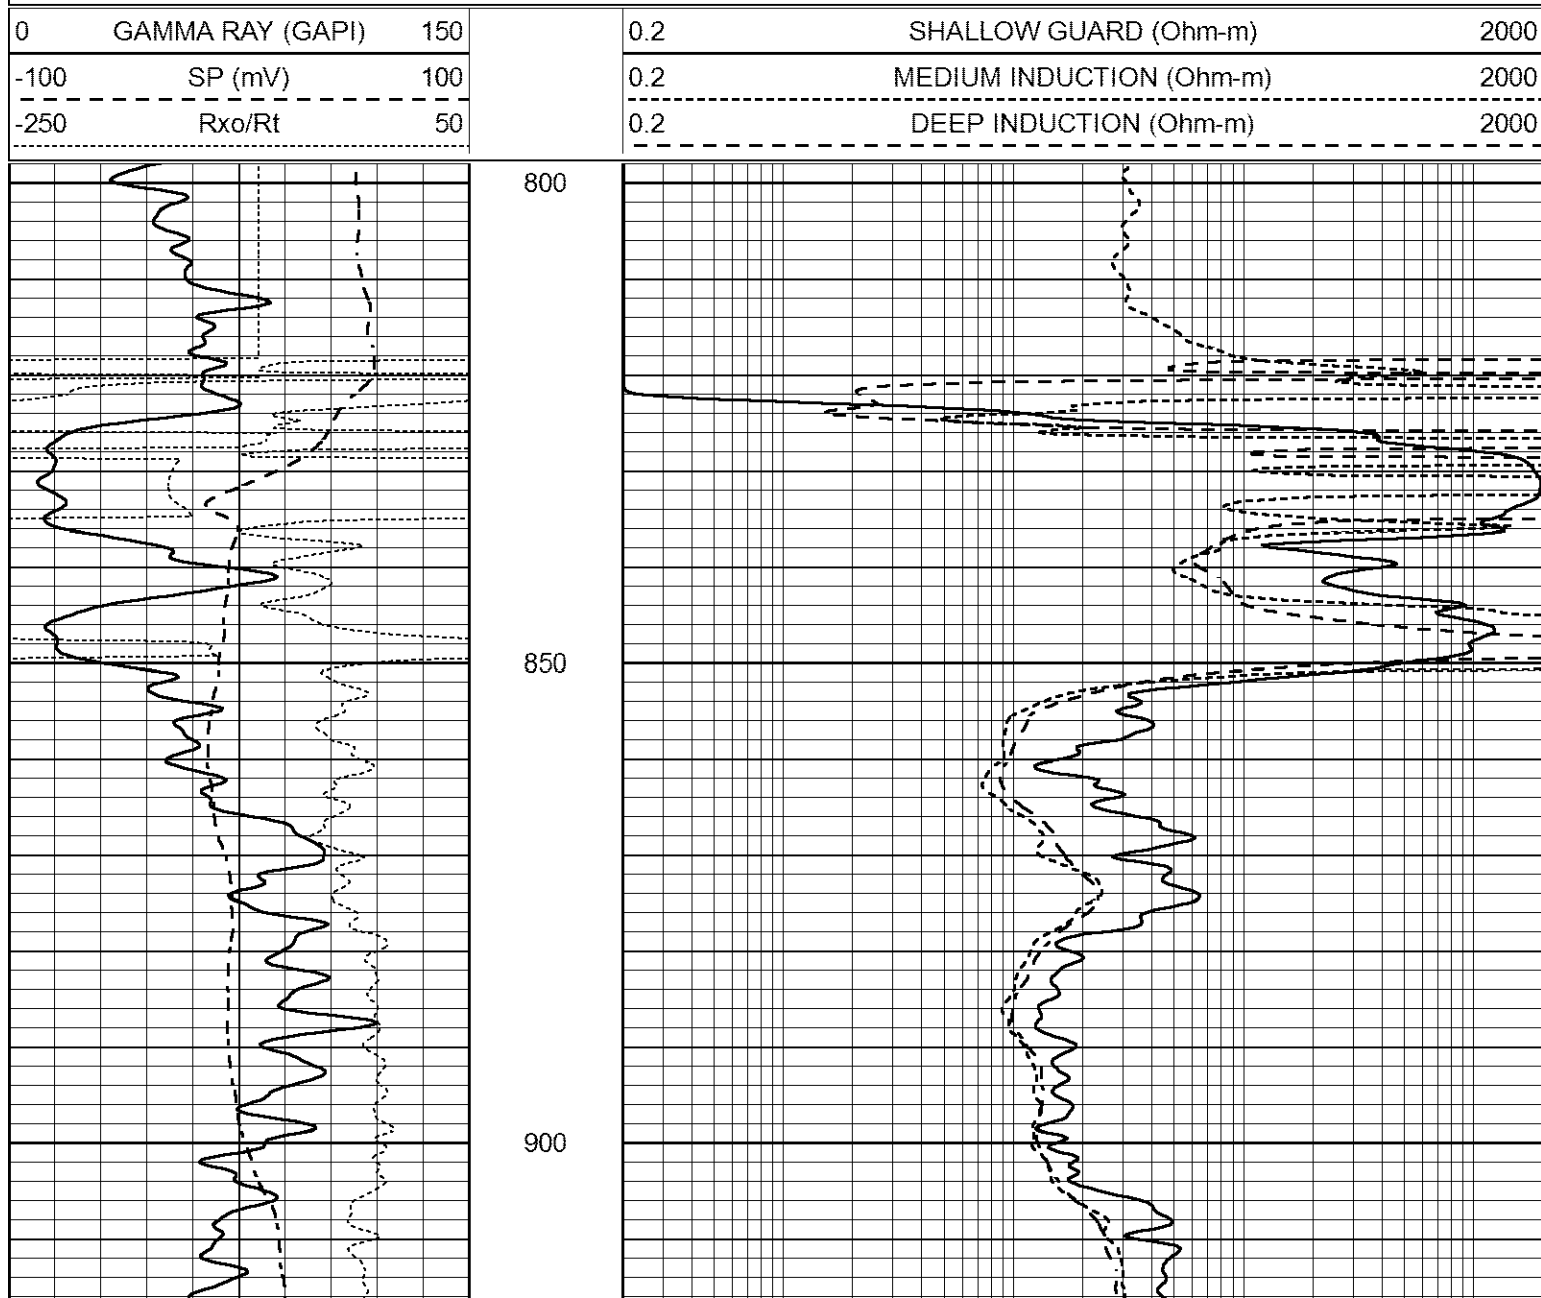

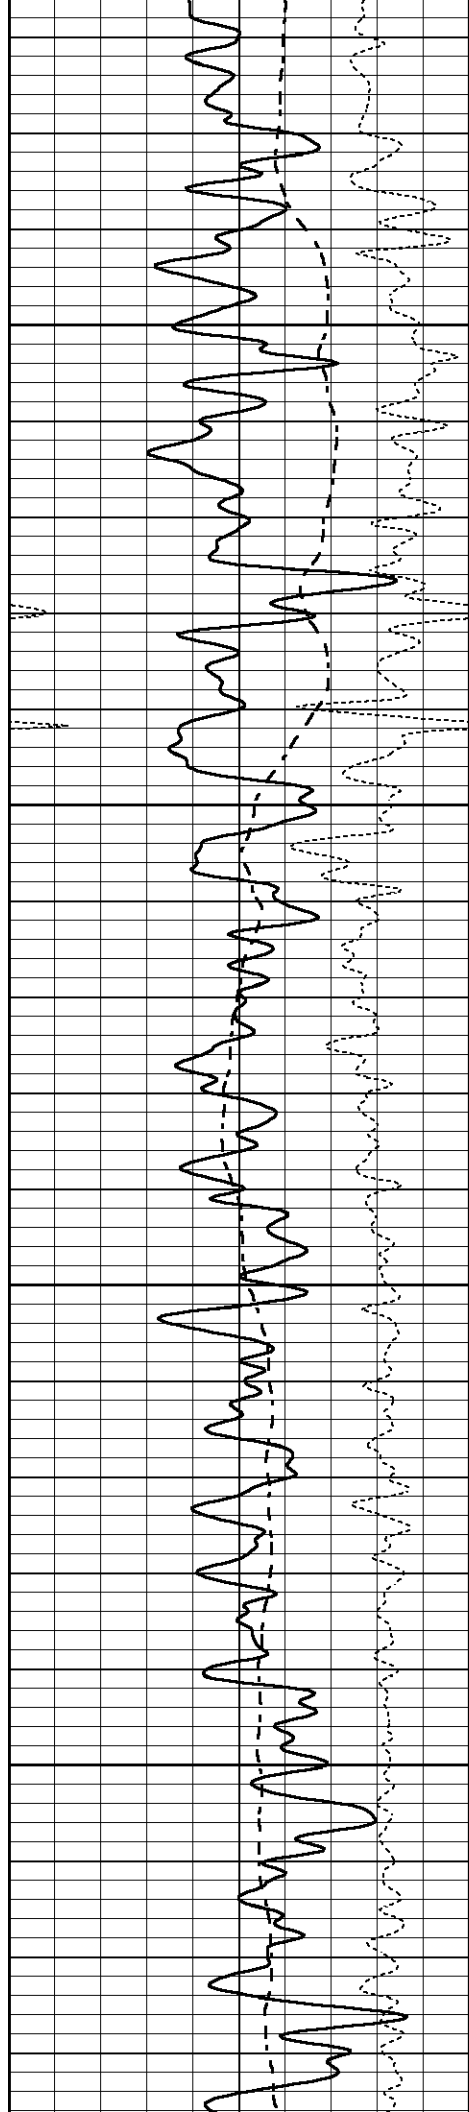



950

1000

1050

1100

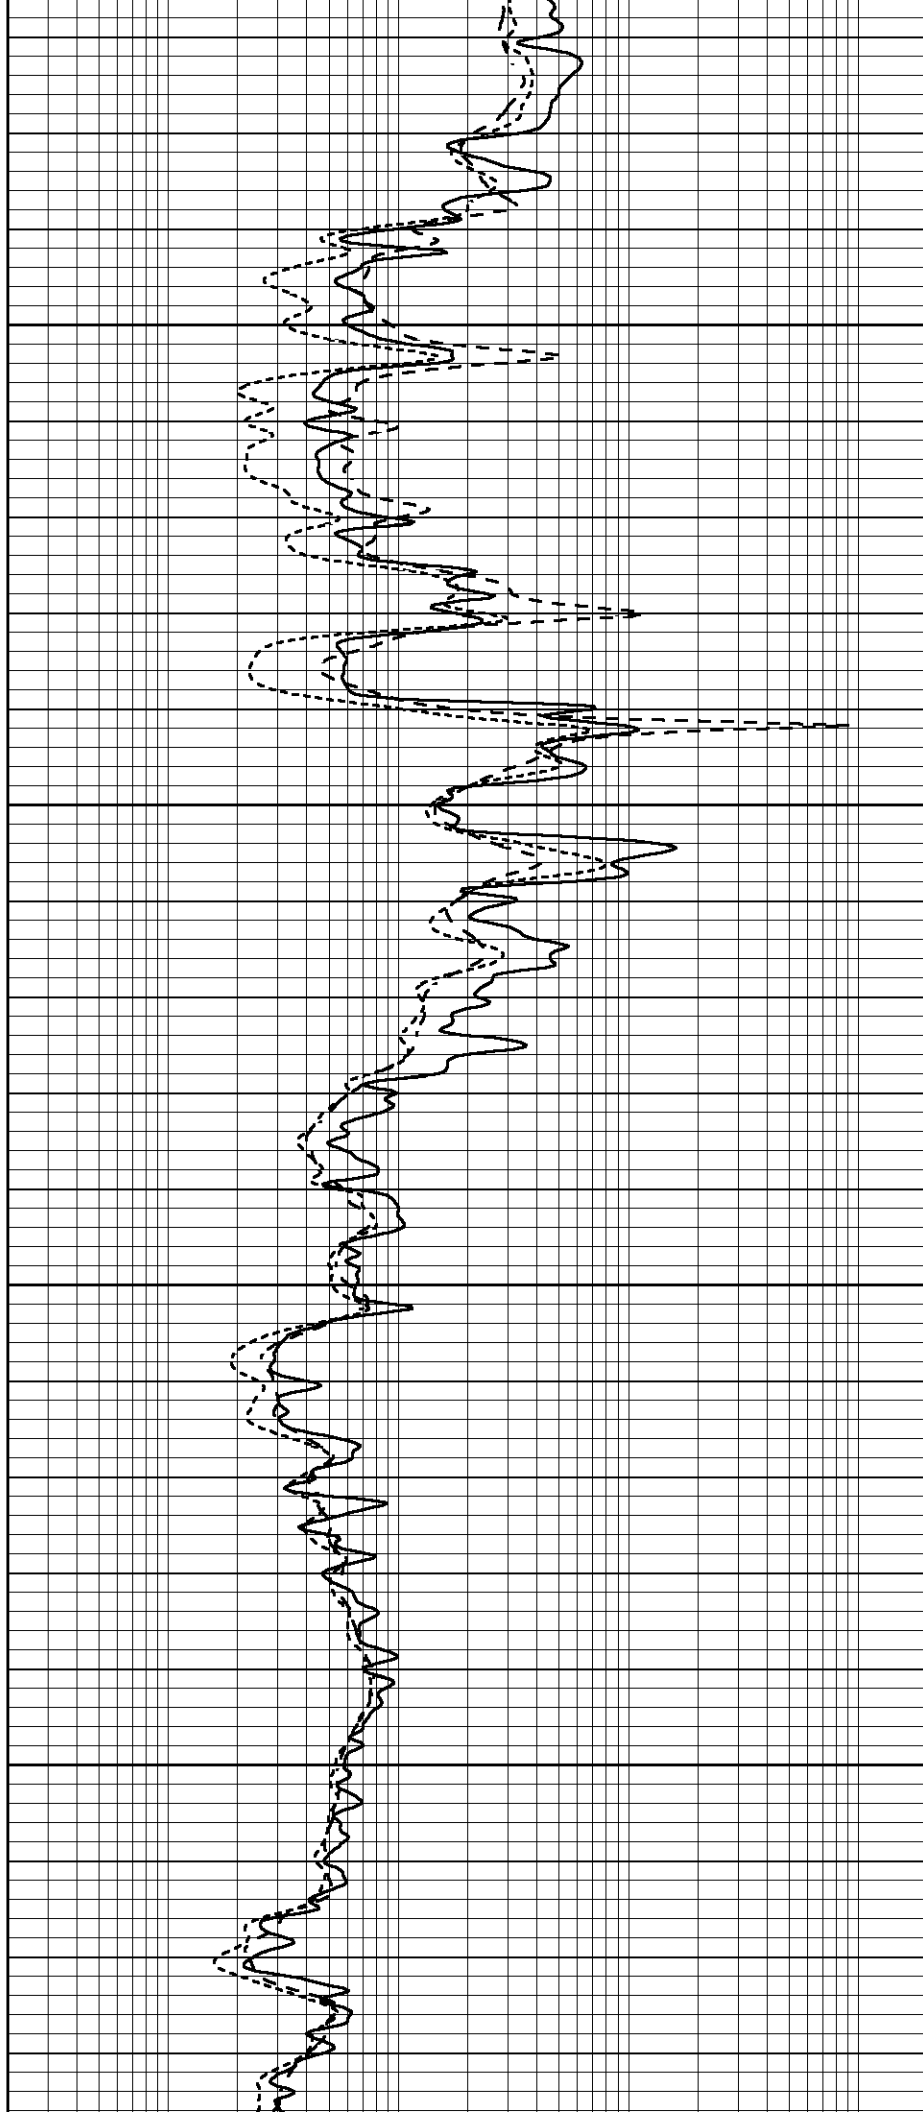

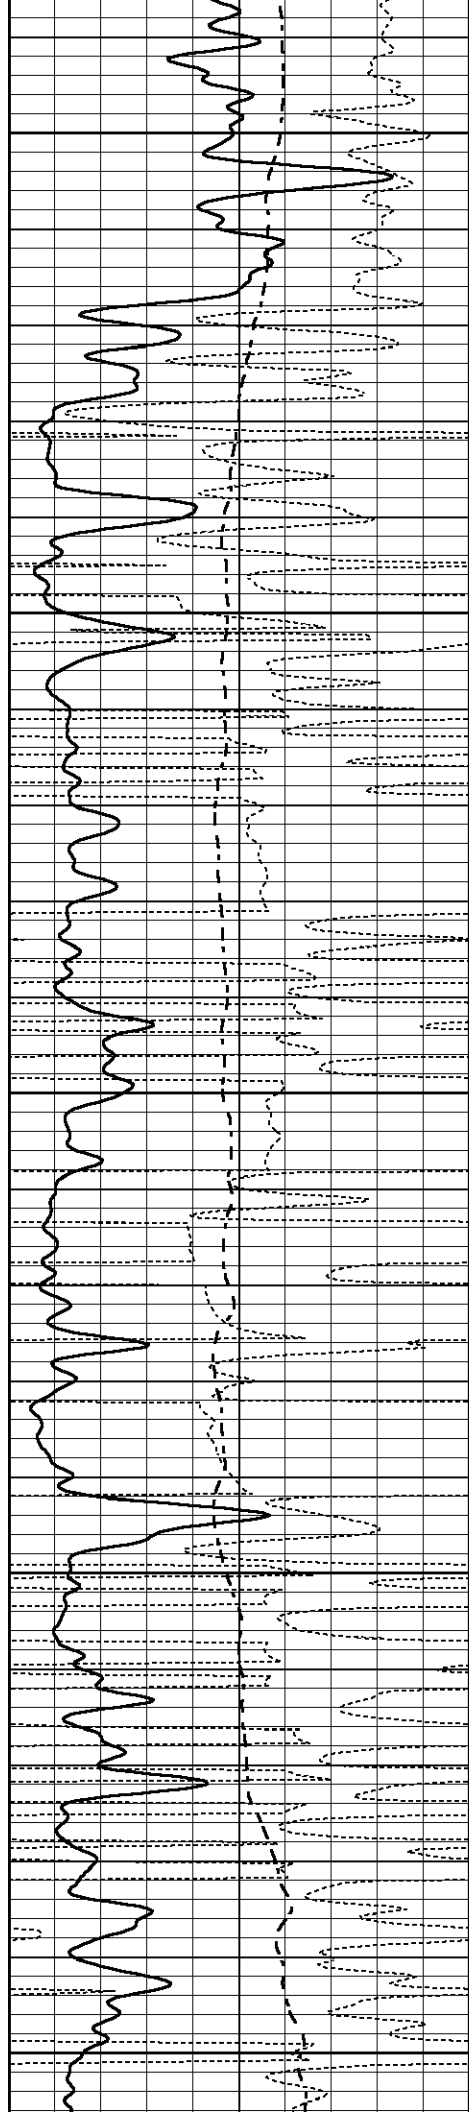


1150


1200

1250

1300

1350

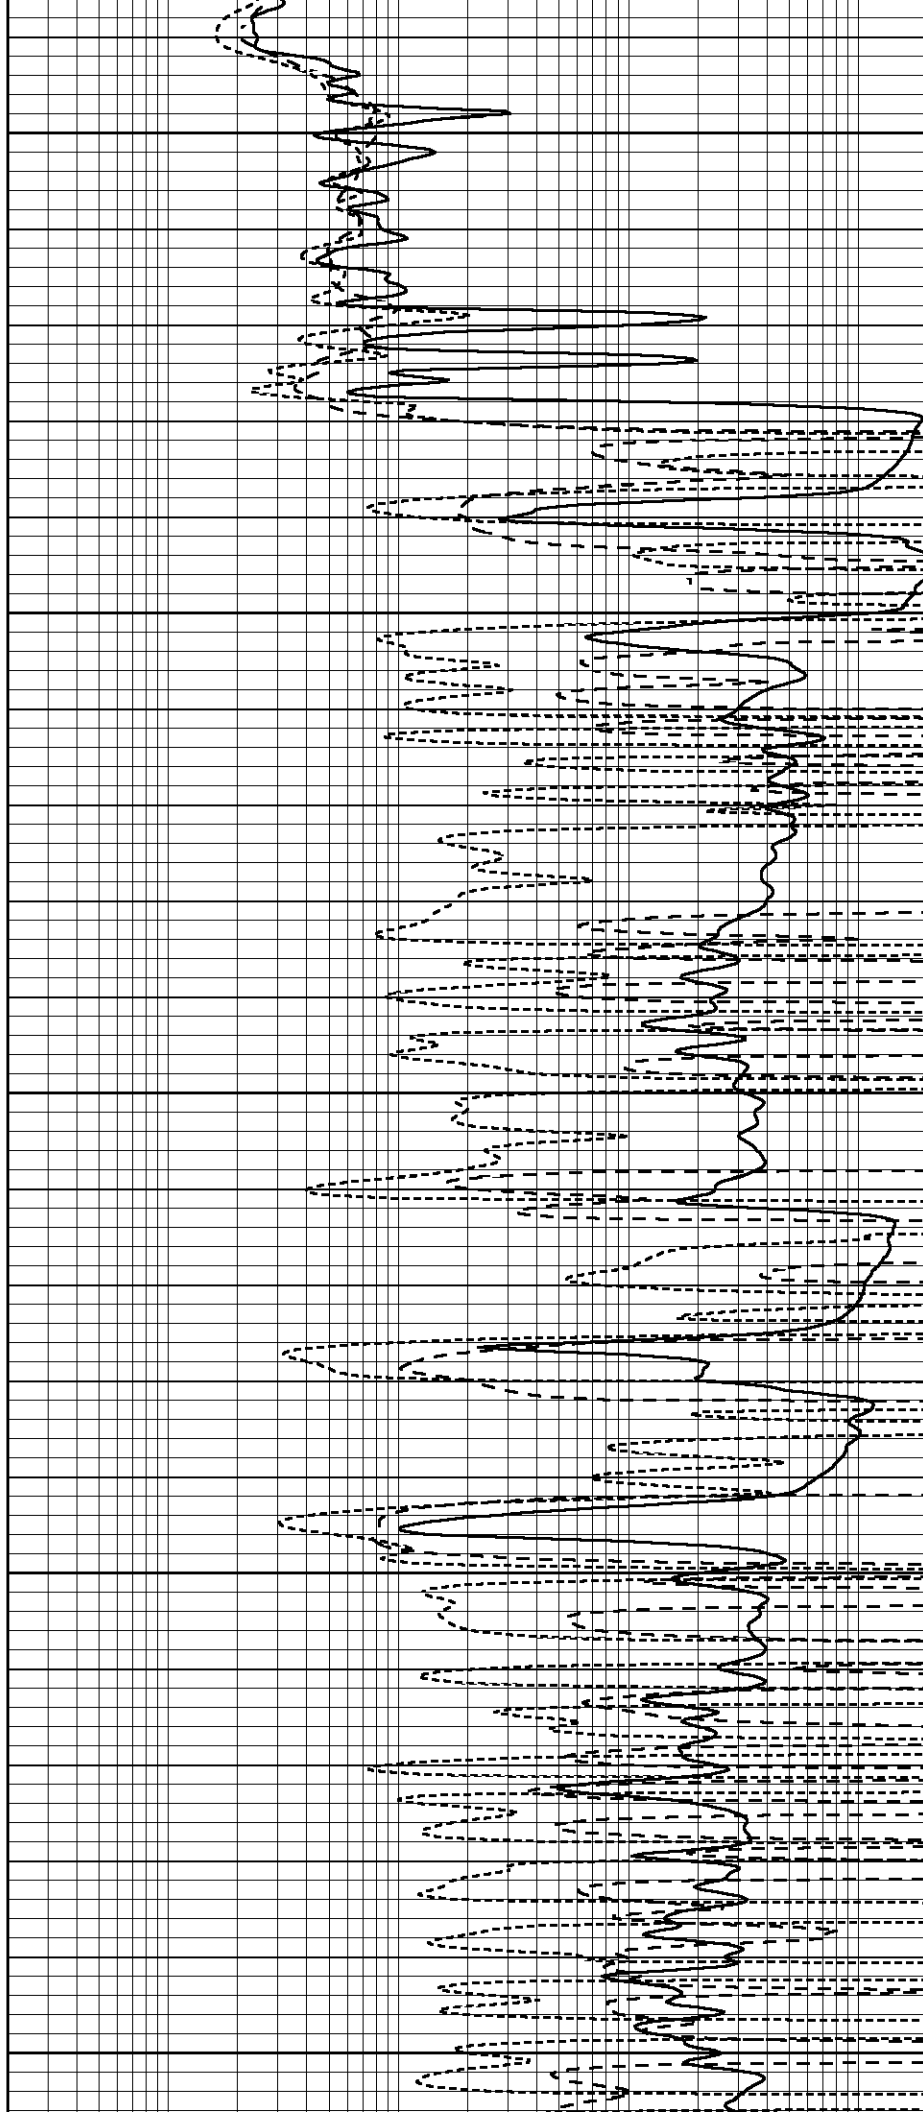

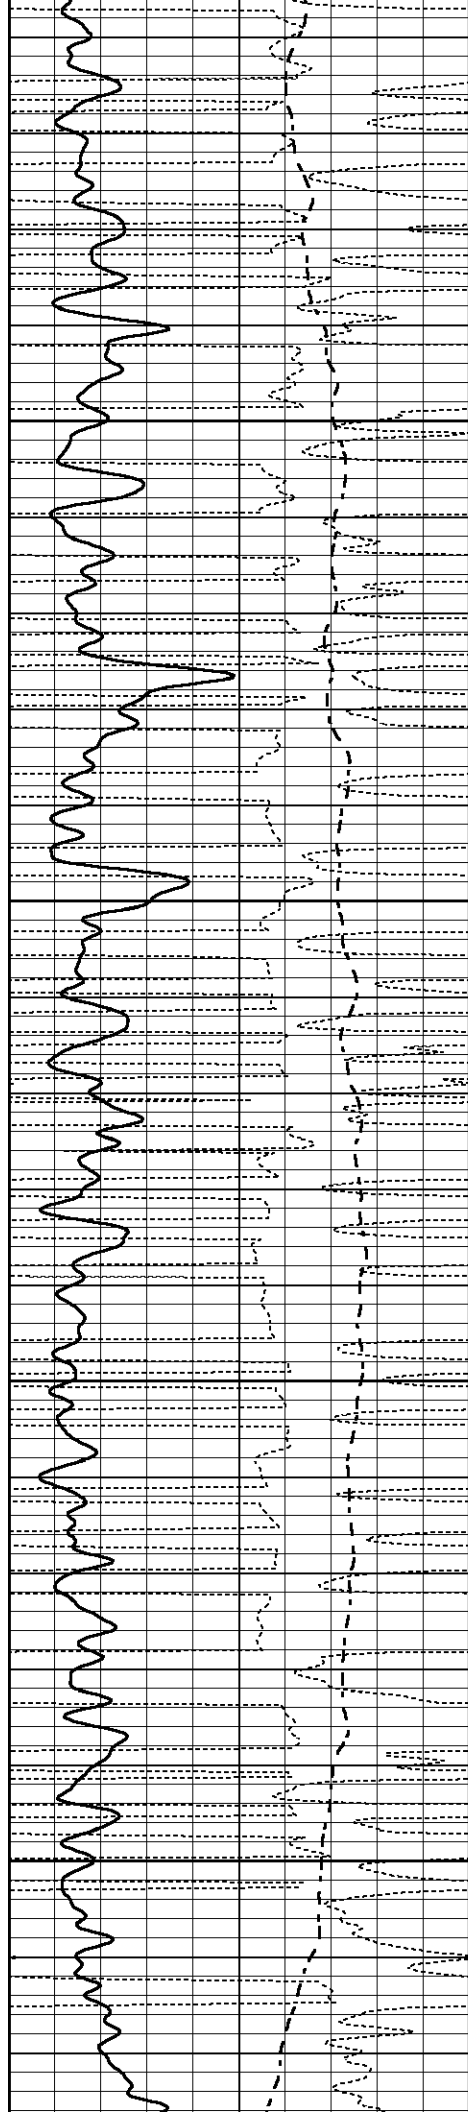



1400

1450

1500

1550

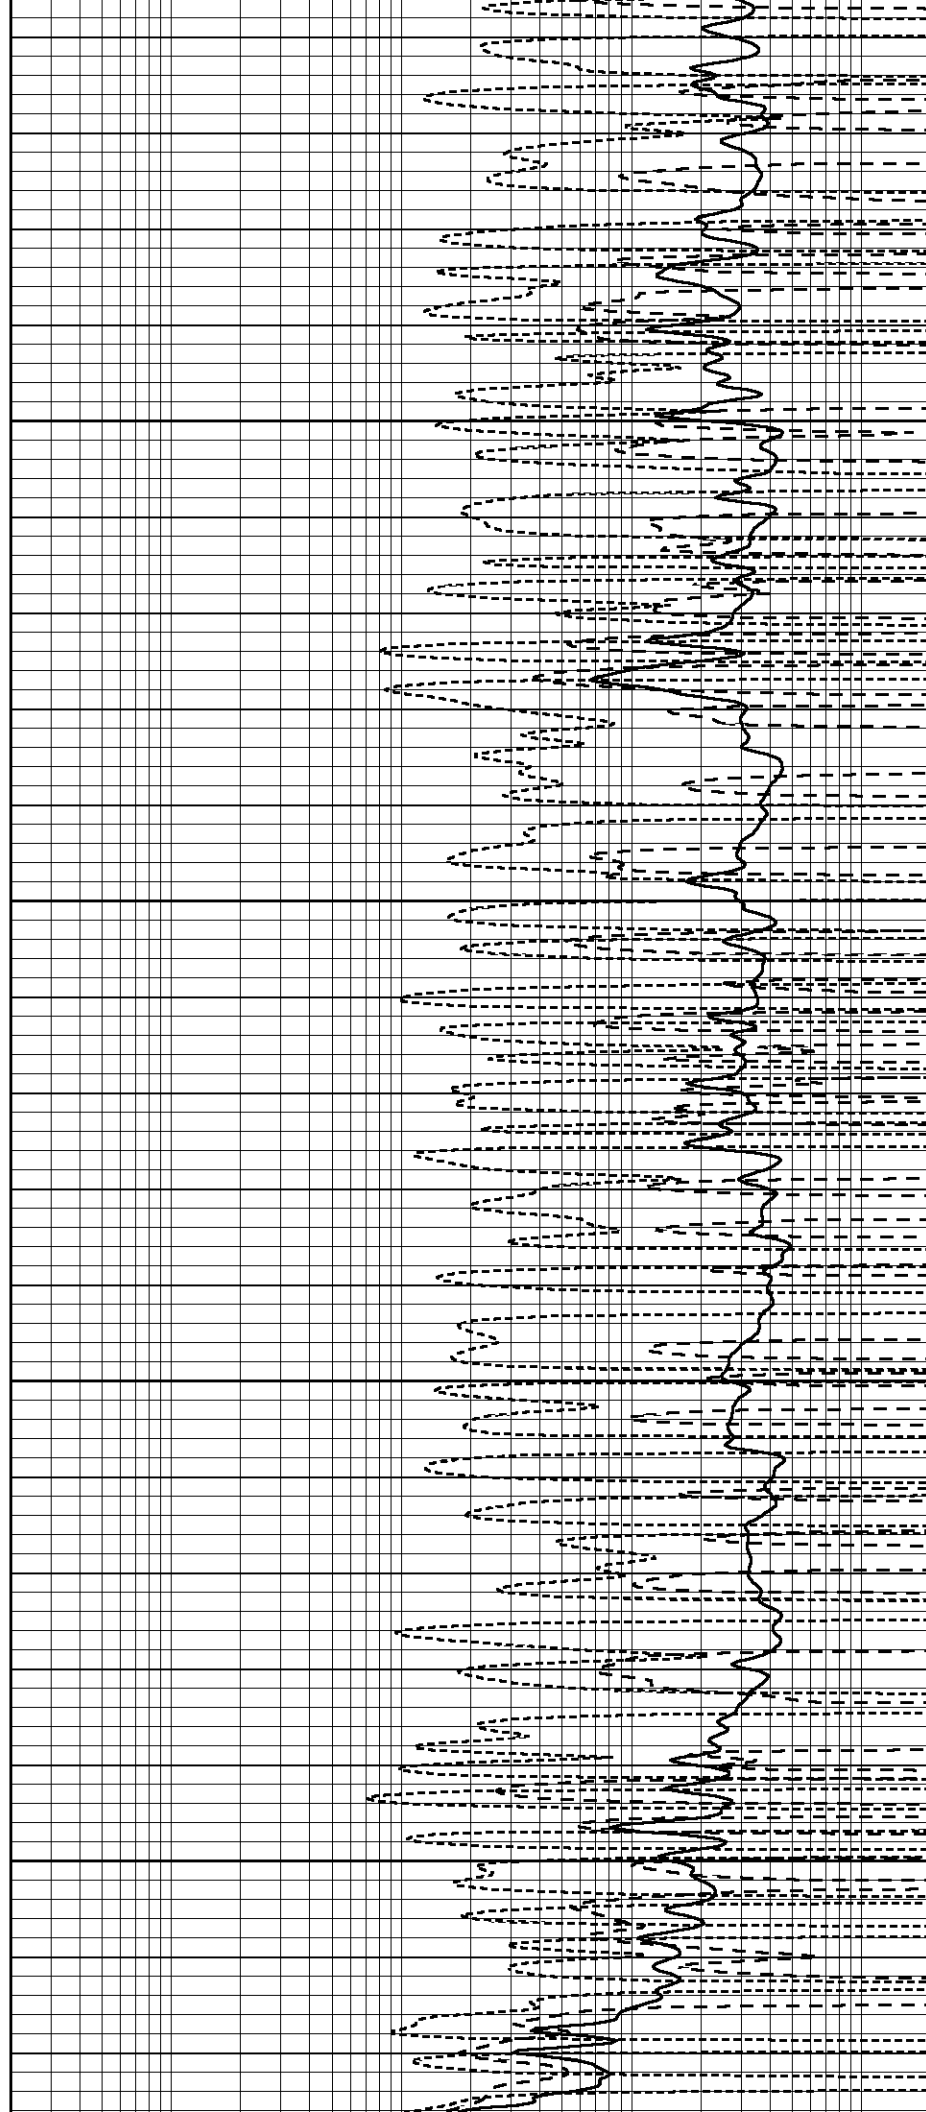

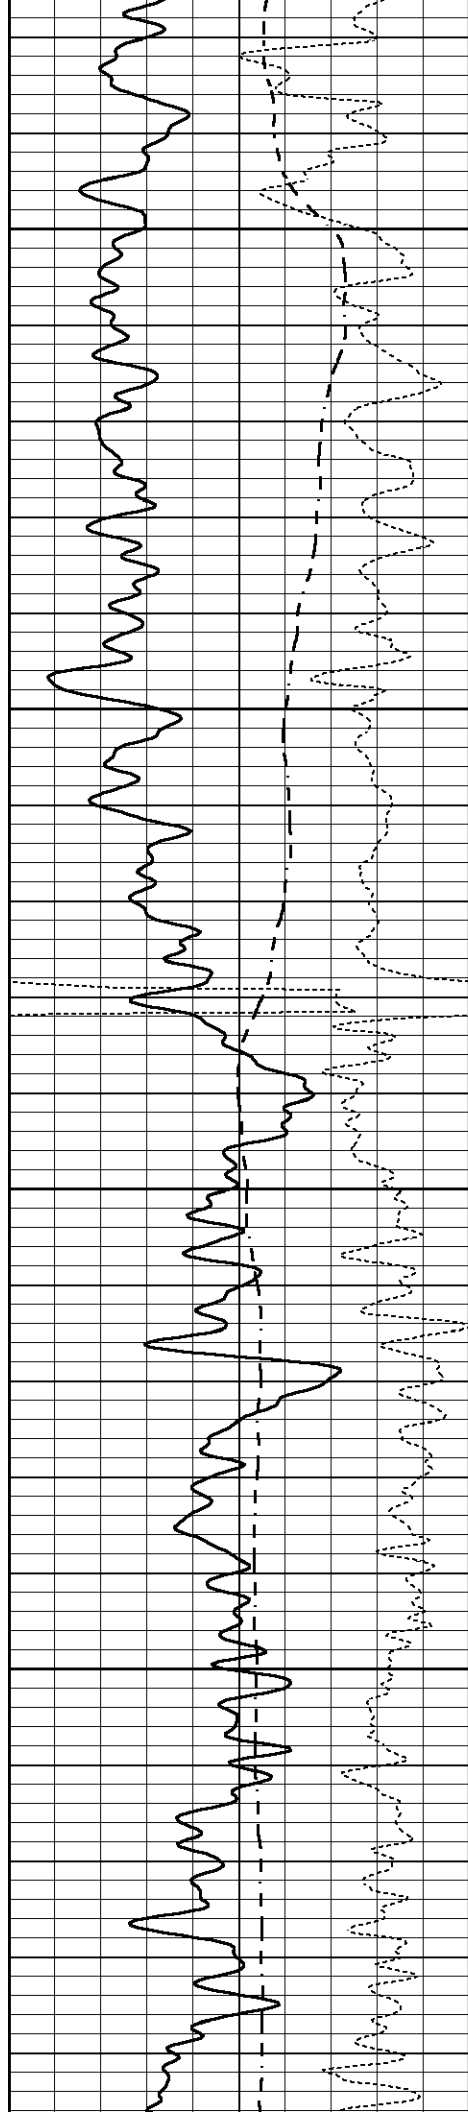



1600

1650

1700

1750

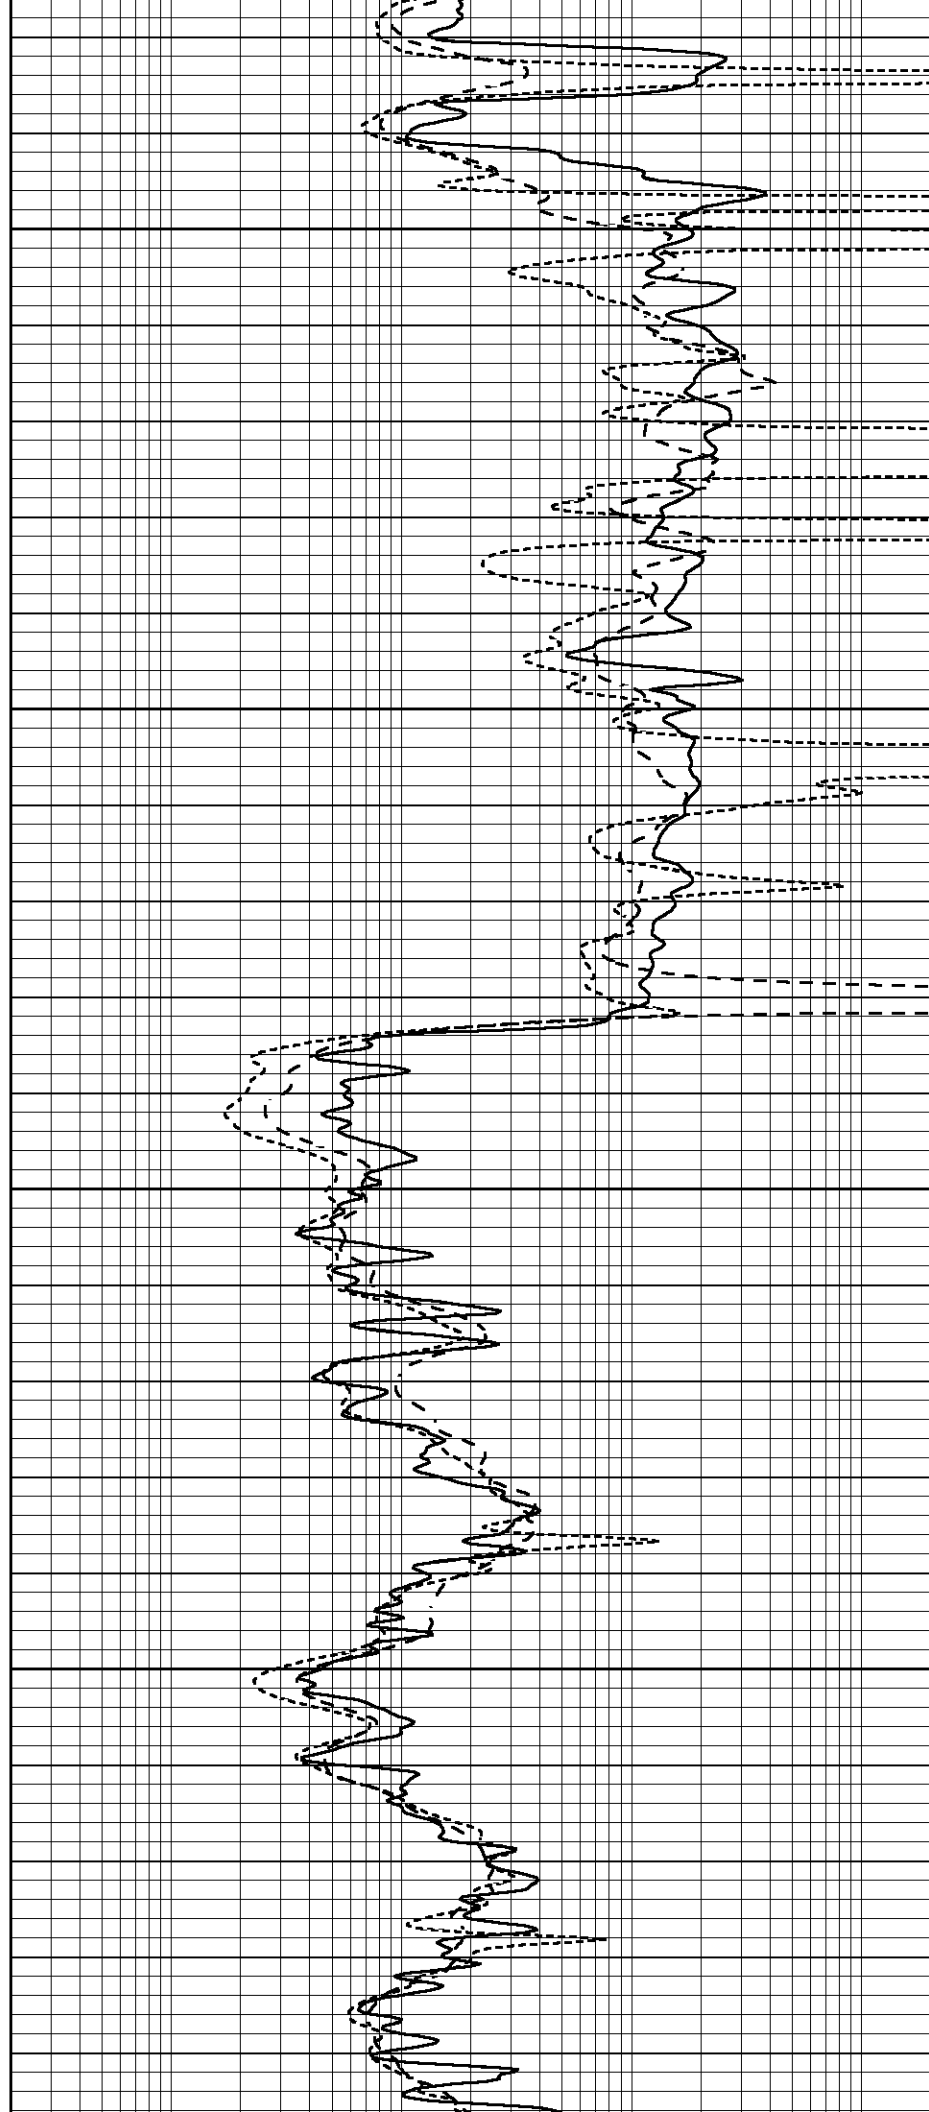

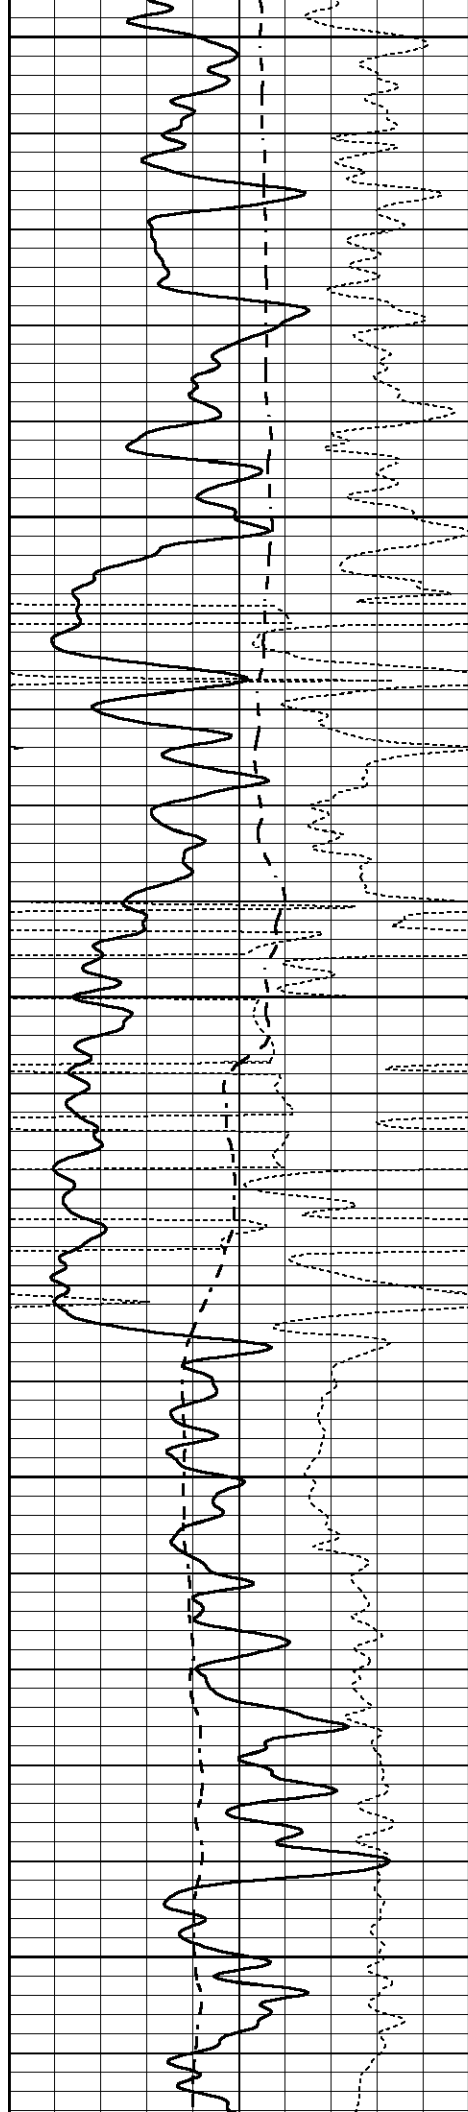


1800


1850

1900

1950

2000

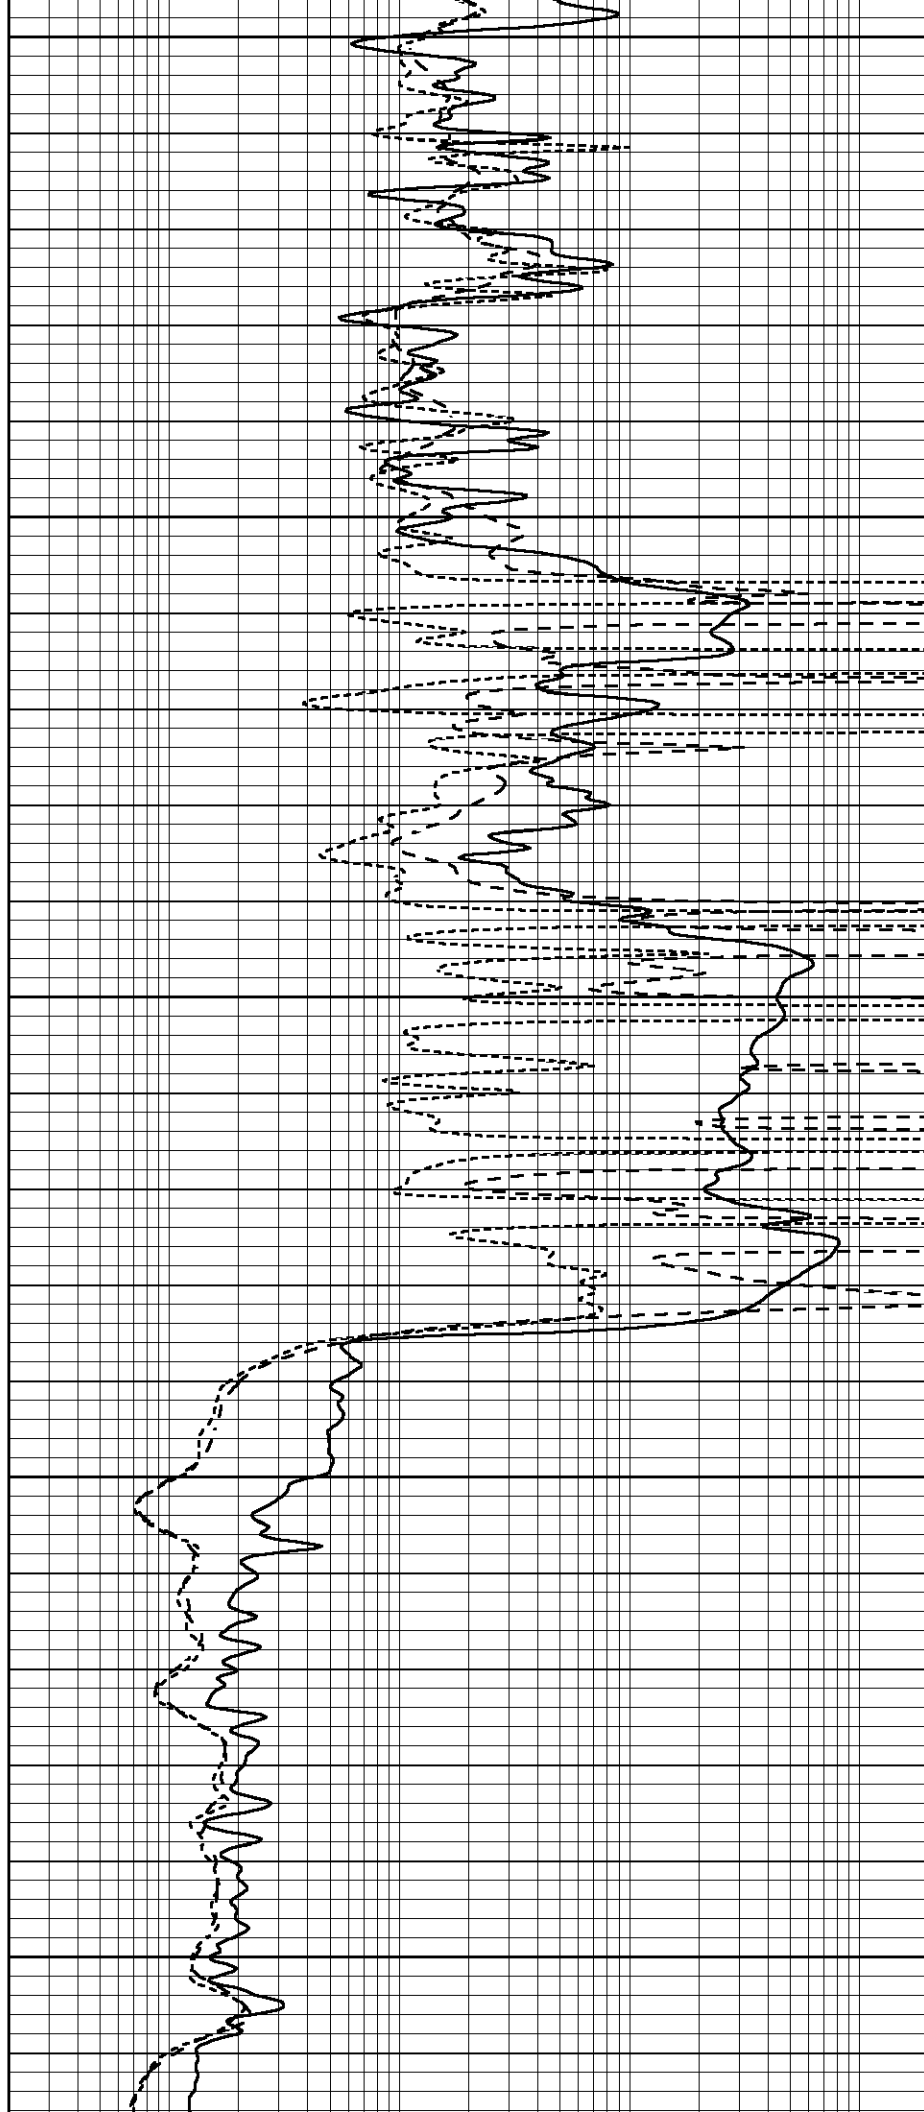

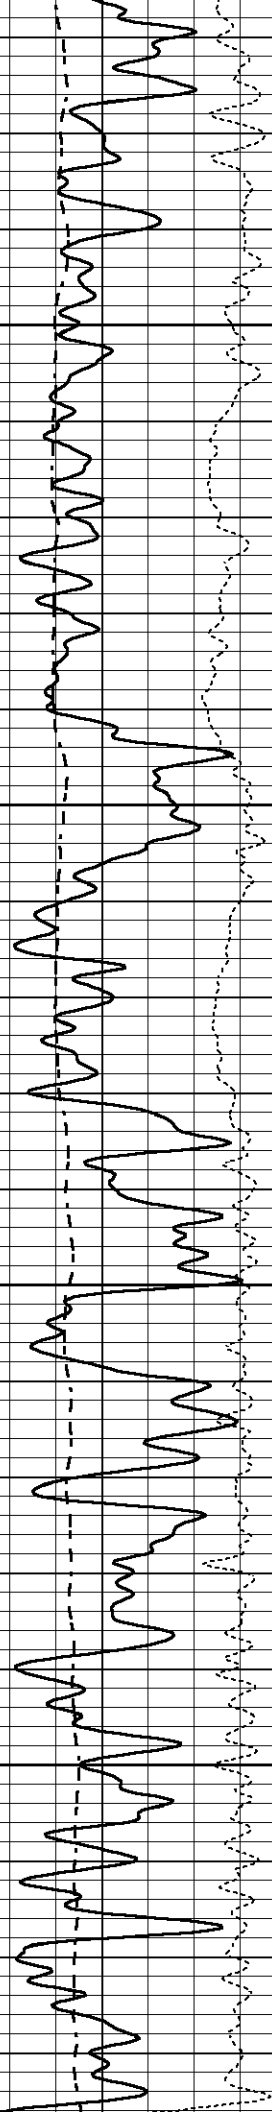



2050

2100

2150

2200

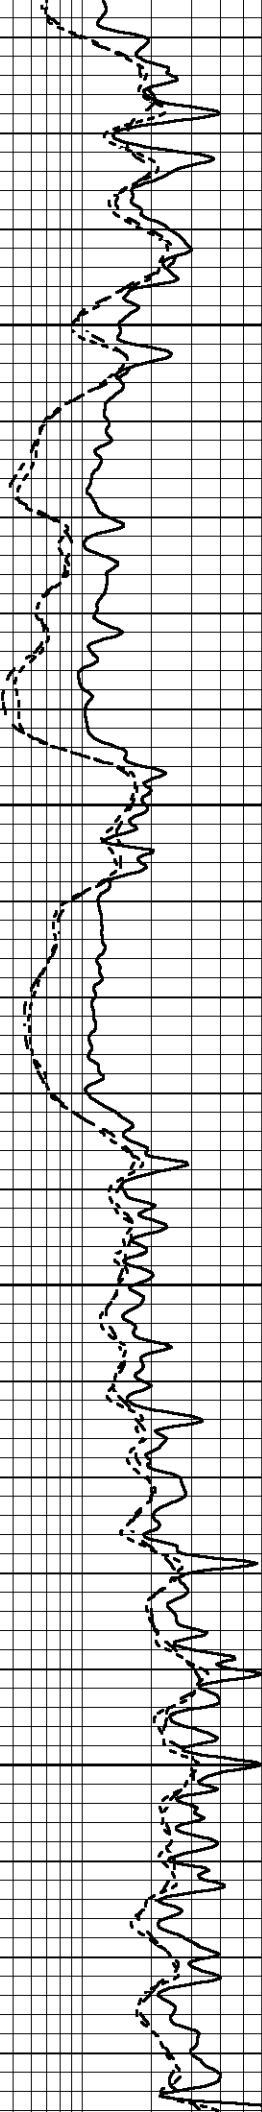

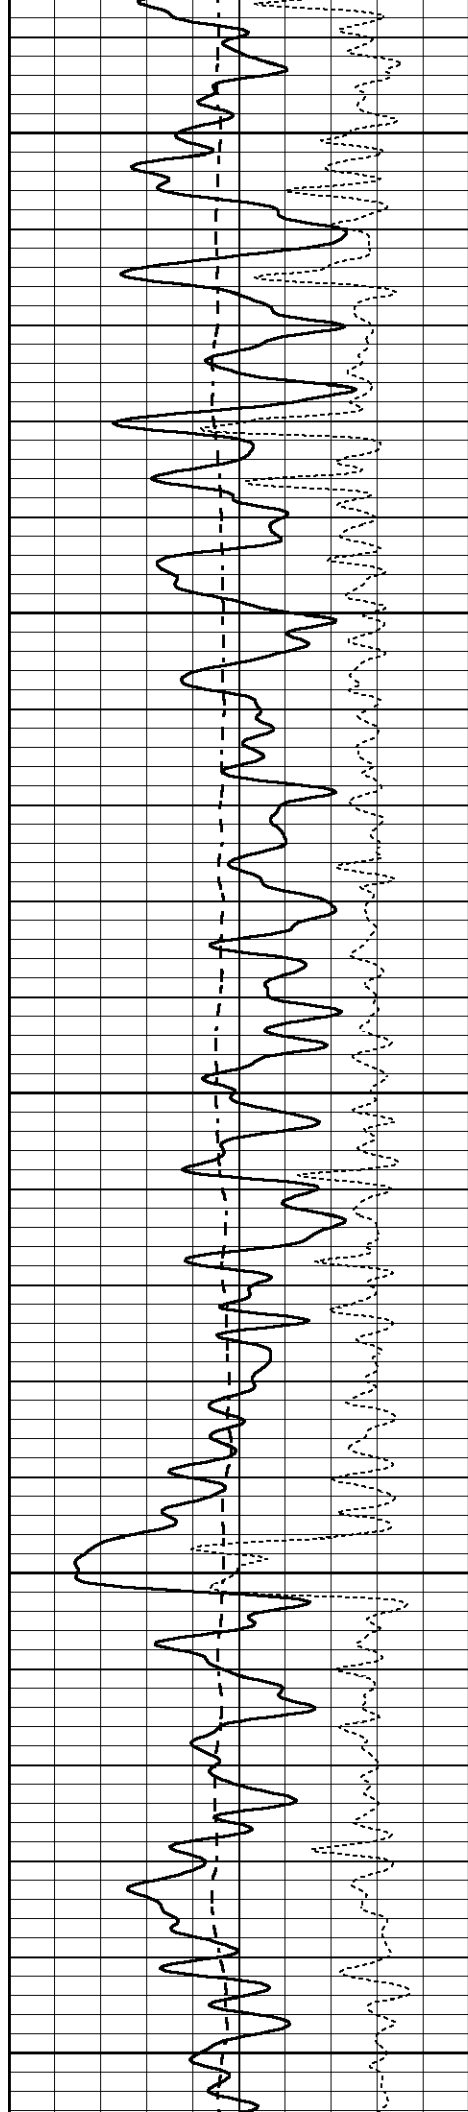


2250



2300

2350

2400

2450

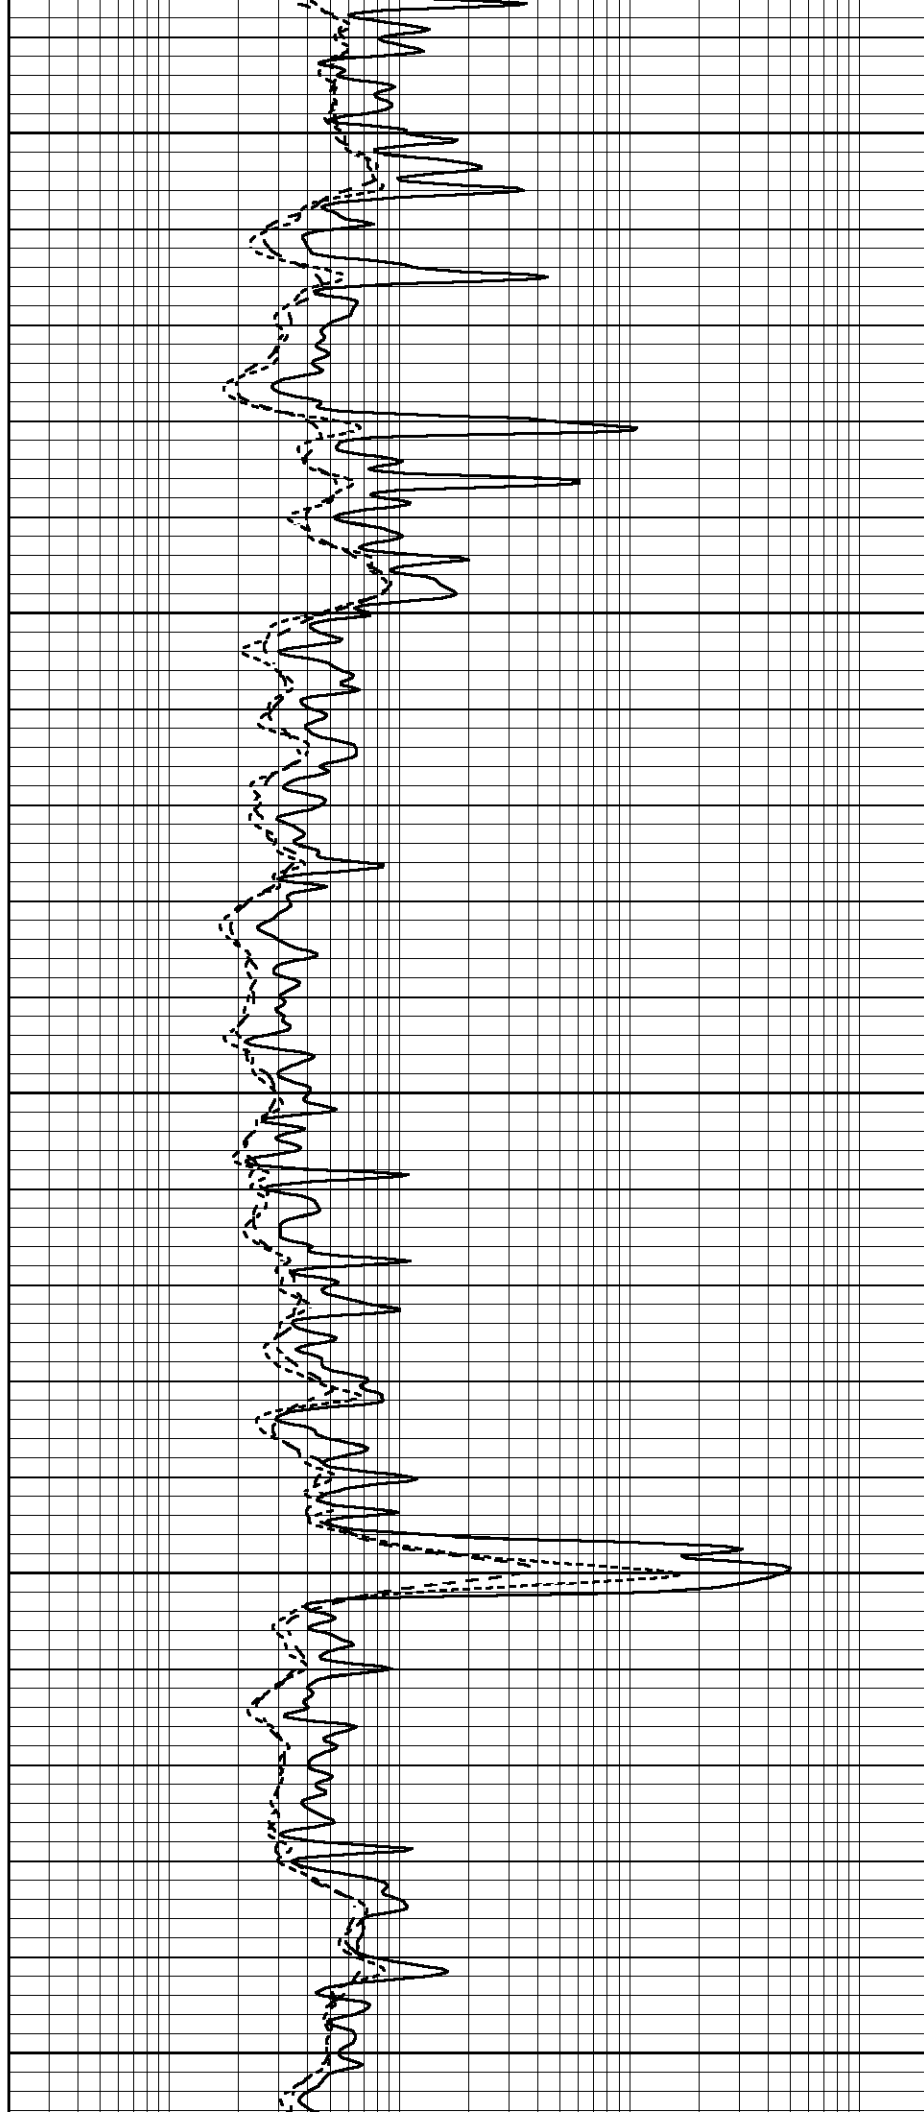

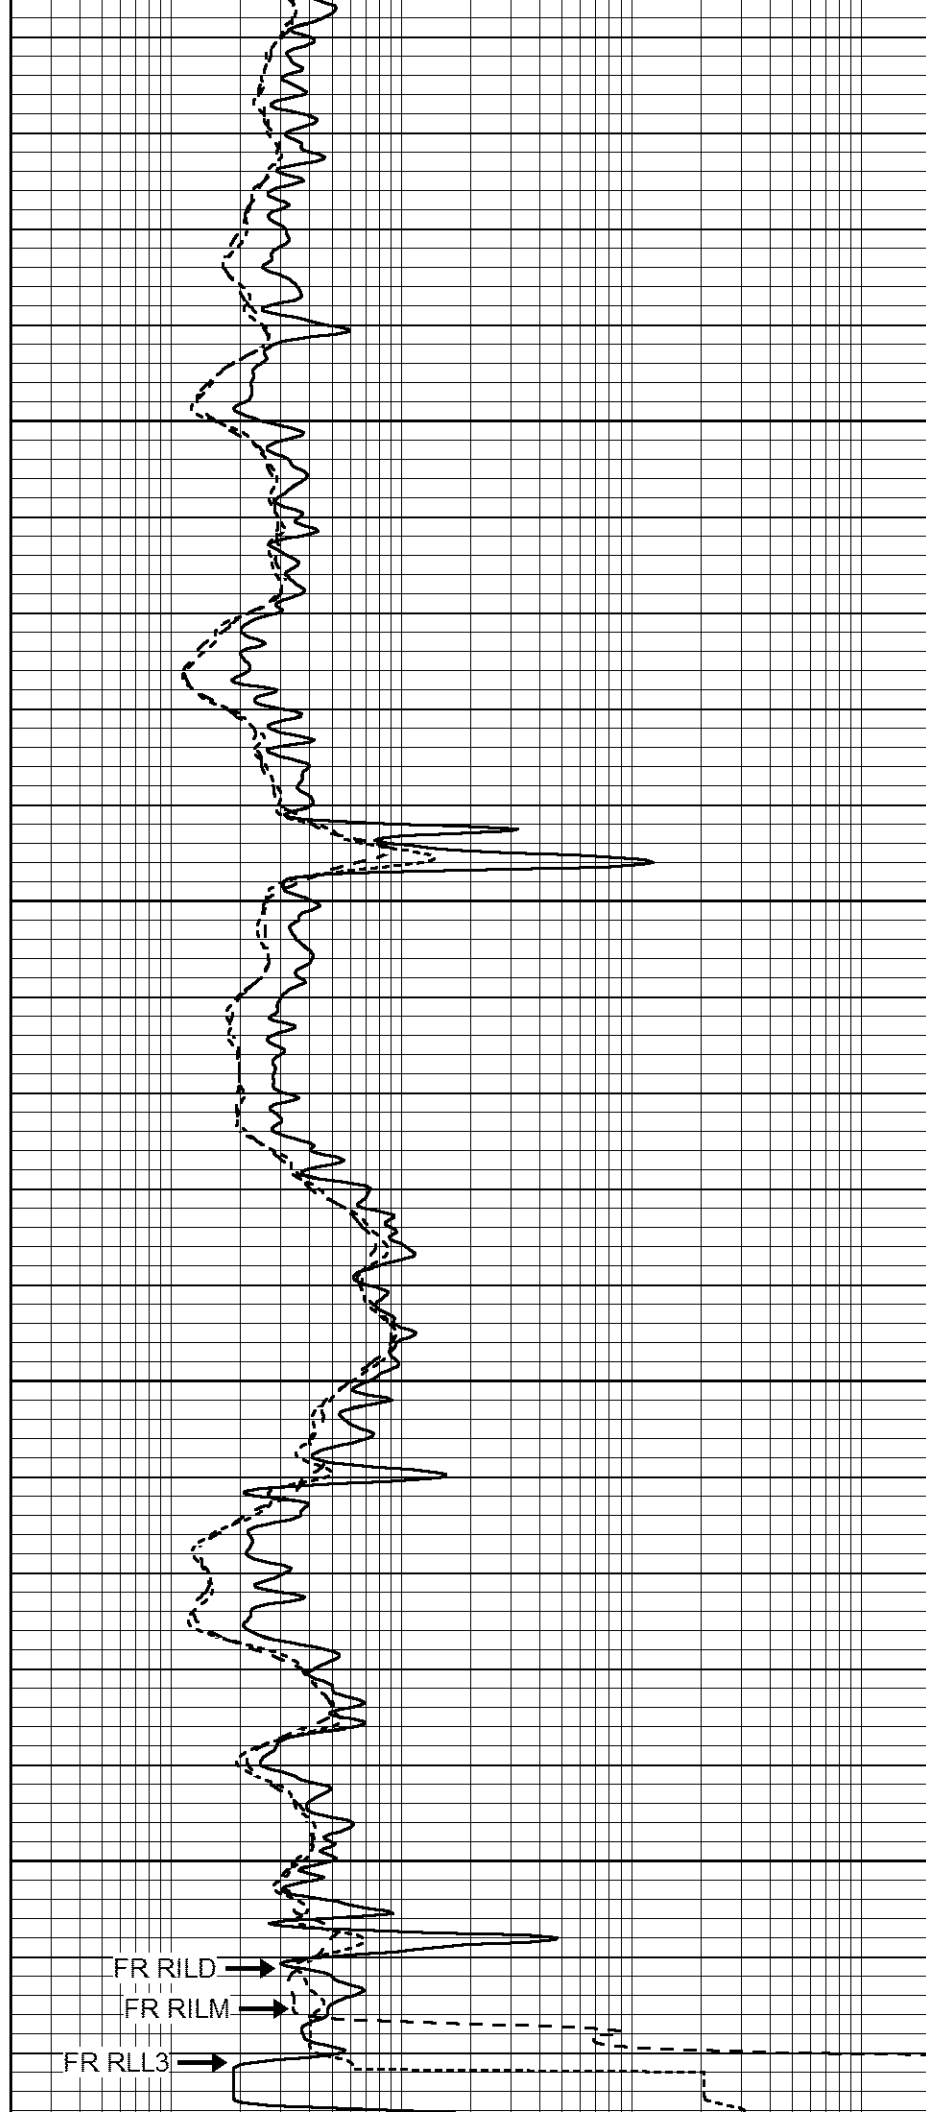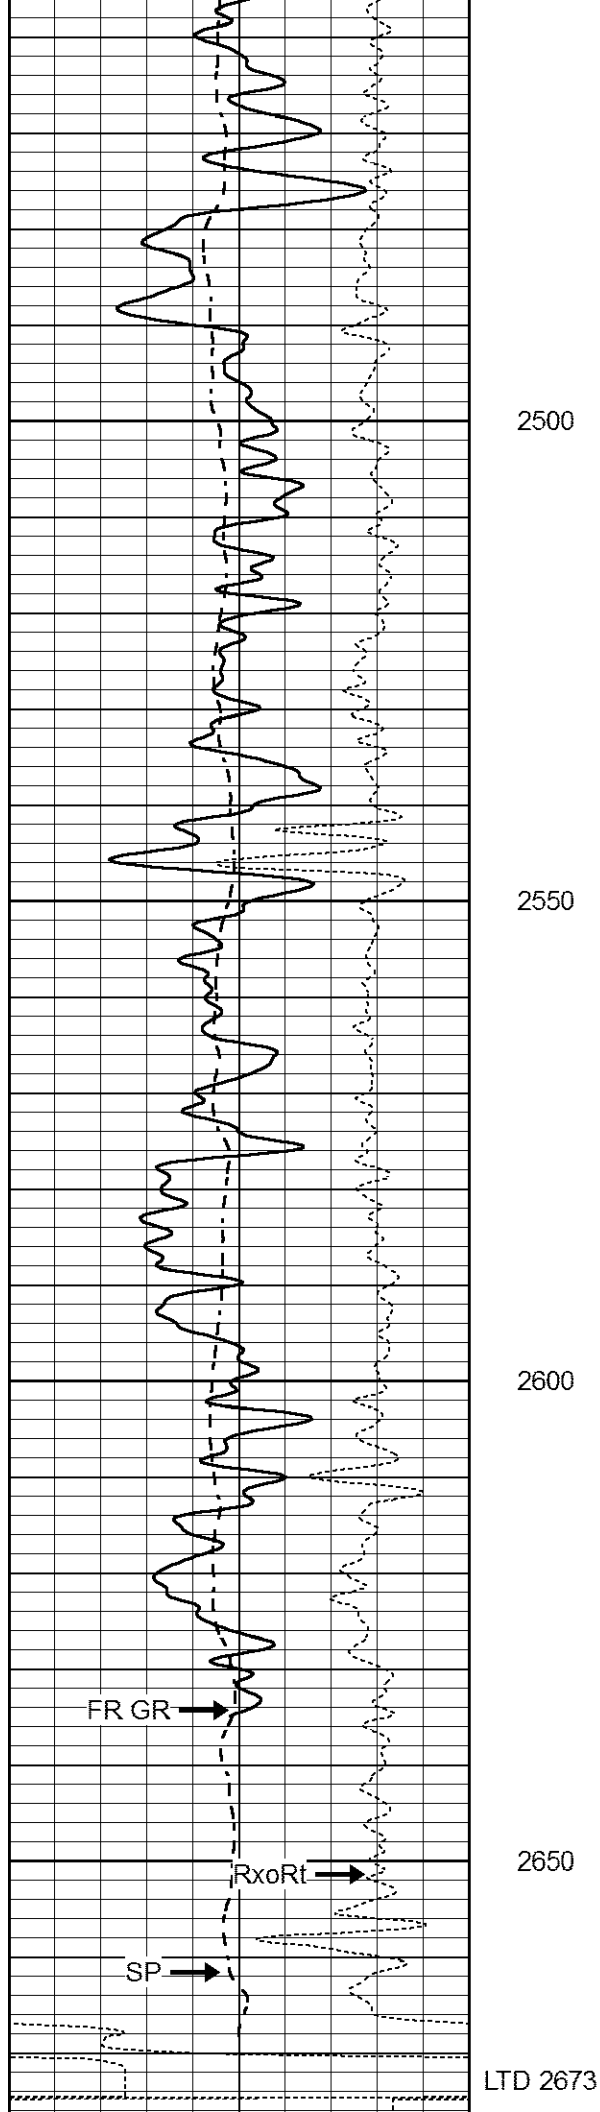

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000




REPEAT SECTION

Database File 6240pe.db
 Dataset Pathname pass2.1
 Presentation Format _dil
 Dataset Creation Tue Feb 15 21:08:12 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

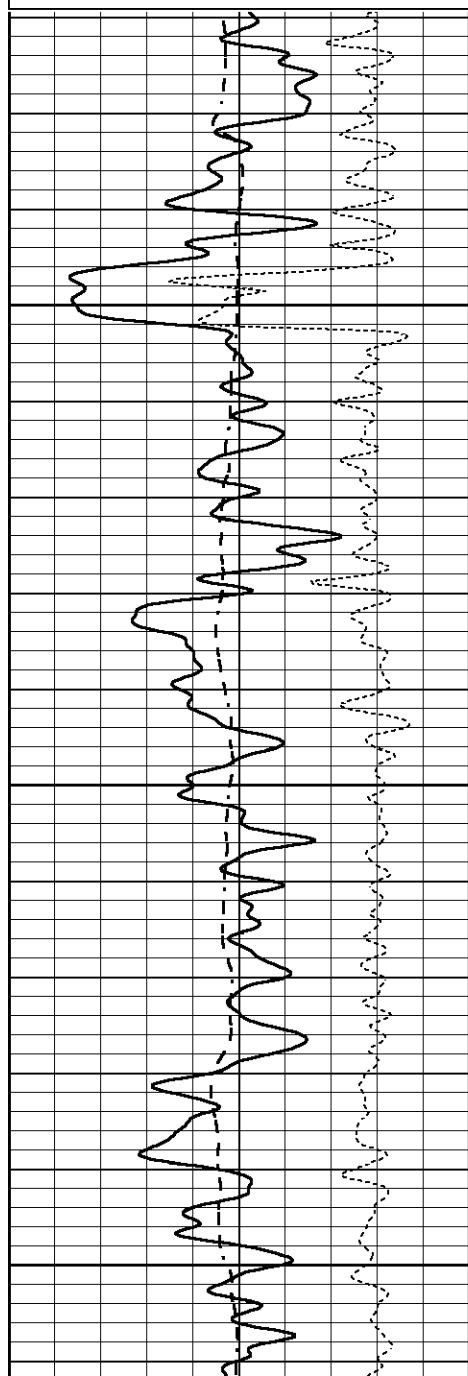


2400

2450

2500

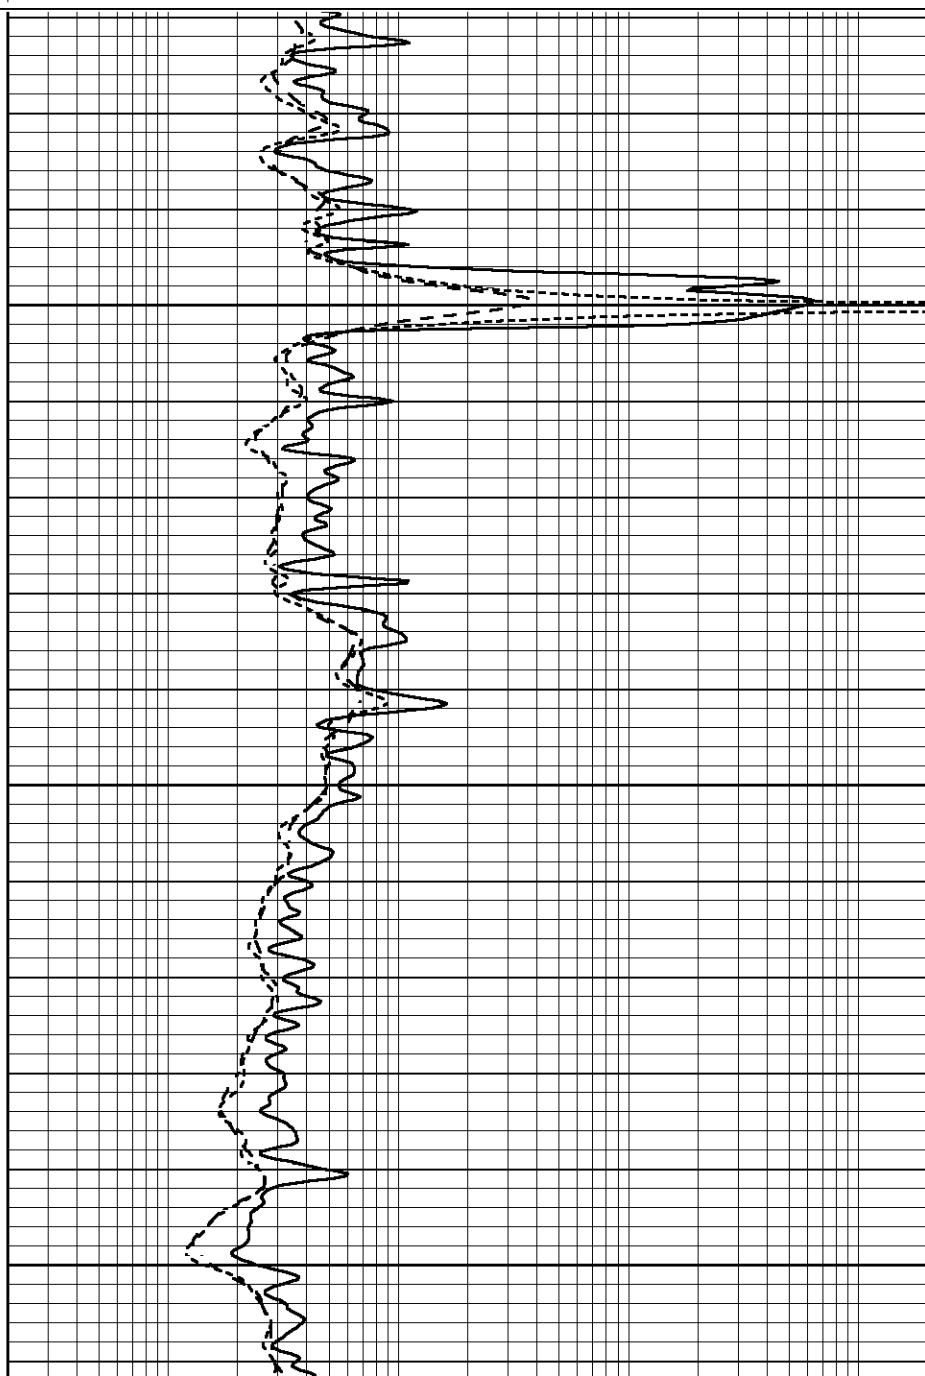

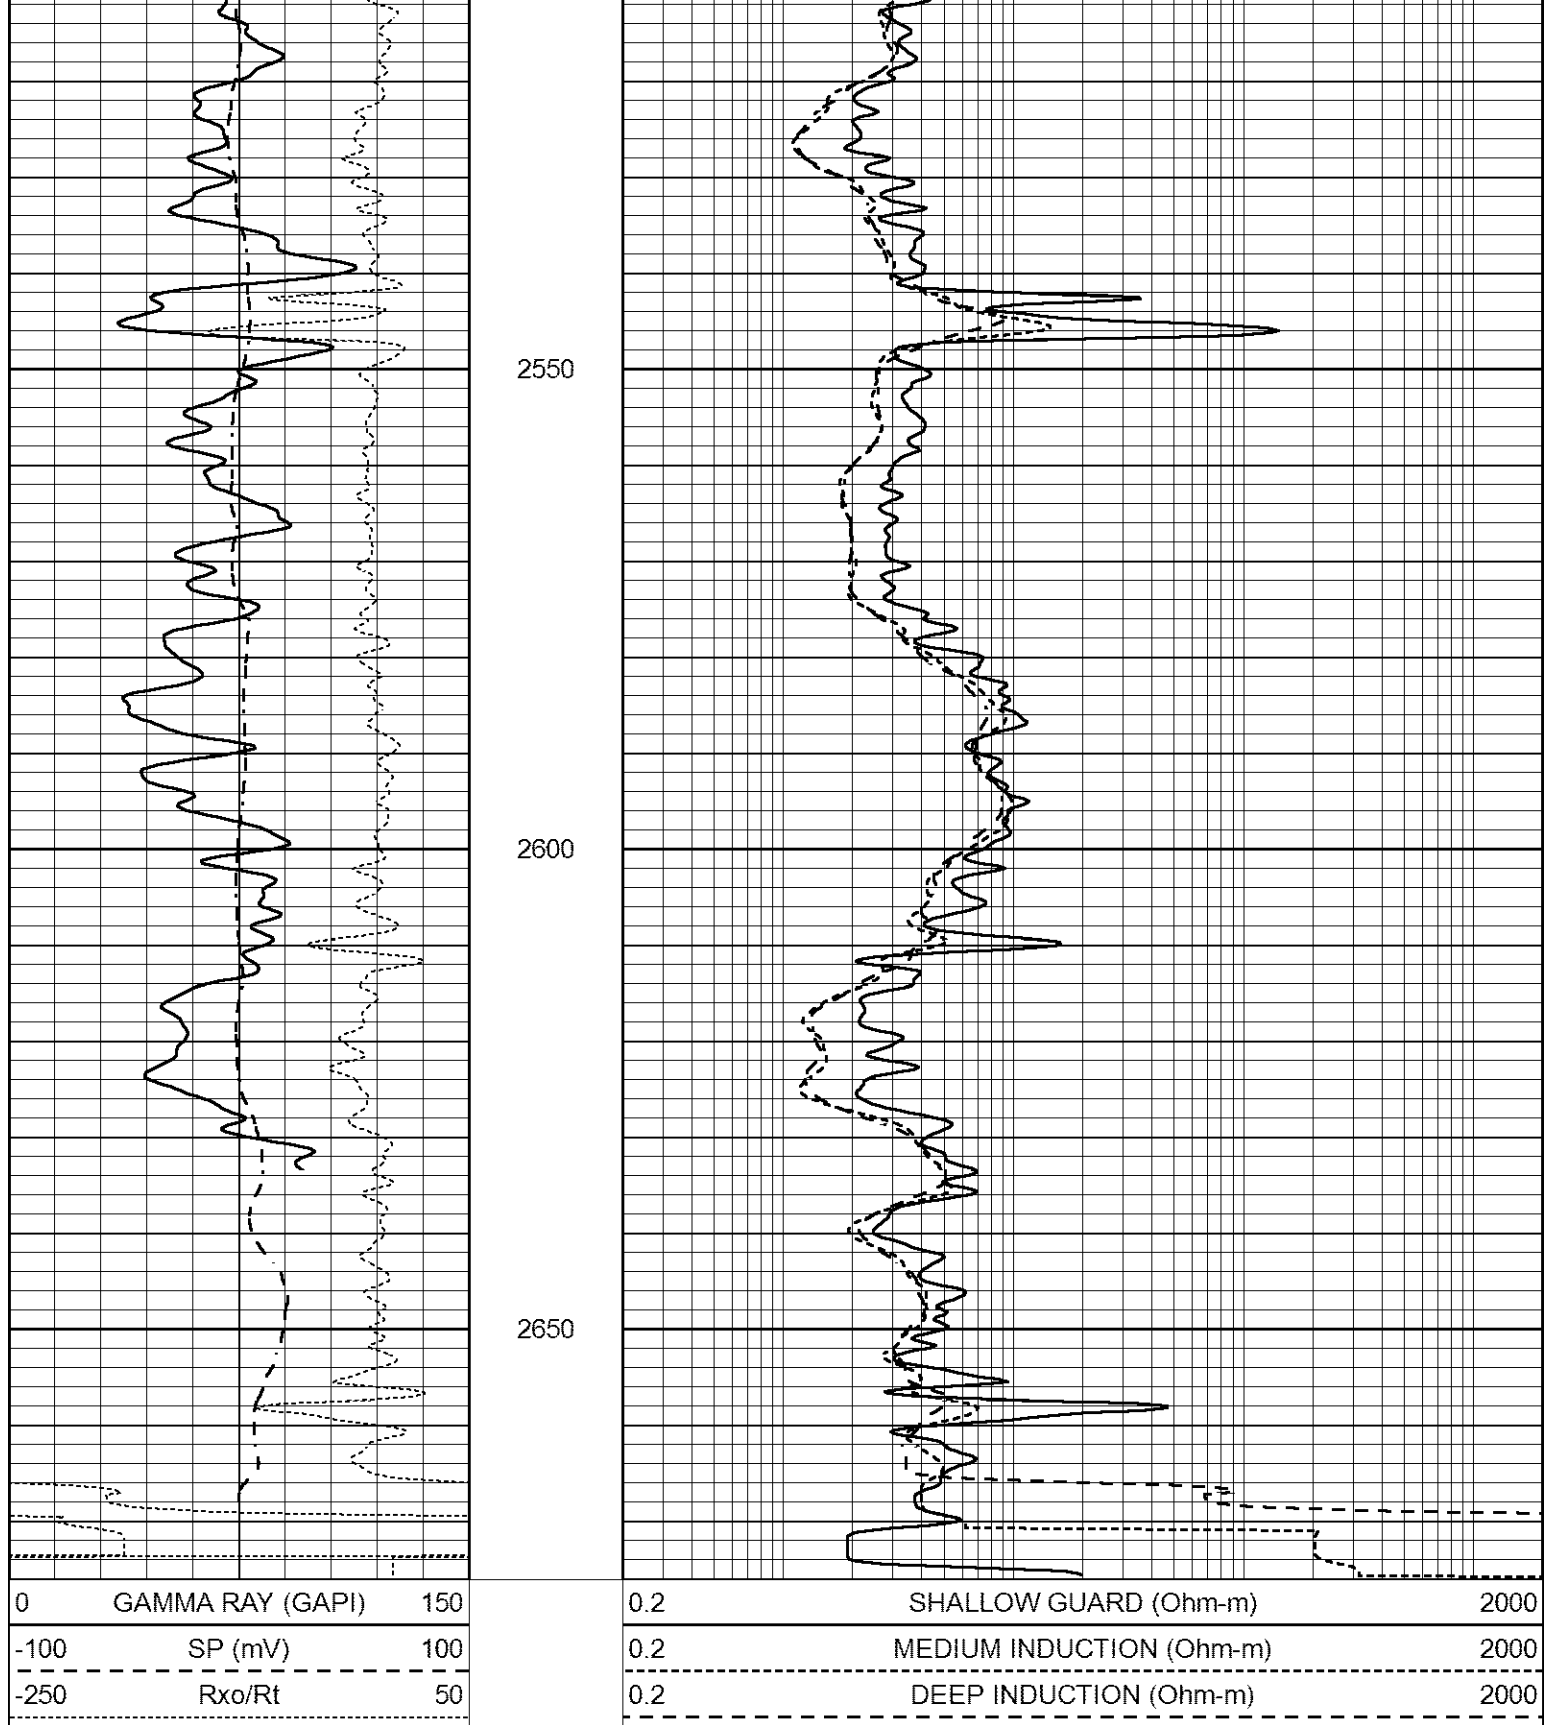

Calibration Report

Database File 6240pe.db
Dataset Pathname pass3.2
Dataset Creation Tue Feb 15 22:13:45 2022

Dual Induction Calibration Report

Serial-Model:	FW1410-56-Probe
Surface Cal Performed:	Mon Jun 15 22:52:02 2020
Downhole Cal Performed:	Tue Jul 25 12:15:37 2017

Surface Calibration								
Readings				References			Results	
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.008	0.765	V	1.000	400.000	mmho/m	400.061	-3.201
Medium	-0.056	0.761	V	1.000	464.000	mmho/m	425.187	32.510
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.005	0.624	V	0.000	400.000	mmho/m	645.611	-3.034
Medium	0.012	0.721	V	0.000	464.000	mmho/m	653.591	-7.532

Downhole Calibration								
Readings				References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.647	301.329	mmho/m	-0.780	336.378	mmho/m	1.117	-0.058
Medium	38.256	411.013	mmho/m	39.046	441.706	mmho/m	1.080	-2.280
LL3		7.471	V		2500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.085	V		3500.000	mmho-m		

After Survey Verification								
Readings				Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.647	301.329	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	38.256	411.013	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Compensated Neutron Calibration Report

Serial Number: 080621PMC
Tool Model: NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number: 7
Tool Model: Probe1
Performed: Tue Jan 19 17:50:08 2021

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.5300 GAPI/cps