

MICRO LOG

Company	FOURWINDS OIL CORPORATION
Well	KEMPER B #3
Field	RAY WEST
County	NORTON
State	KANSAS
Location:	API # : 15-137-20760-0000 1650' FNL & 990' FWL NE - SW - NW SEC 23 TWP 5S RGE 21W
Permanent Datum Log Measured From Drilling Measured From	GROUND LEVEL KELLY BUSHING 7' A.G.L. KELLY BUSHING
Elevation	2184
Other Services CDL/CNL DIL	
Date	4/9/22
Run Number	TWO
Depth Driller	3625
Depth Logger	3624
Bottom Logged Interval	3622
Top Log Interval	3100
Casing Driller	8 5/8"@222'
Casing Logger	222
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	7.1/70
pH / Fluid Loss	11.0/7.8
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.70@68F
Rmf @ Meas. Temp	1.28@68F
Rmc @ Meas. Temp	2.04@68F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	1.02@113F
Time Circulation Stopped	10 HOURS
Time Logger on Bottom	10:30 P.M.
Maximum Recorded Temperature	113F
Equipment Number	922339
Location	HAYS, KANSAS
Recorded By	JEFF LUEBBERS
Witnessed By	CAMERON BRIN
	COLE ROBBEN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-137-20760-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
LOGAN KS. 5 W ON HWY 9 TO RD E12, 3 S TO DEAD END, E INTO CATTLE GUARD





MAIN SECTION

Database File	6275pe.db
Dataset Pathname	pass9.2
Presentation Format	micro
Dataset Creation	Sat Apr 09 23:35:59 2022
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

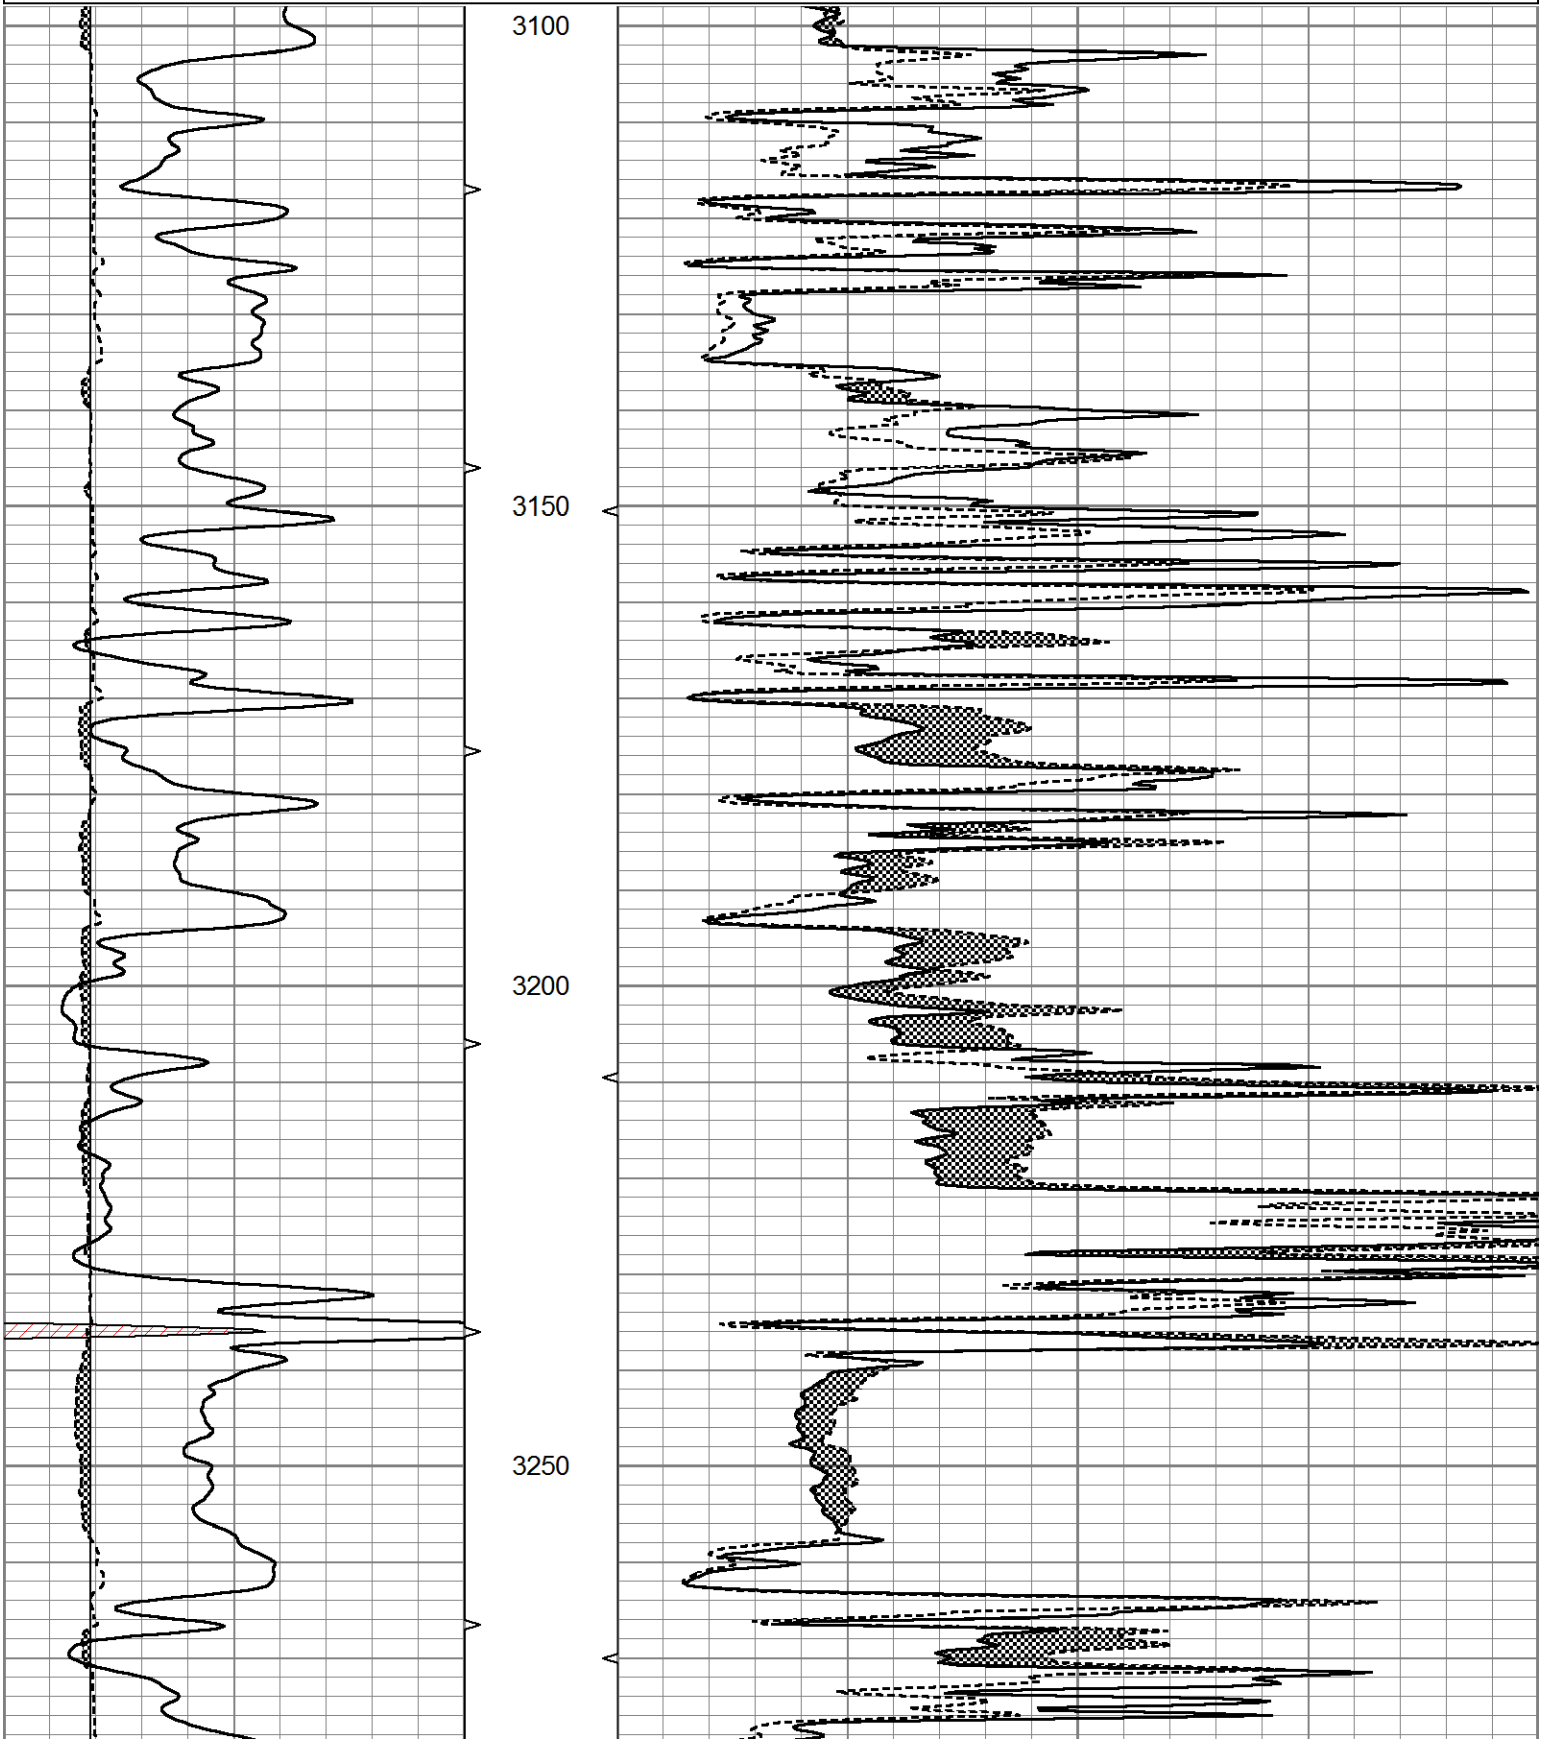

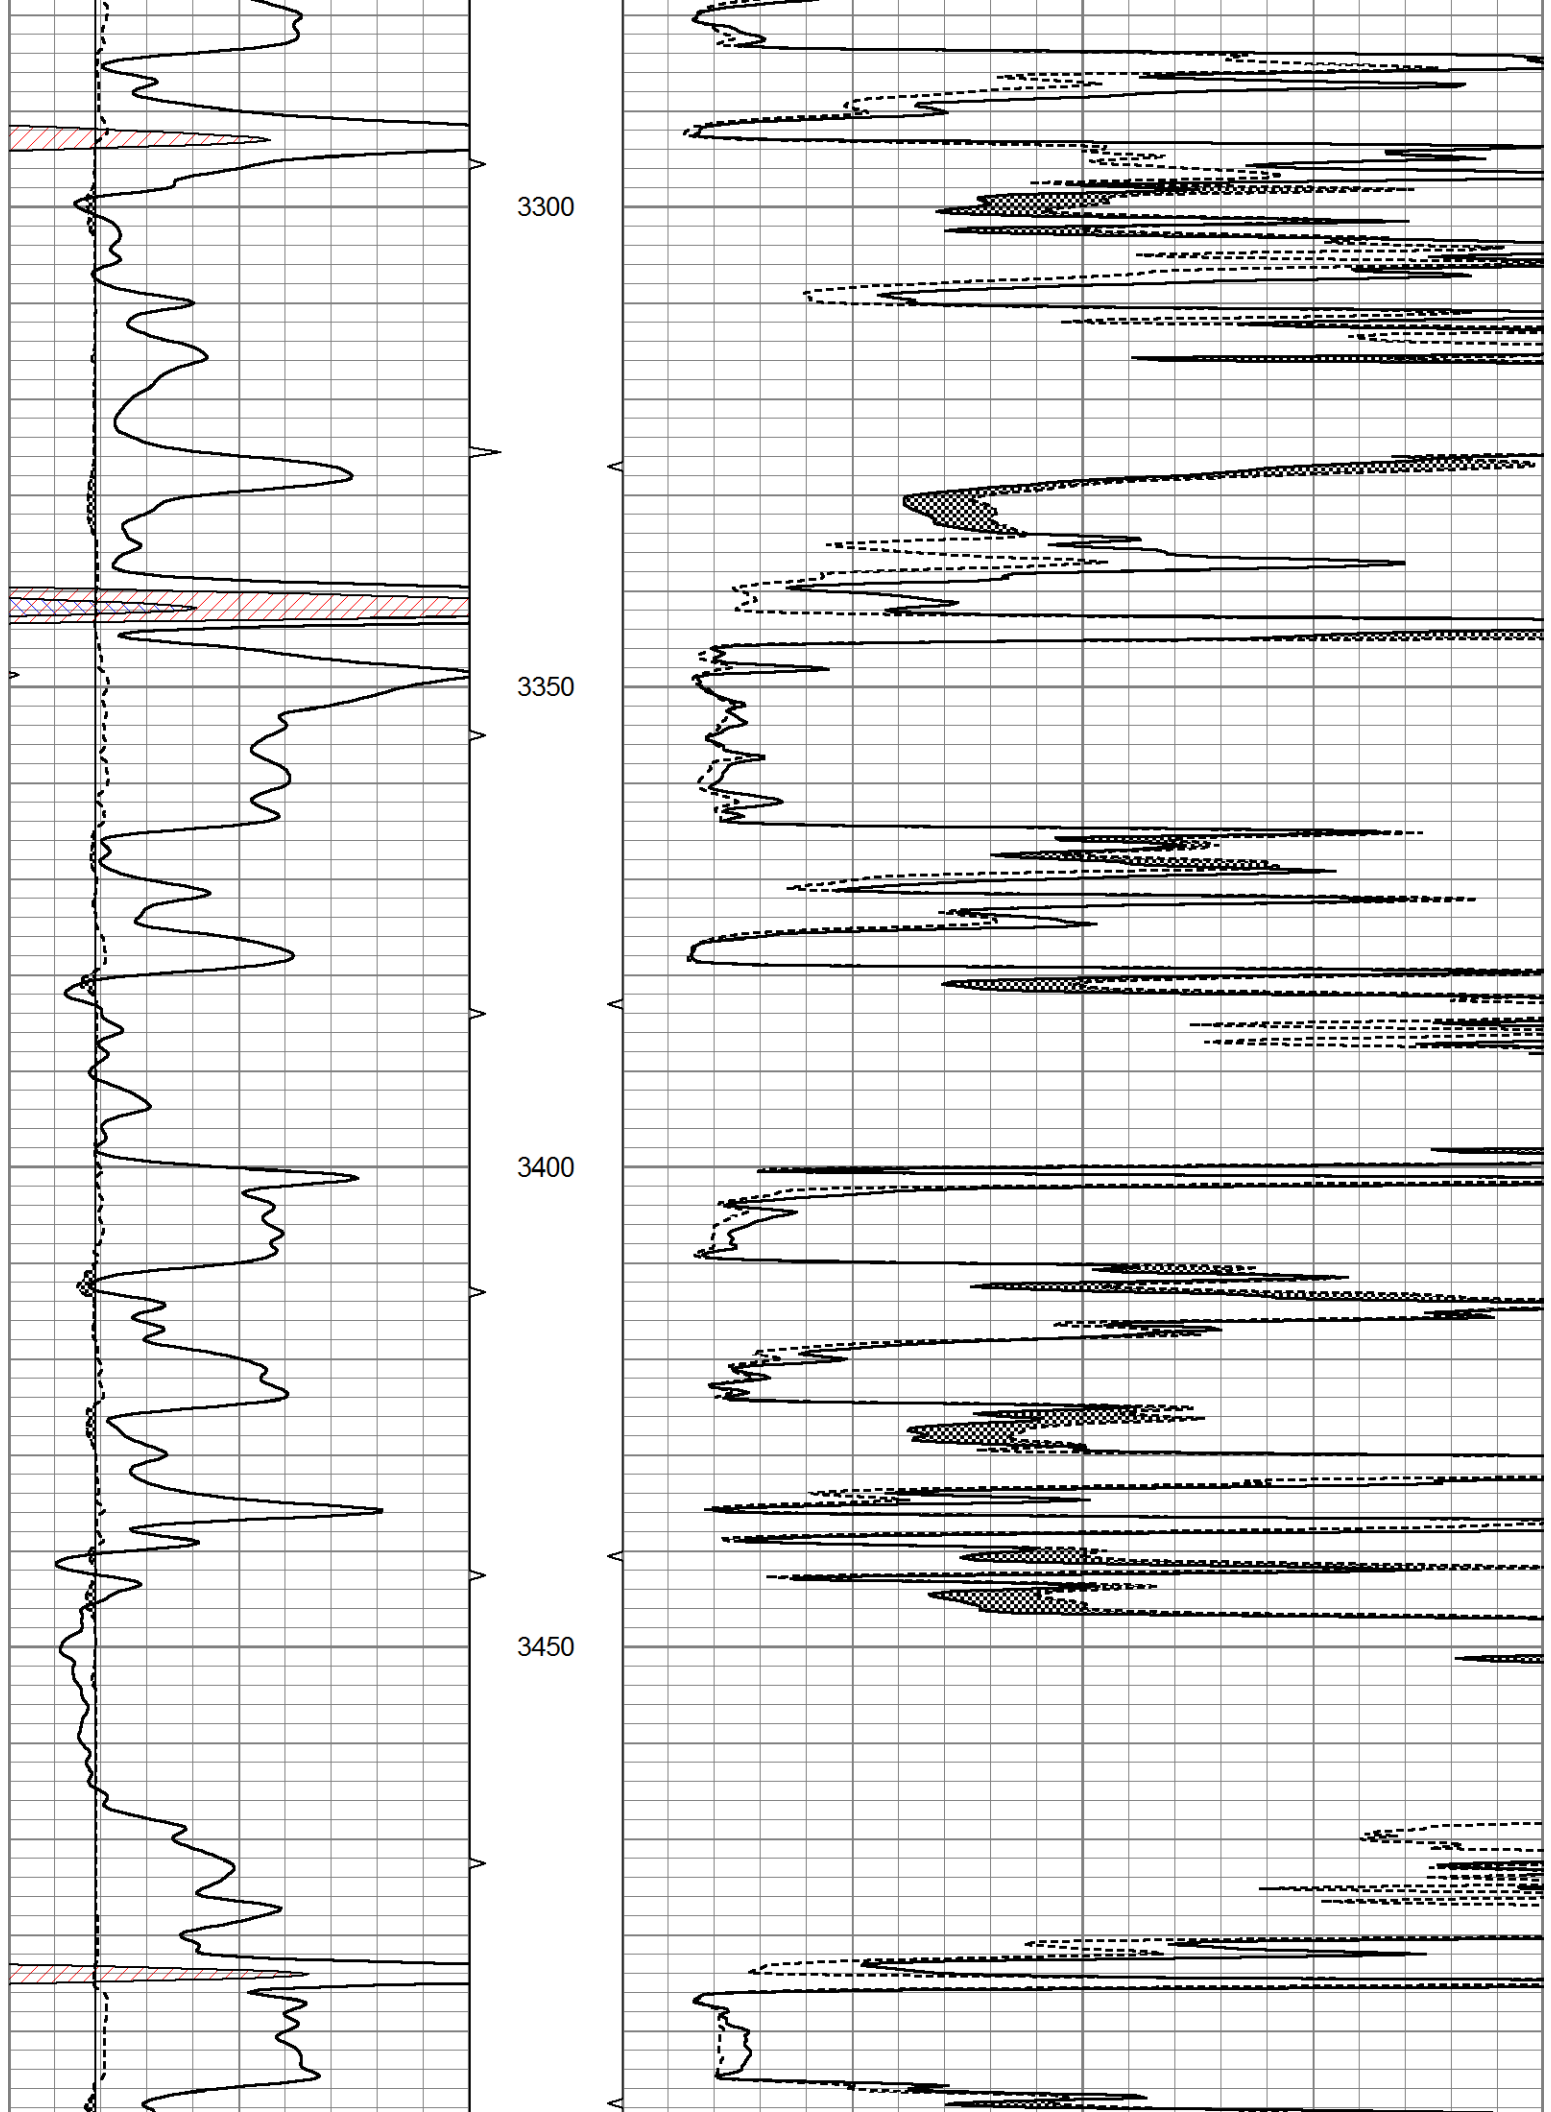

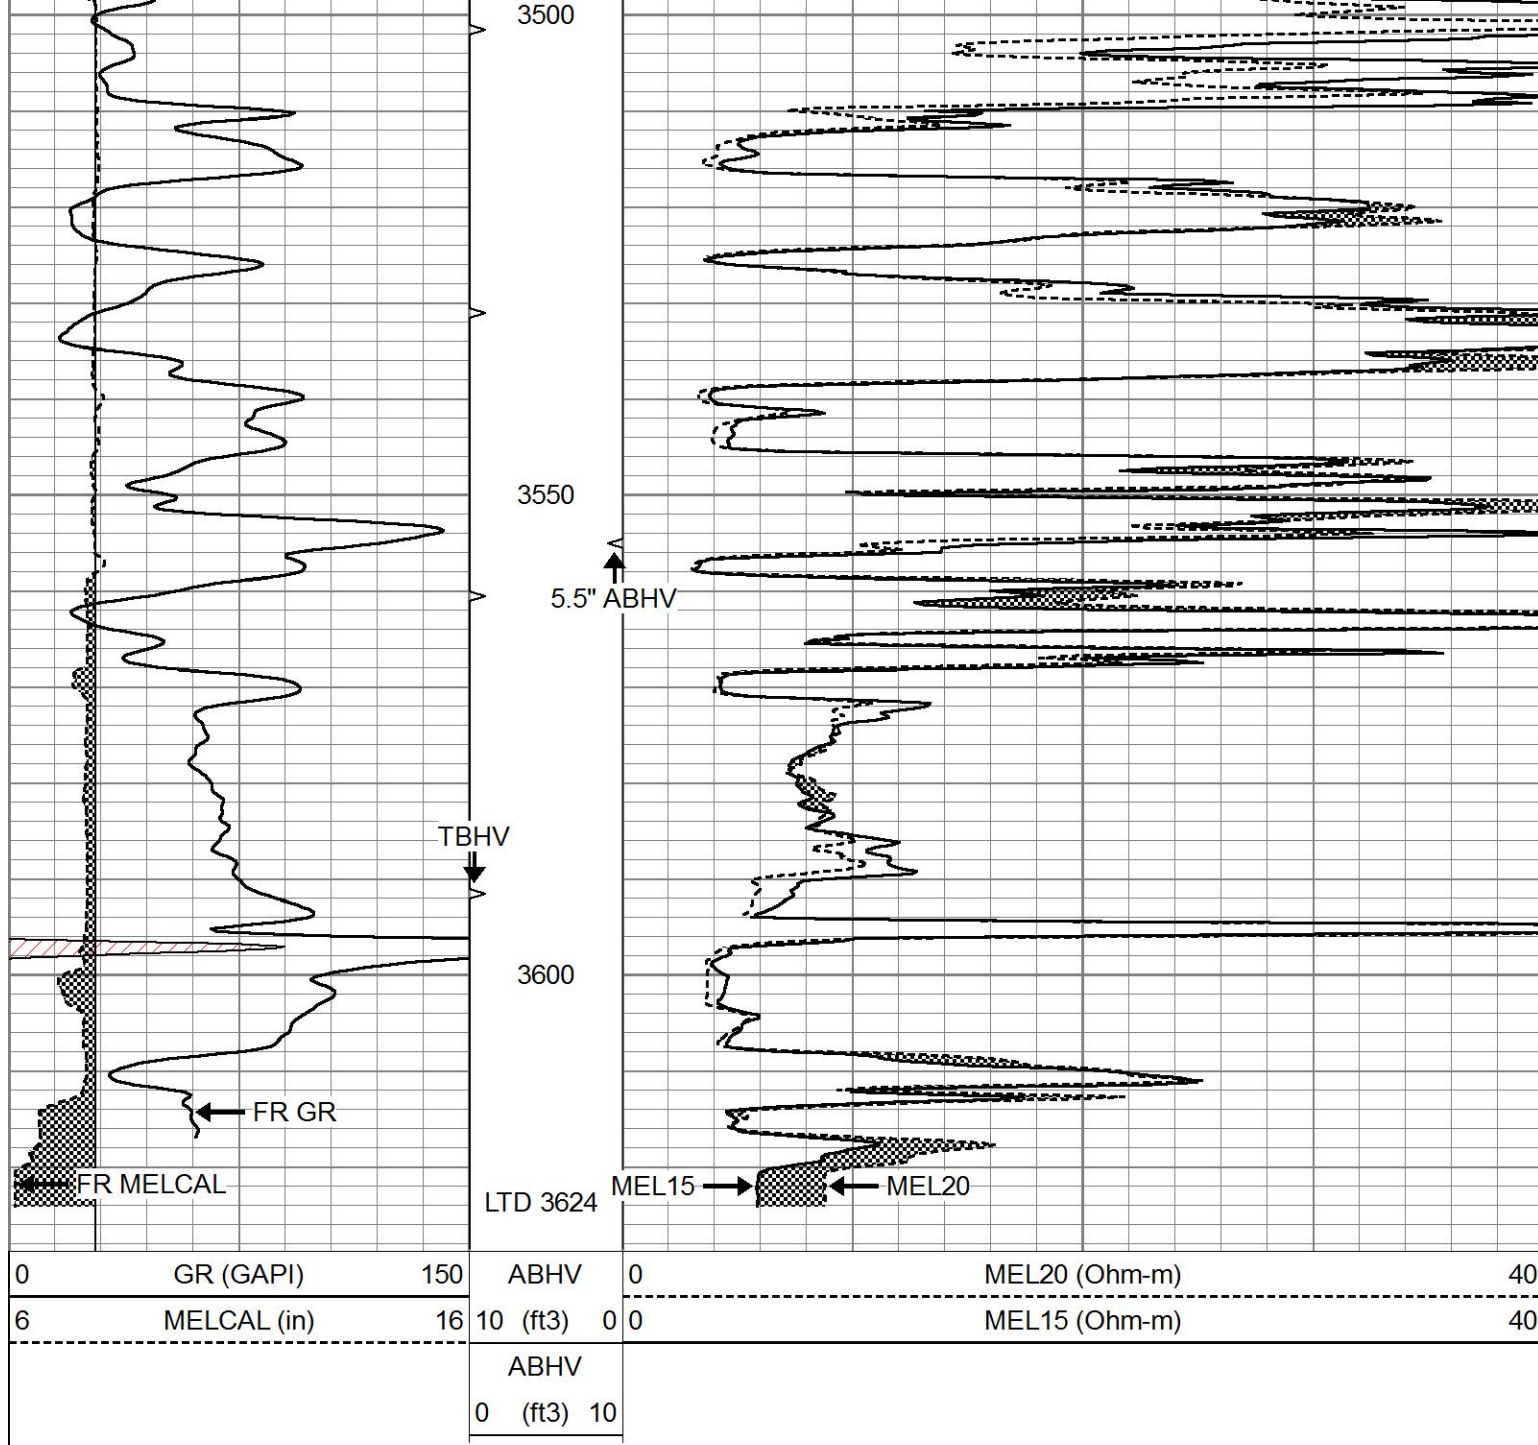


REPEAT SECTION

Database File 6275pe.db
 Dataset Pathname pass8.1
 Presentation Format micro
 Dataset Creation Sat Apr 09 23:27:45 2022
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			



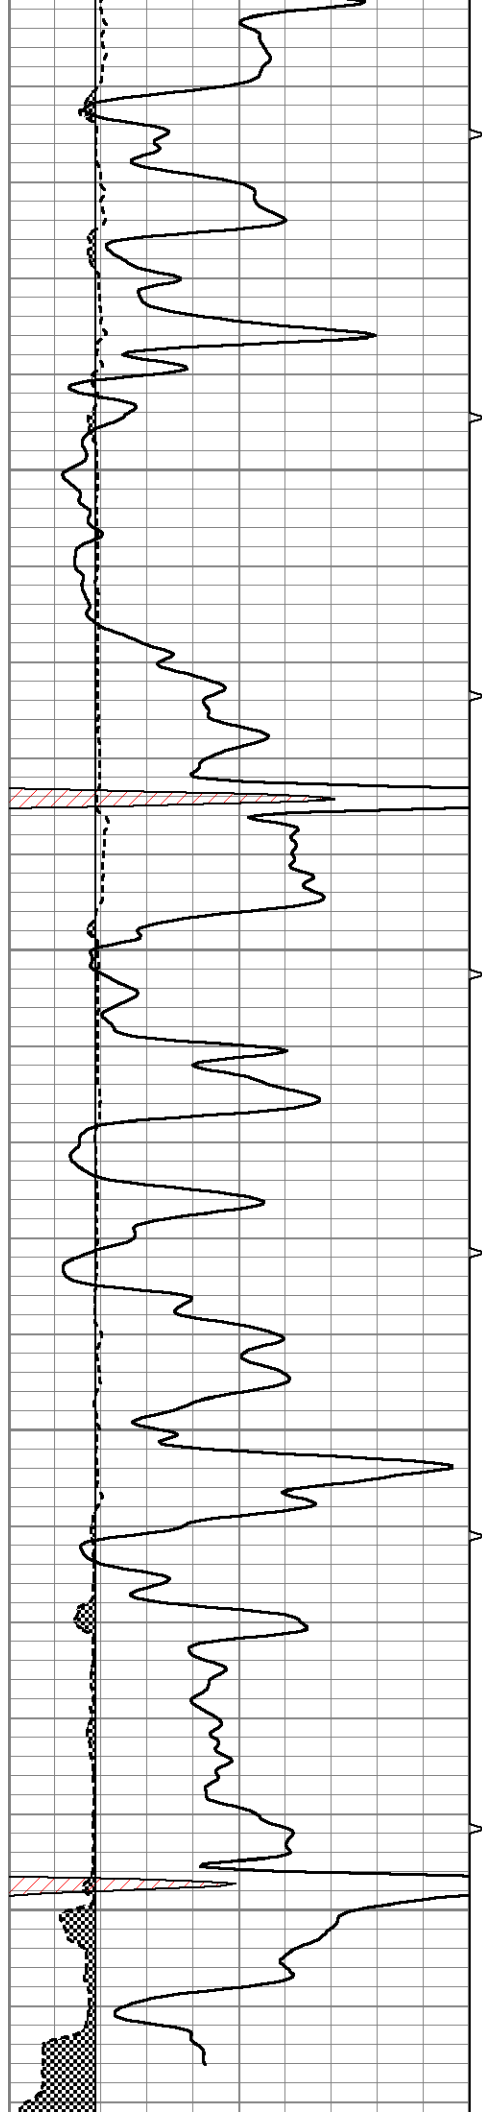


3450

3500

3550

3600

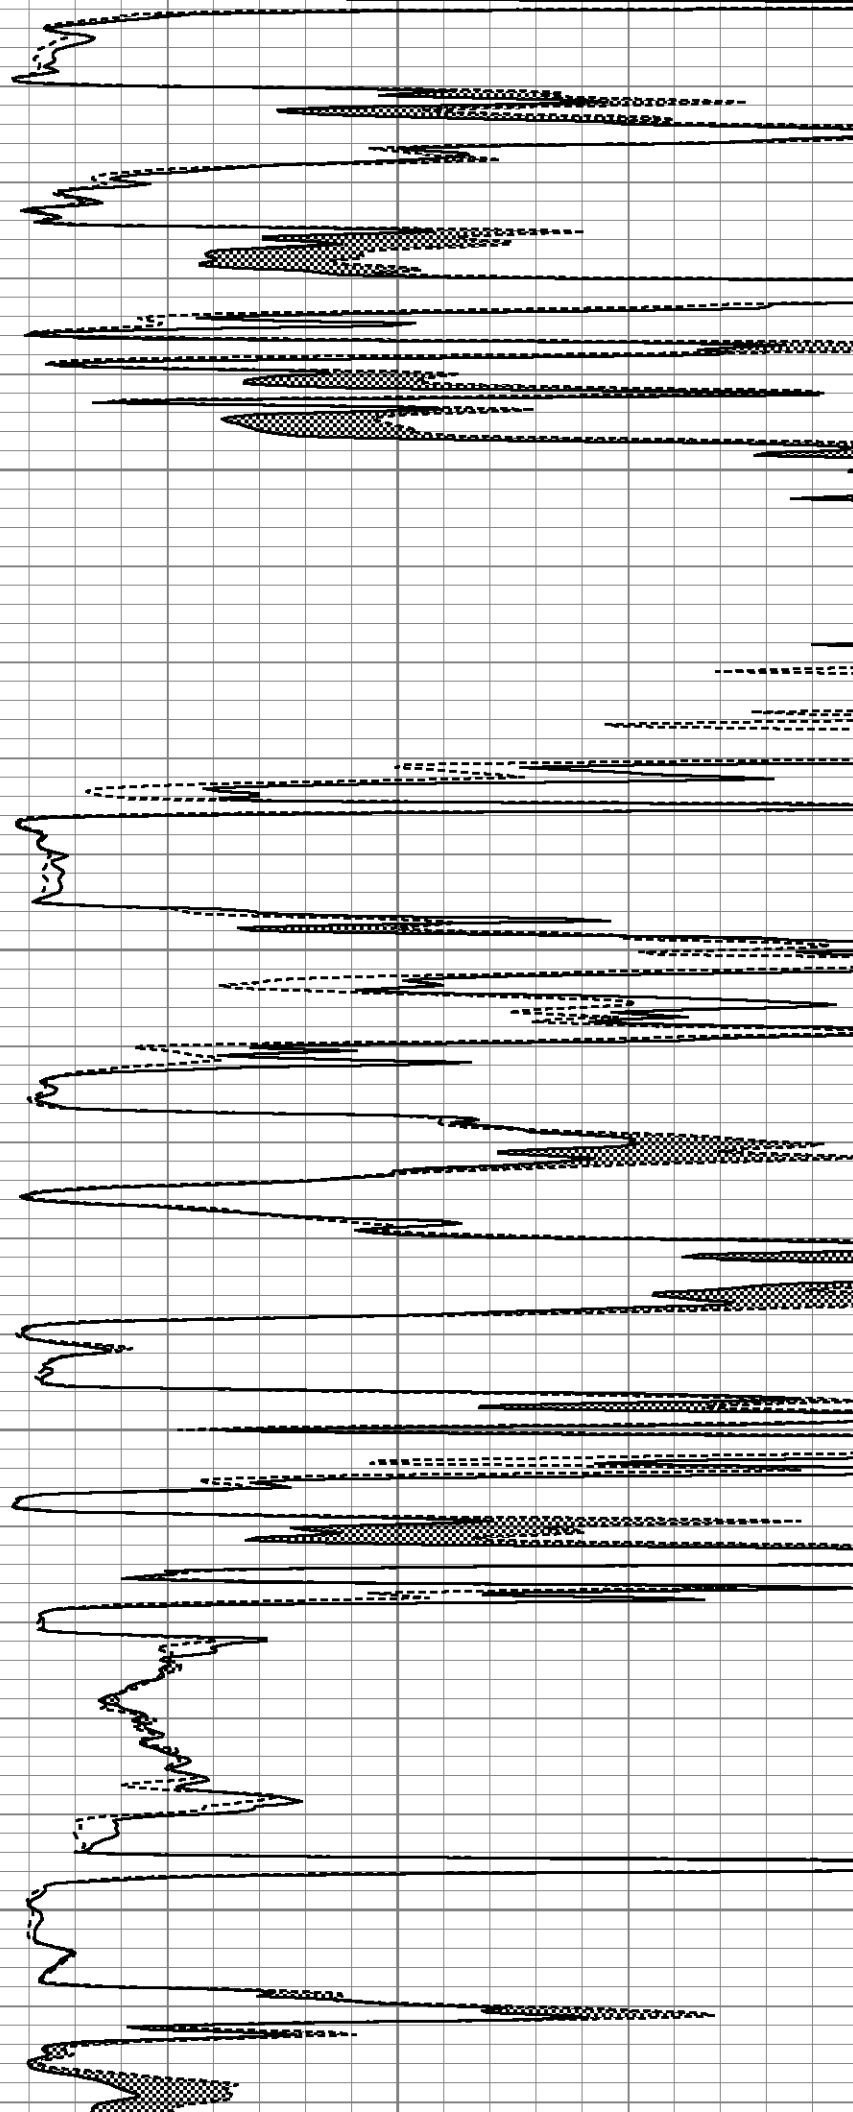

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

Calibration Report			
Database File	6275pe.db		
Dataset Pathname	pass9.2		
Dataset Creation	Sat Apr 09 23:35:59 2022		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Sun Apr 03 07:43:56 2022		
Caliper Calibration:	Gain=4.624	Offset=2.358	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.220	2.950	
1.5" Calibration:	Gain=35.000	Offset=0.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.001	1.291	
2" Calibration:	Gain=38.000	Offset=0.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.003	1.103	
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Tue Mar 22 20:25:25 2022		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3000	GAPI/cps	