



MICRO LOG

Company DIXON OPERATING CO.,LLC
Well POUND #3-3
Field MIKES METEOR
County STAFFORD State KANSAS

Location: API # : 15-185-24097-0000

3170' FSL & 330' FEL

Other Services
DIL/SON
CDL/CNL

SEC 3 TWP 23S RGE 12W

Permanent Datum GROUND LEVEL Elevation 1827
Log Measured From KELLY BUSHING 11' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1838
D.F. 1836
G.L. 1827

Date 11/23/21

Run Number TWO

Depth Driller 3775

Depth Logger 3773

Bottom Logged Interval 3753

Top Log Interval 2800

Casing Driller 8 5/8" @ 332

Casing Logger 332

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.2/56

pH / Fluid Loss 9.5/10.4

Source of Sample FLOWLINE

Rm @ Meas. Temp .55@ 60F

Rmf @ Meas. Temp .41@ 60F

Rmc @ Meas. Temp .66 @ 60F

Source of Rmf / Rmc MEASURED

Rm @ BHT .29@ 114F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 2 HOURS

Maximum Recorded Temperature 114F

Equipment Number 1523

Location HAYS, KANSAS

Recorded By GUS PFANENSTIEL

Witnessed By AARON YOUNG

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: SOUTH OF GREATBEND ON 281 TO NE 70 TH (STAFFORD CO)
EAST 7 MILES, 1.5 NORTH, WEST INTO.






MAIN PASS

Database File	5896pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Tue Nov 23 20:25:33 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

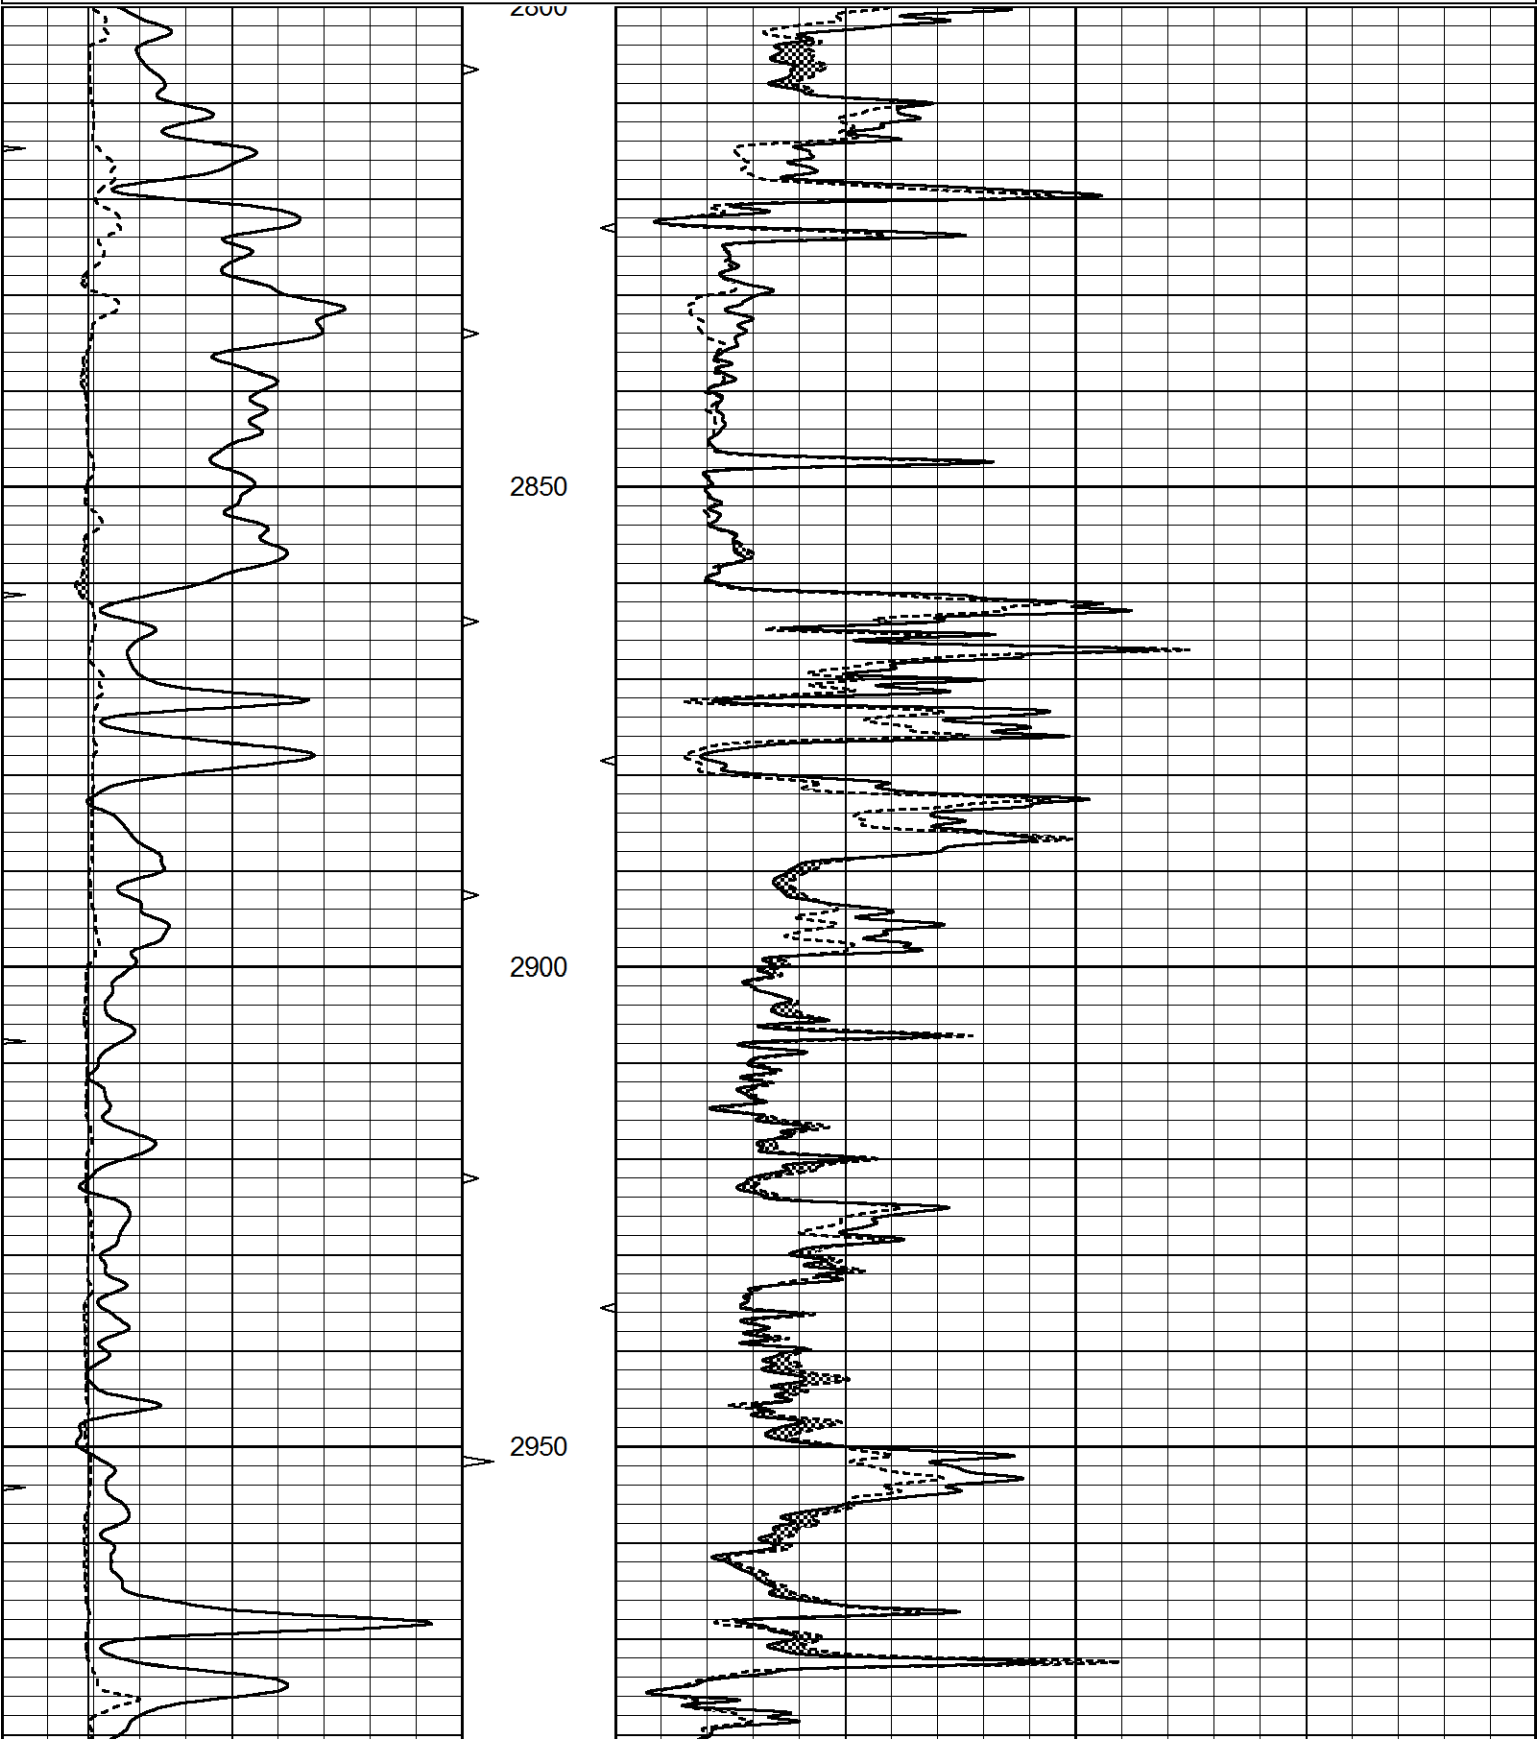

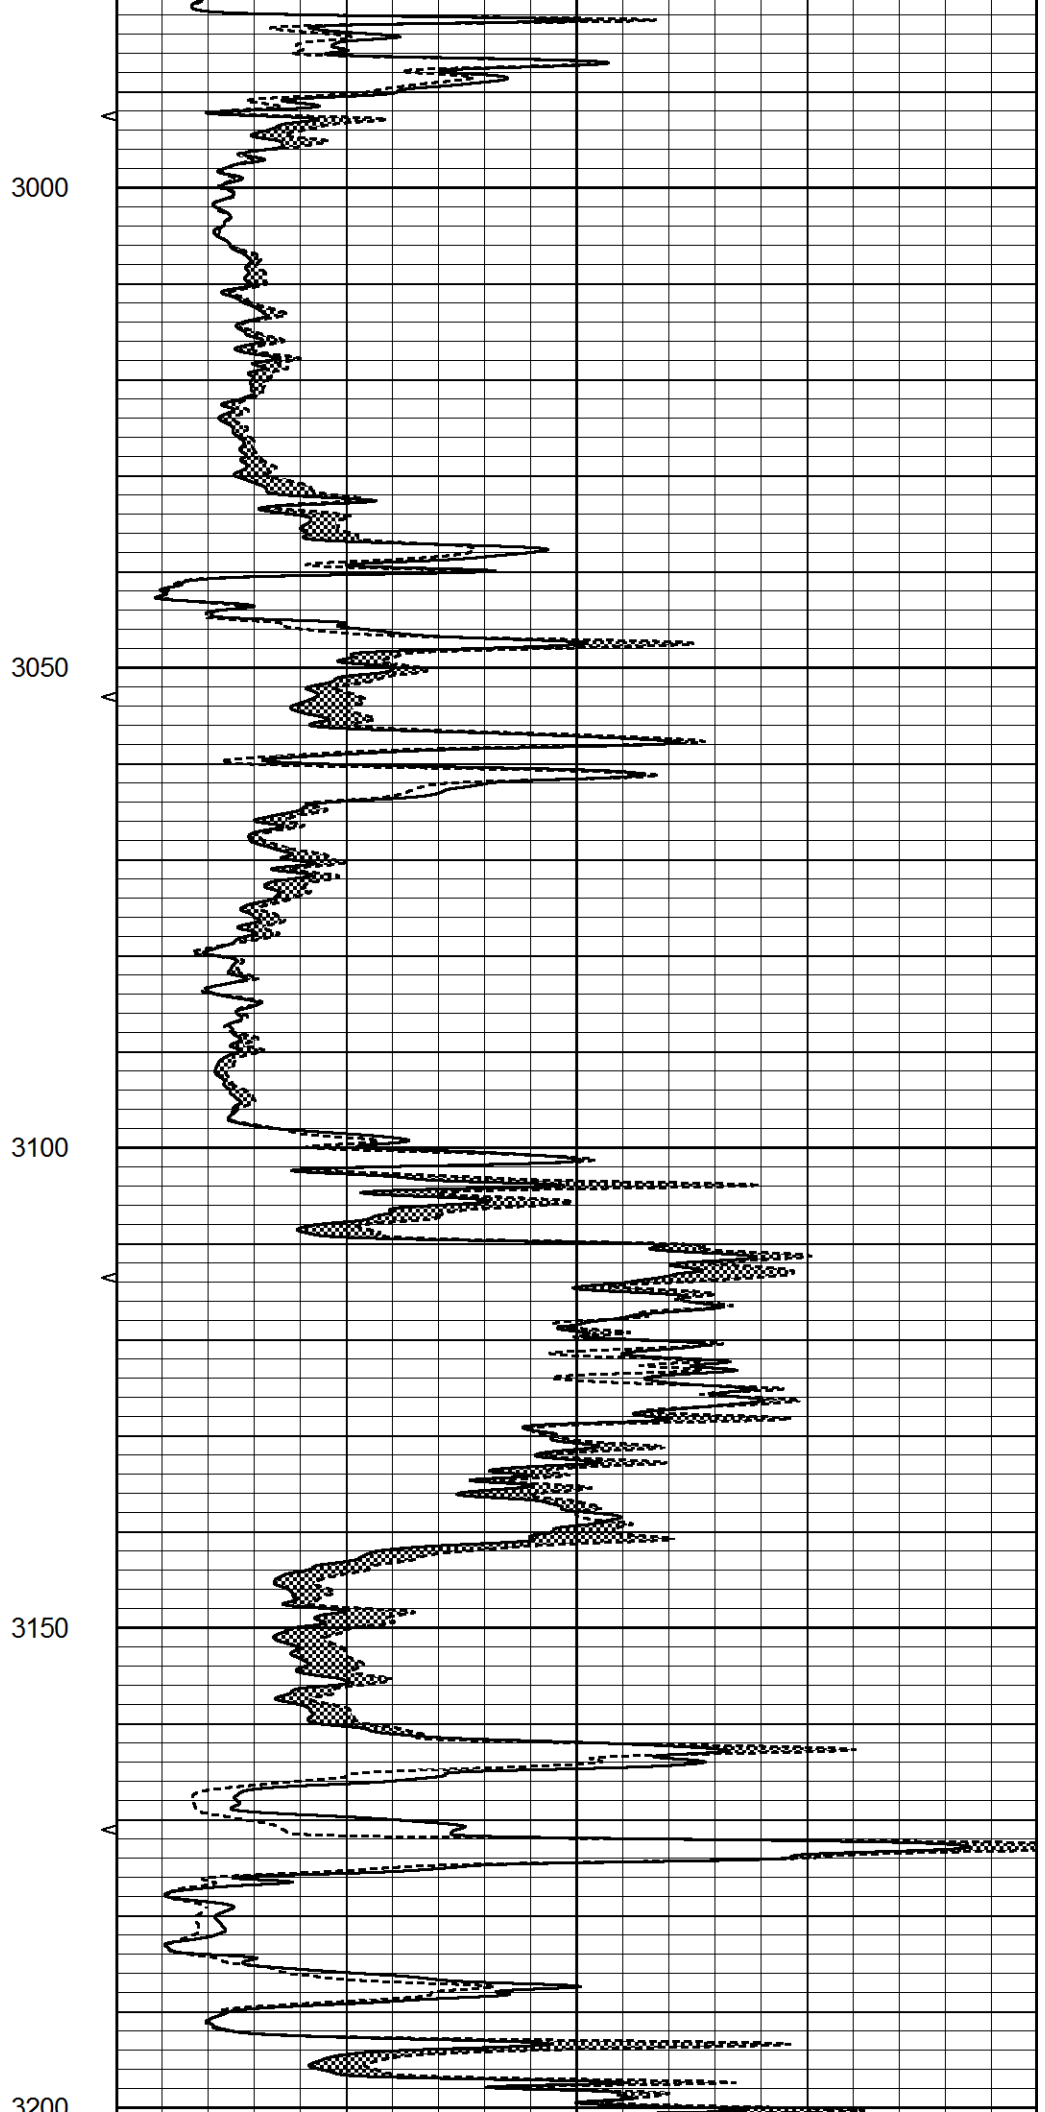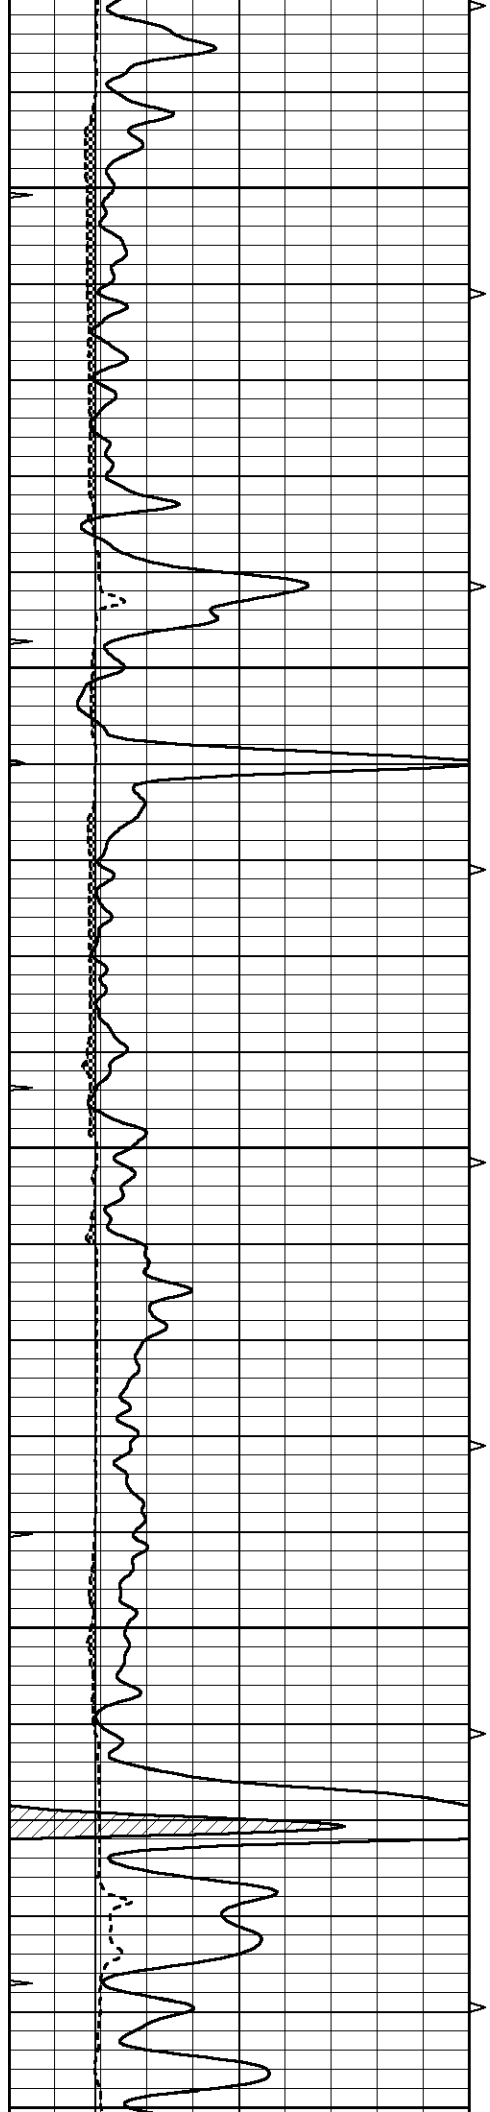

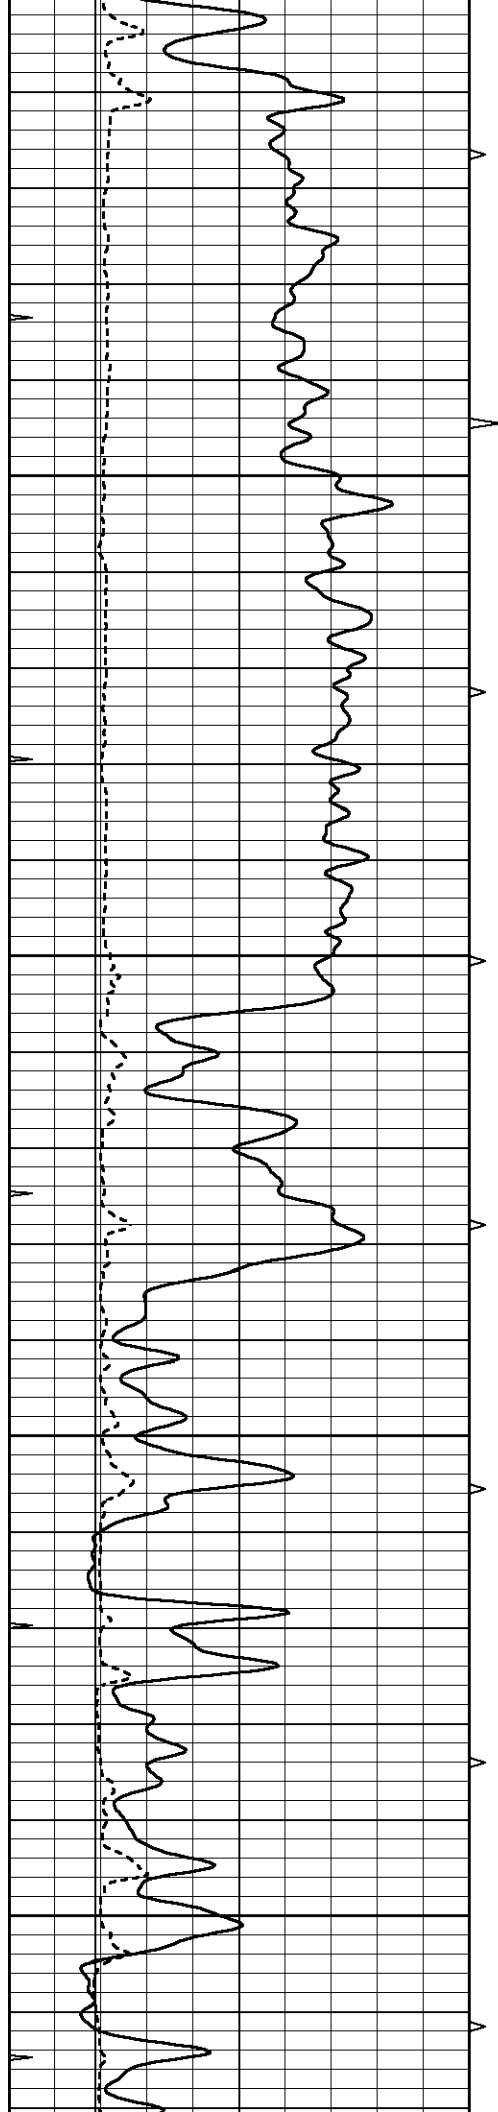



3200
3250

3300

3350

3400

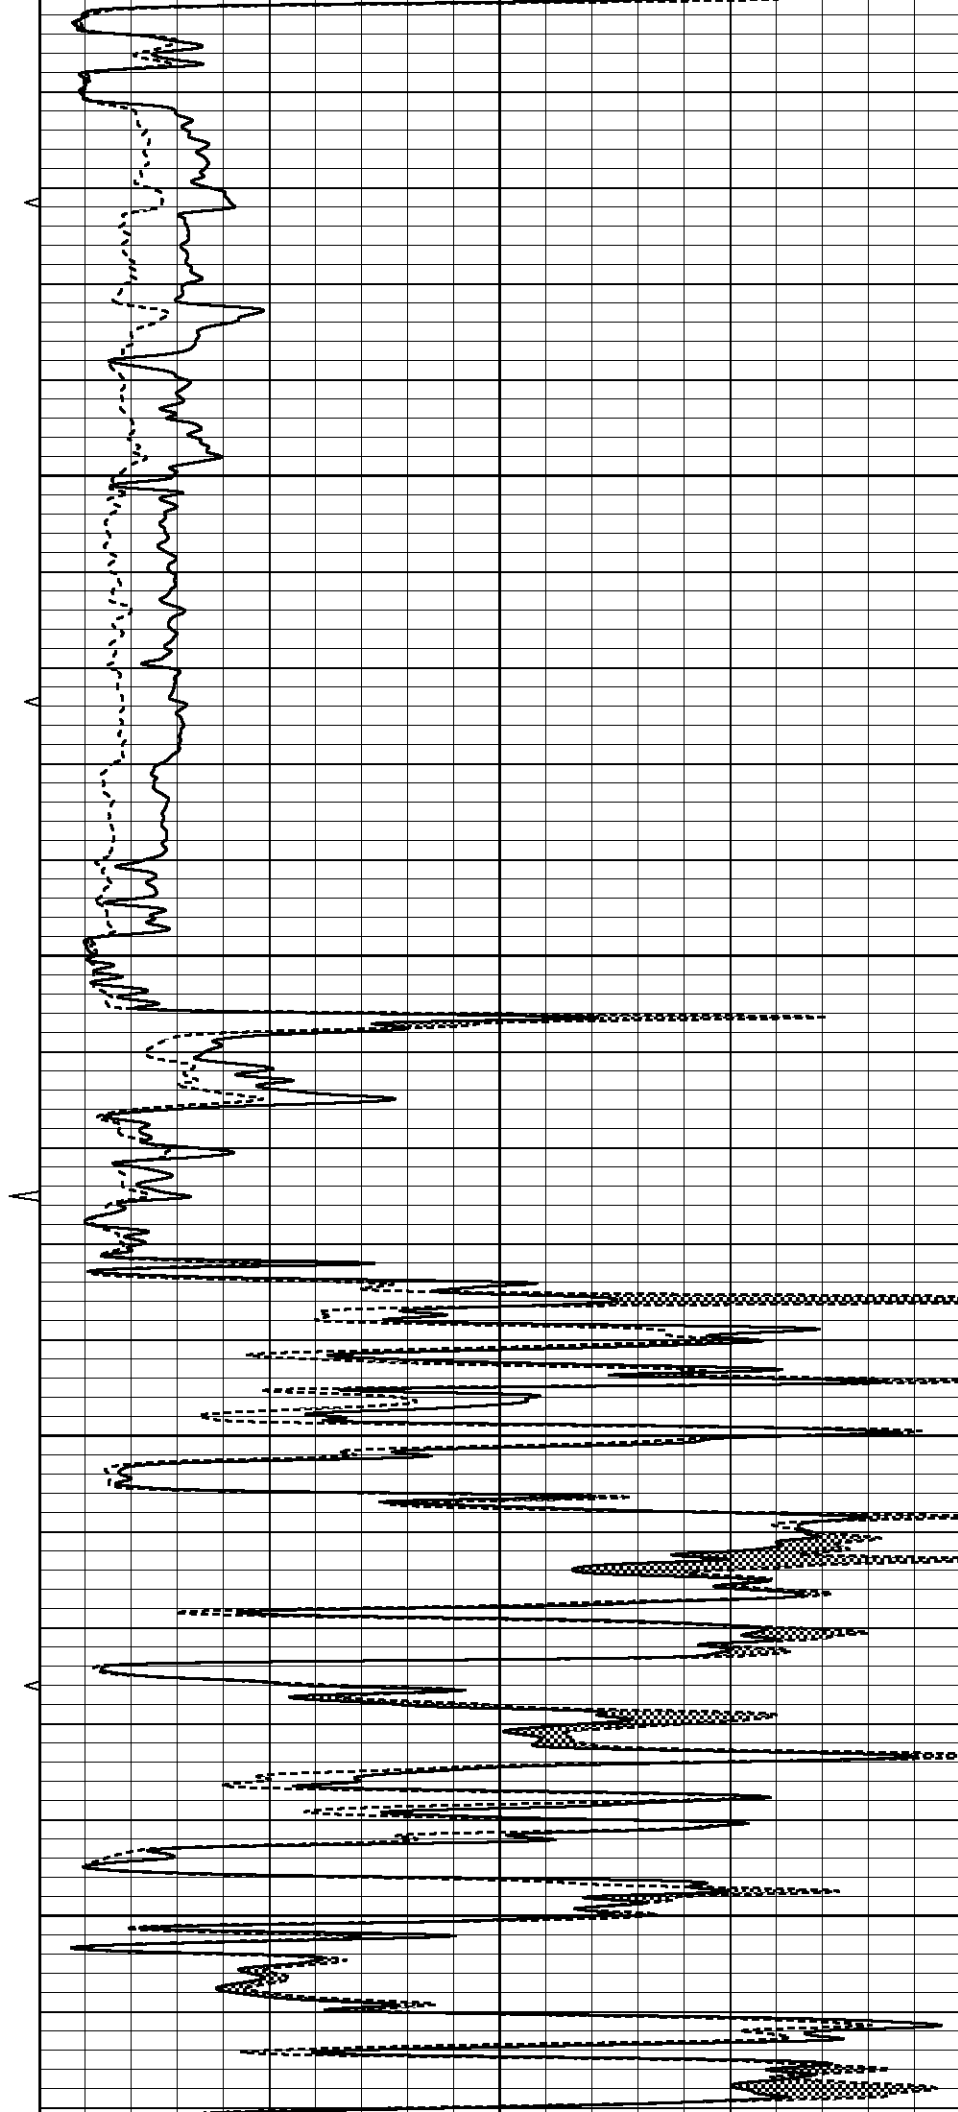

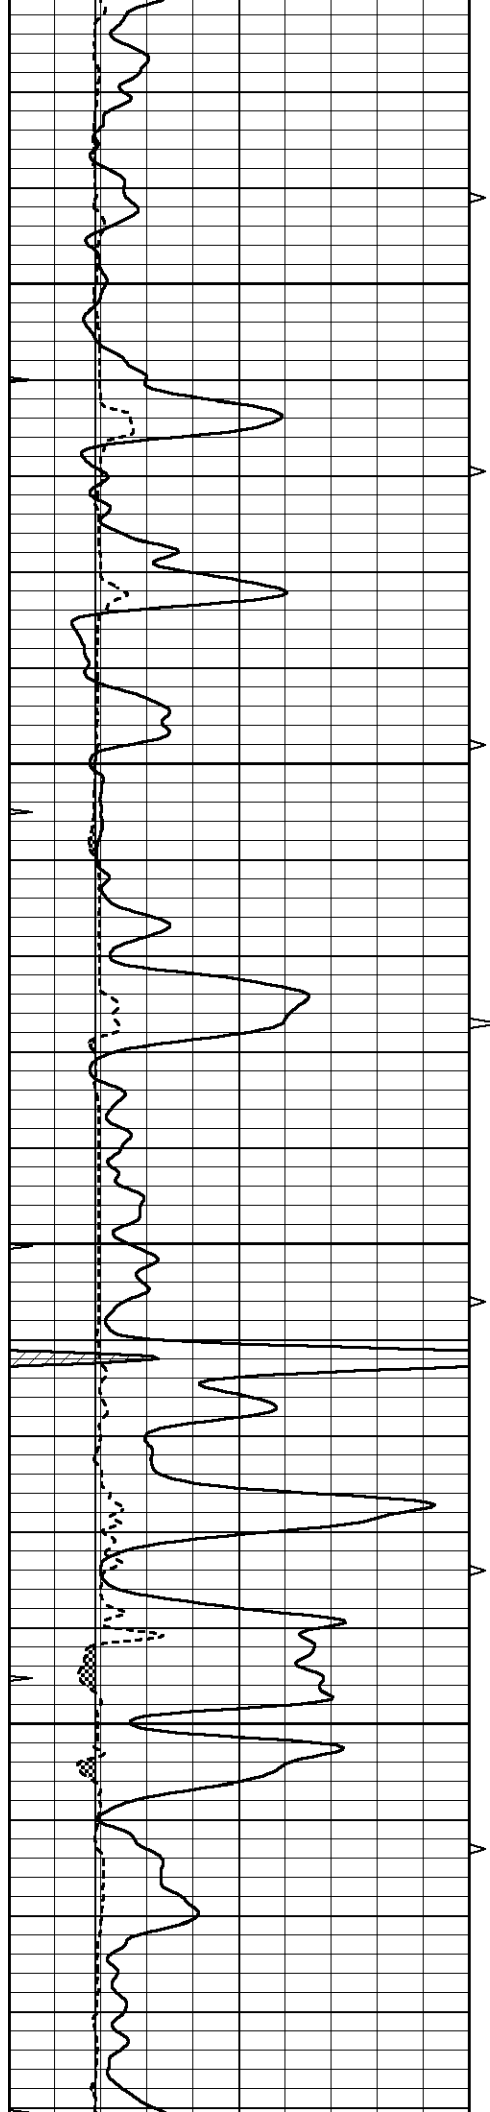



3450

3500

3550

3600

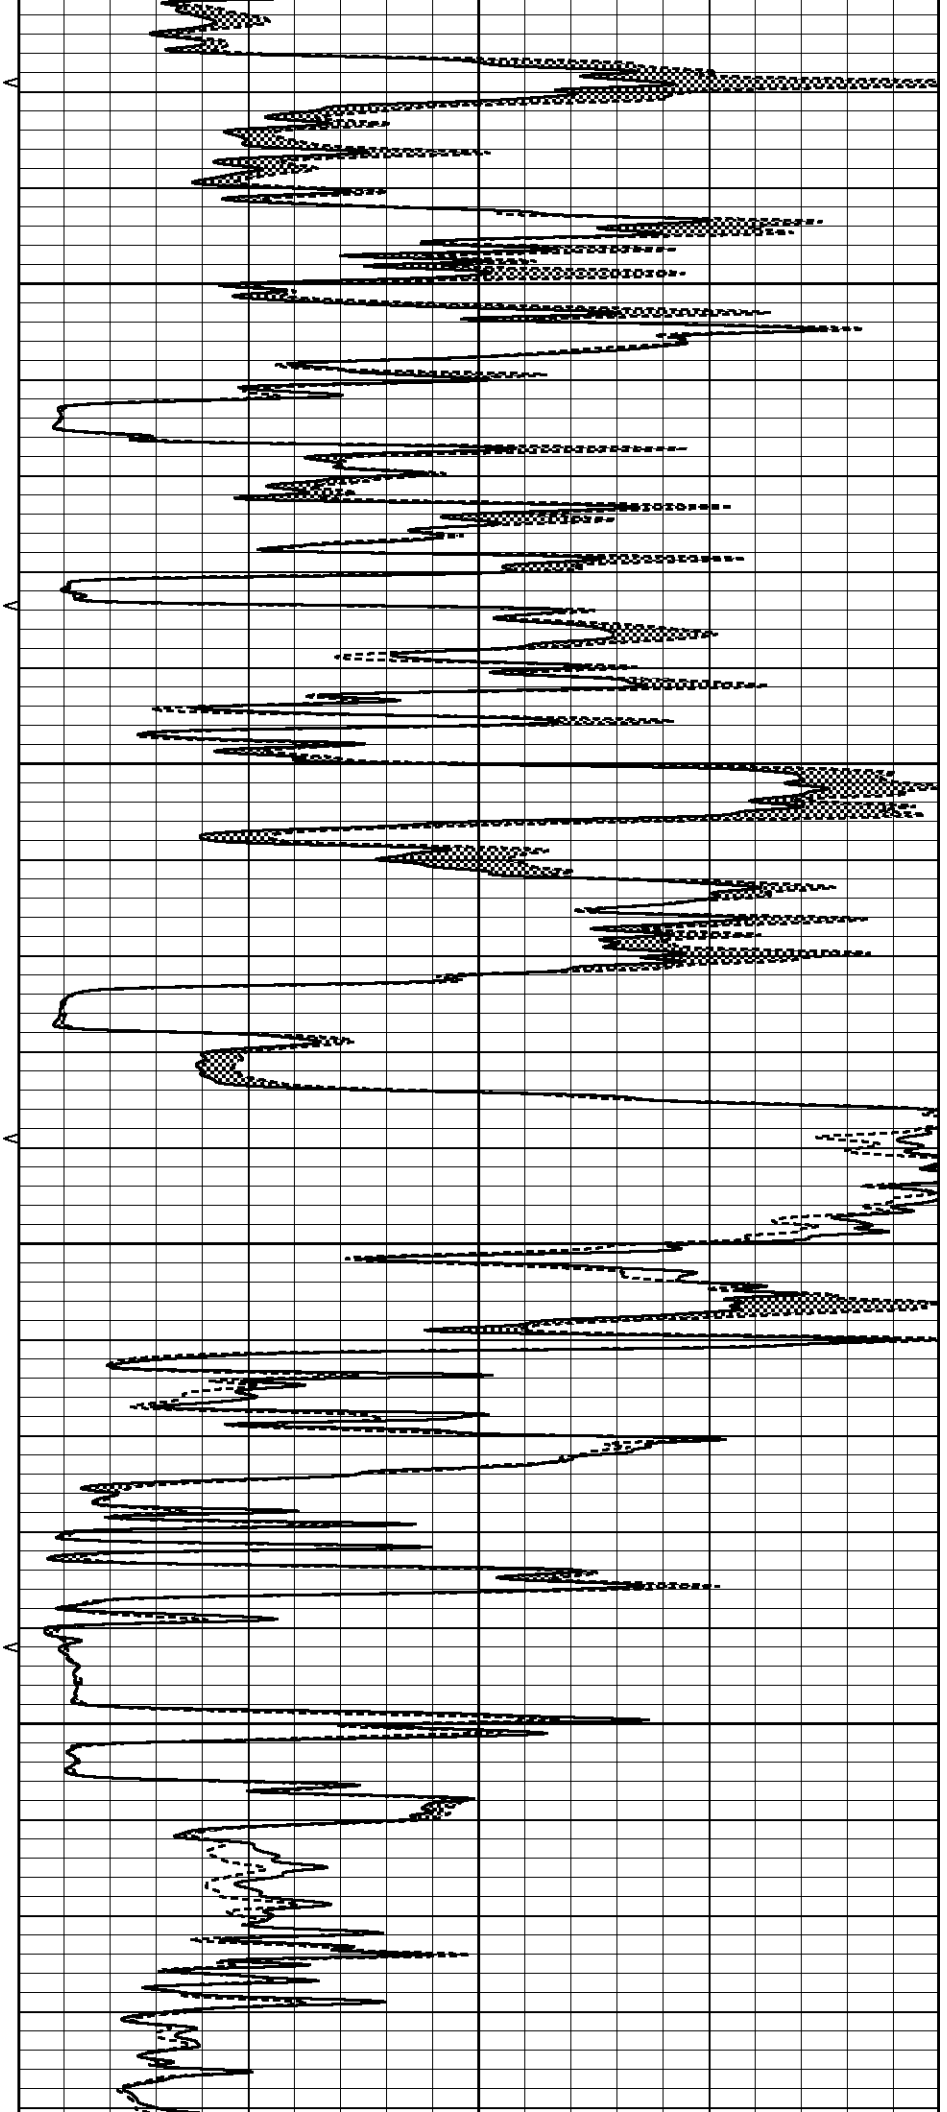


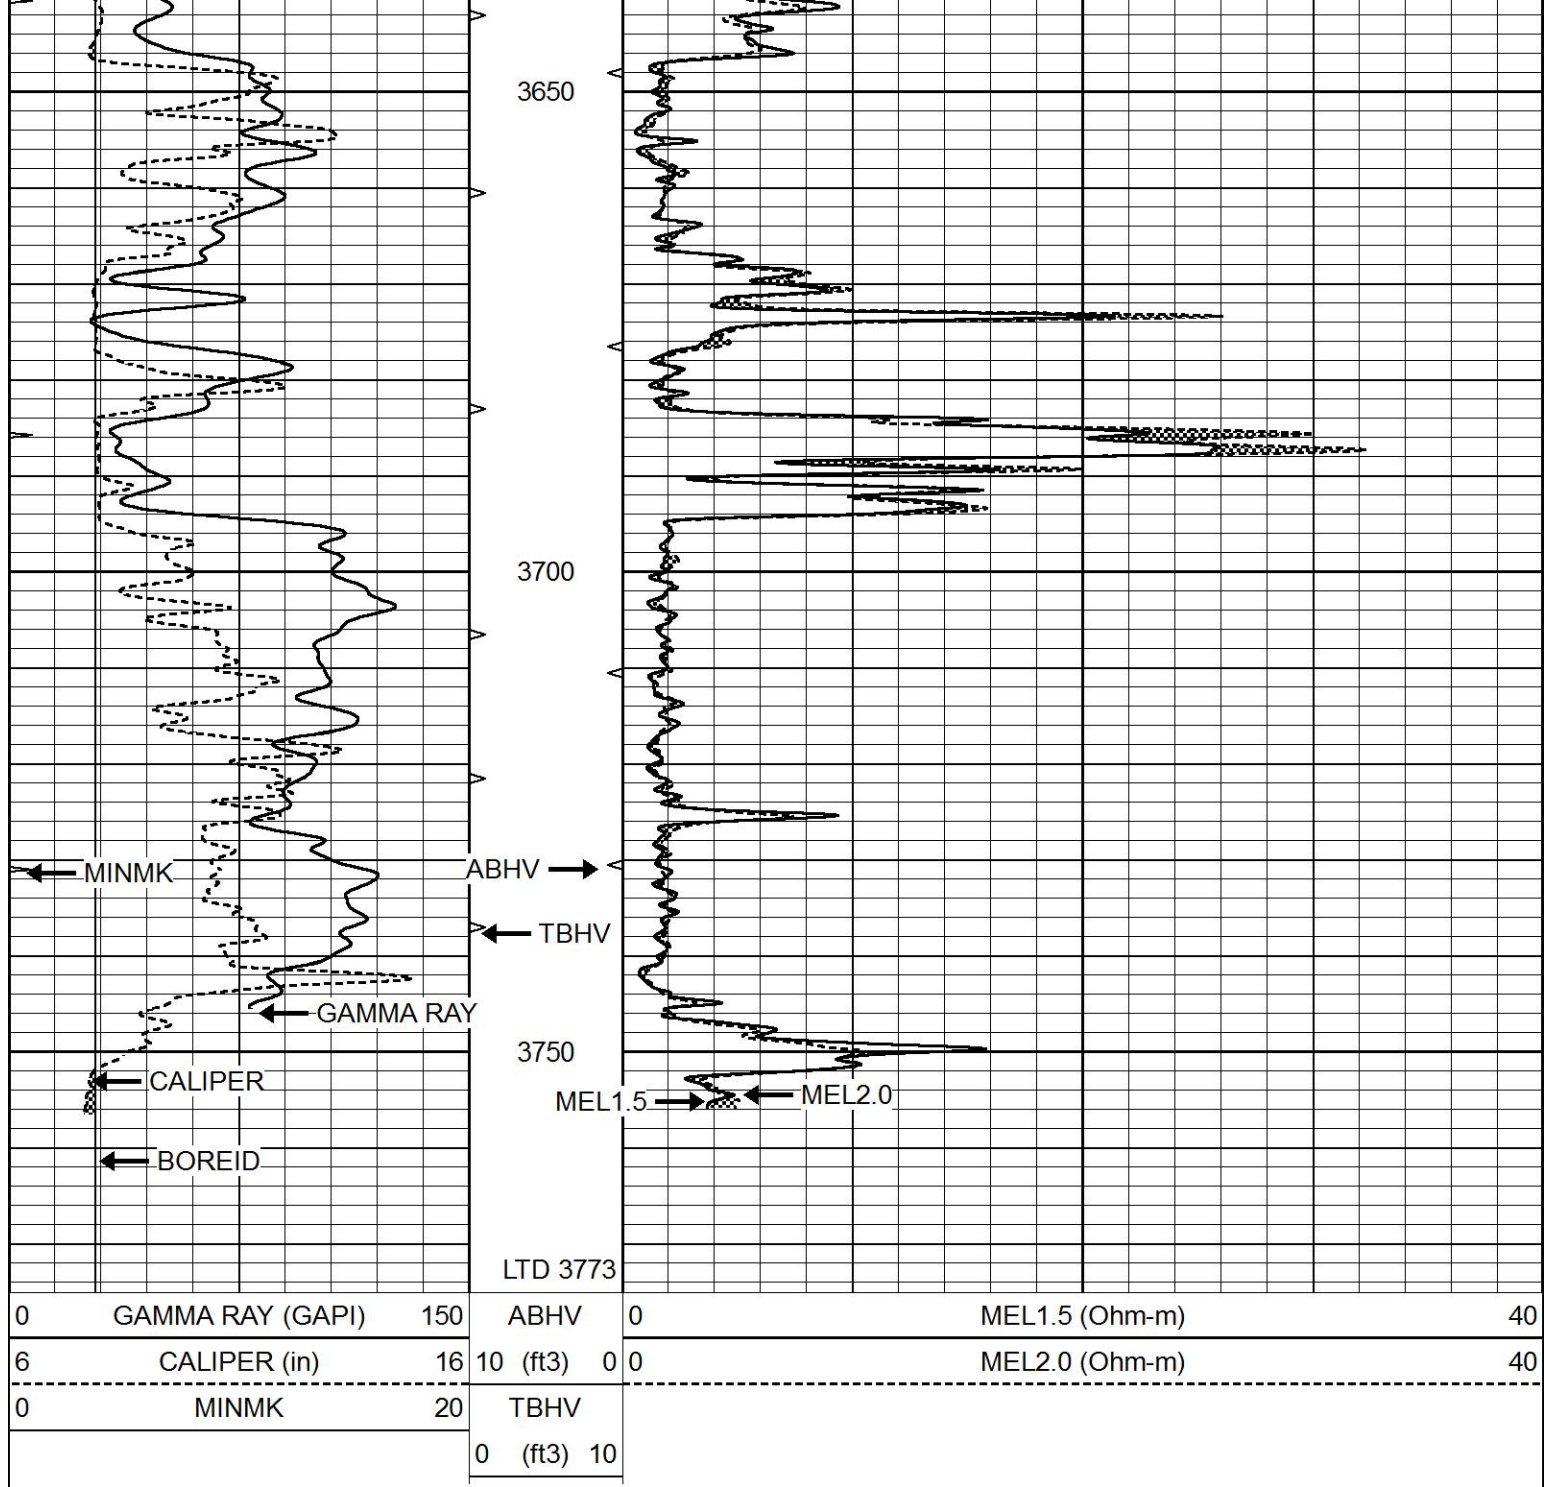

REPEAT SECTION

Database File 5896pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Tue Nov 23 20:22:32 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

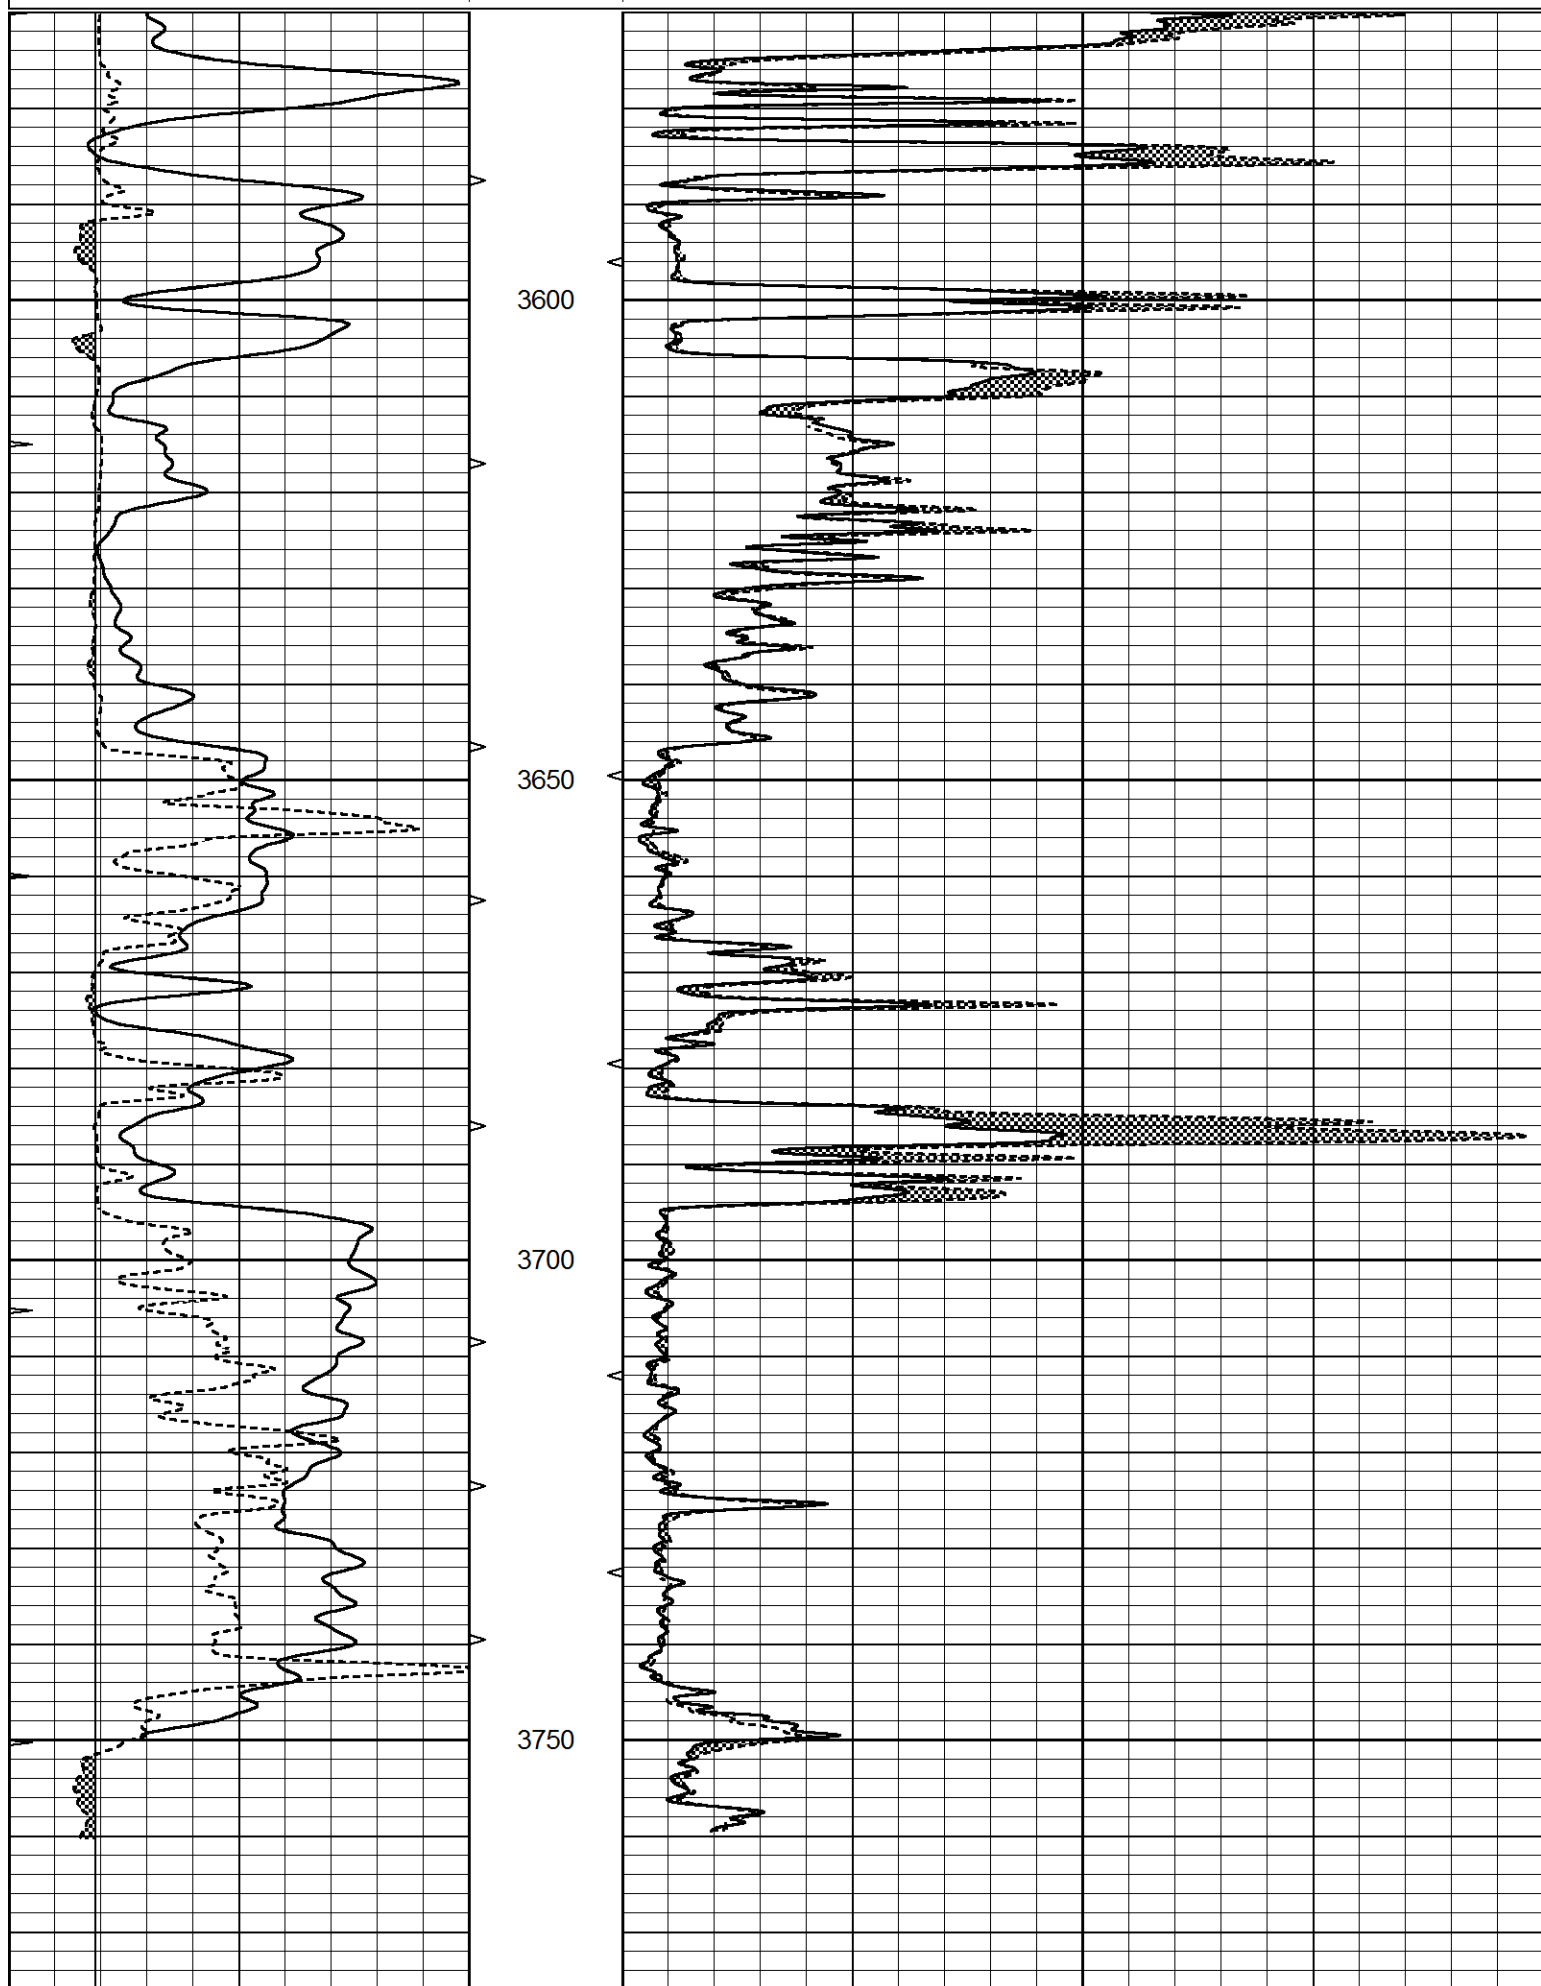

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TRHV			

	0	(ft3)	10
--	---	-------	----

Calibration Report			
Database File	5896pe.db		
Dataset Pathname	pass6.1		
Dataset Creation	Tue Nov 23 20:22:32 2021		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Tue Oct 26 10:40:04 2021		
Caliper Calibration:	Gain=3.675	Offset=3.905	
References	Low Cal	High Cal	
Readings	8.500	13.500	
	1.196	2.557	
1.5" Calibration:	Gain=27.134	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.832	
2" Calibration:	Gain=38.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.022	0.793	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Fri Oct 01 08:18:05 2021		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.6900	GAPI/cps	