



MICRO LOG

Company	BIRD DOG OIL, LLC.	Location:	API # : 15-185-24092-0000	Other Services DIL CDL/CNL
Well	KELLER-GATES #2-17	SEC 17 TWP 22S RGE 13W		
Field	KENILWORTH WEST	1650' FNL & 330' FEL		
County	STAFFORD			
State	KANSAS			
Permanent Datum	GROUND LEVEL	Elevation	1899	K.B. 1907 D.F. 1905 G.L. 1899
Log Measured From	KELLY BUSHING 8' A.G.L.			
Drilling Measured From	KELLY BUSHING			
Date	10/20/21			
Run Number	TWO			
Depth Driller	3910			
Depth Logger	3913			
Bottom Logged Interval	3911			
Top Log Interval	2900			
Casing Driller	8 5/8" @ 445			
Casing Logger	445			
Bit Size	7 7/8"			
Type Fluid in Hole	CHEMICAL MUD			
Density / Viscosity	8.8/52			
pH / Fluid Loss	9.0/10.6			
Source of Sample	FLOWLINE			
Rm @ Meas. Temp	.75@ 60F			
Rmf @ Meas. Temp	.56@ 60F			
Rmc @ Meas. Temp	.90 @ 60F			
Source of Rmf / Rmc	MEASURED			
Rm @ BHT	.39@ 115F			
Time Circulation Stopped	2 HOURS			
Time Logger on Bottom	////			
Maximum Recorded Temperature	115F			
Equipment Number	1523			
Location	HAYS, KANSAS			
Recorded By	GUS PFANENSTIEL			
Witnessed By	JEFF LAWLER			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: SOUTH OF GREATBEND TO RD 130., 1 MILE WEST,
1/4 SOUTH, WEST INTO.




MAIN PASS

Database File	5888pe.db
Dataset Pathname	pass1LAS
Presentation Format	_micro
Dataset Creation	Wed Oct 20 12:09:17 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

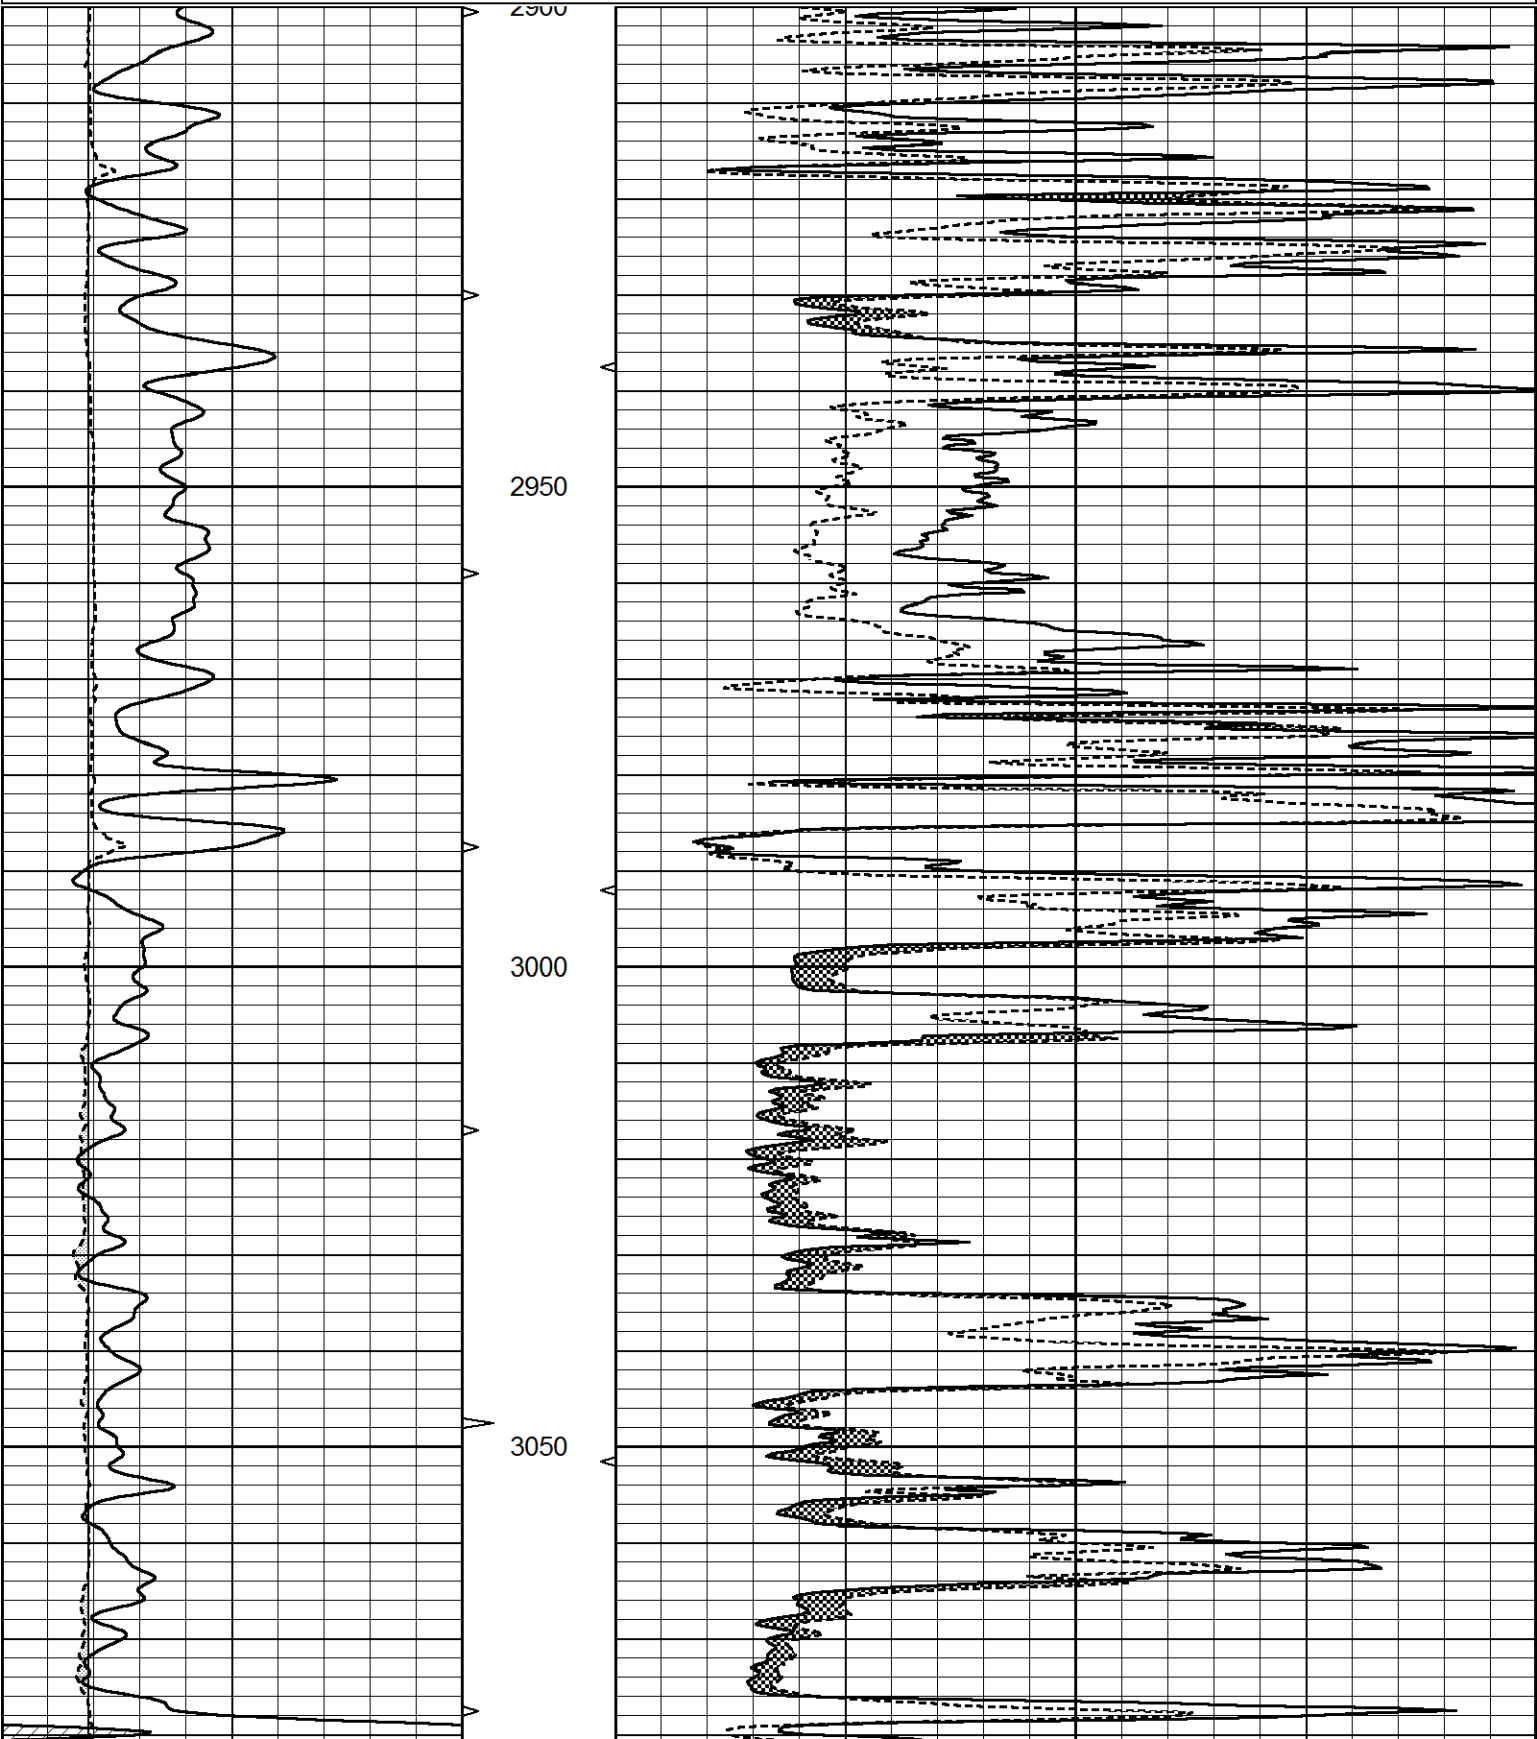

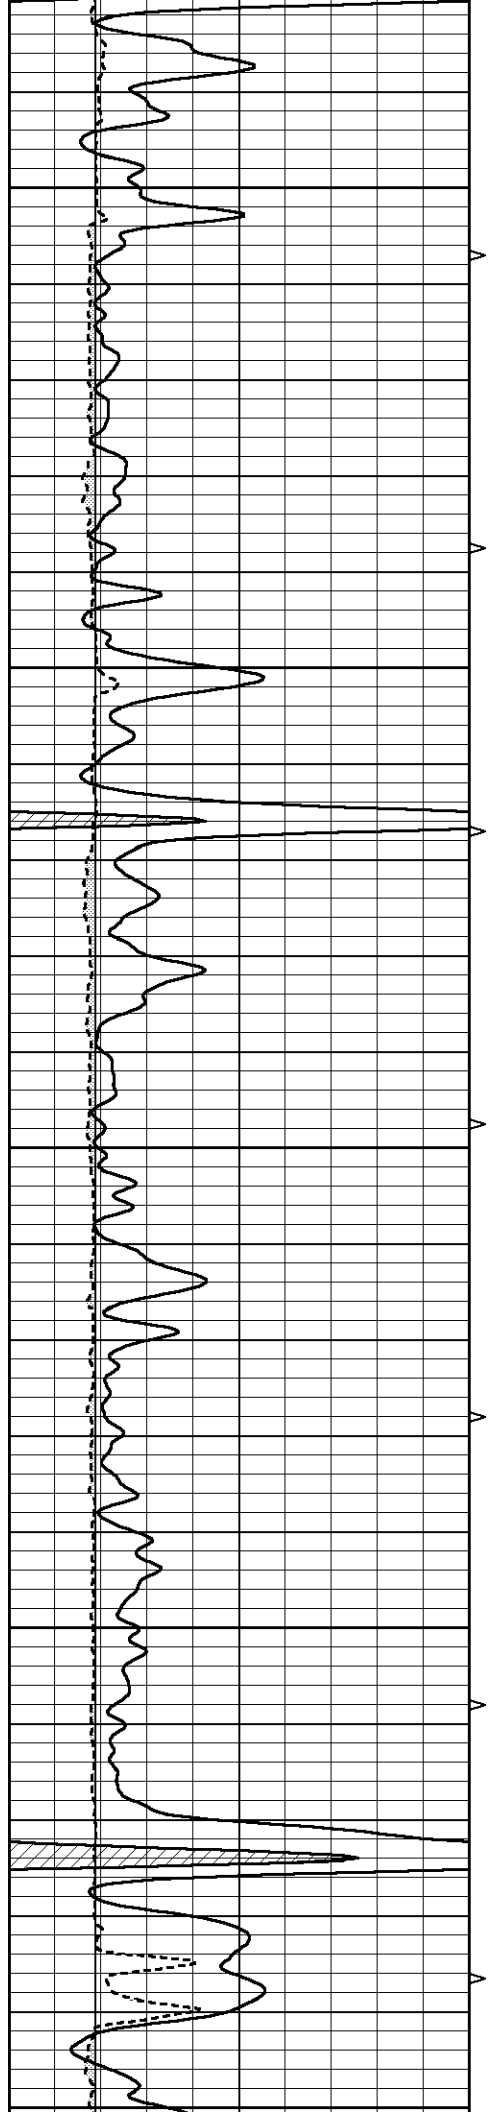


3100



3150


3200

3250

3300

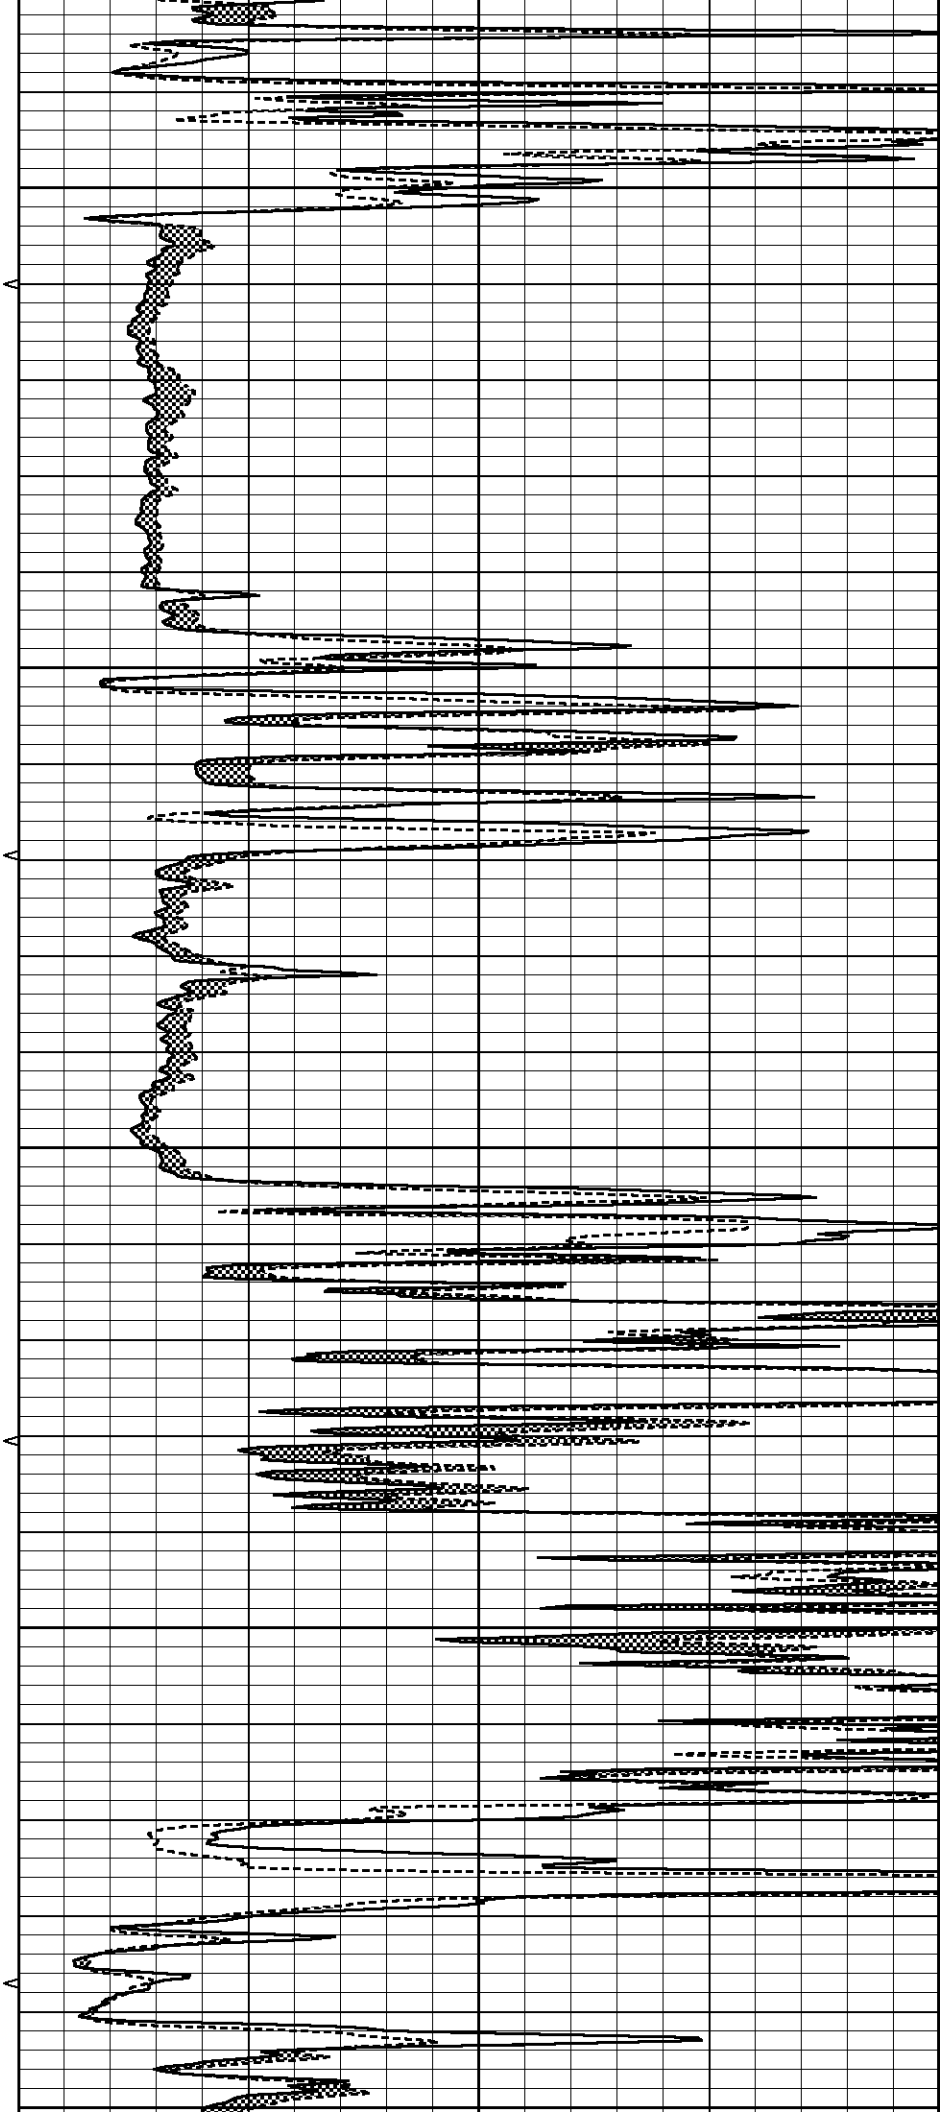


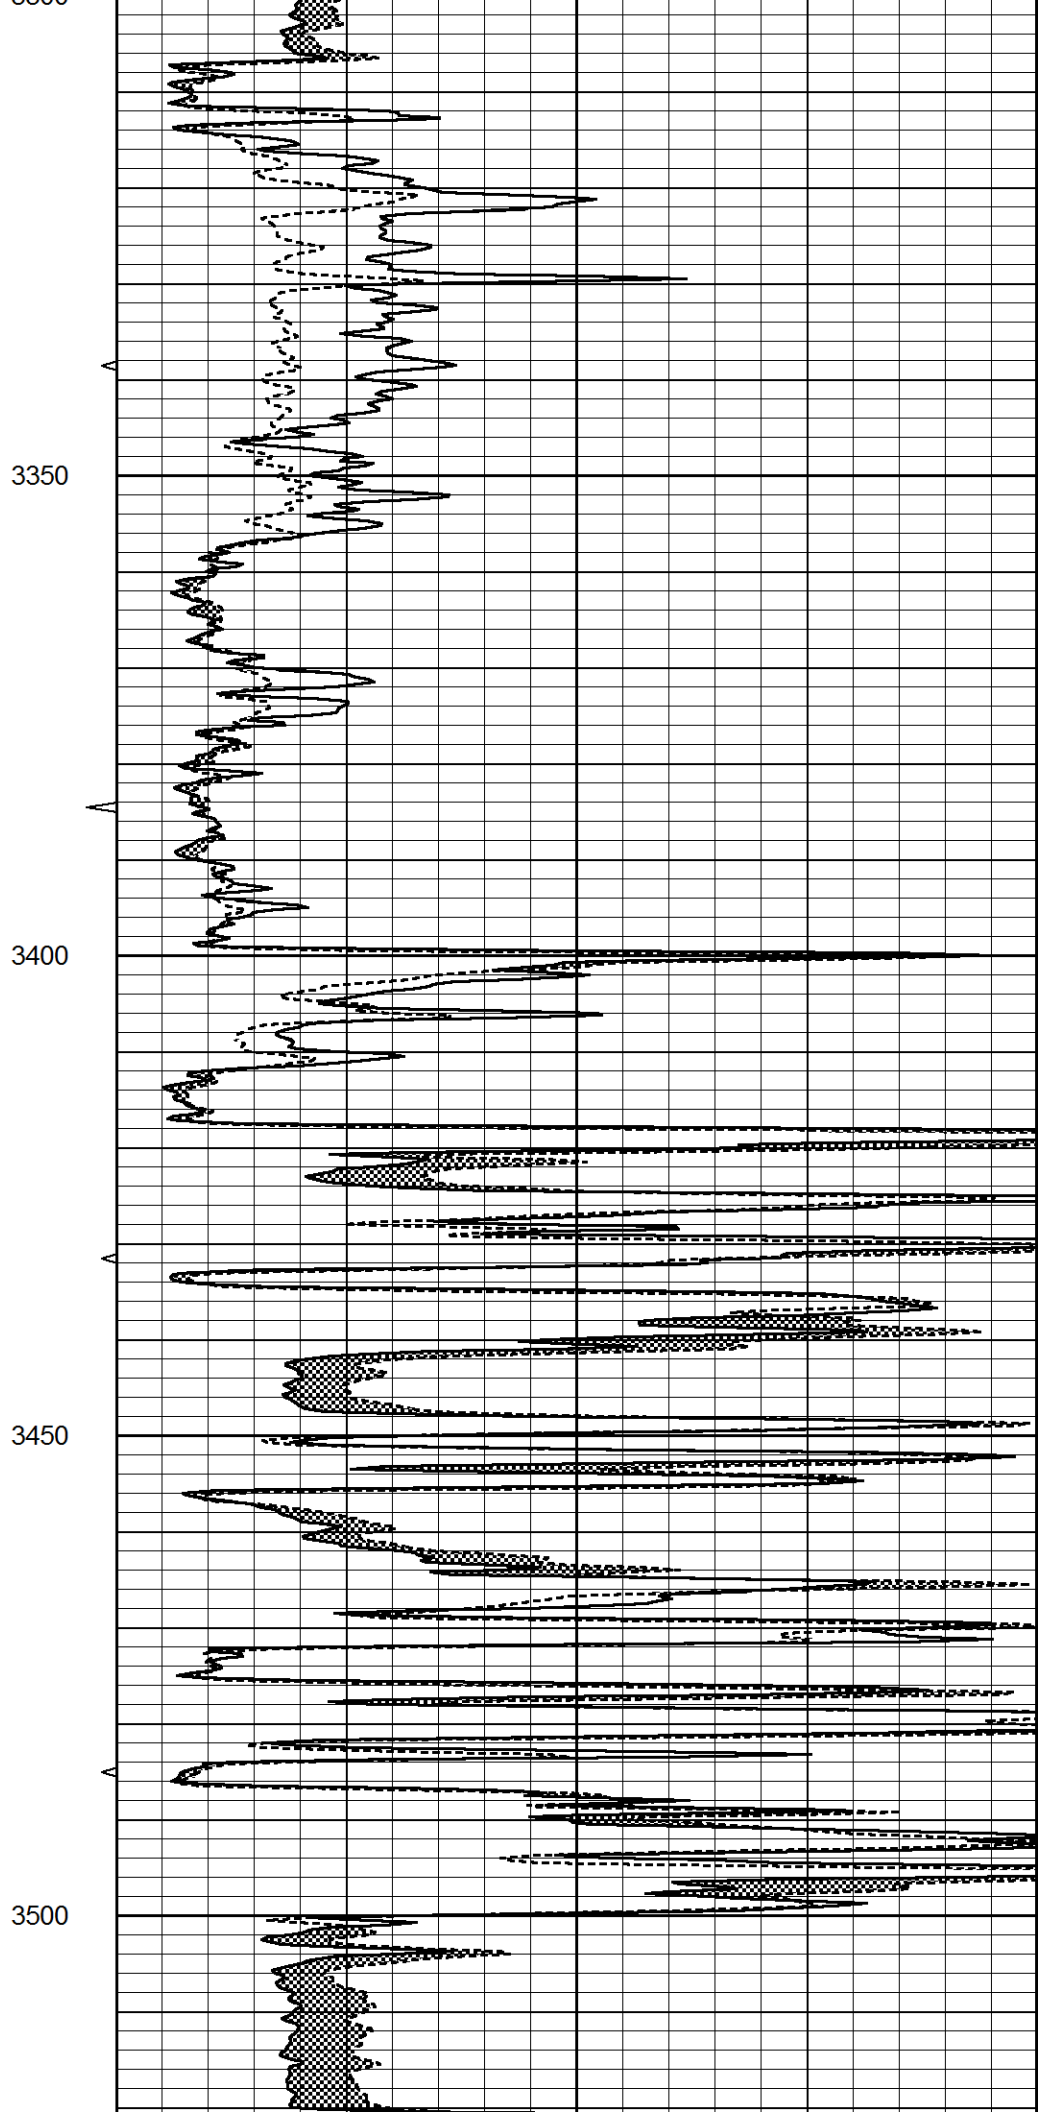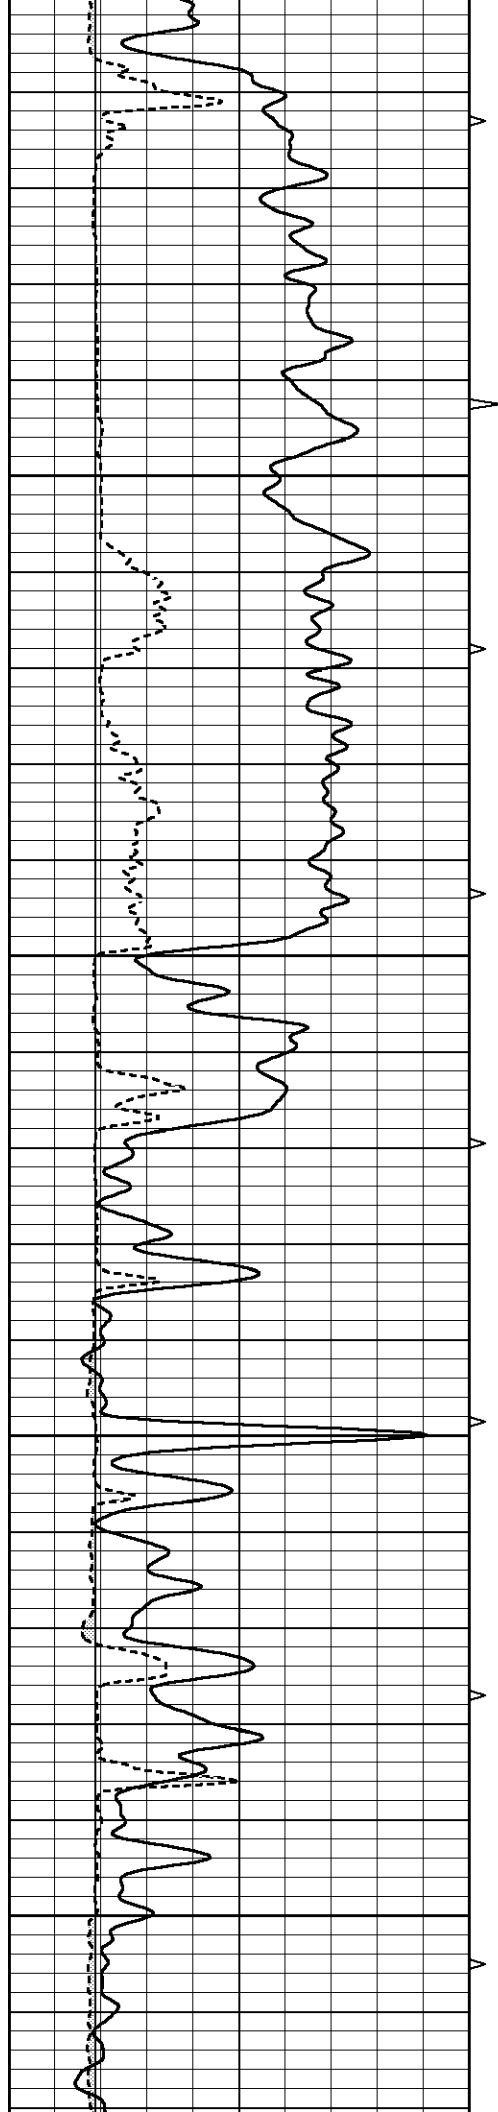


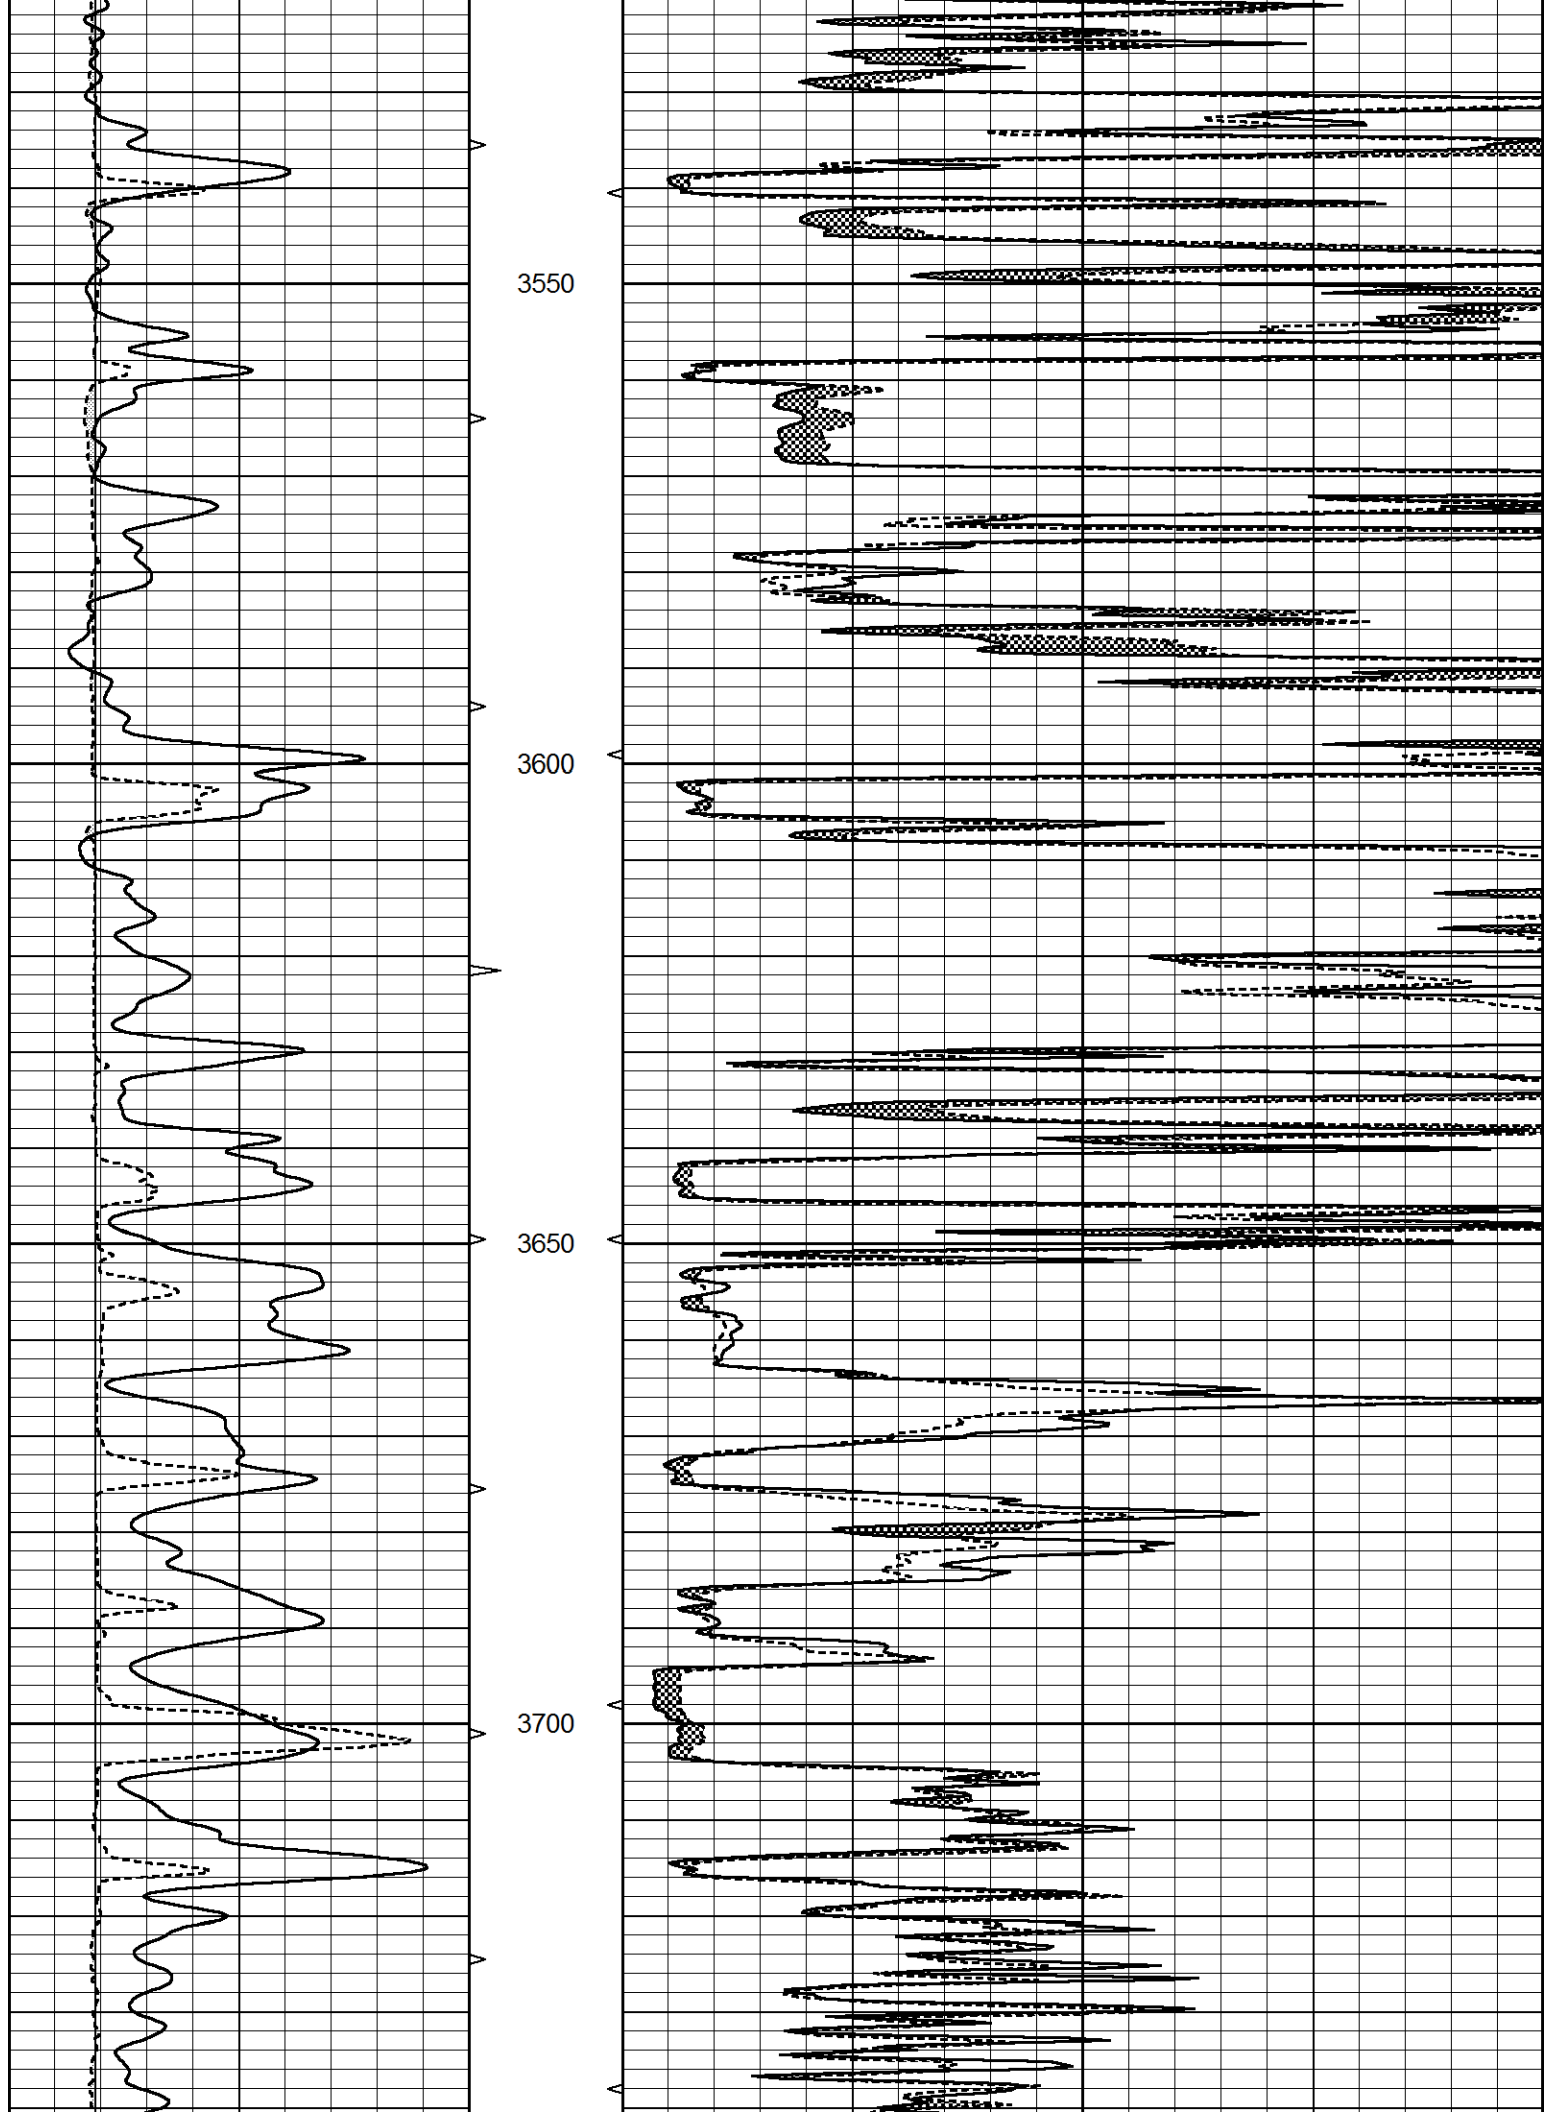

Database File 5888pe.db
Dataset Pathname pass4.1
Presentation Format _micro
Dataset Creation Wed Oct 20 12:02:33 2021
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

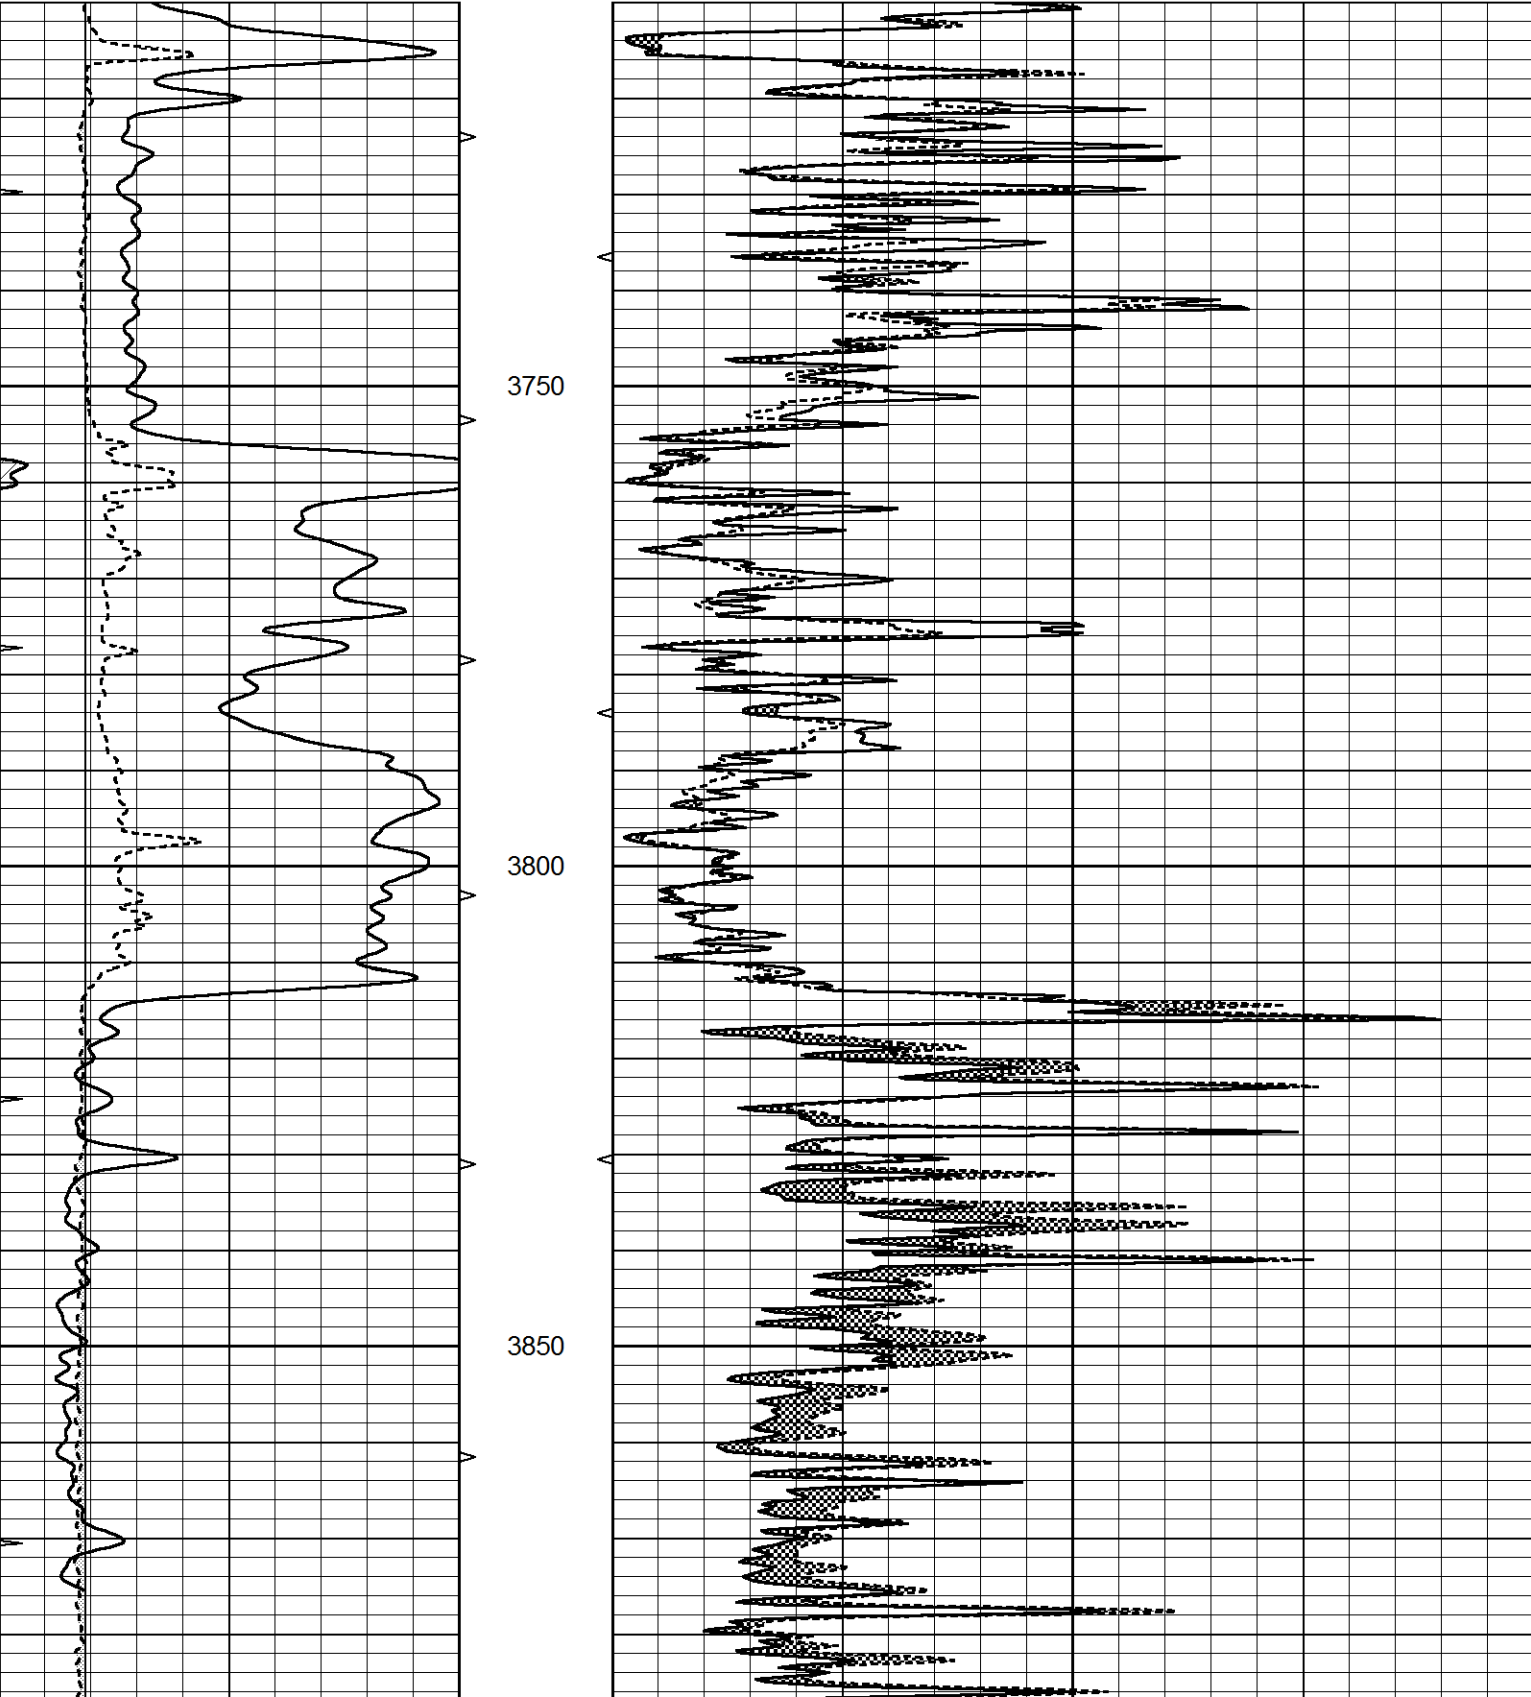

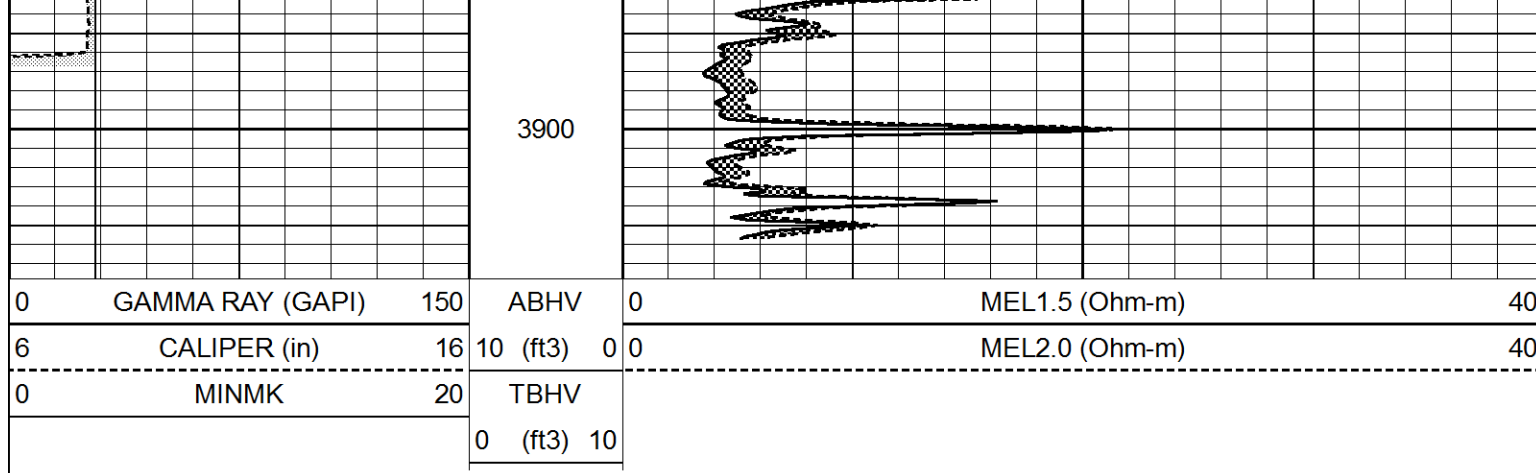

Database File		5888pe.db		Calibration Report	
Dataset Pathname		pass4.1			
Dataset Creation		Wed Oct 20 12:02:33 2021			
MICRO Calibration Report					
Serial Number:		Micro1			
Tool Model:		ProbeL			
Performed:		Thu Aug 05 13:03:33 2021			
Caliper Calibration:		Gain=2.815	Offset=7.152		
References		Low Cal	High Cal		
Readings		8.500	13.500		
		0.887	2.663		
1.5" Calibration:		Gain=36.134	Offset=0.500		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.004	0.832		
2" Calibration:		Gain=38.000	Offset=1.000		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.022	0.793		
Gamma Ray Calibration Report					
Serial Number:		GR5			
Tool Model:		OPEN			
Performed:		Fri Oct 01 08:18:05 2021			
Calibrator Value:		1.0	GAPI		
Background Reading:		0.0	cps		
Calibrator Reading:		1.0	cps		
Sensitivity:		0.7000	GAPI/cps		