



MICRO LOG

Company	PLATEAU OPERATING CORPORATION		
Well	DURLER #2-21		
Field	N/A		
County	HAMILTON		
State	KANSAS		
Location:	API # : 15-075-20903-0000		Other Services CDL/CNL DIL
1320' FNL & 1320' FEL			
Permanent Datum	SEC 21	TWP 25S	RGE 40W
Log Measured From	GROUND LEVEL Elevation 3399		
Drilling Measured From	KELLY BUSHING 3' A.G.L. KELLY BUSHING		
Elevation	K.B. 3402 D.F. 3401 G.L. 3399		
Date	08/12/21		
Run Number	TWO		
Depth Driller	5000		
Depth Logger	4994		
Bottom Logged Interval	4992		
Top Log Interval	1150		
Casing Driller	8 5/8" @ 1165		
Casing Logger	1165		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD		
Density / Viscosity	9.4/48		
pH / Fluid Loss	9.5/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.7 @ 70F		
Rmf @ Meas. Temp	.53 @ 70F		
Rmc @ Meas. Temp	.84 @ 70F		
Source of Rmf / Rmc	MEASURED		
Rm @ BHT	.39 @ 125F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	125F		
Equipment Number	1523		
Location	HAYS, KANSAS		
Recorded By	GUS PFANENSTIEL		
Witnessed By	BILL KERRIGAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: SYRACUSE SOUTH TO RD 29, 2.5 EAST TO RD R.
NORTH INTO.





MAIN PASS


Database File	5613pe.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Thu Aug 12 16:30:07 2021
Charted by	Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

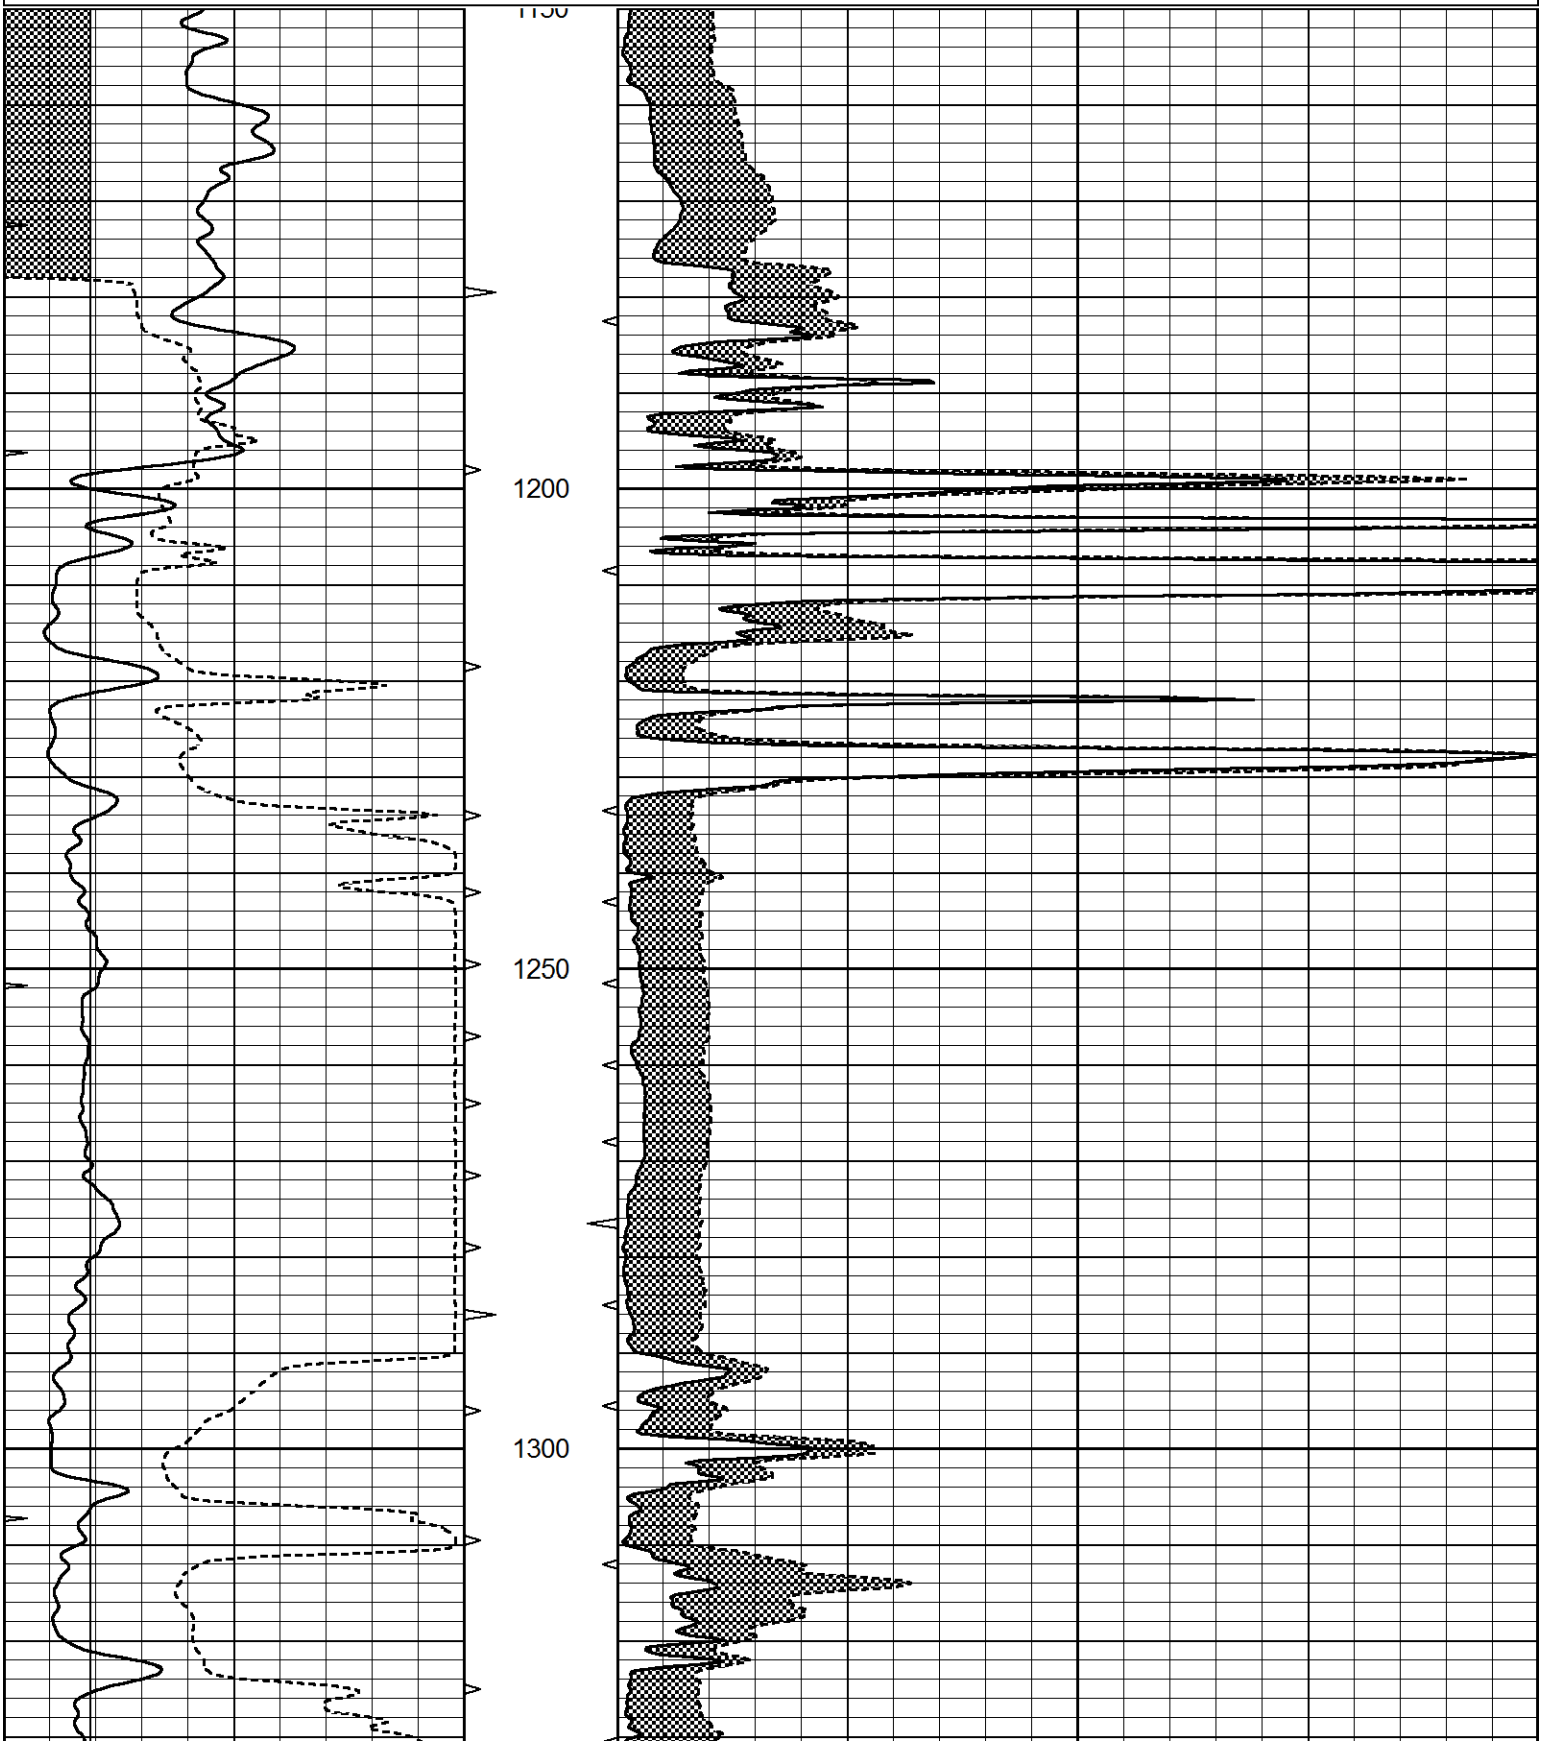

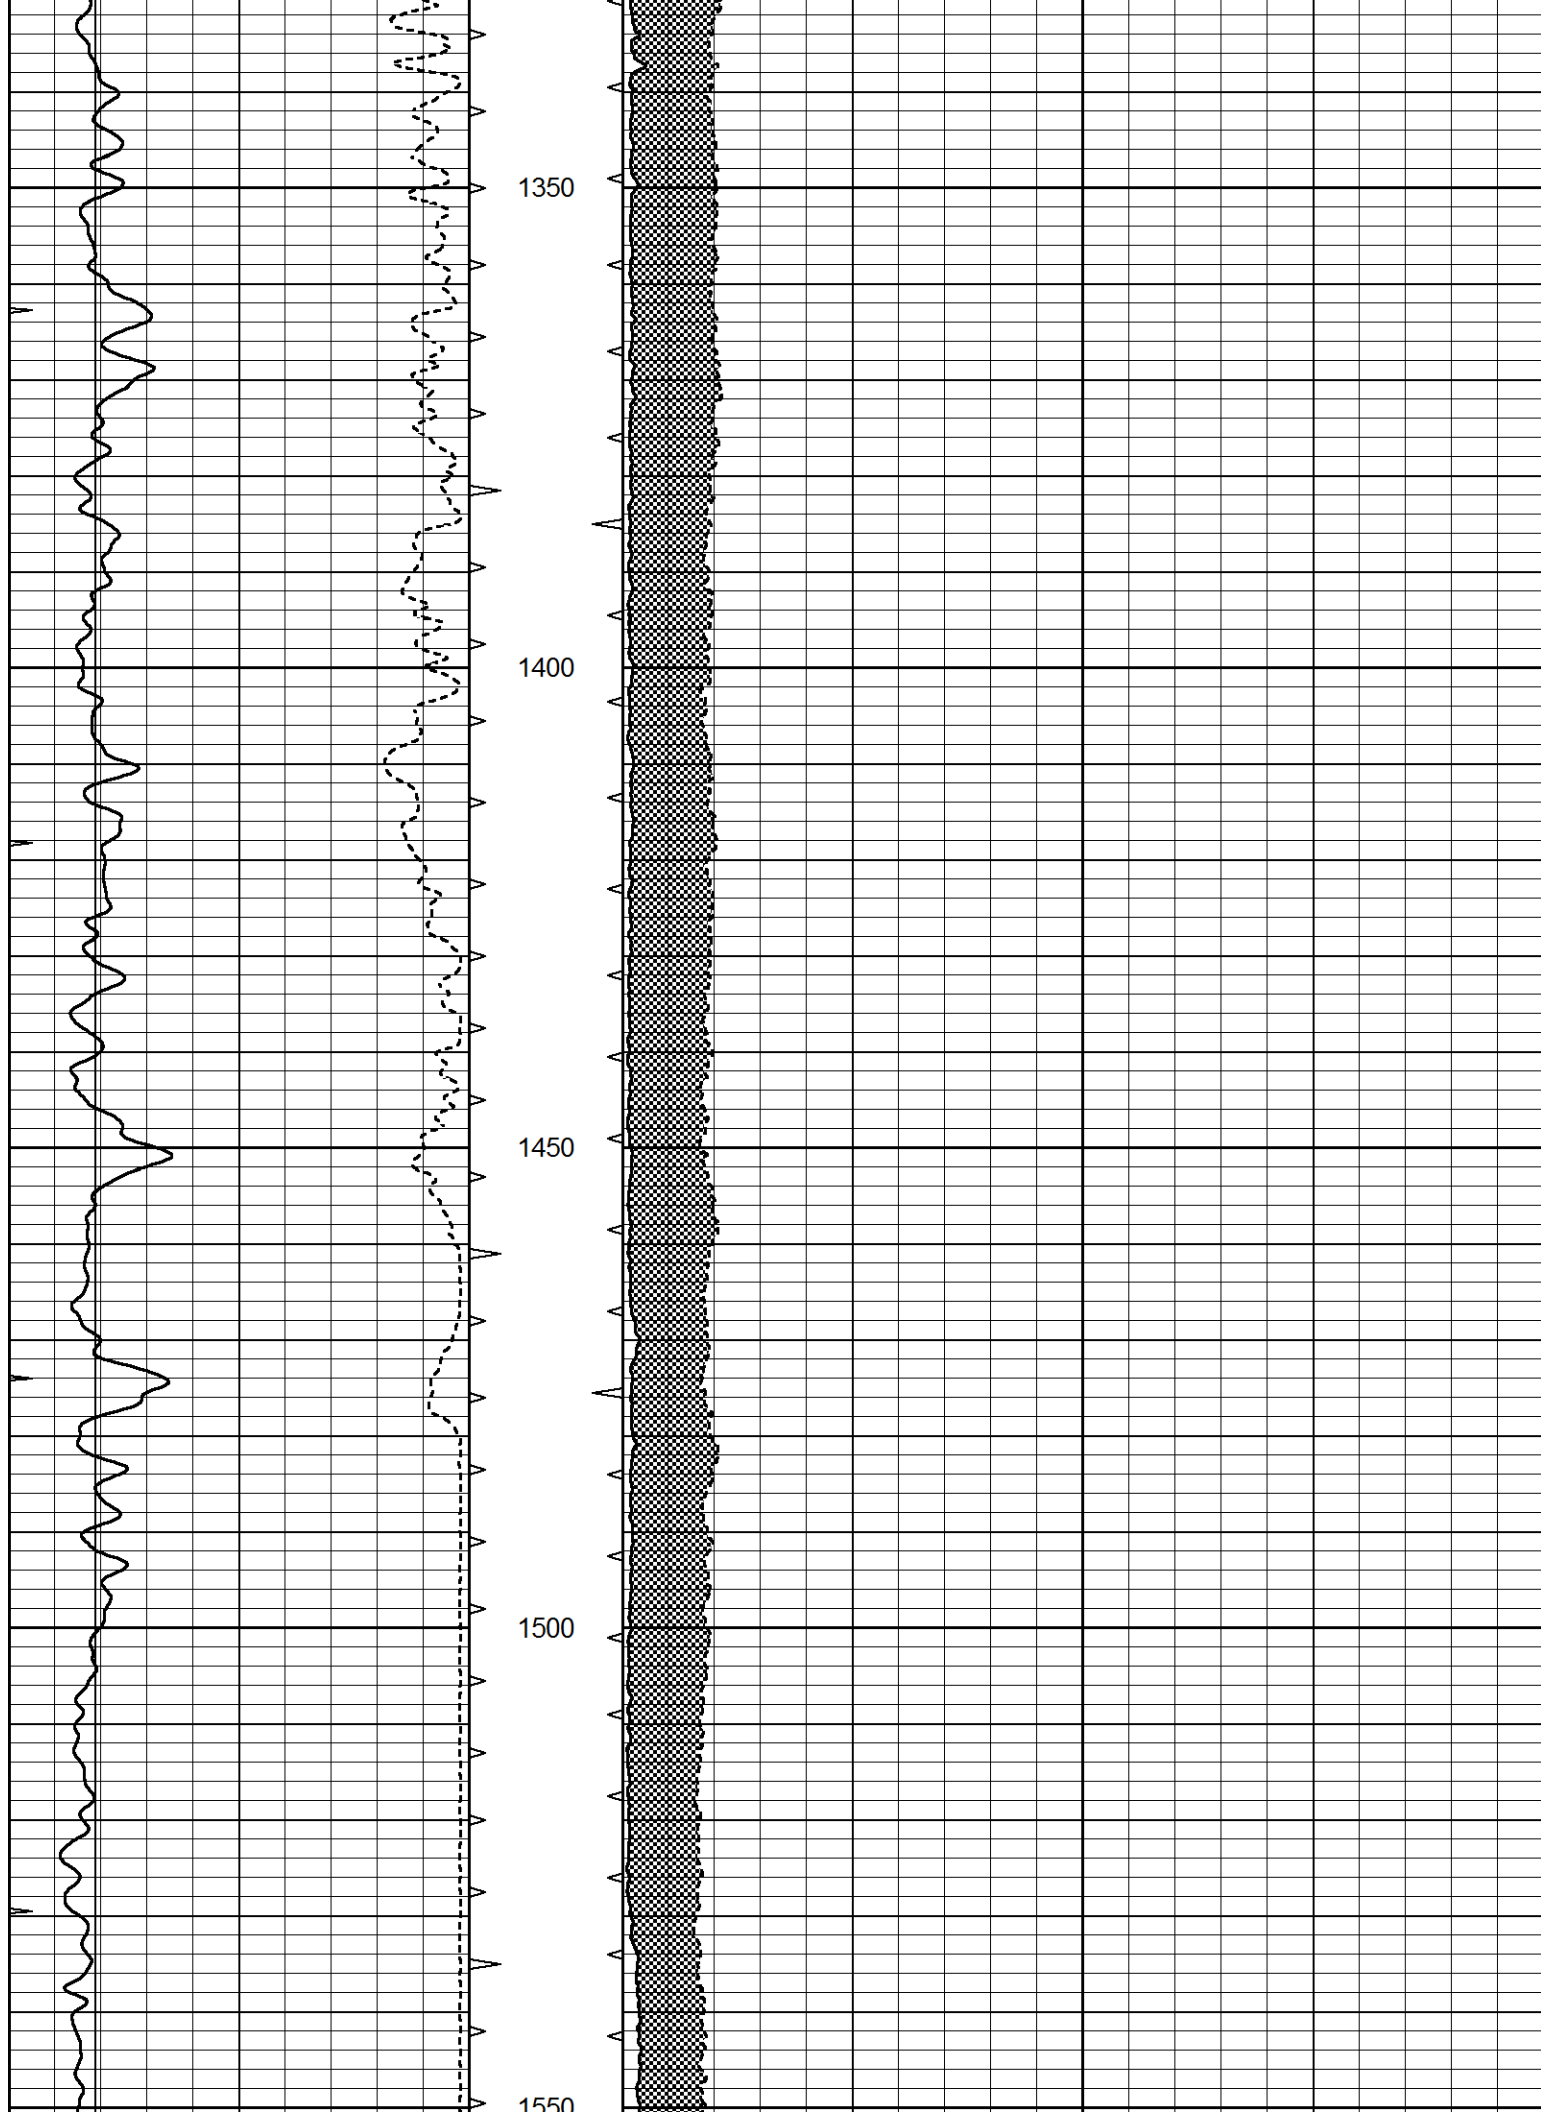

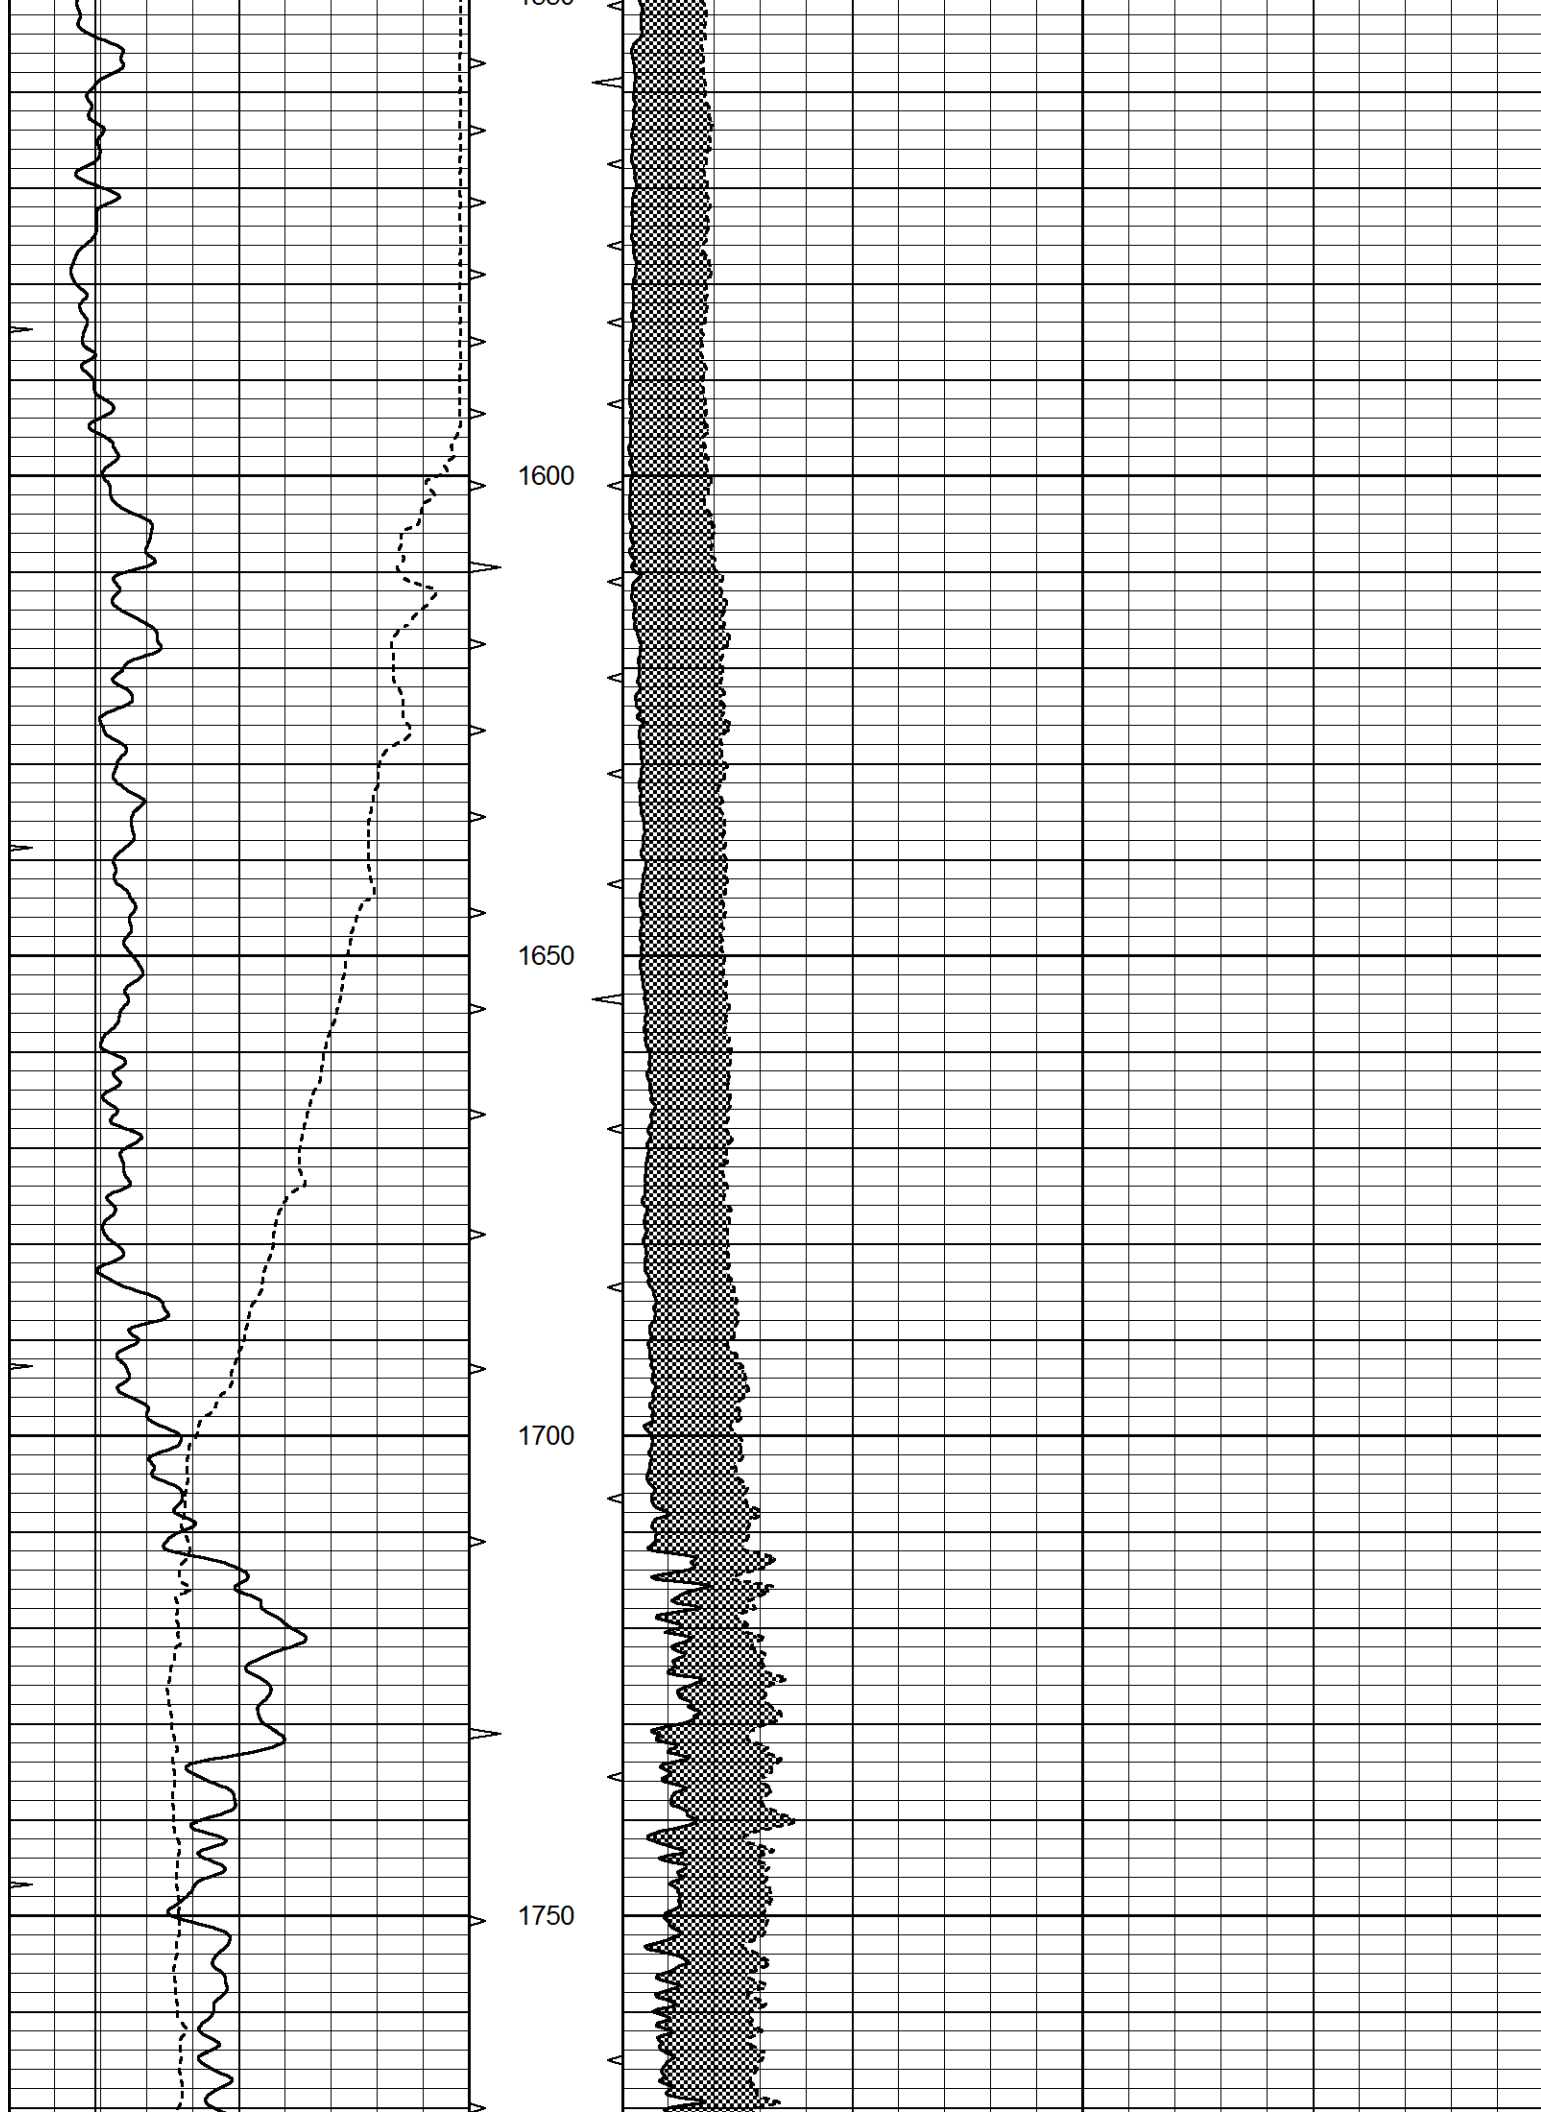

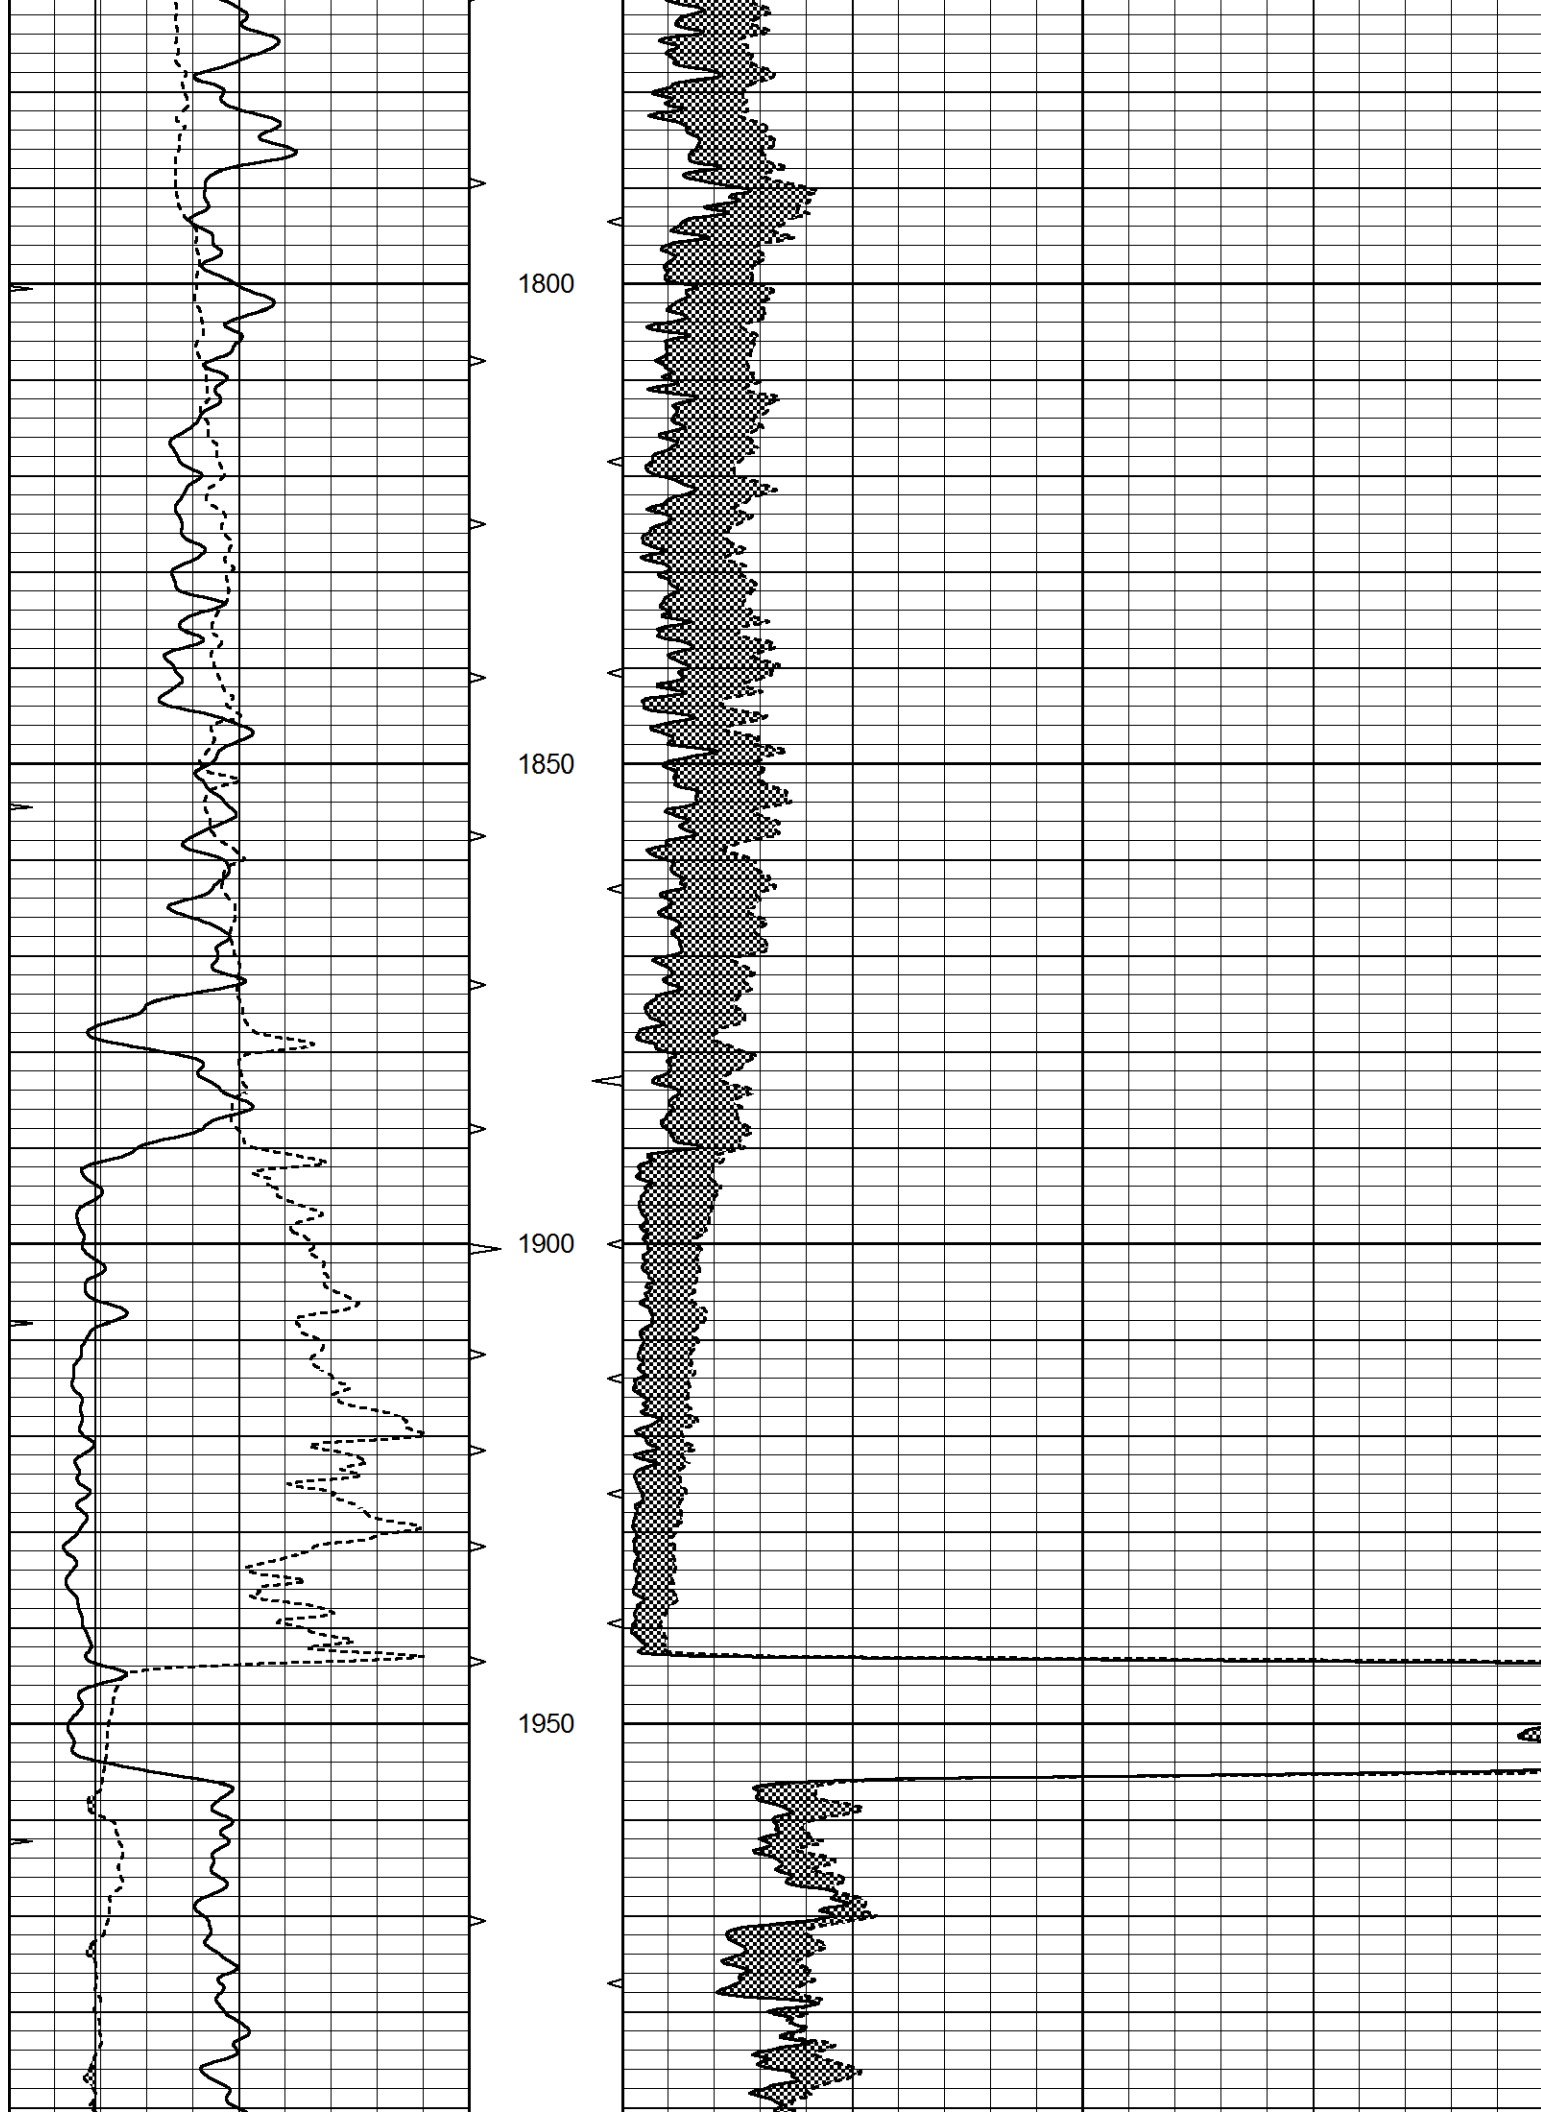

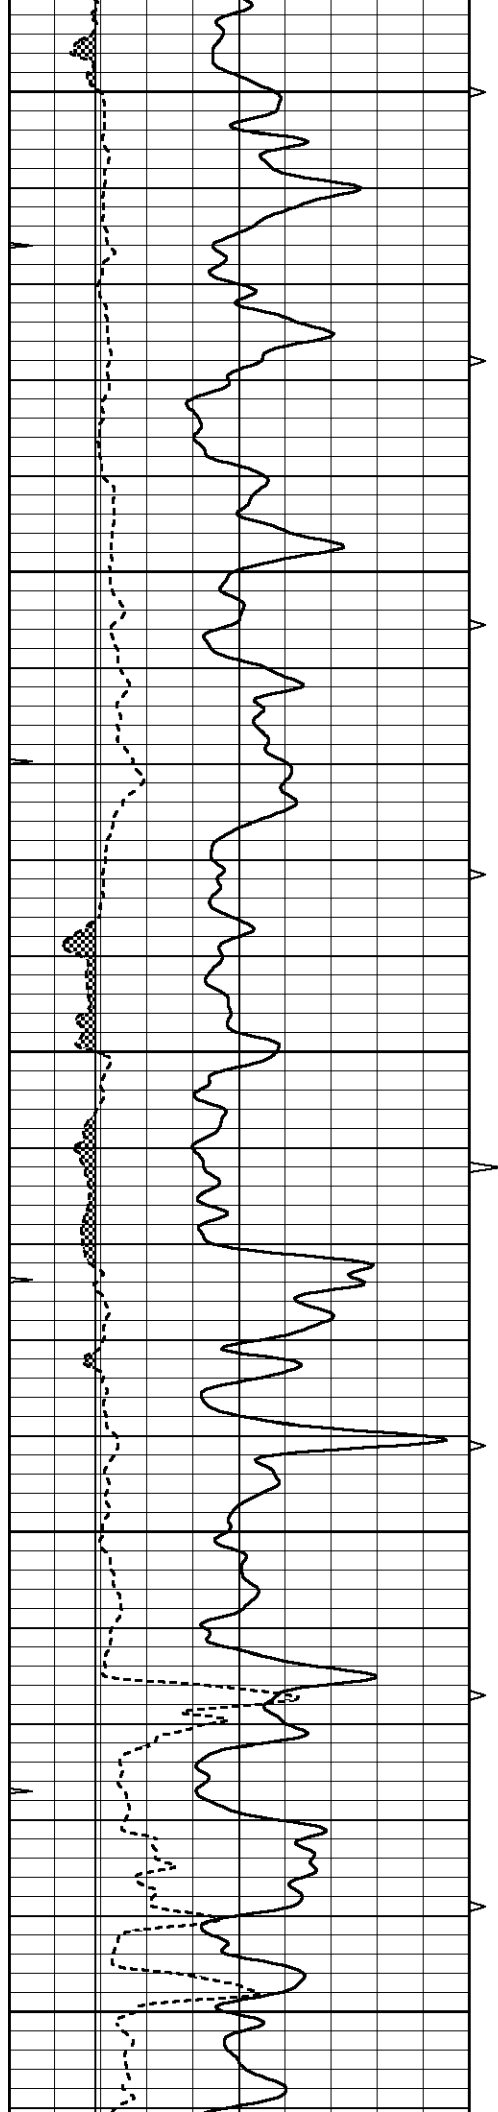


2000


2050


2100

2150

2200

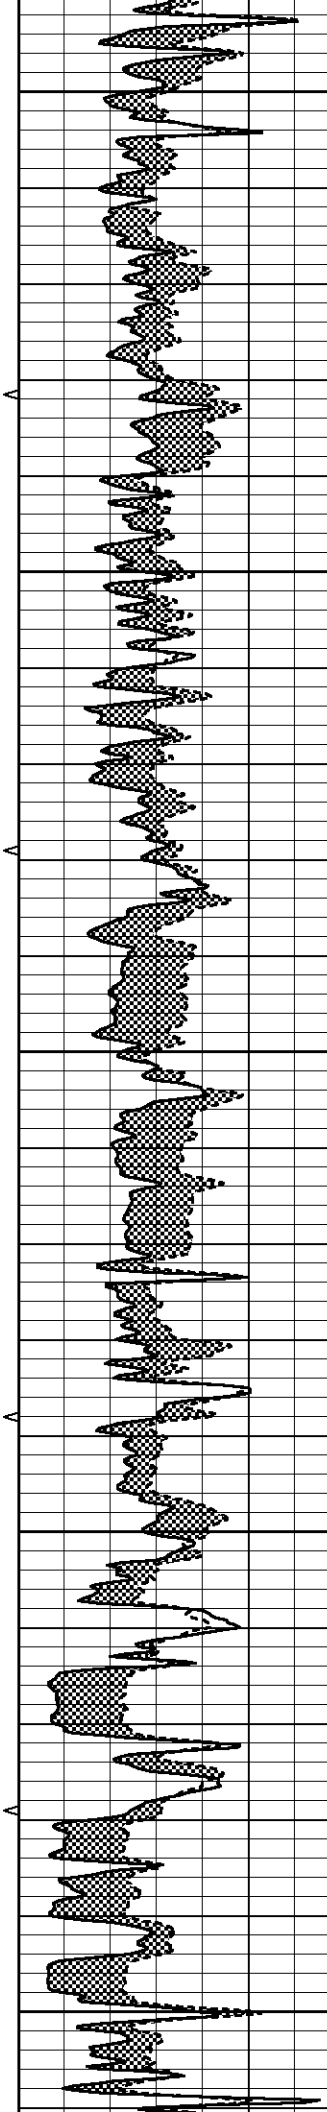

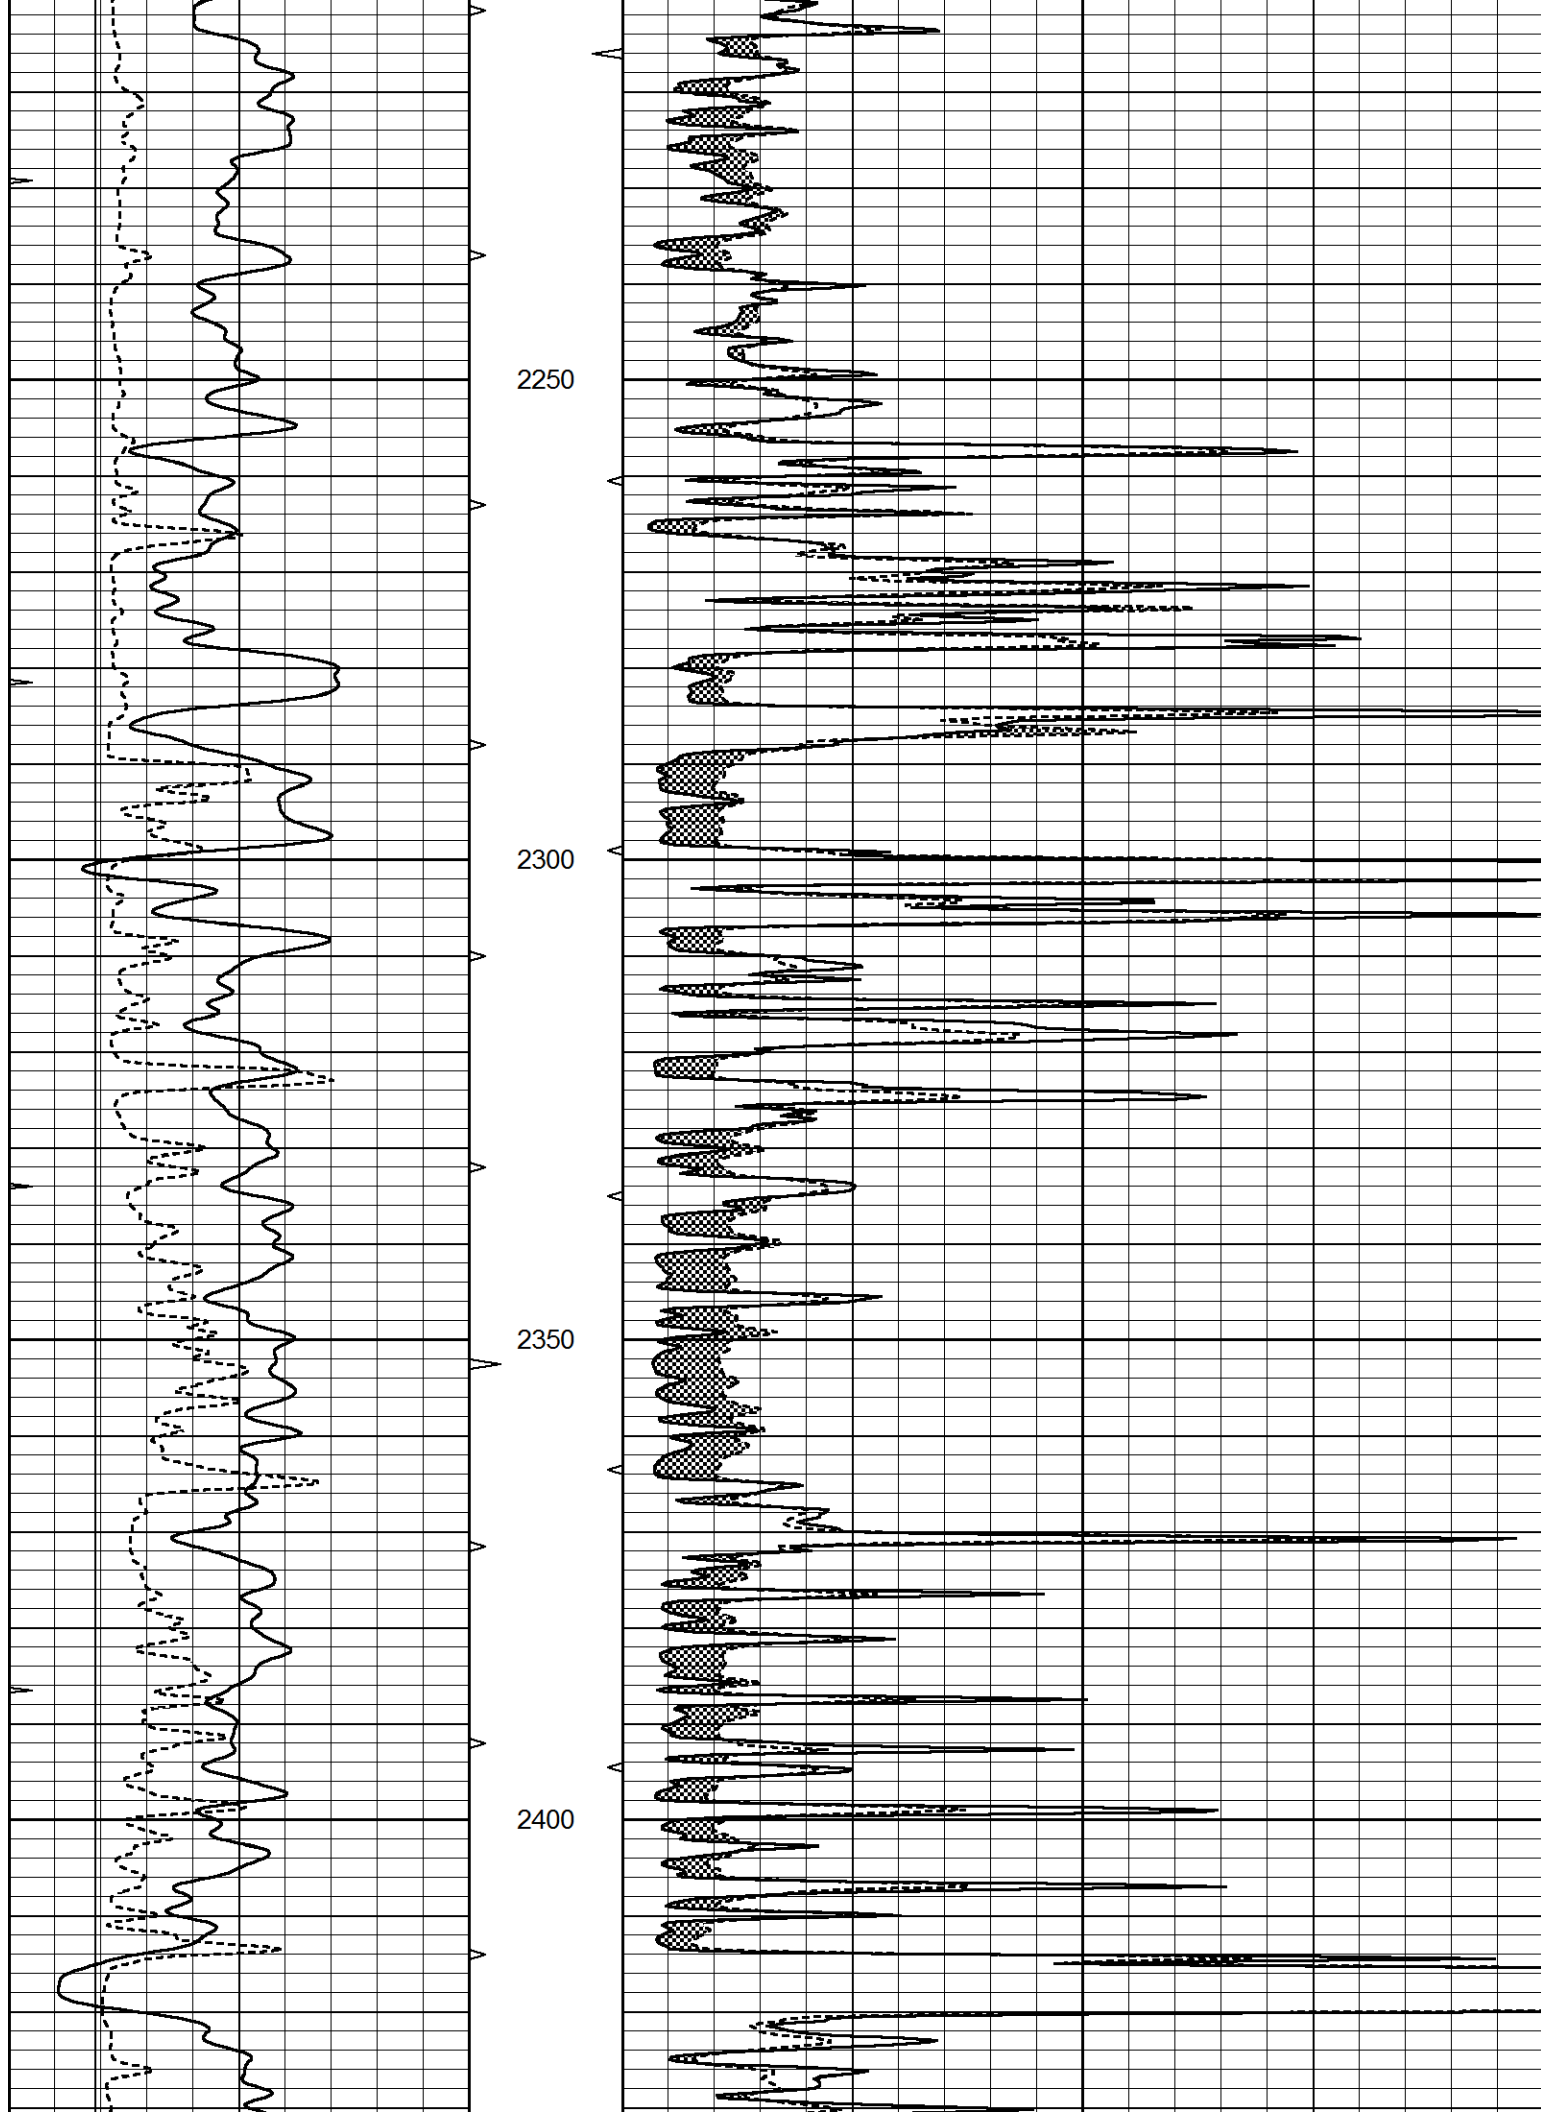

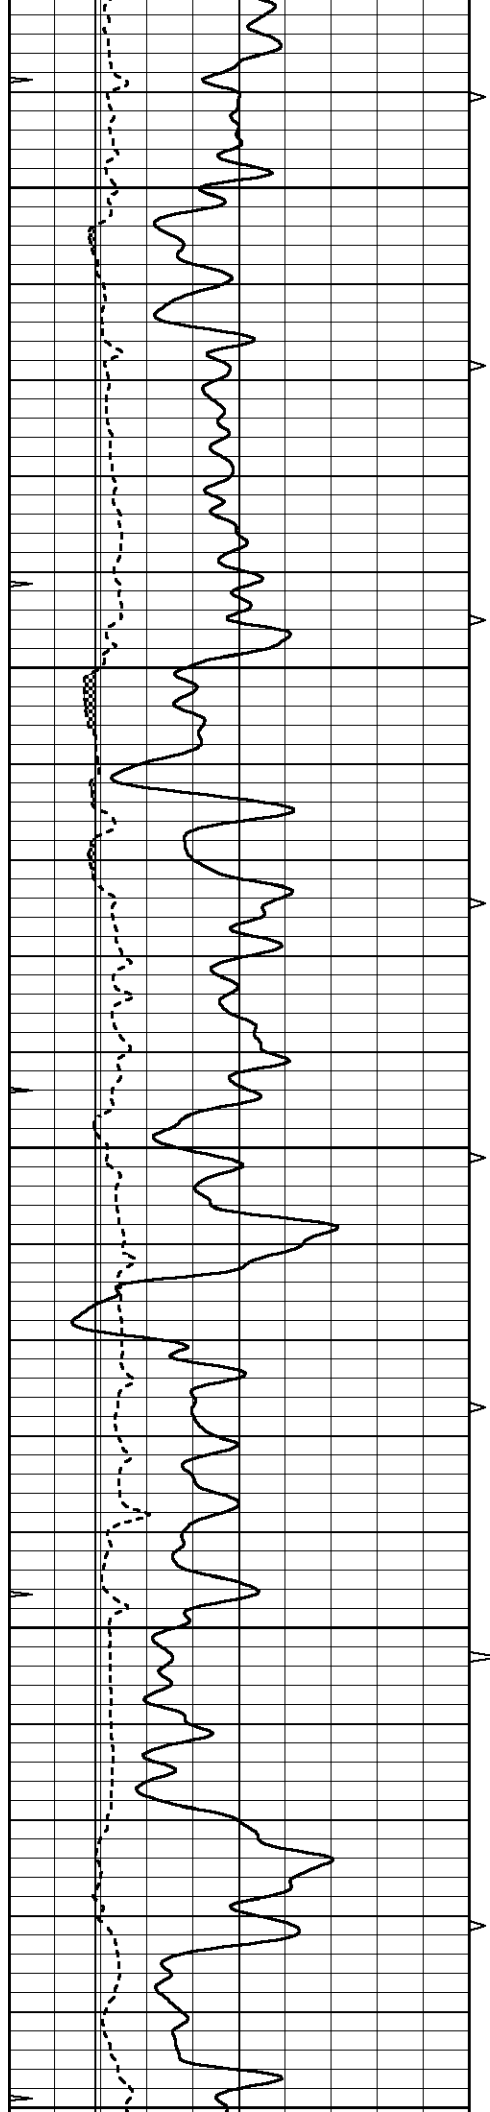


2450


2500

2550

2600

2650

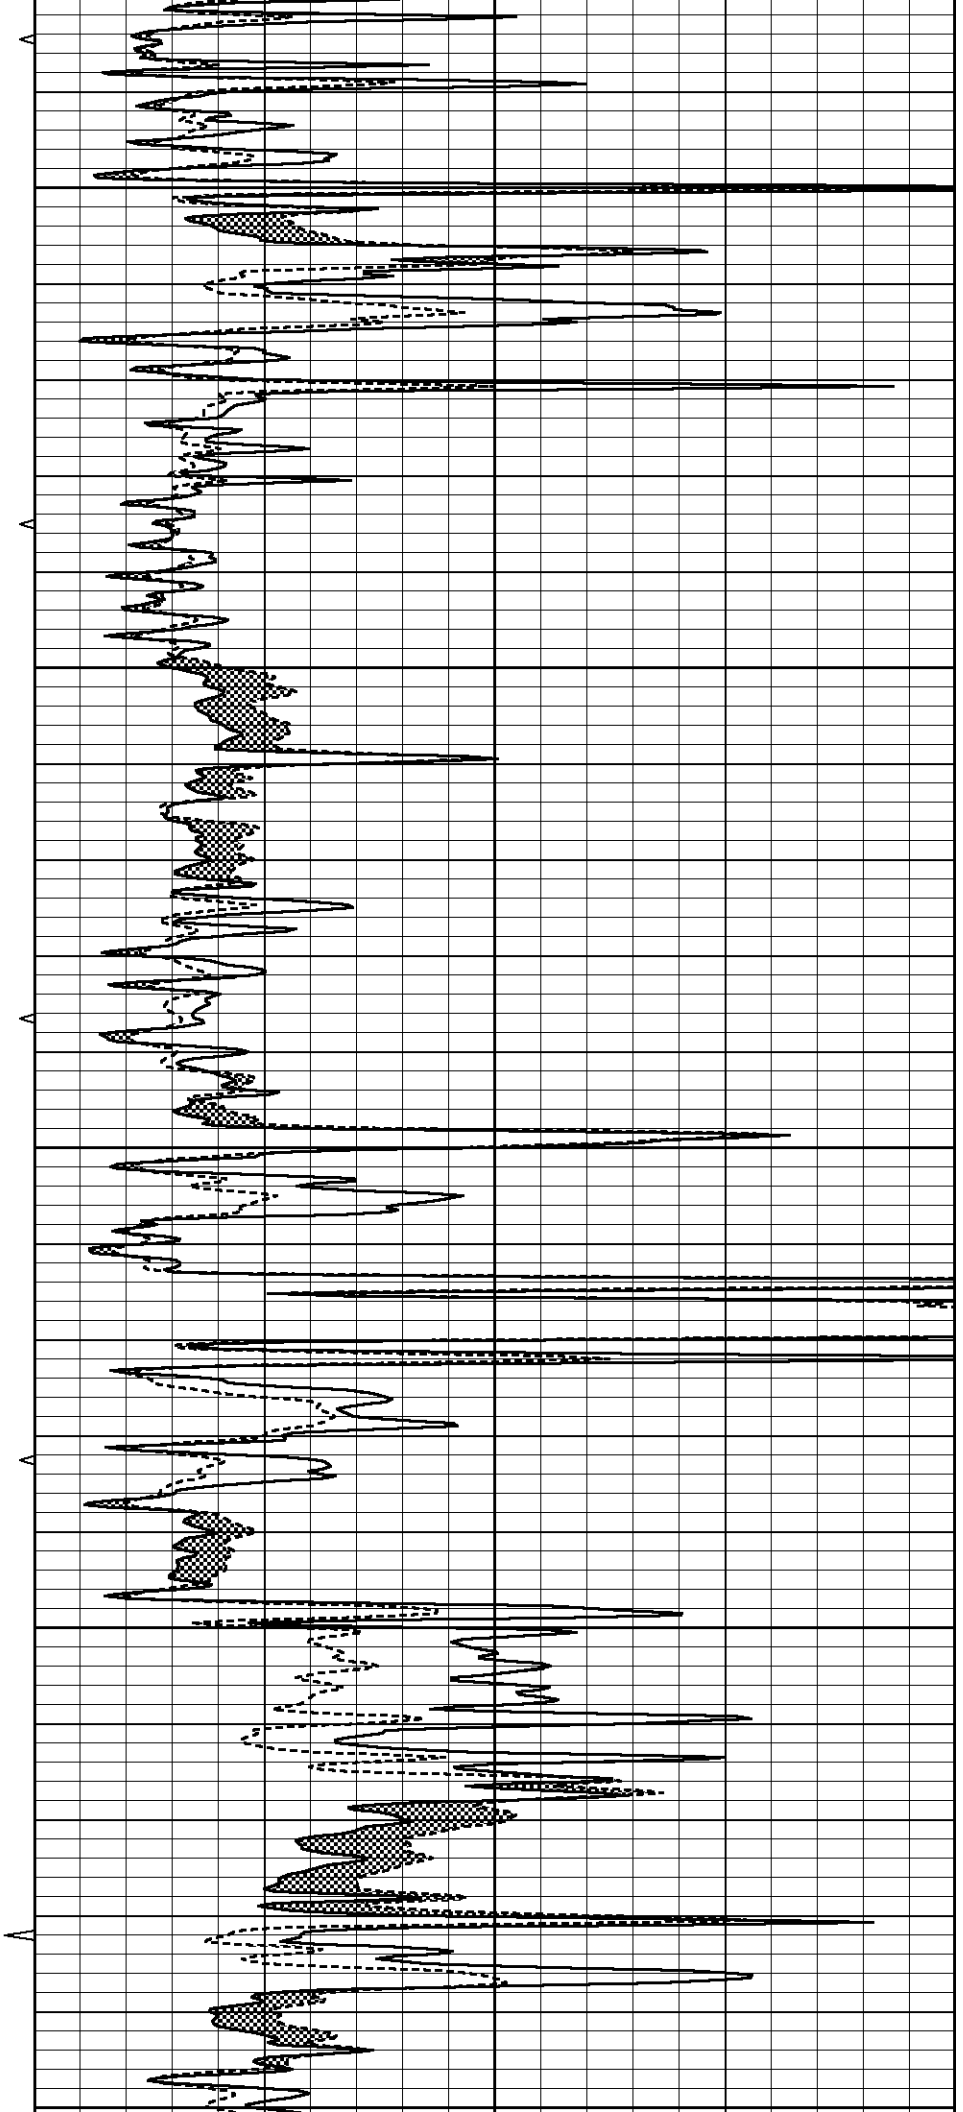

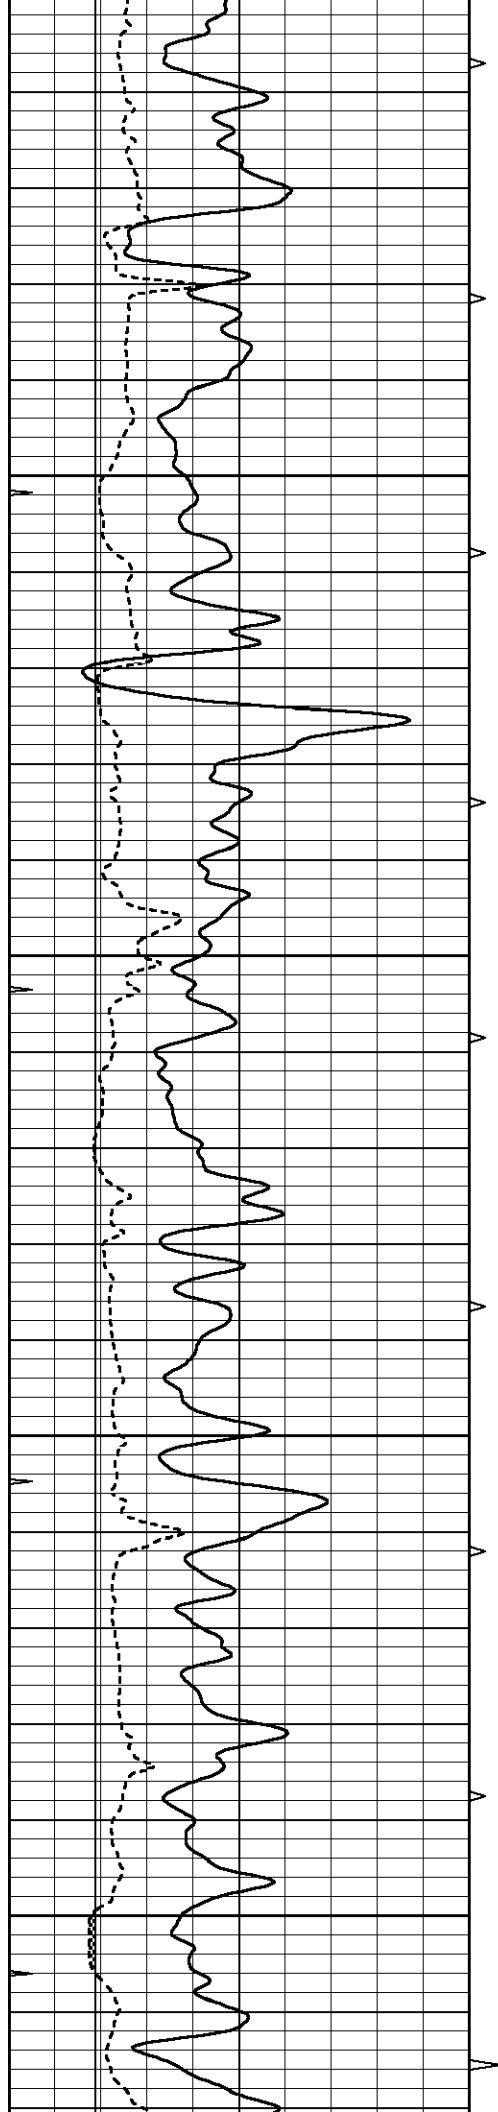


2600


2700

2750

2800

2850

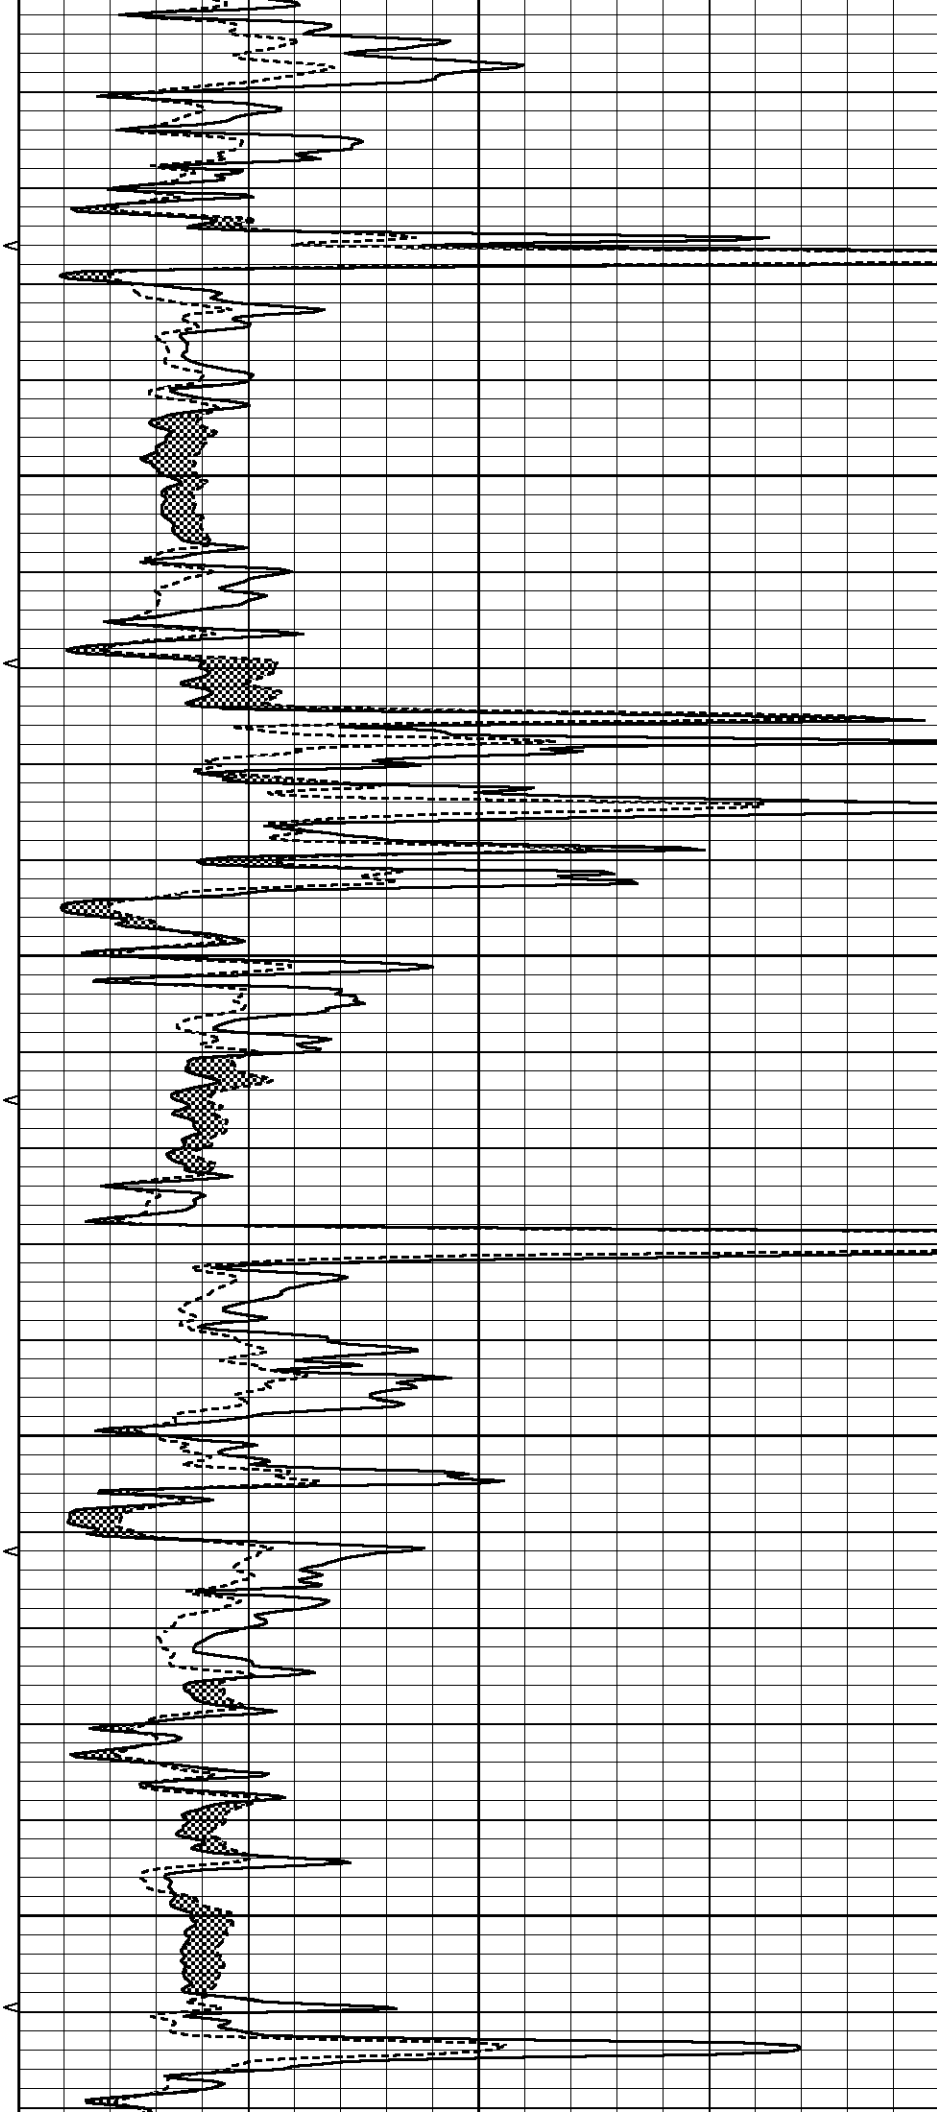

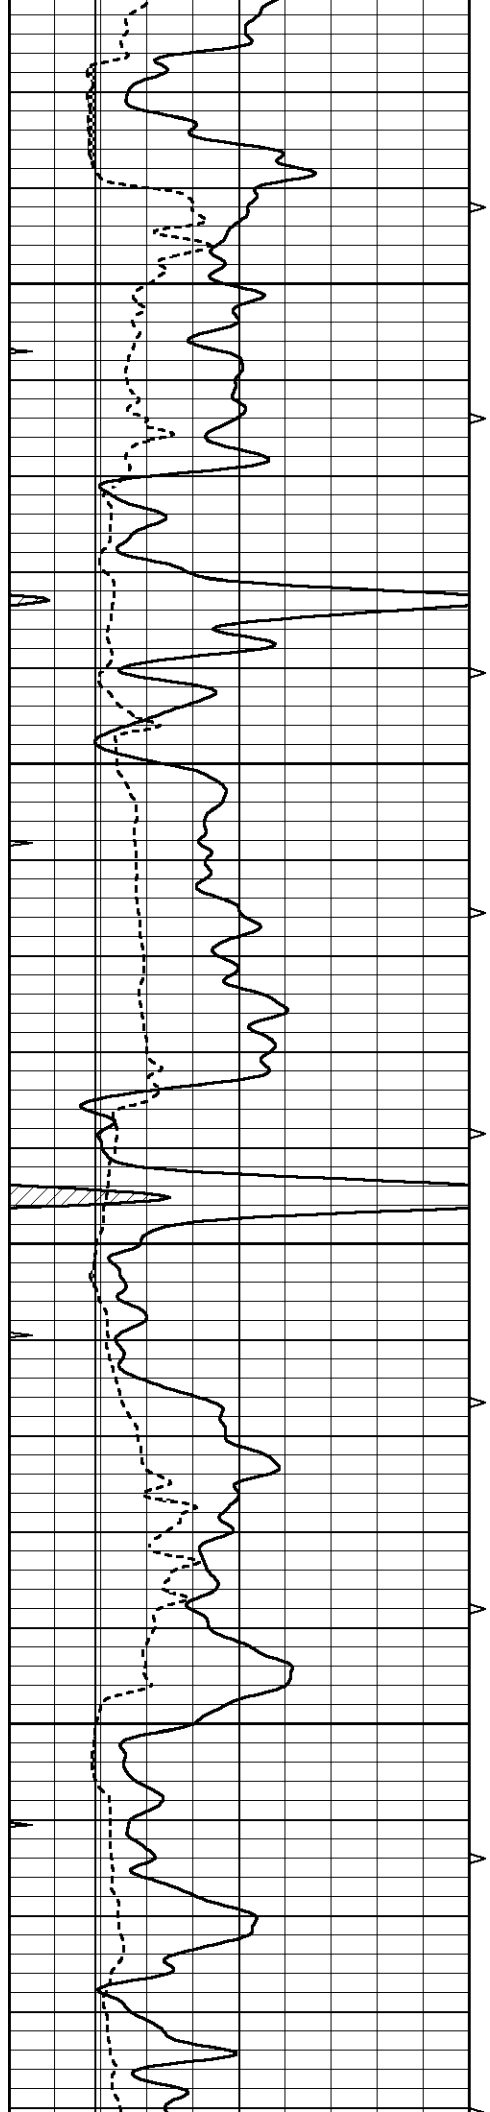



2900

2950

3000

3050

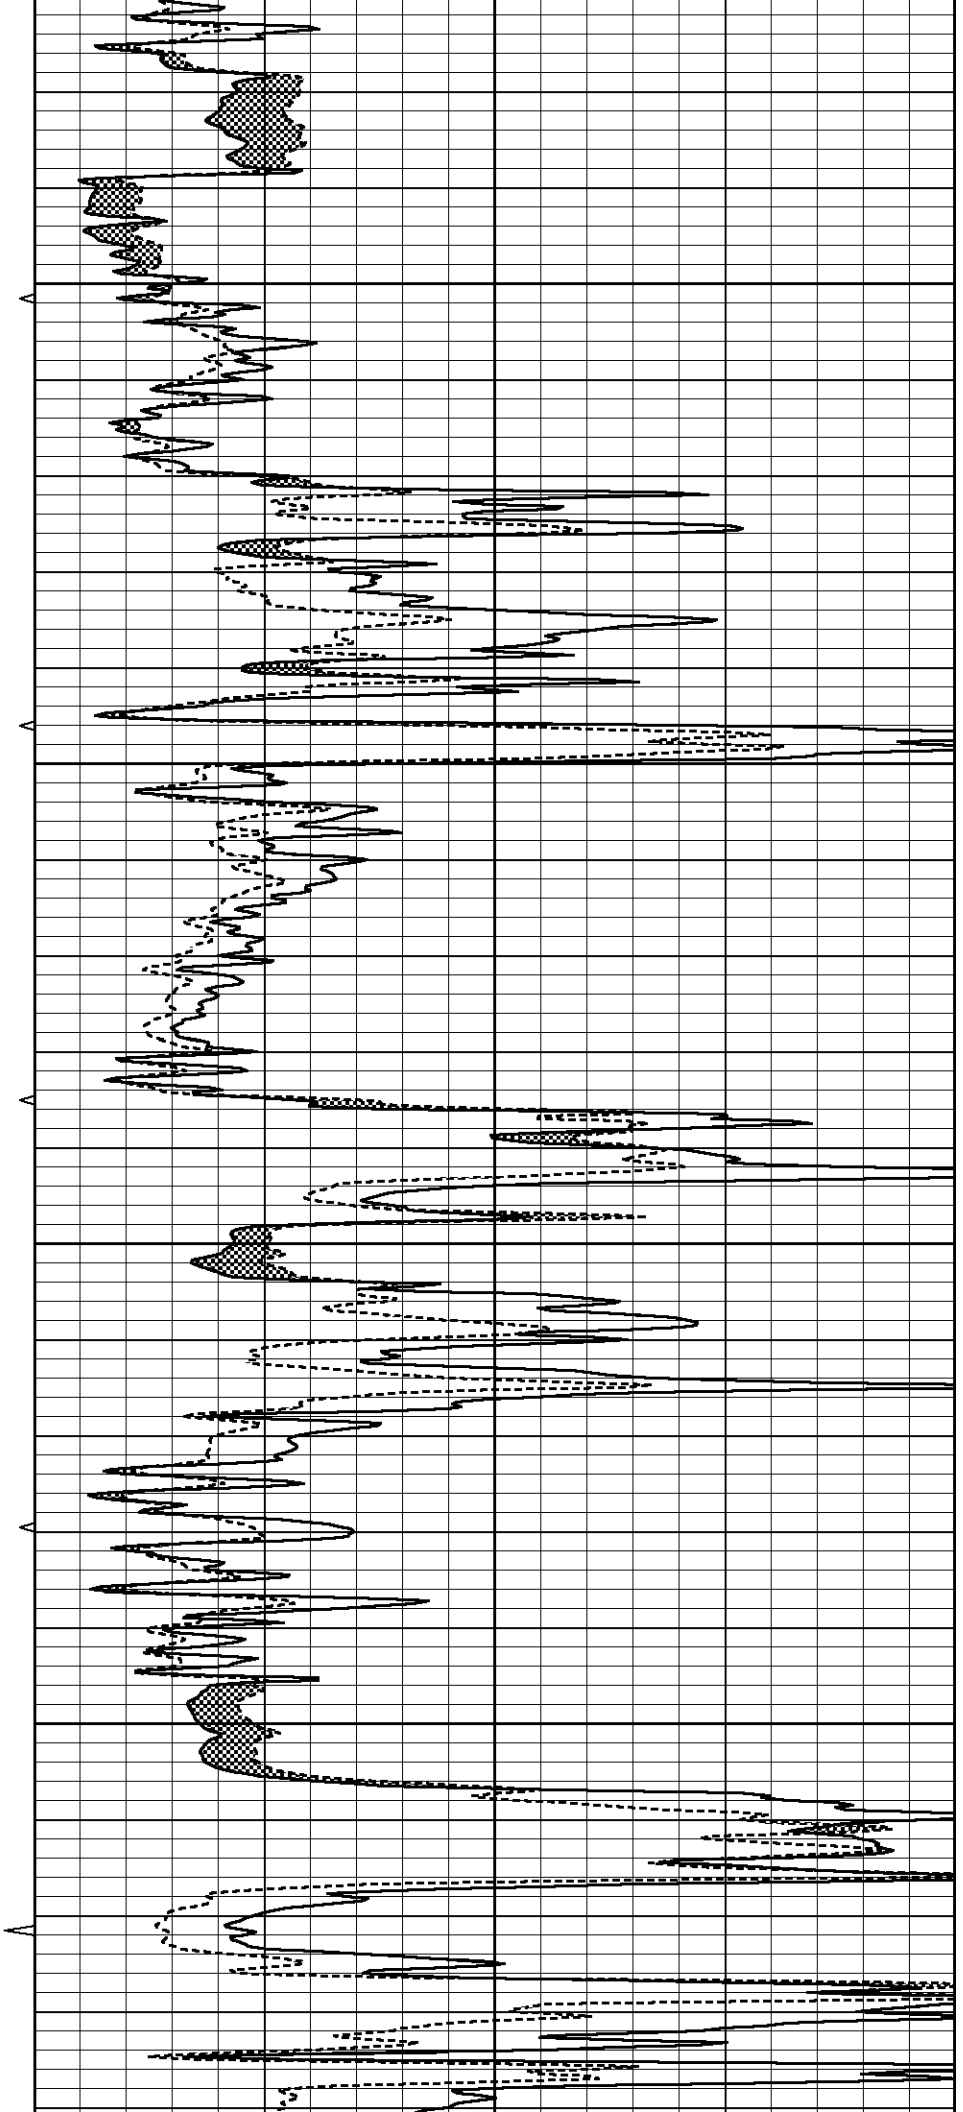

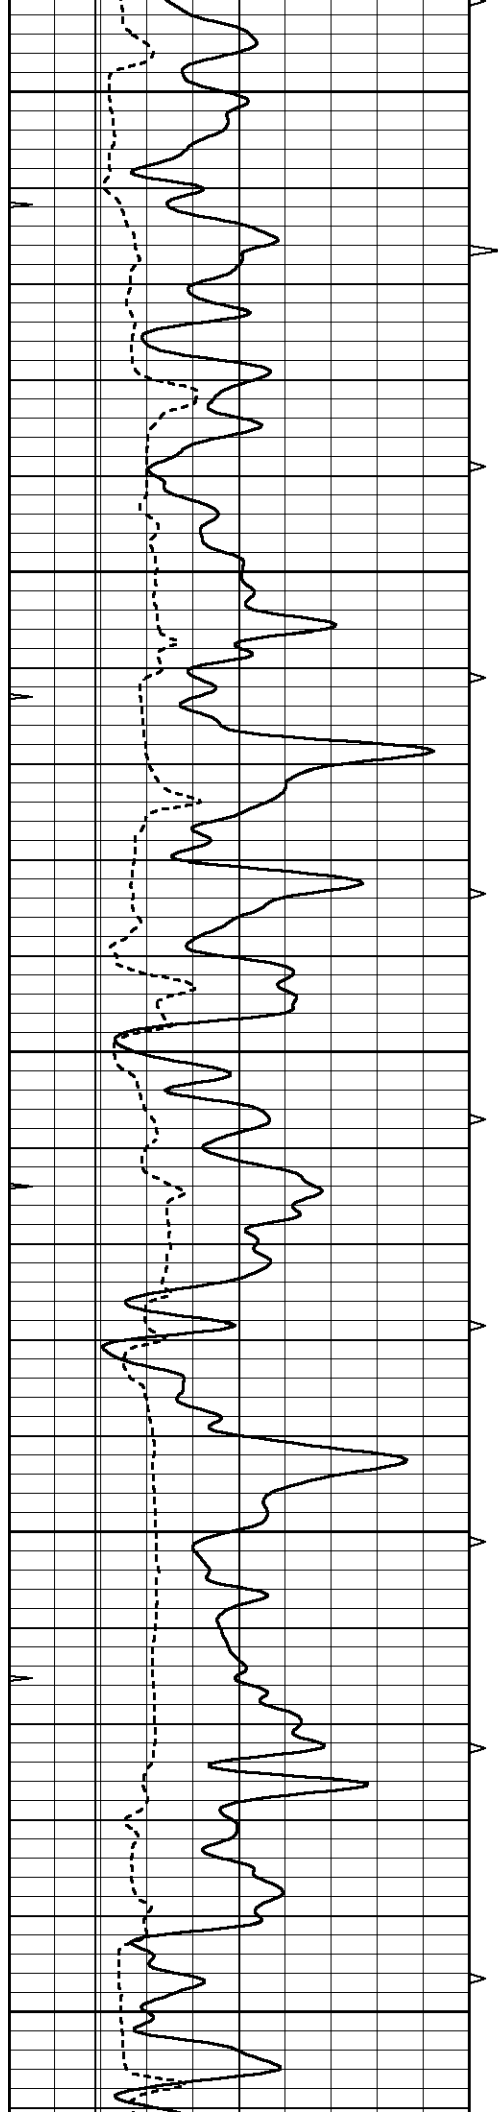


3100


3150

3200

3250

3300

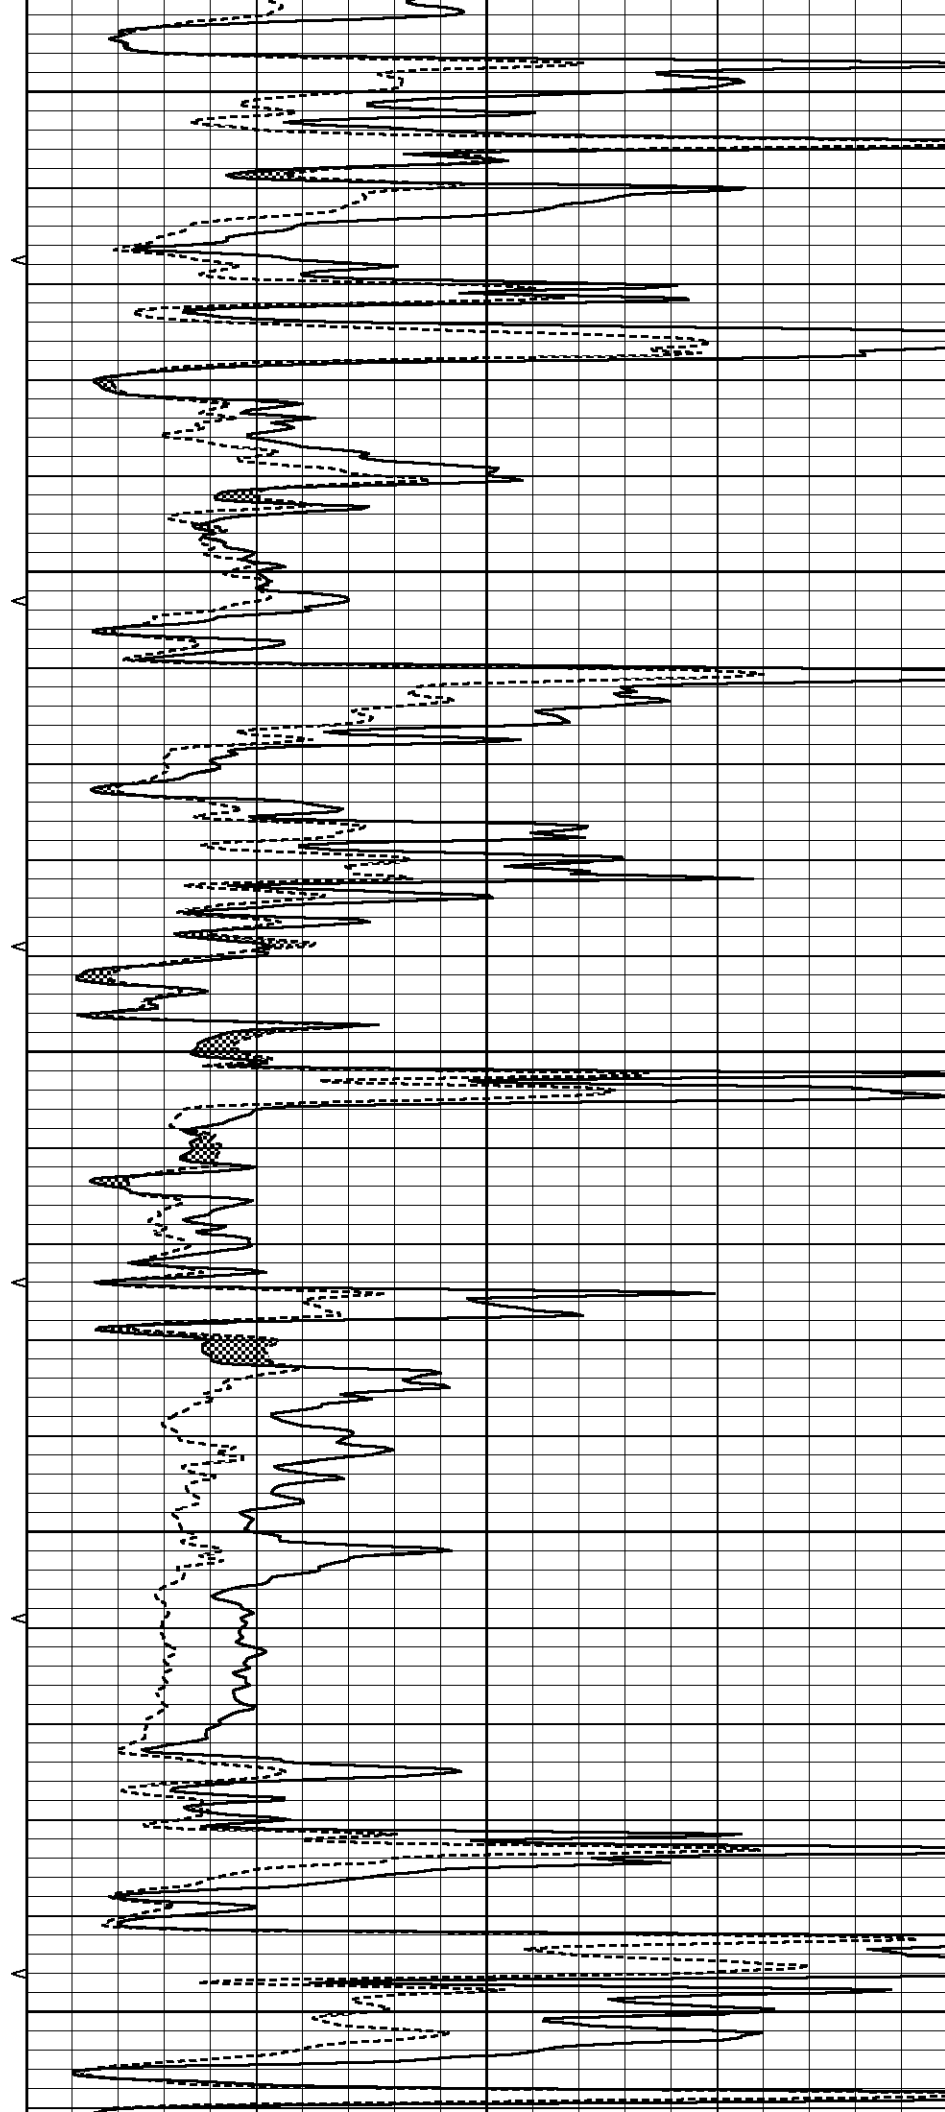

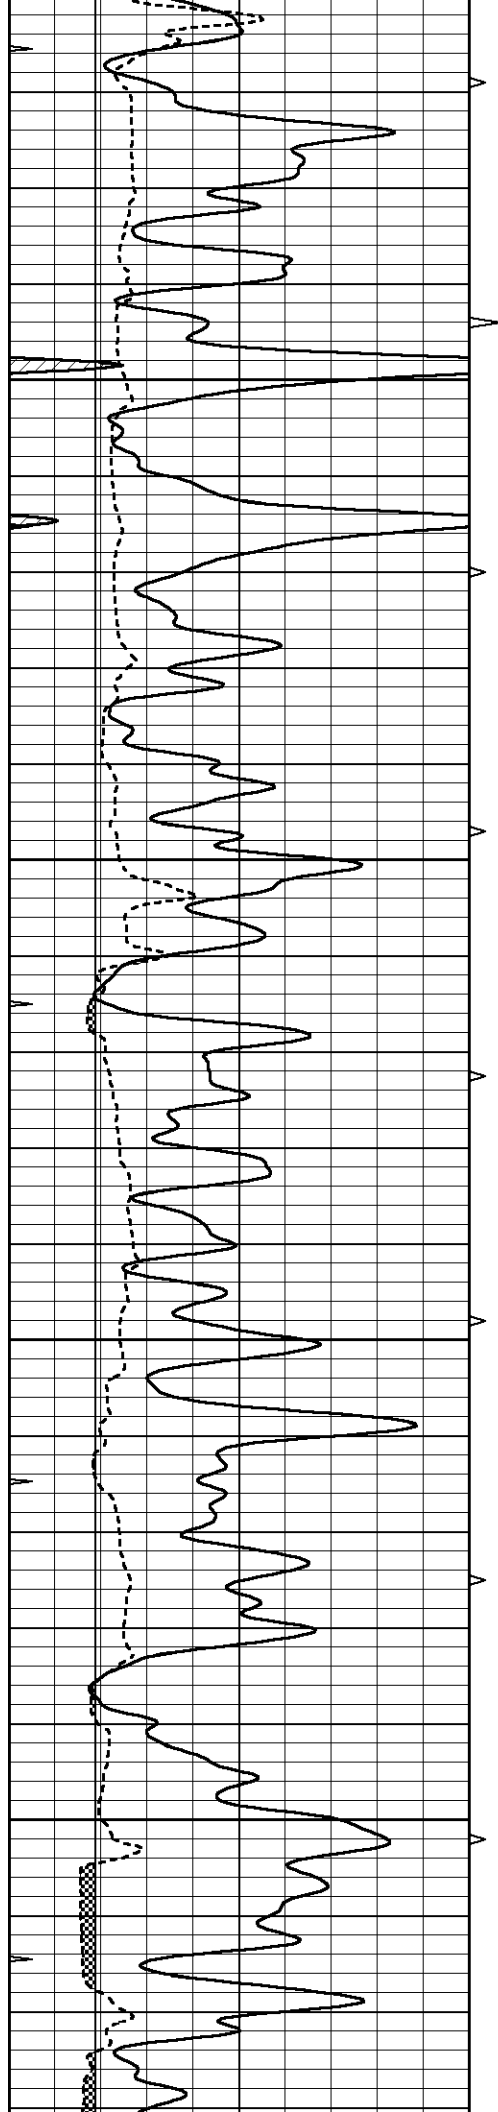



3350

3400

3450

3500

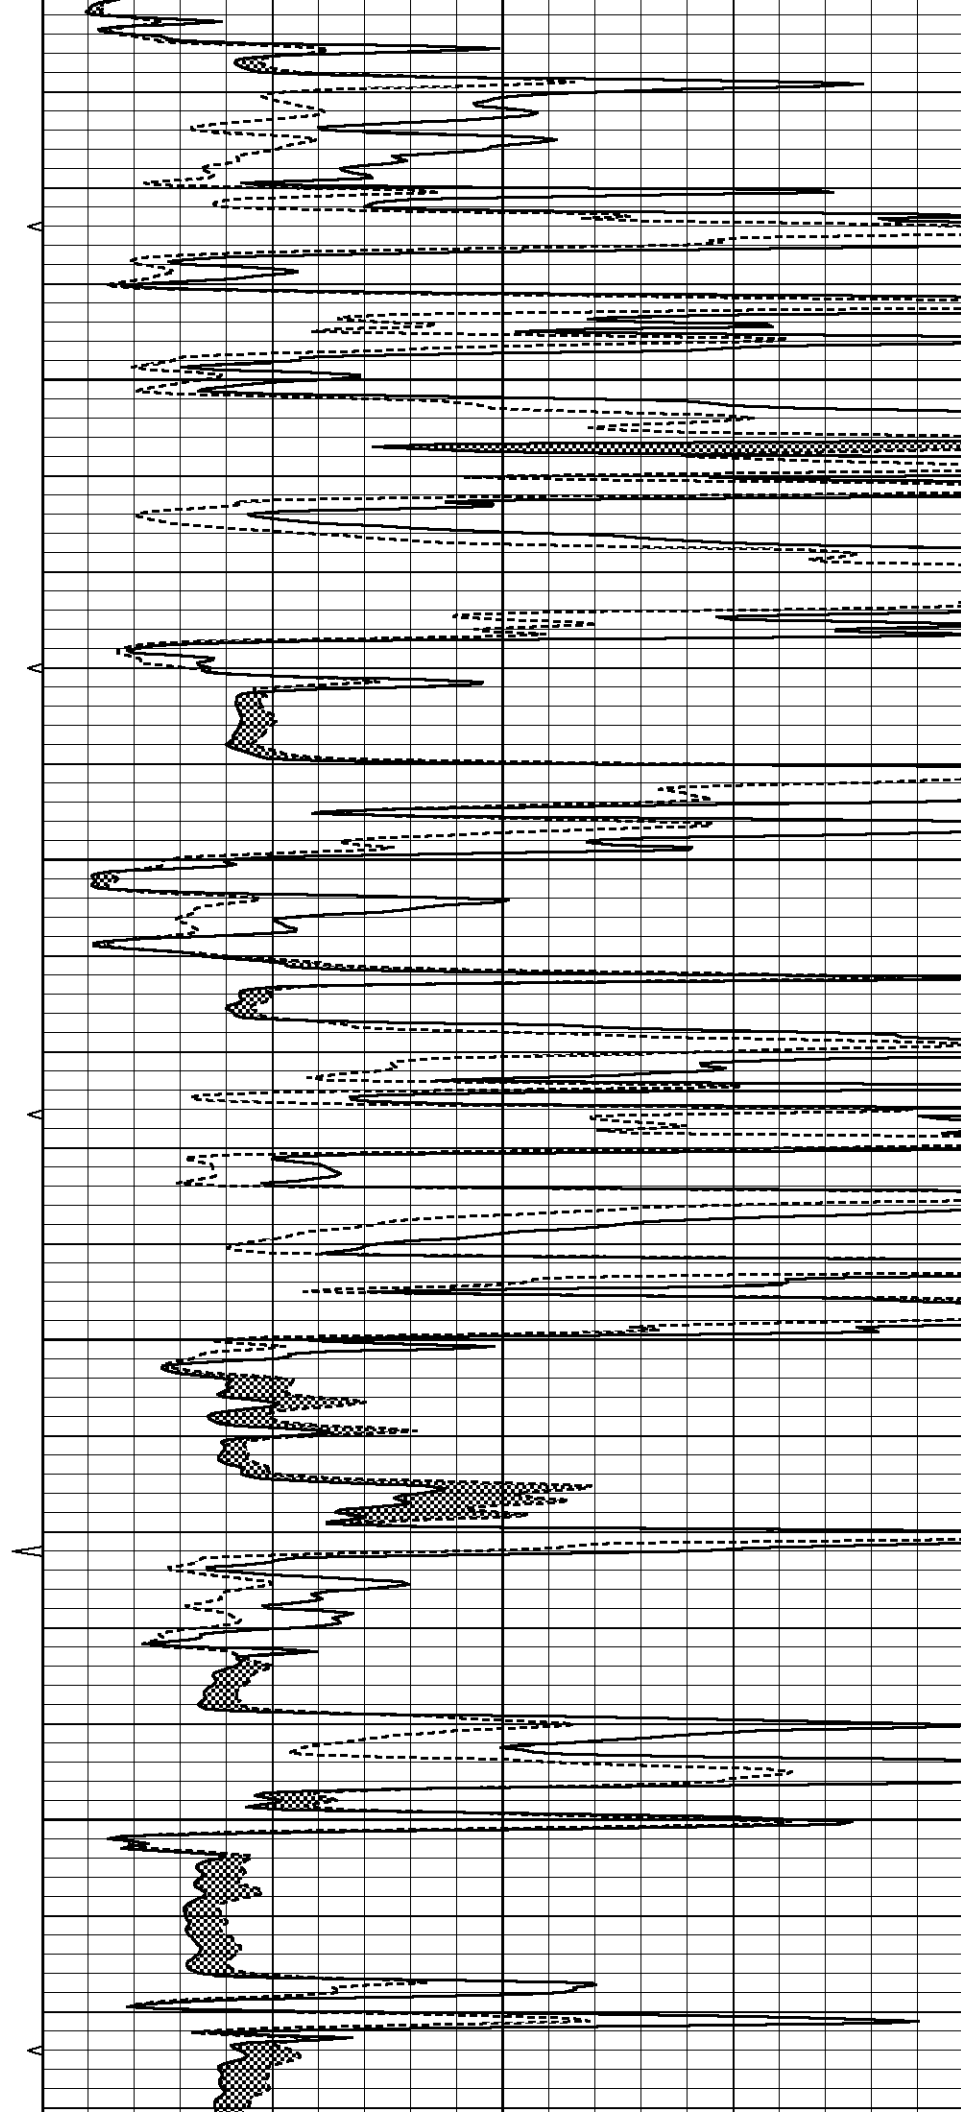

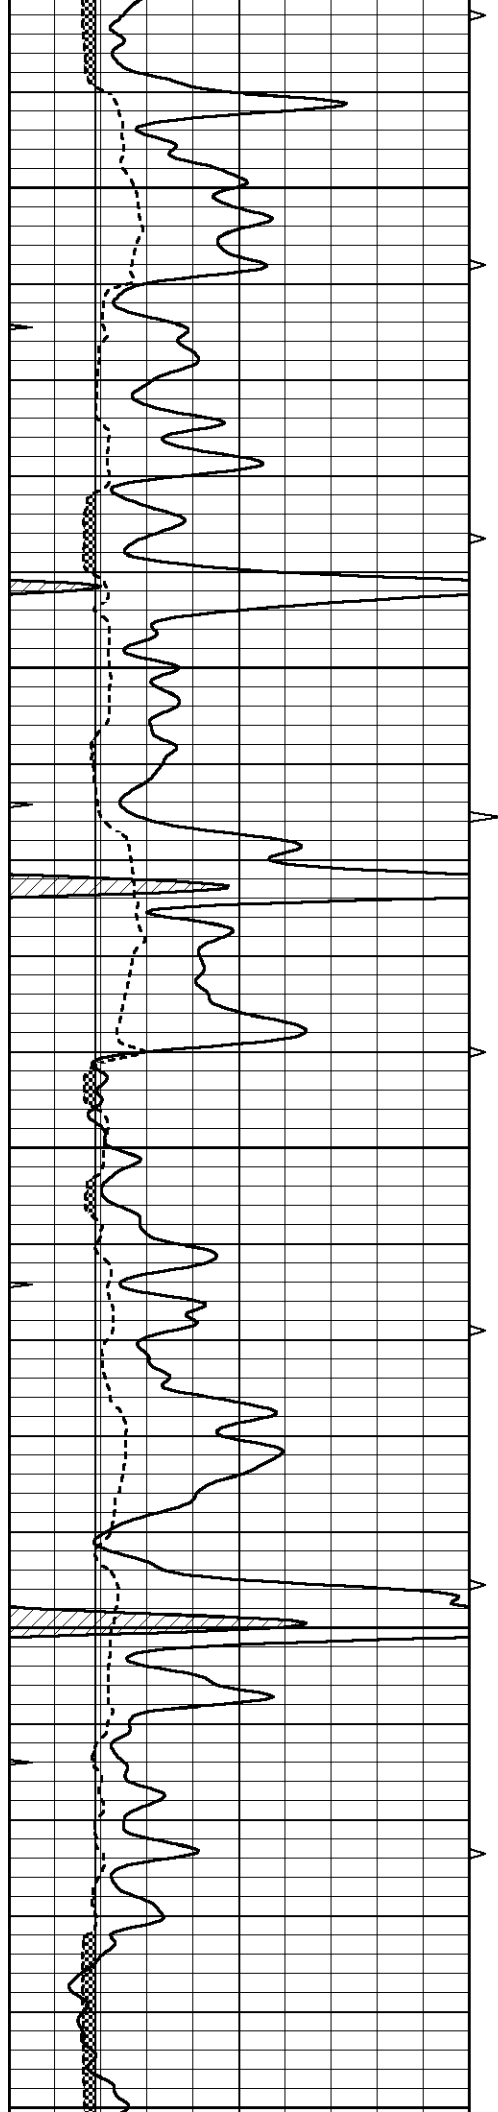


3550


3600

3650


3700


3750

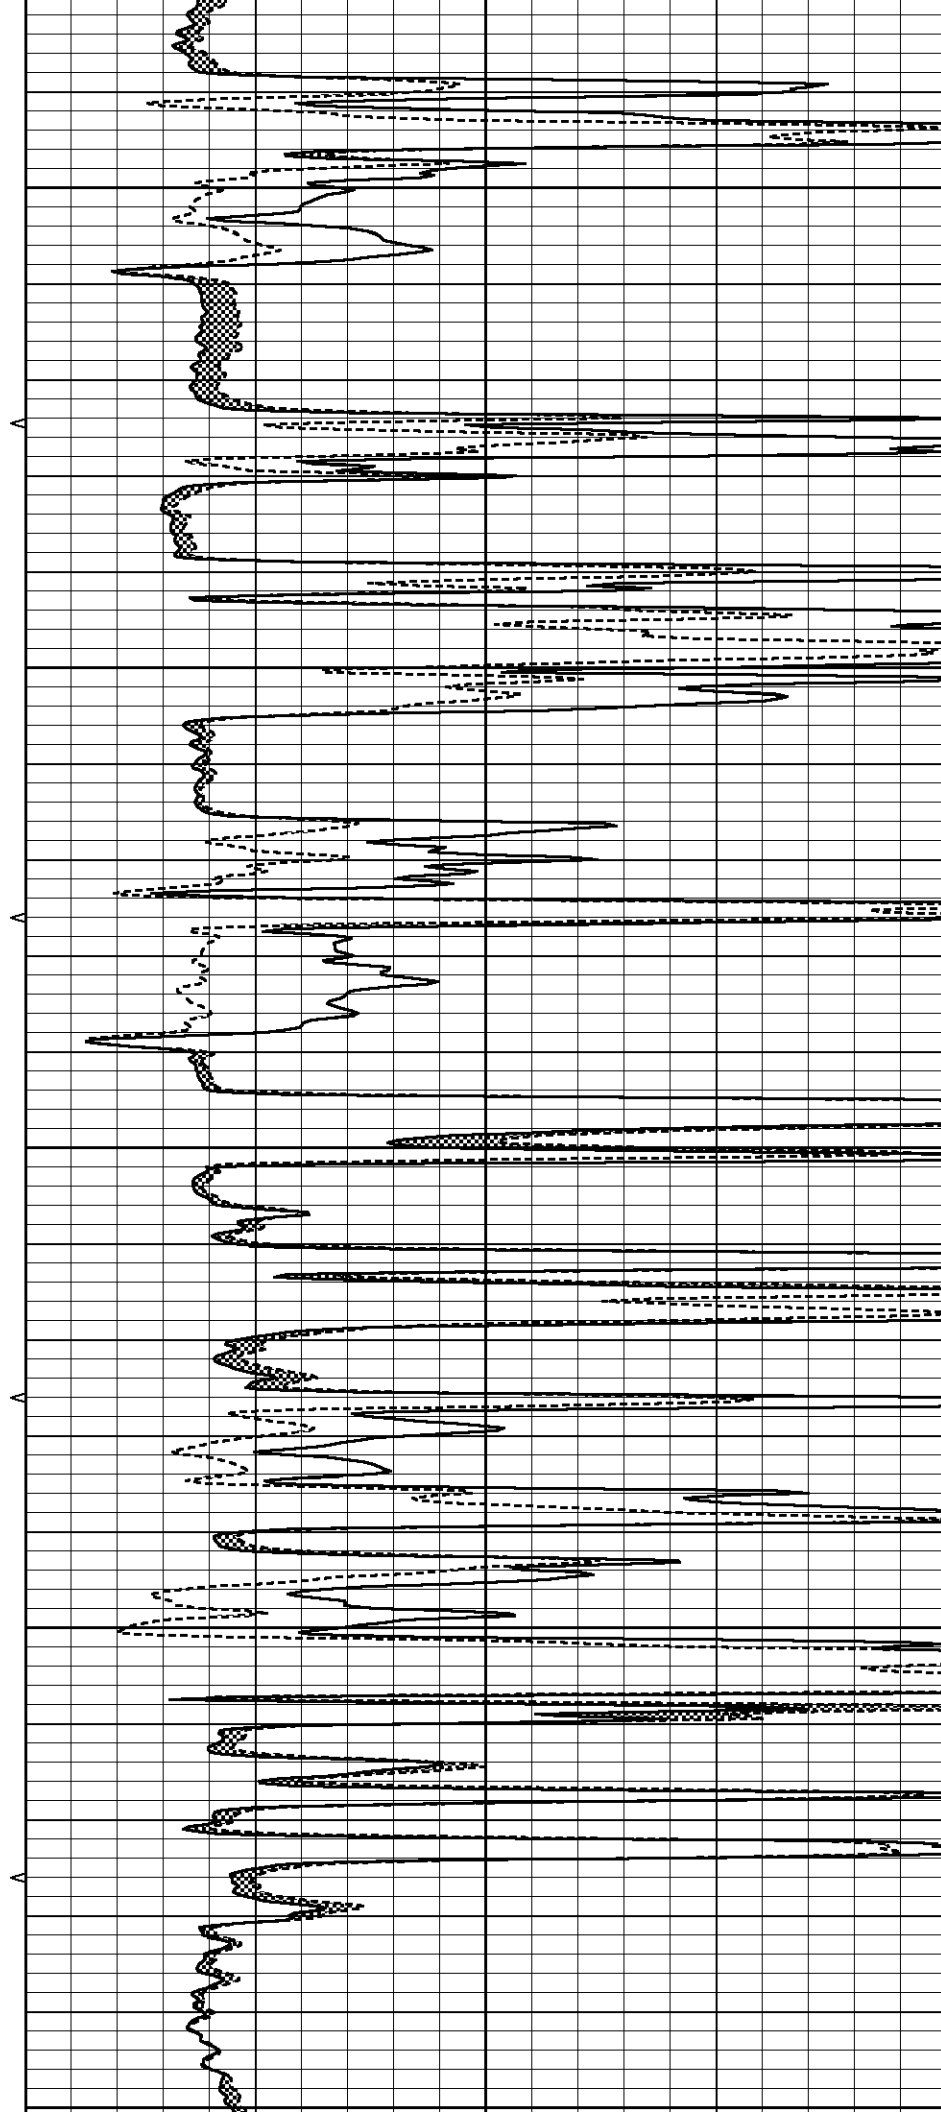

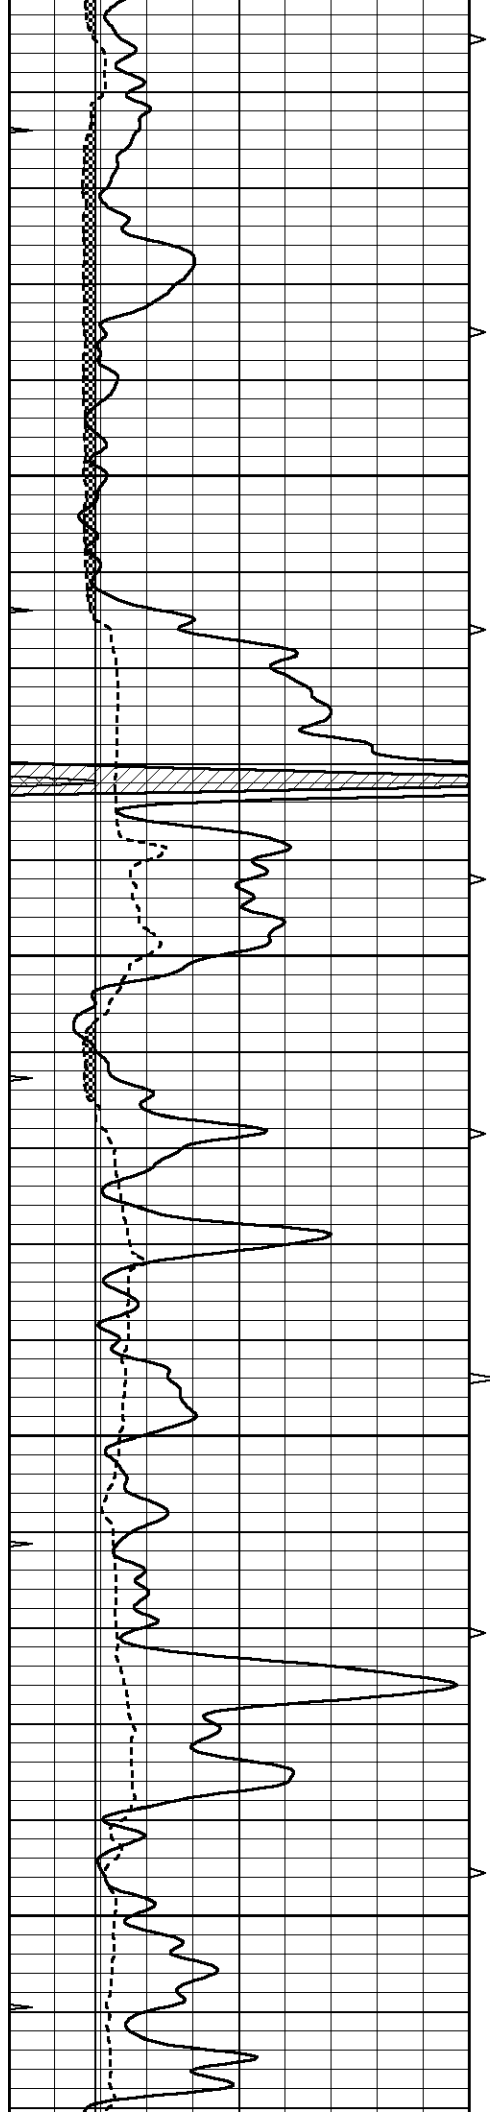

3800
3850
3900
3950

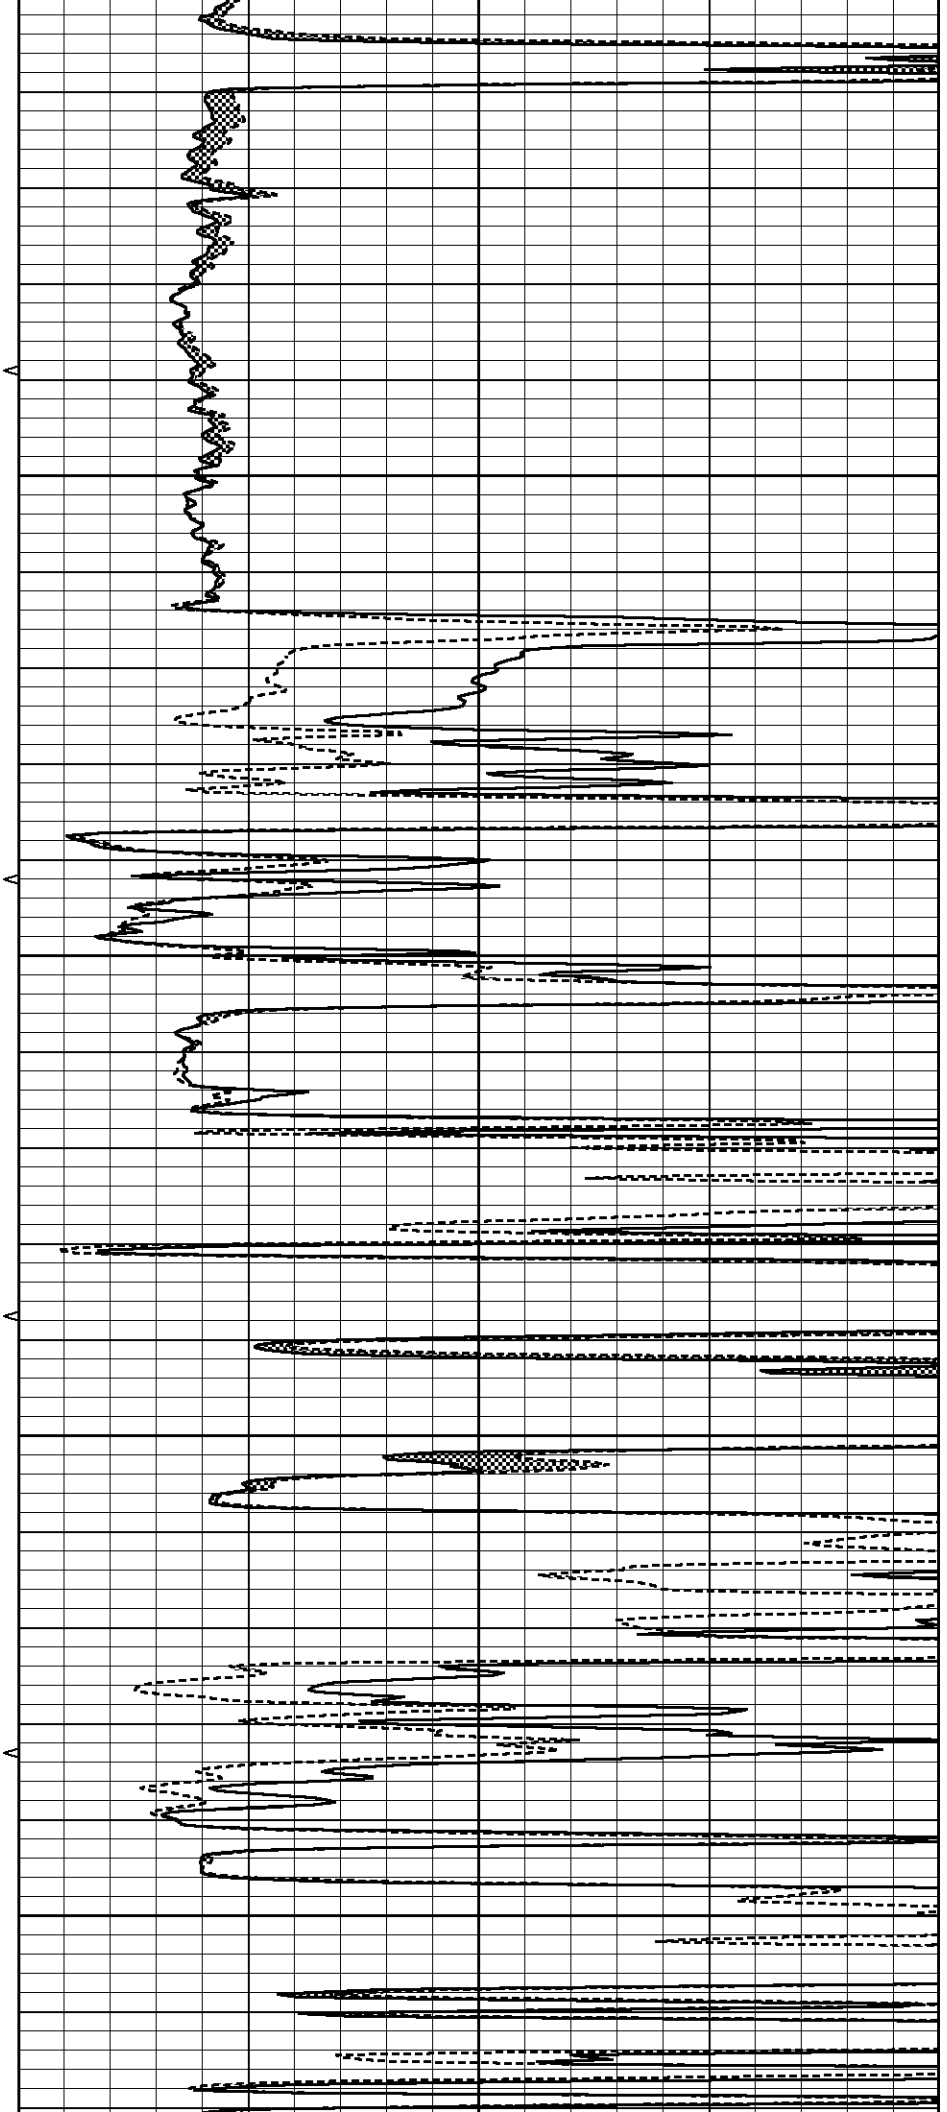

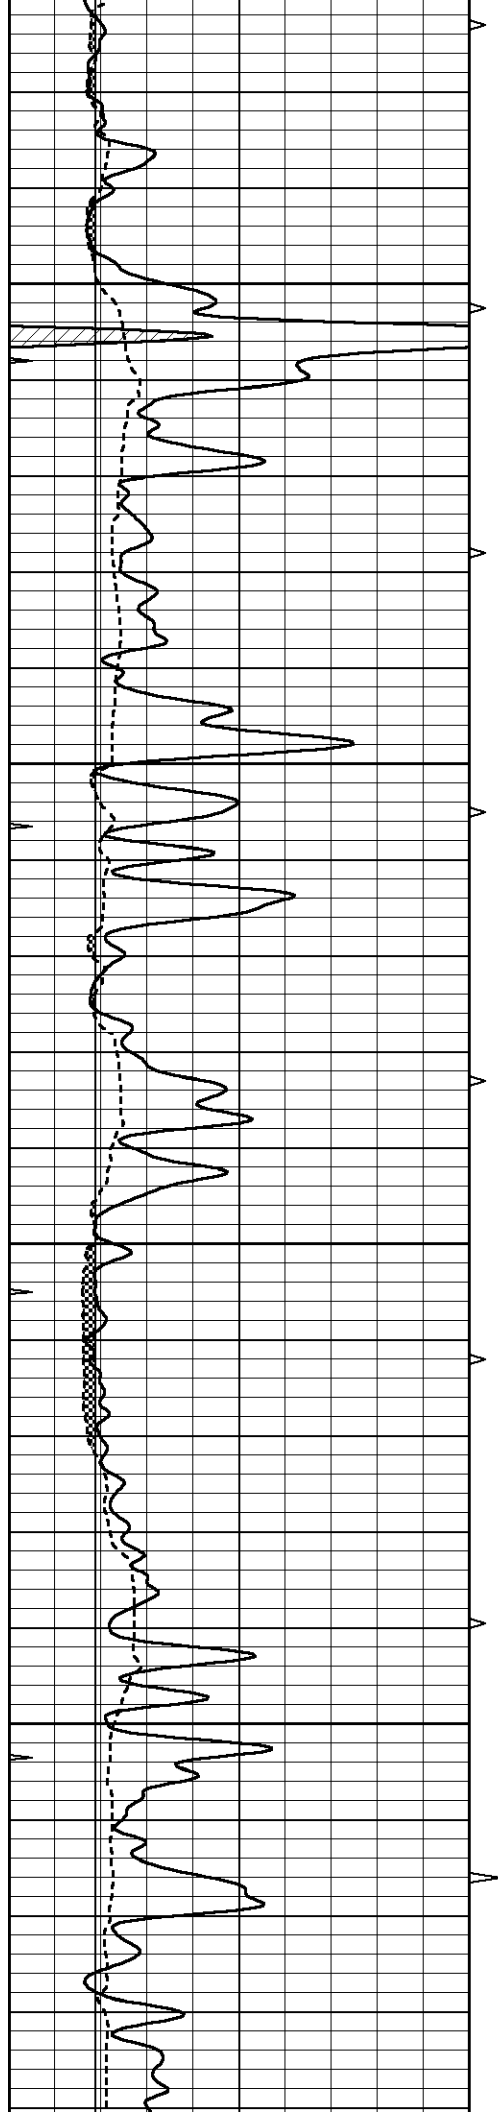



4000


4050

4100

4150

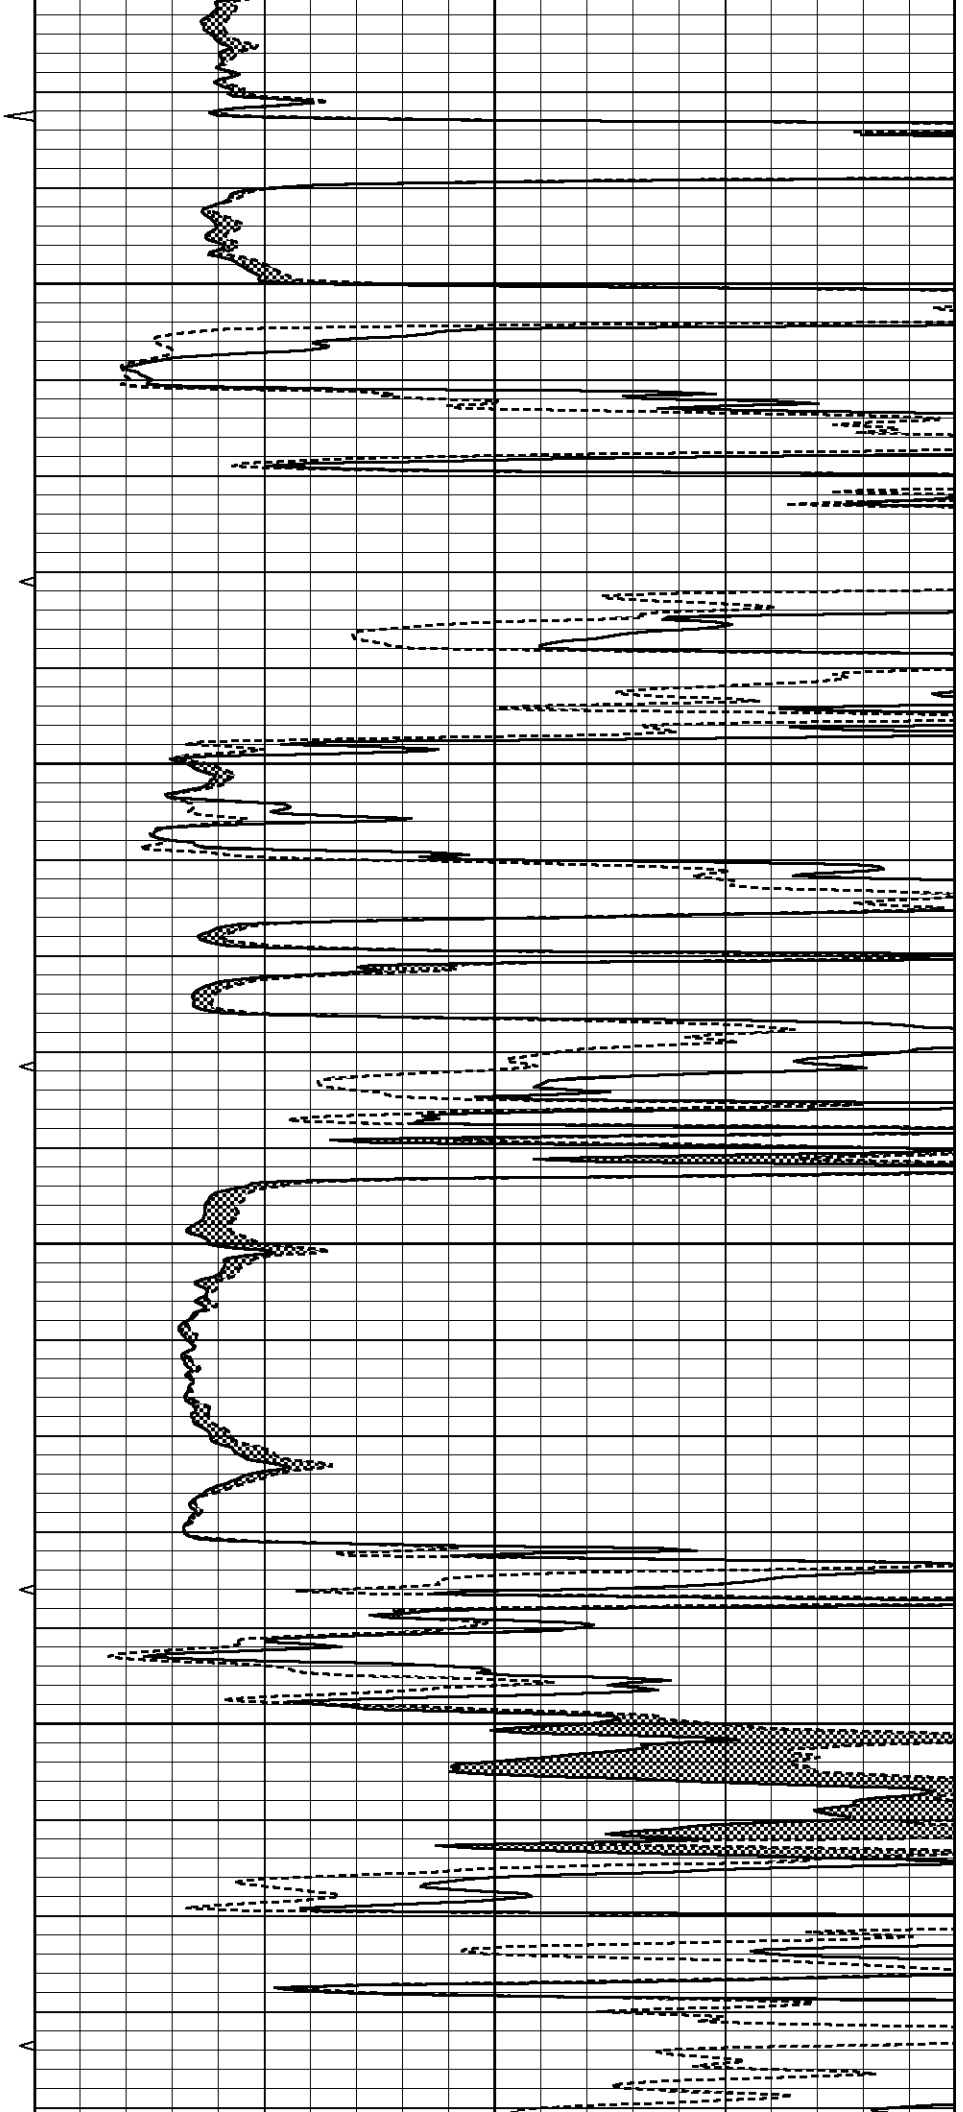

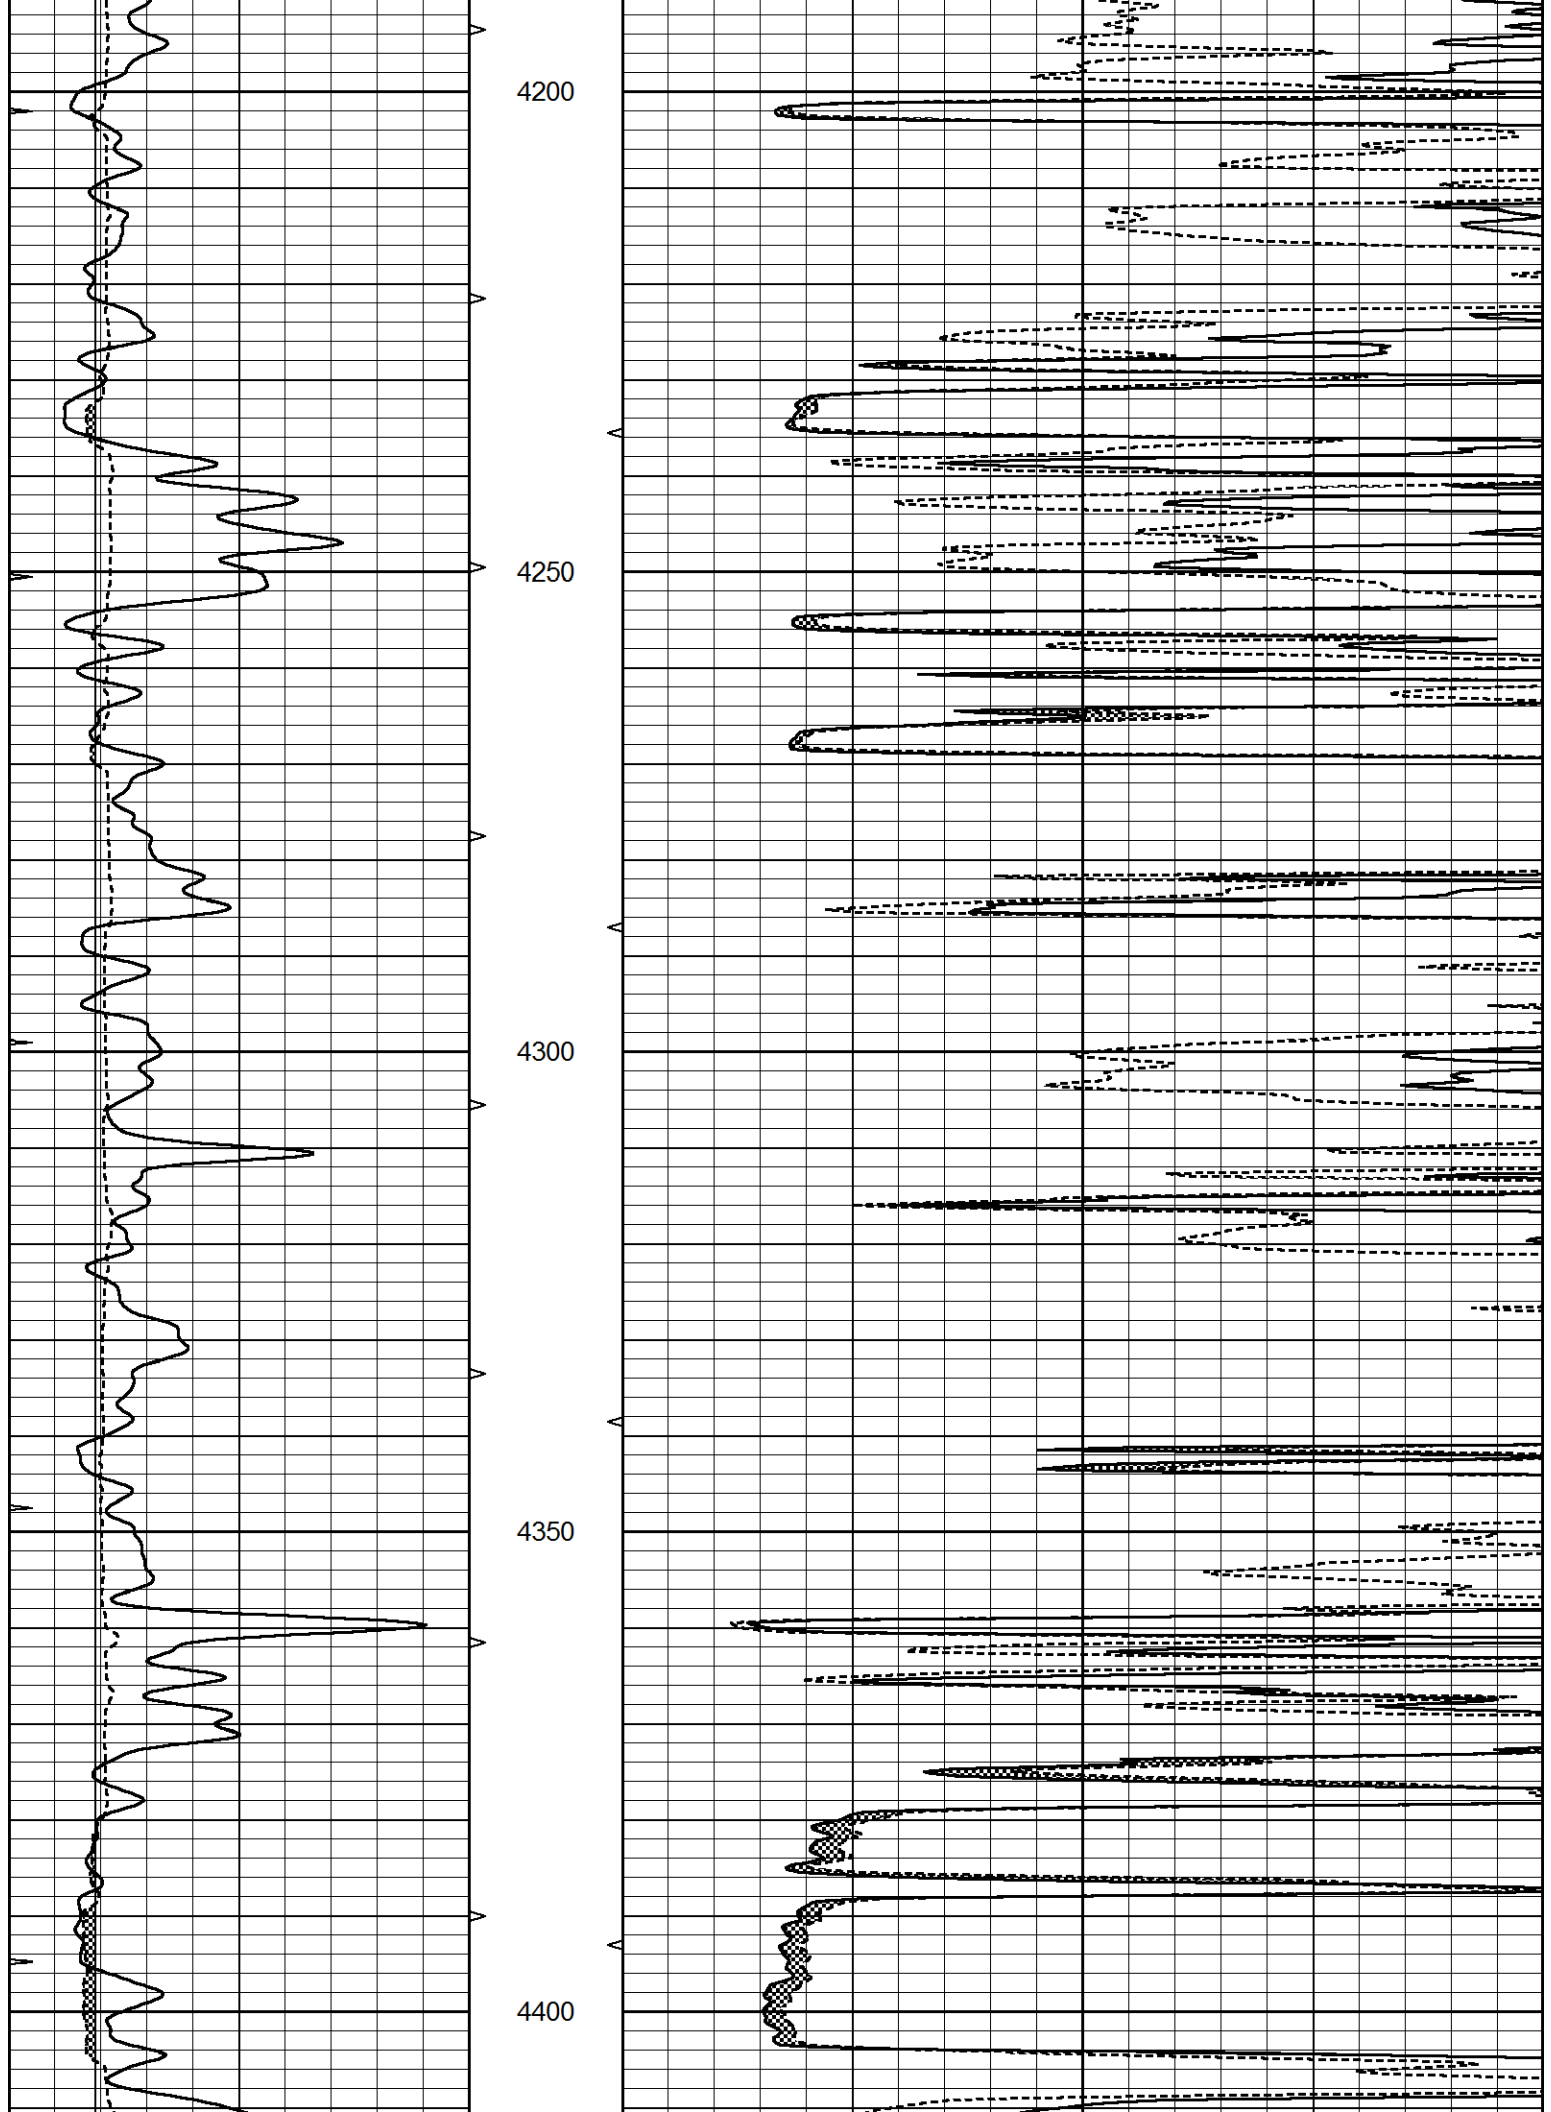

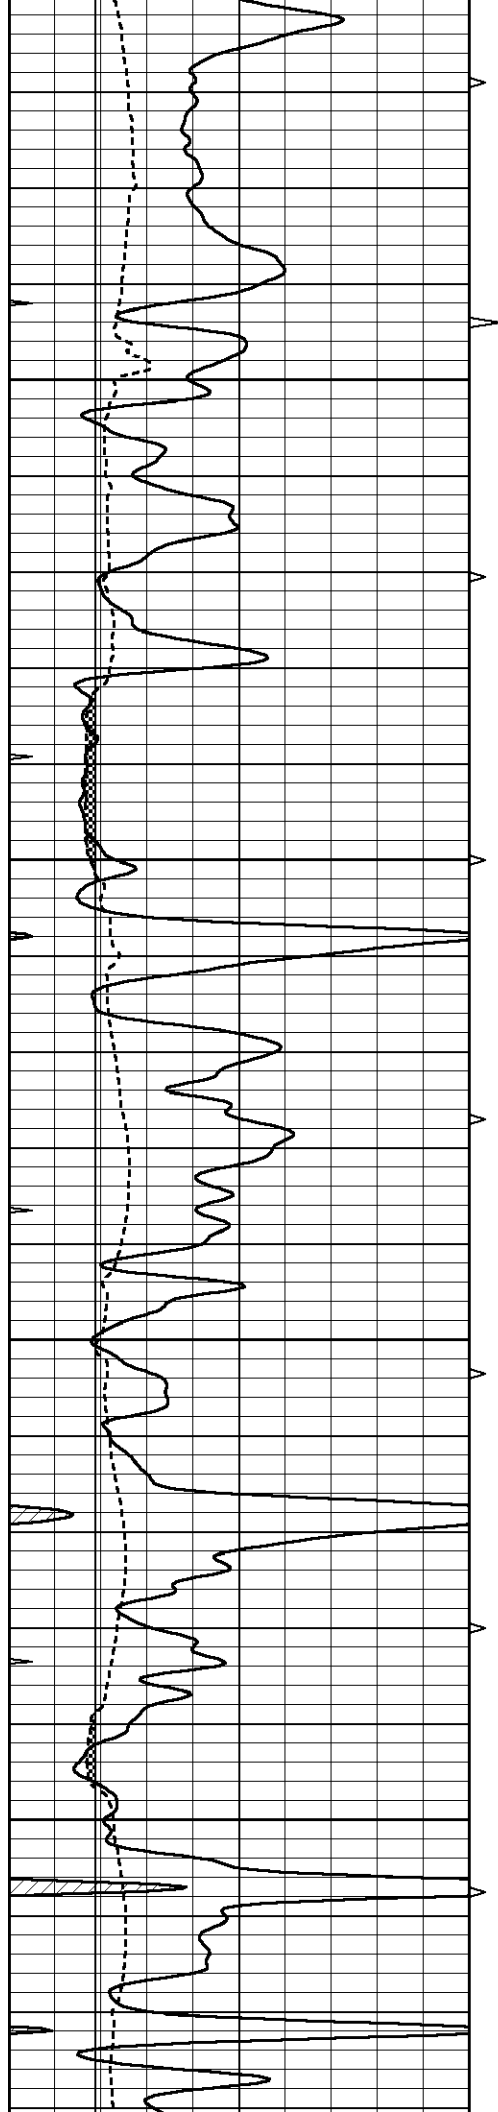



4450

4500

4550

4600

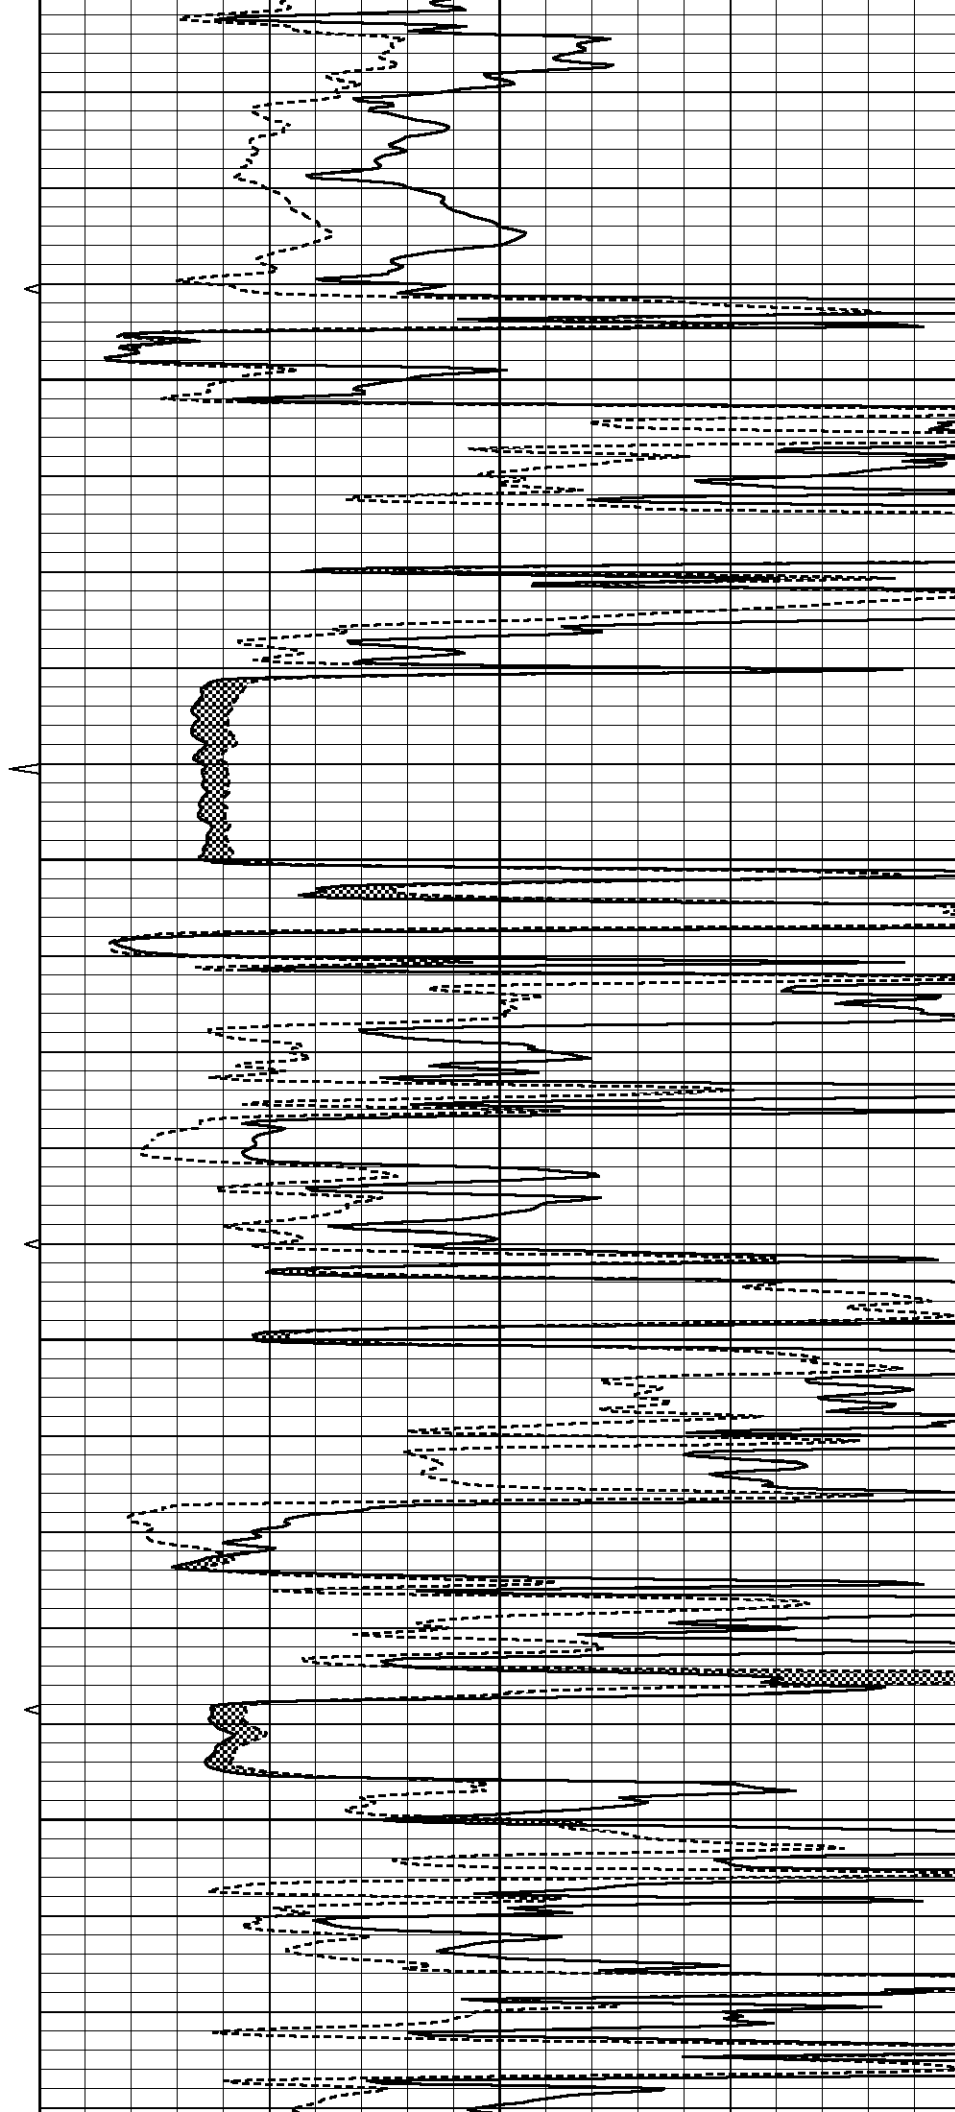

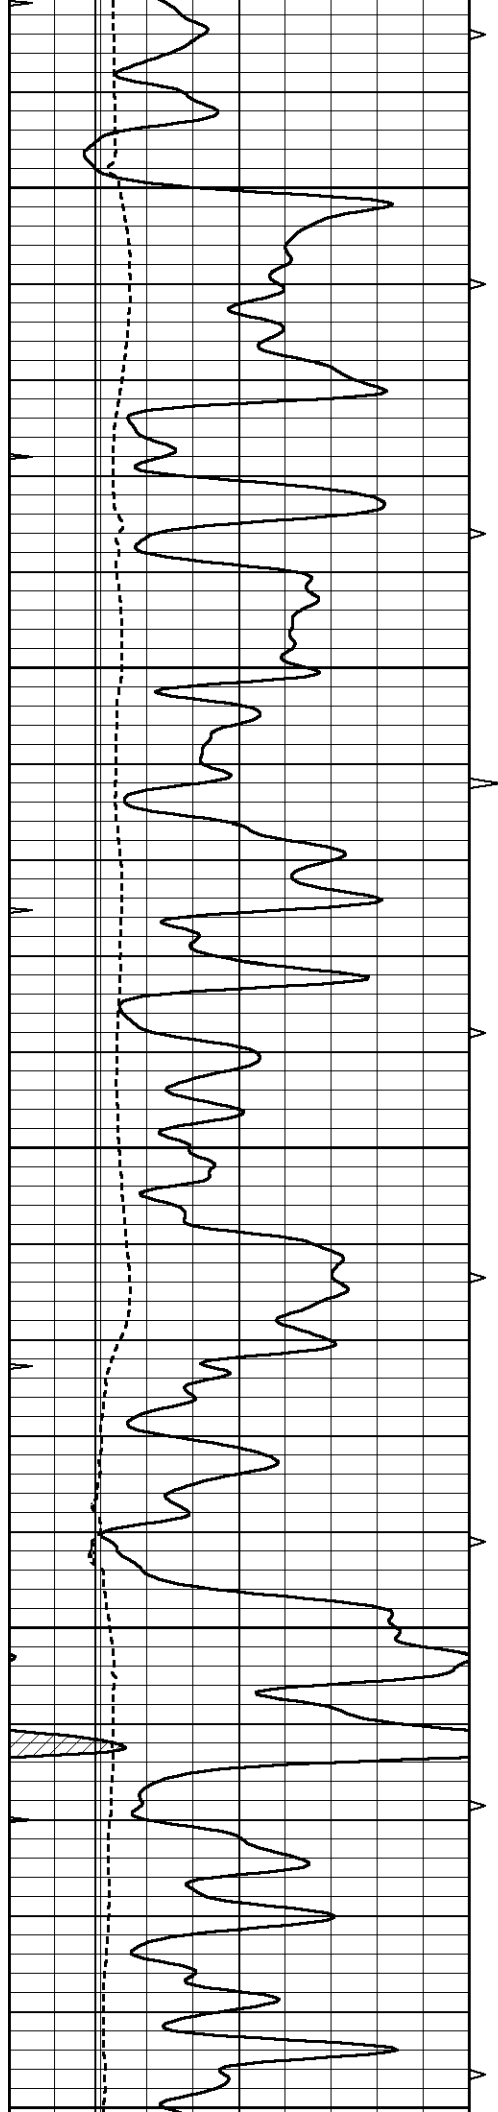


4650


4700

4750

4800

4850

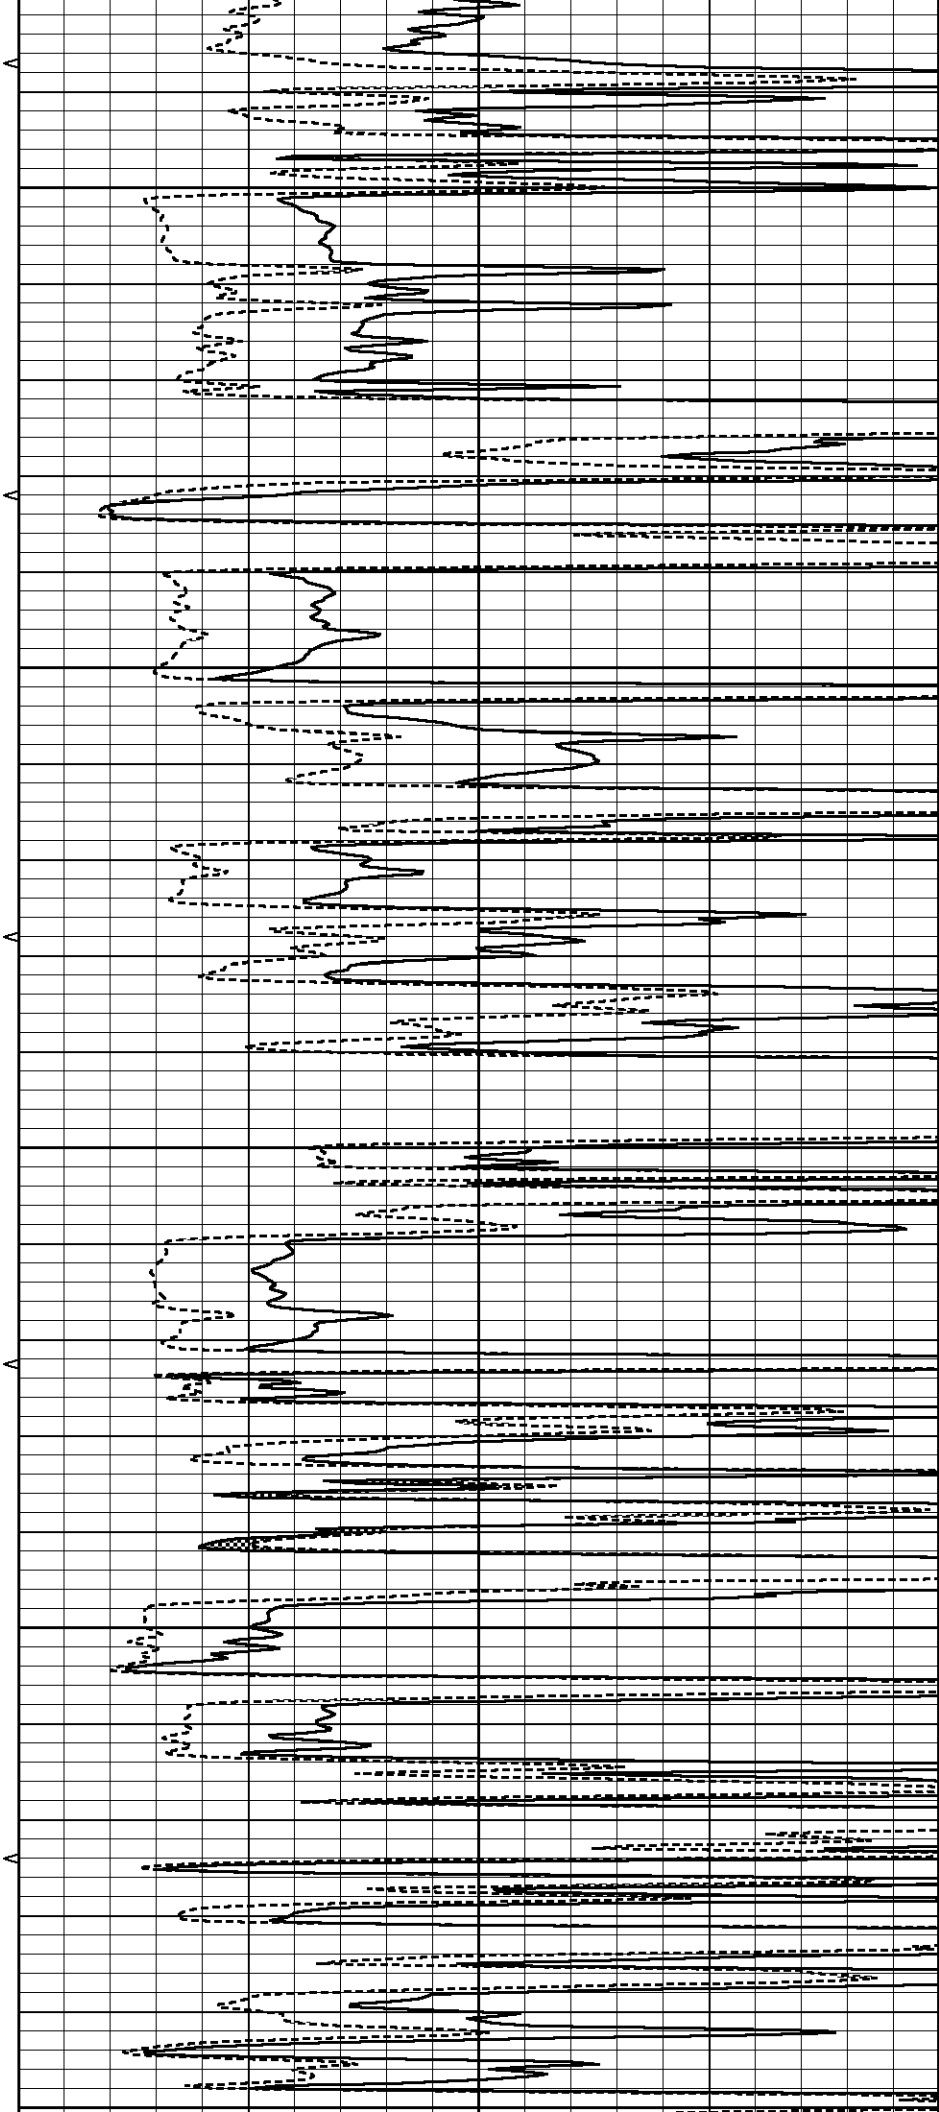


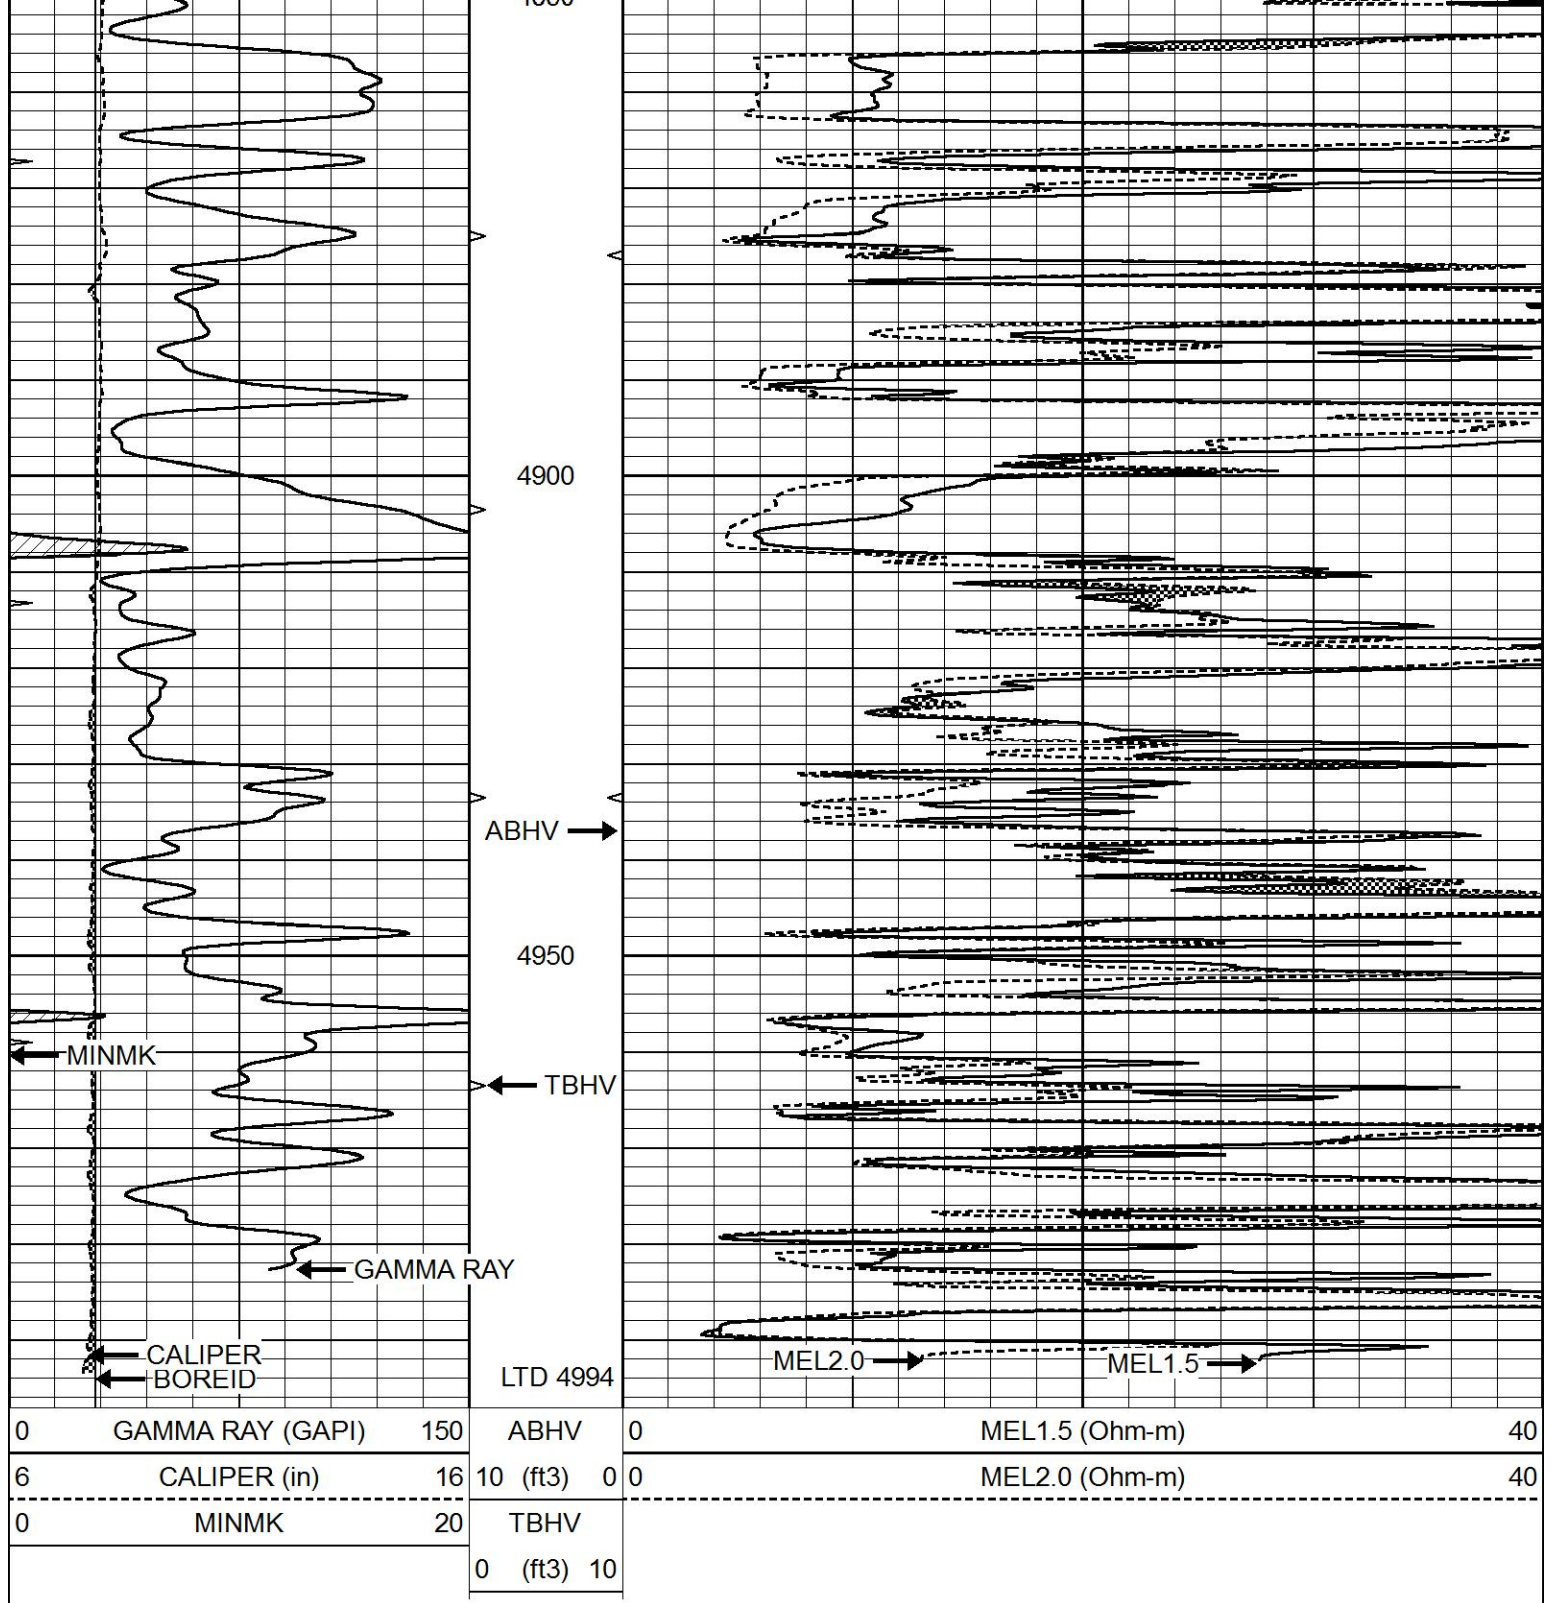

REPEAT SECTION

Database File 5613pe.db
 Dataset Pathname pass4.1
 Presentation Format _micro
 Dataset Creation Thu Aug 12 16:32:09 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

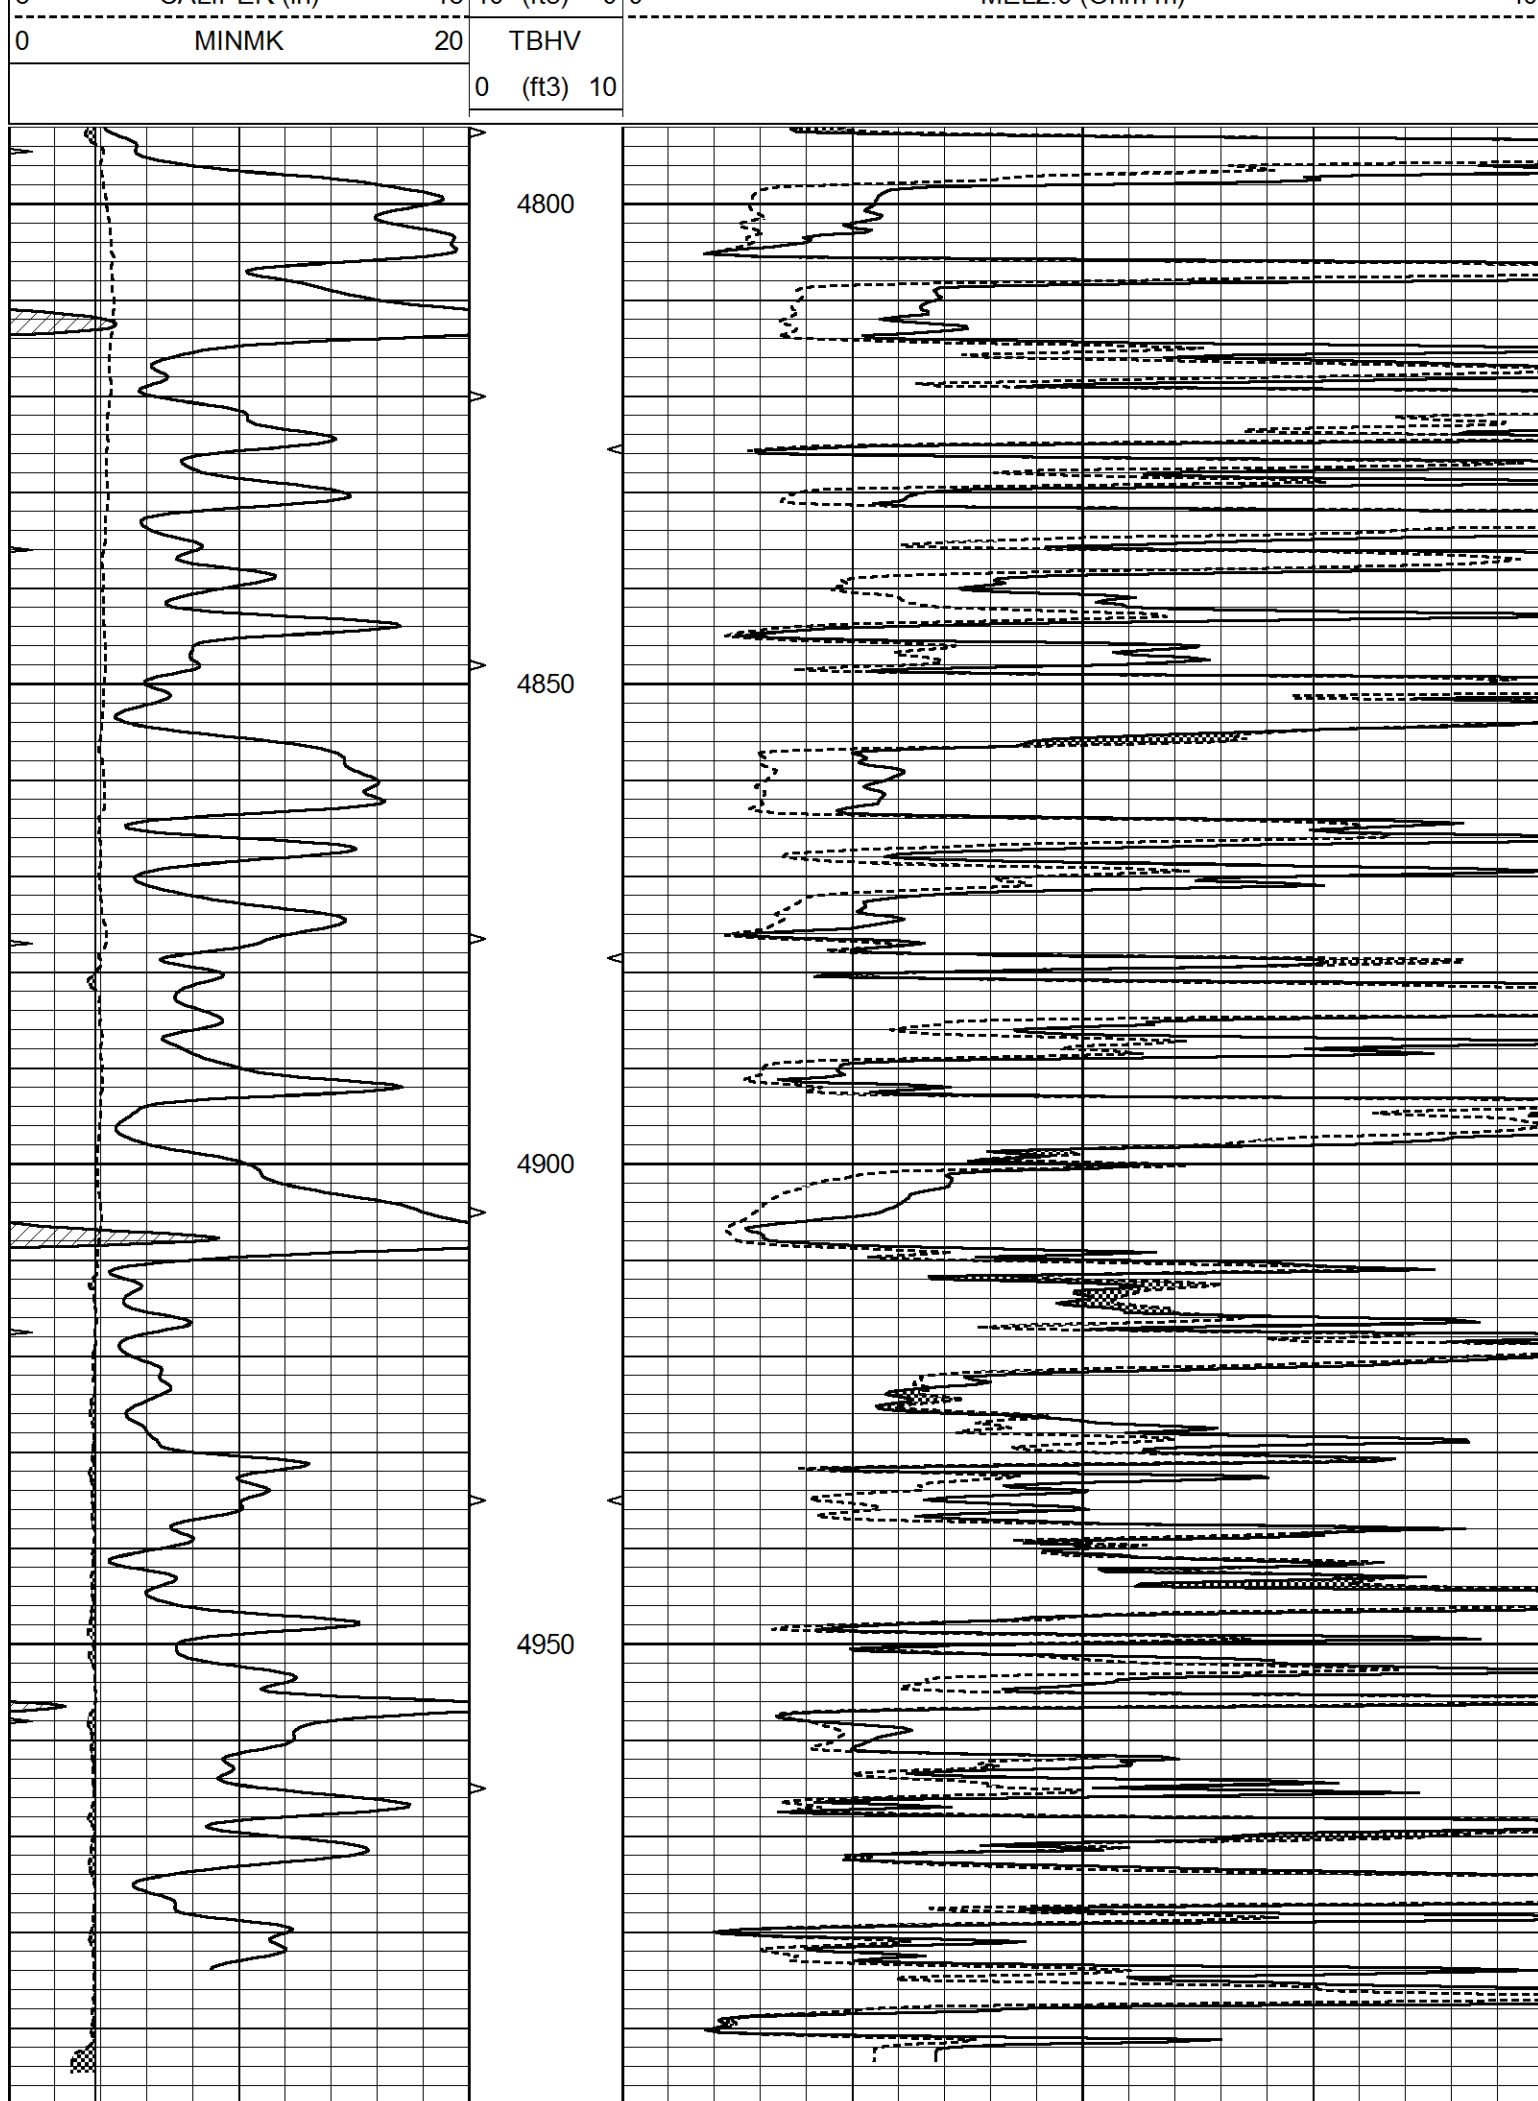

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

Calibration Report					
Database File	5613pe.db				
Dataset Pathname	pass4.1				
Dataset Creation	Thu Aug 12 16:32:09 2021				
MICRO Calibration Report					
Serial Number:		Micro1			
Tool Model:		ProbeL			
Performed:		Thu Aug 05 13:03:33 2021			
Caliper Calibration:		Gain=2.815	Offset=4.402		
References		Low Cal	High Cal		
Readings		8.500	13.500		
		0.887	2.663		
1.5" Calibration:		Gain=38.134	Offset=-1.000		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.004	0.832		
2" Calibration:		Gain=38.000	Offset=-0.800		
References		Low Cal	High Cal		
Readings		0.000	20.000		
		0.022	0.793		
Gamma Ray Calibration Report					
Serial Number:		GR5			
Tool Model:		OPEN			
Performed:		Thu Jul 30 23:16:16 2020			
Calibrator Value:		1.0	GAPI		
Background Reading:		0.0	cps		
Calibrator Reading:		1.0	cps		
Sensitivity:		0.5800	GAPI/cps		