



# MICRO LOG

|                              |                                                       |                                     |                               |
|------------------------------|-------------------------------------------------------|-------------------------------------|-------------------------------|
| Company                      | PLATEAU OPERATING CORPORATION                         | Company                             | PLATEAU OPERATING CORPORATION |
| Well                         | LEVEN #2                                              | Well                                | LEVEN #2                      |
| Field                        | NA                                                    | Field                               | NA                            |
| County                       | HAMILTON                                              | County                              | HAMILTON                      |
| State                        | KANSAS                                                | State                               | KANSAS                        |
| Location:                    | API # : 15-075-20904-0000<br>660' FNL & 660' FWL      | Other Services<br>CDL/CNL/PE<br>DIL |                               |
| Permanent Datum              | SEC 6 TWP 25S RGE 40W                                 | Elevation                           |                               |
| Log Measured From            | GROUND LEVEL Elevation 3356<br>KELLY BUSHING 7' A.G.L | K.B. 3363<br>D.F. 3361<br>G.L. 3356 |                               |
| Drilling Measured From       | KELLY BUSHING                                         |                                     |                               |
| Date                         | 8/17/21                                               |                                     |                               |
| Run Number                   | TWO                                                   |                                     |                               |
| Depth Driller                | 2600                                                  |                                     |                               |
| Depth Logger                 | 2595                                                  |                                     |                               |
| Bottom Logged Interval       | 2593                                                  |                                     |                               |
| Top Log Interval             | 1100                                                  |                                     |                               |
| Casing Driller               | 8 5/8" @ 1115                                         |                                     |                               |
| Casing Logger                | 1115                                                  |                                     |                               |
| Bit Size                     | 7 7/8                                                 |                                     |                               |
| Type Fluid in Hole           | CHEMICAL MUD                                          |                                     |                               |
| Density / Viscosity          | 9.4/34                                                |                                     |                               |
| pH / Fluid Loss              | 8.0/NC                                                |                                     |                               |
| Source of Sample             | FLOWLINE                                              |                                     |                               |
| Rm @ Meas. Temp              | .75 @ 70F                                             |                                     |                               |
| Rmf @ Meas. Temp             | .56 @ 70F                                             |                                     |                               |
| Rmc @ Meas. Temp             | .90 @ 70F                                             |                                     |                               |
| Source of Rmf / Rmc          | MEASUREMENT                                           |                                     |                               |
| Rm @ BHT                     | .50 @ 103F                                            |                                     |                               |
| Time Circulation Stopped     | 2 HOURS                                               |                                     |                               |
| Time Logger on Bottom        | ////                                                  |                                     |                               |
| Maximum Recorded Temperature | 103F                                                  |                                     |                               |
| Equipment Number             | 3802                                                  |                                     |                               |
| Location                     | HAYS, KANSAS                                          |                                     |                               |
| Recorded By                  | JASON CAPELLUCCI                                      |                                     |                               |
| Witnessed By                 | BILL KERRIGAN                                         |                                     |                               |

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

## Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. ( 785 ) 628-6395  
DIRECTIONS  
SYRACUSE, KS. - 5 SOUTH - EAST INTO



# MAIN SECTION

|                     |                            |
|---------------------|----------------------------|
| Database File       | 5642pe.db                  |
| Dataset Pathname    | pass6.1                    |
| Presentation Format | _micro                     |
| Dataset Creation    | Tue Aug 17 11:44:22 2021   |
| Charted by          | Depth in Feet scaled 1:240 |

|   |                  |     |          |    |                |    |
|---|------------------|-----|----------|----|----------------|----|
| 0 | GAMMA RAY (GAPI) | 150 | ABHV     | 0  | MEL1.5 (Ohm-m) | 40 |
| 6 | CALIPER (in)     | 16  | 10 (ft3) | 0  | MEL2.0 (Ohm-m) | 40 |
|   |                  |     | TBHV     |    |                |    |
|   |                  |     | 0 (ft3)  | 10 |                |    |


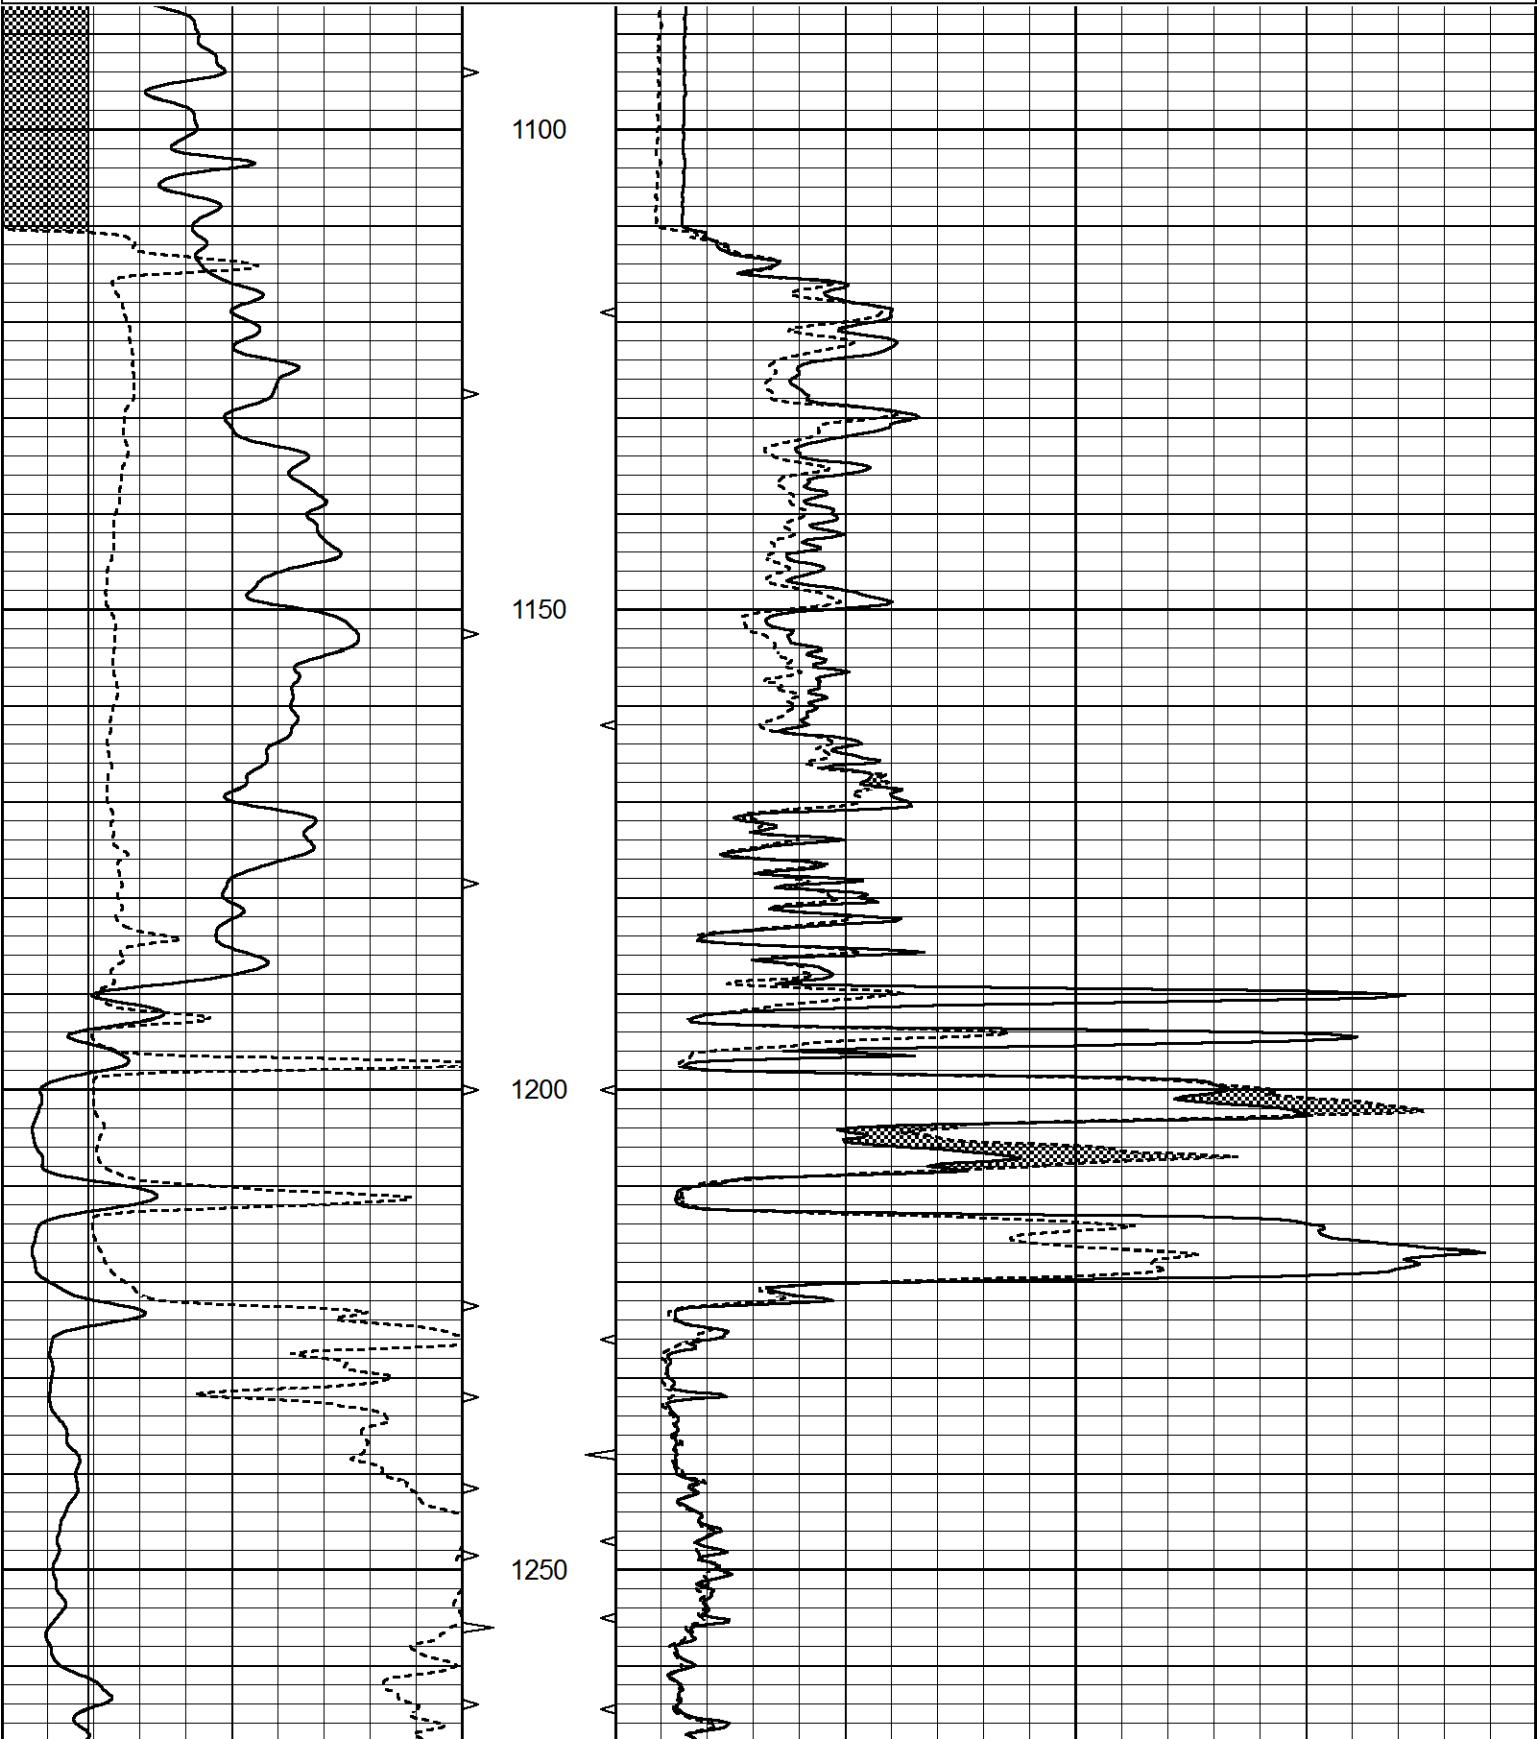



1300


1350

1400

1450

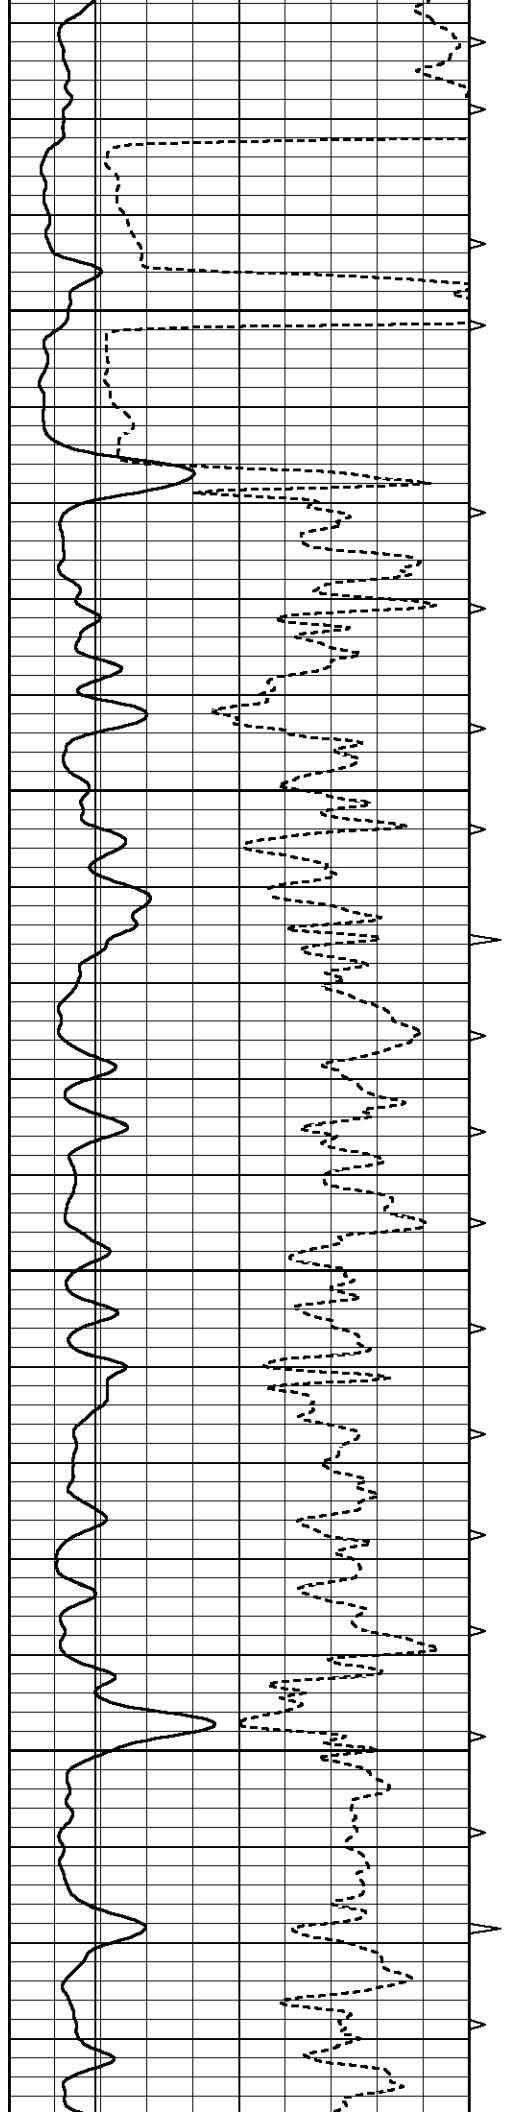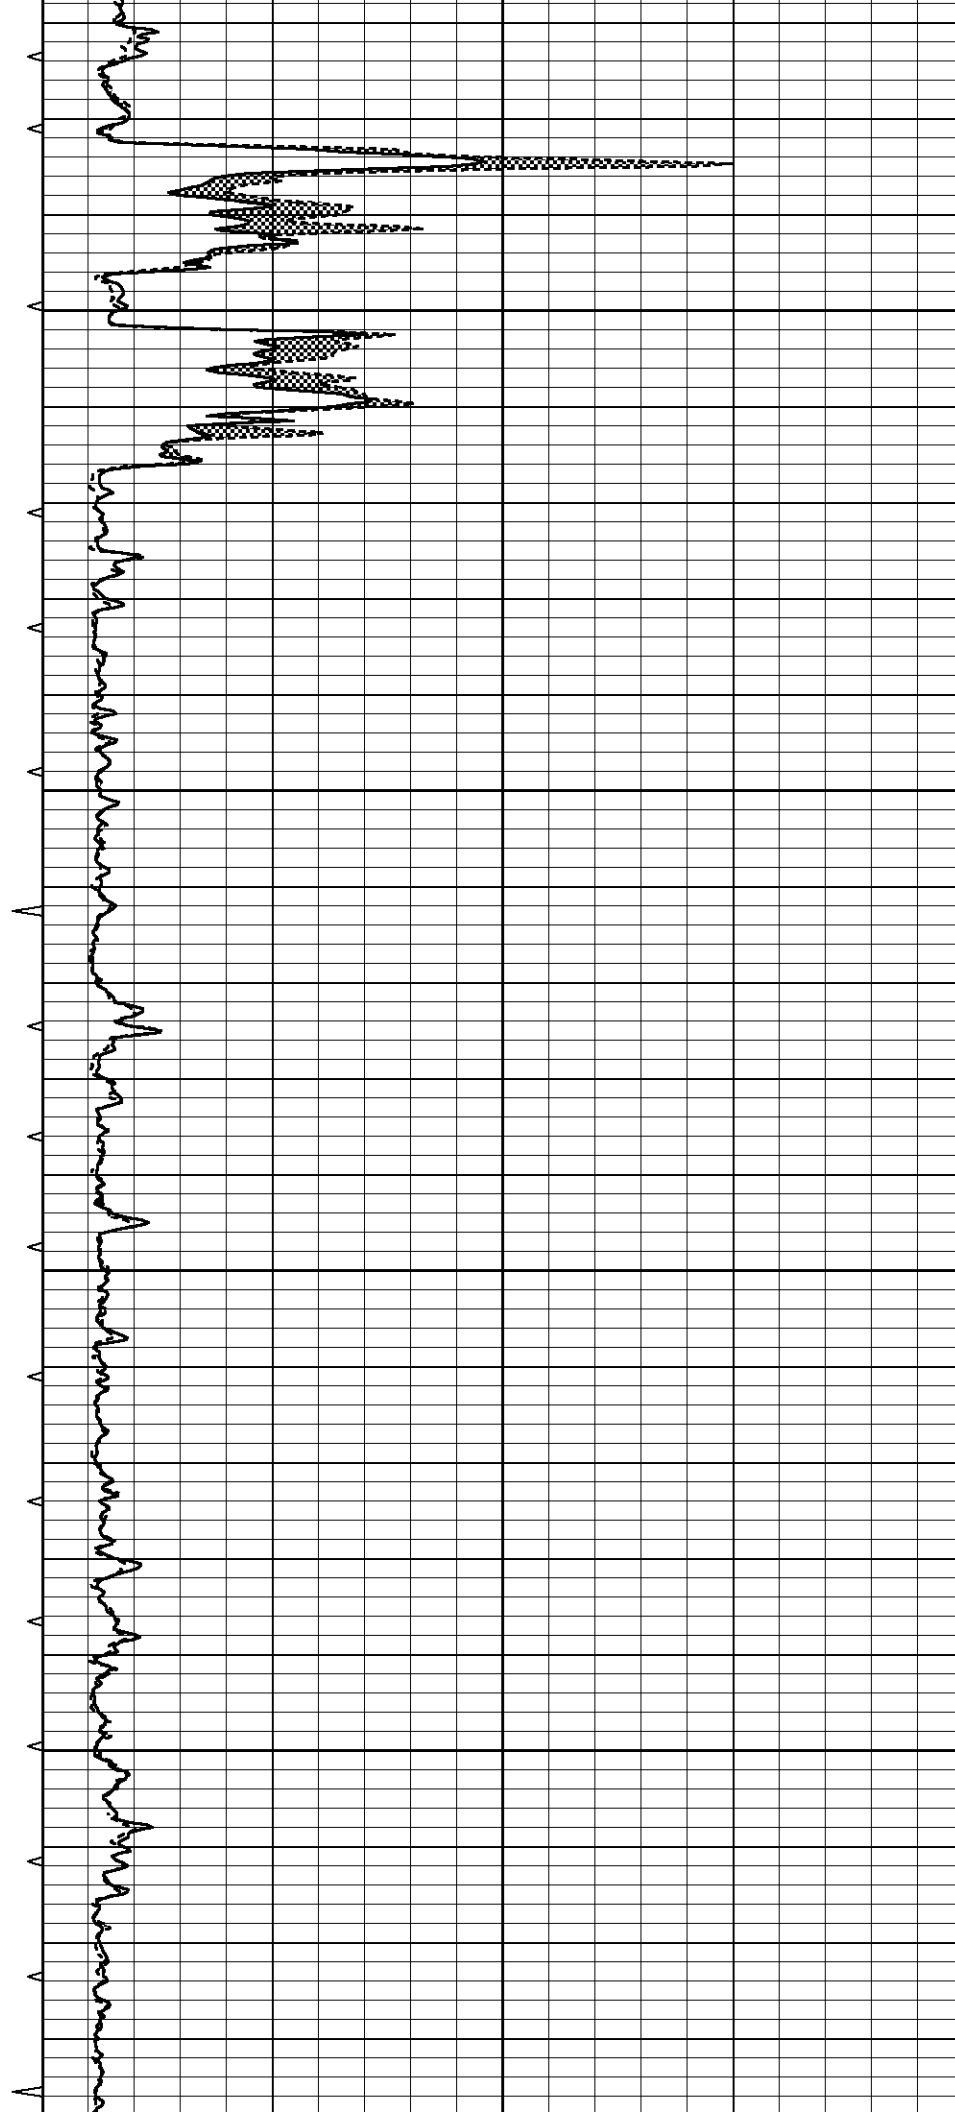

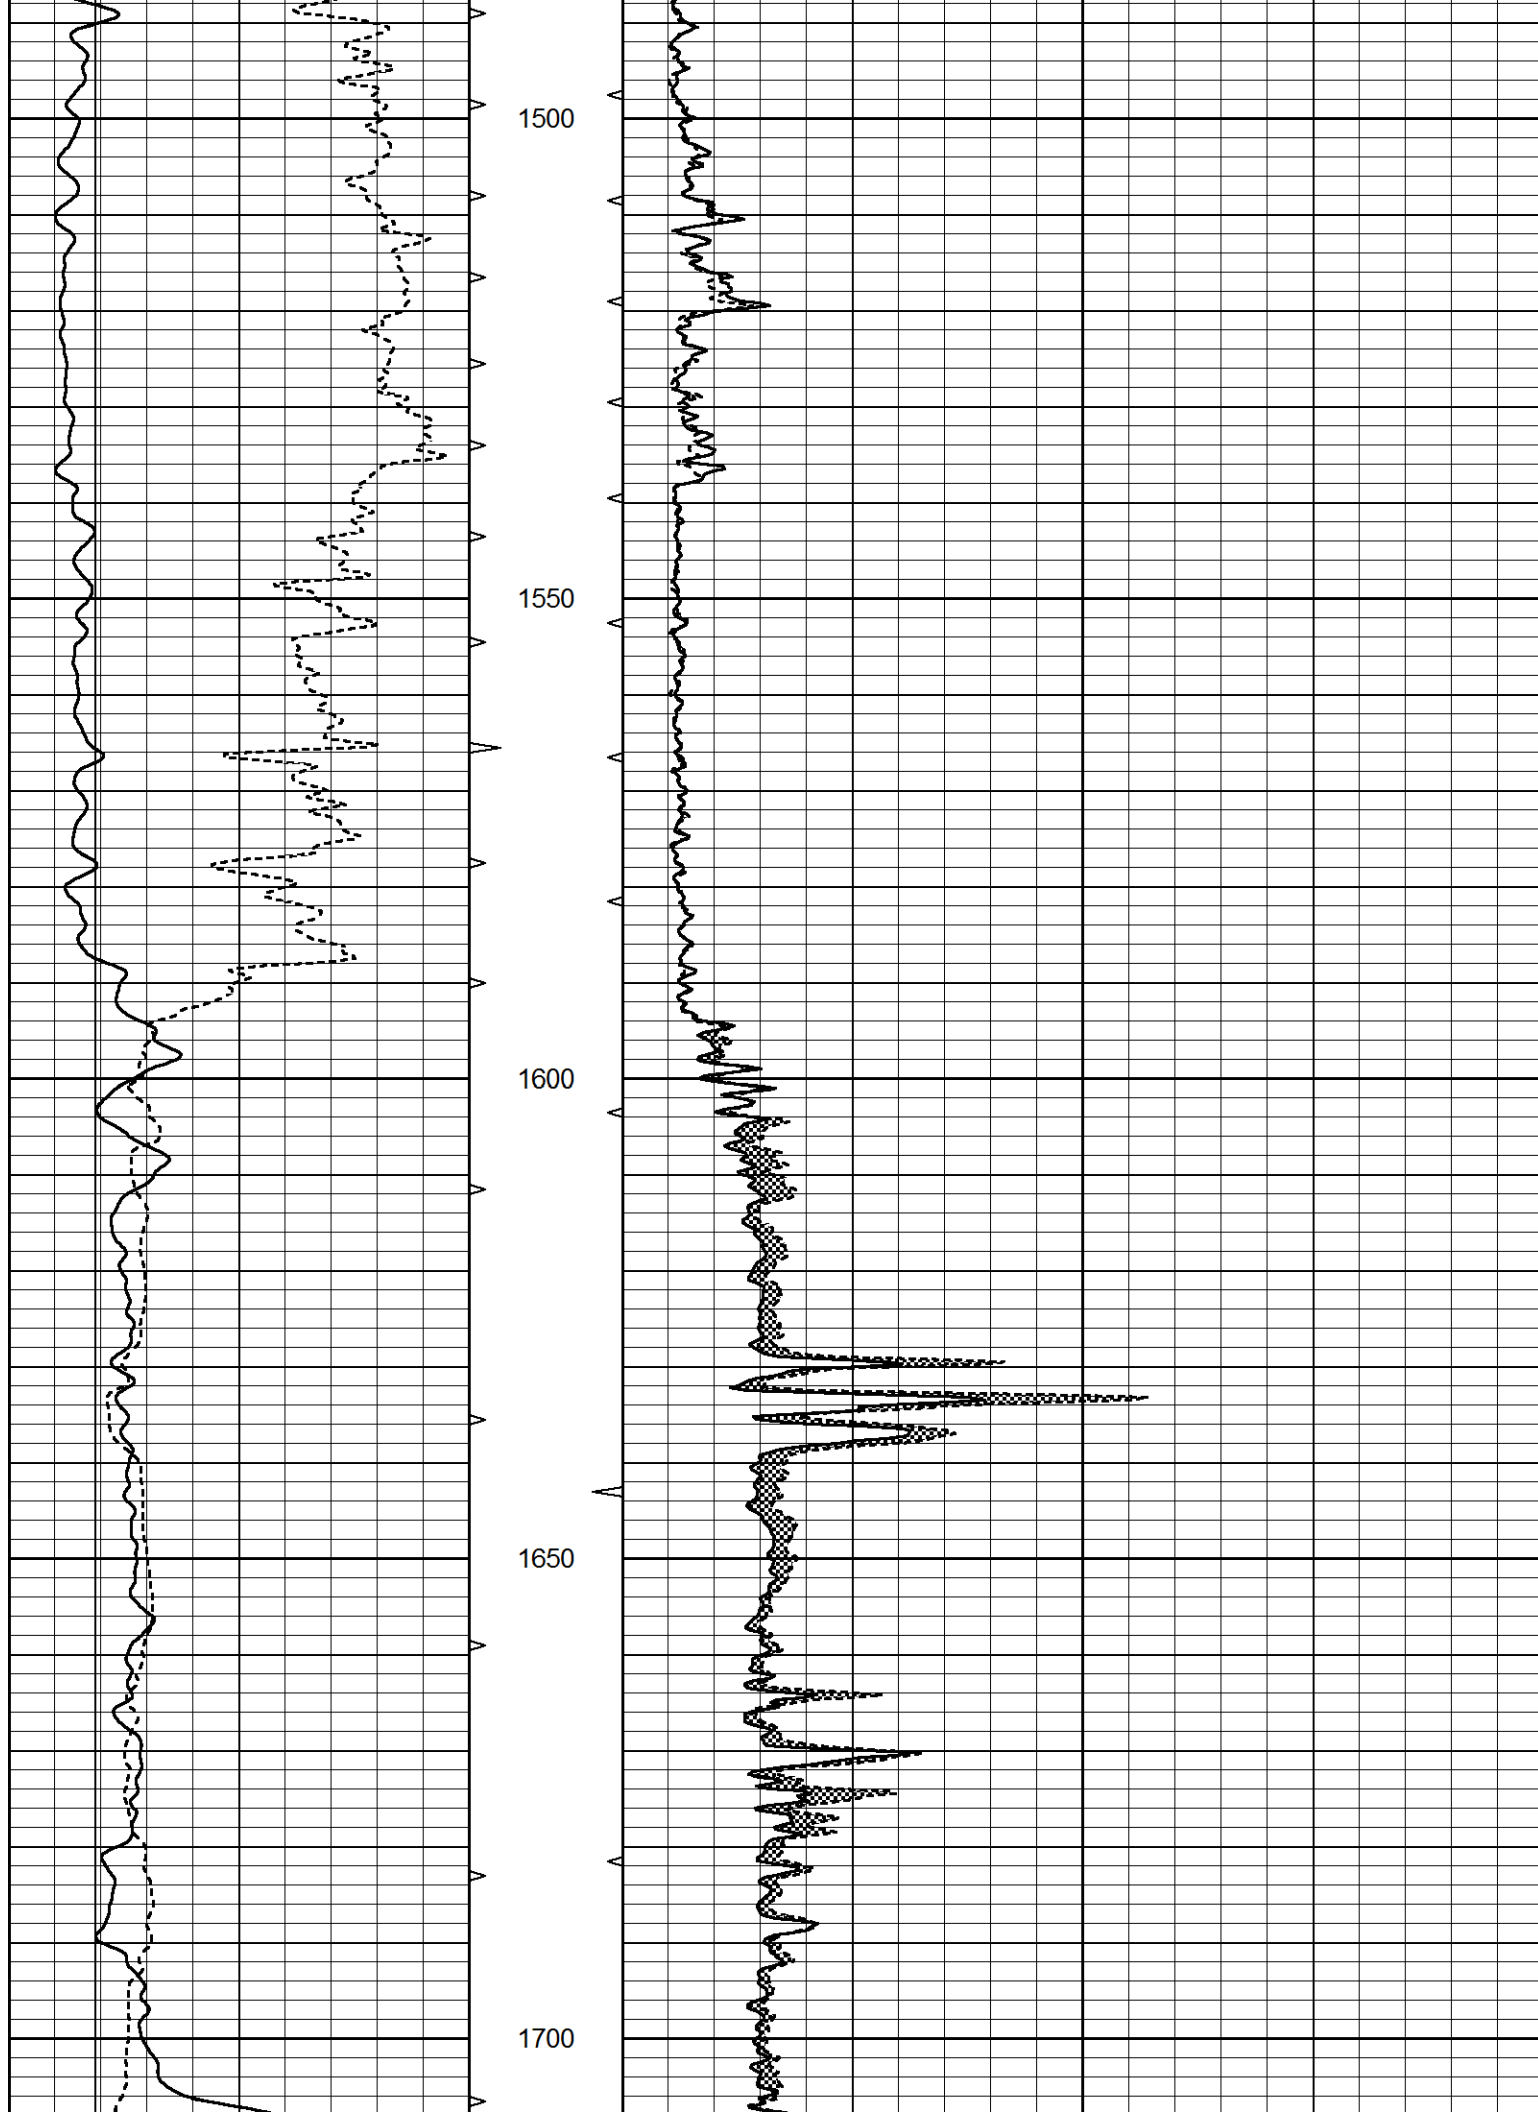

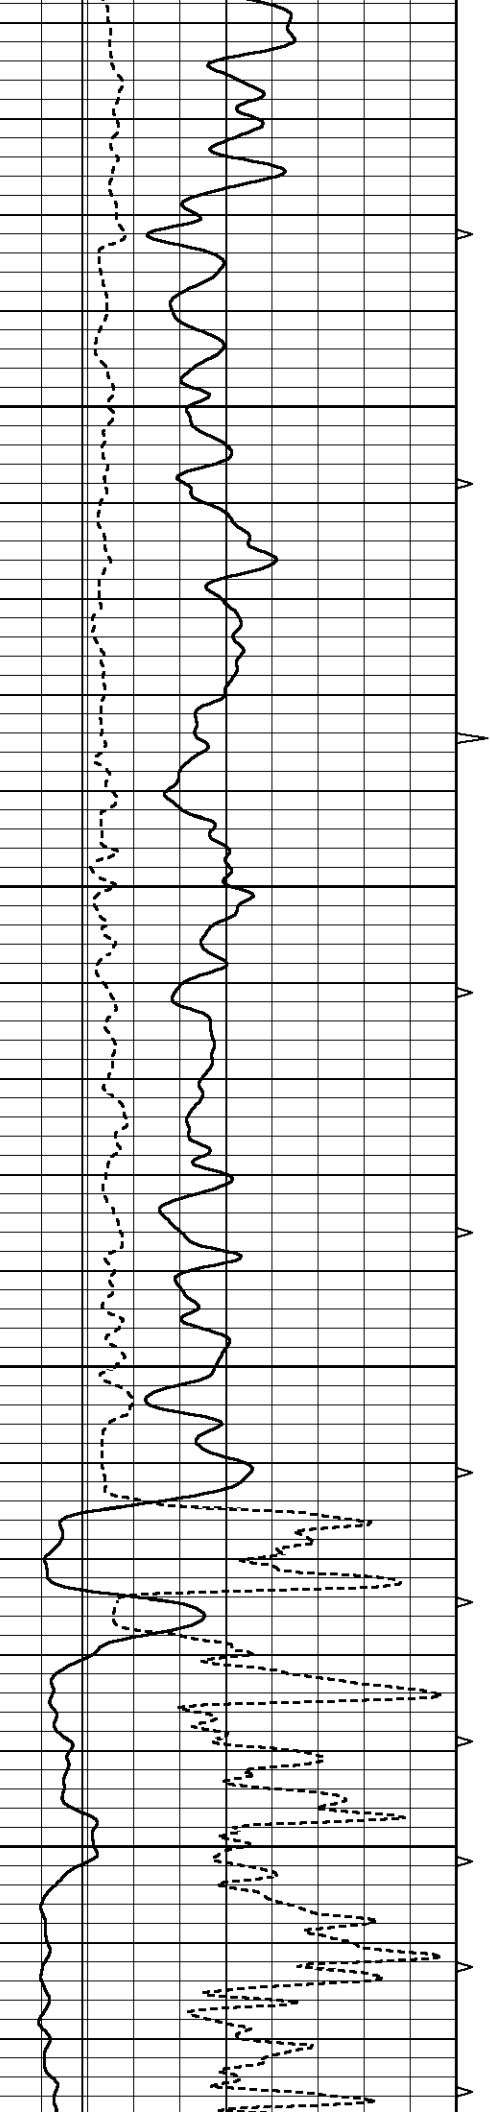



1750



1800


1850

1900


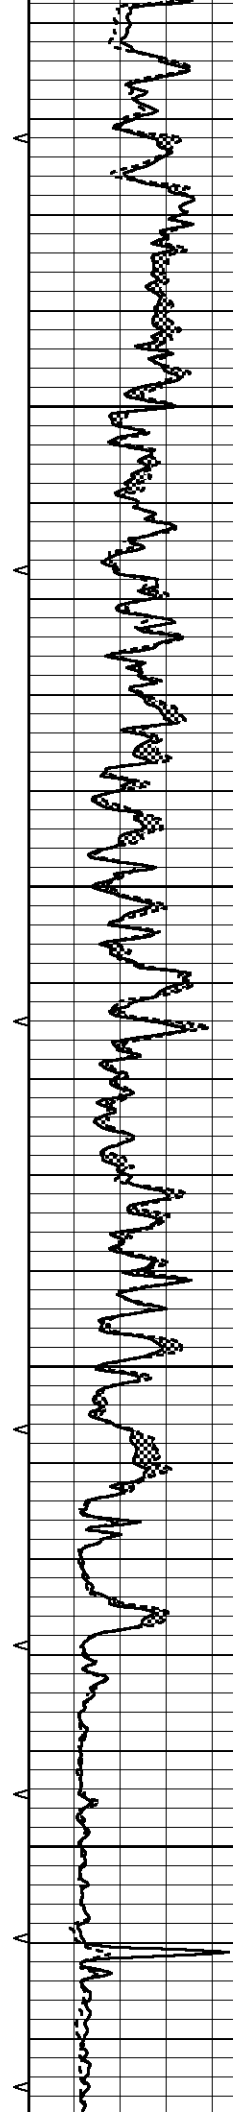


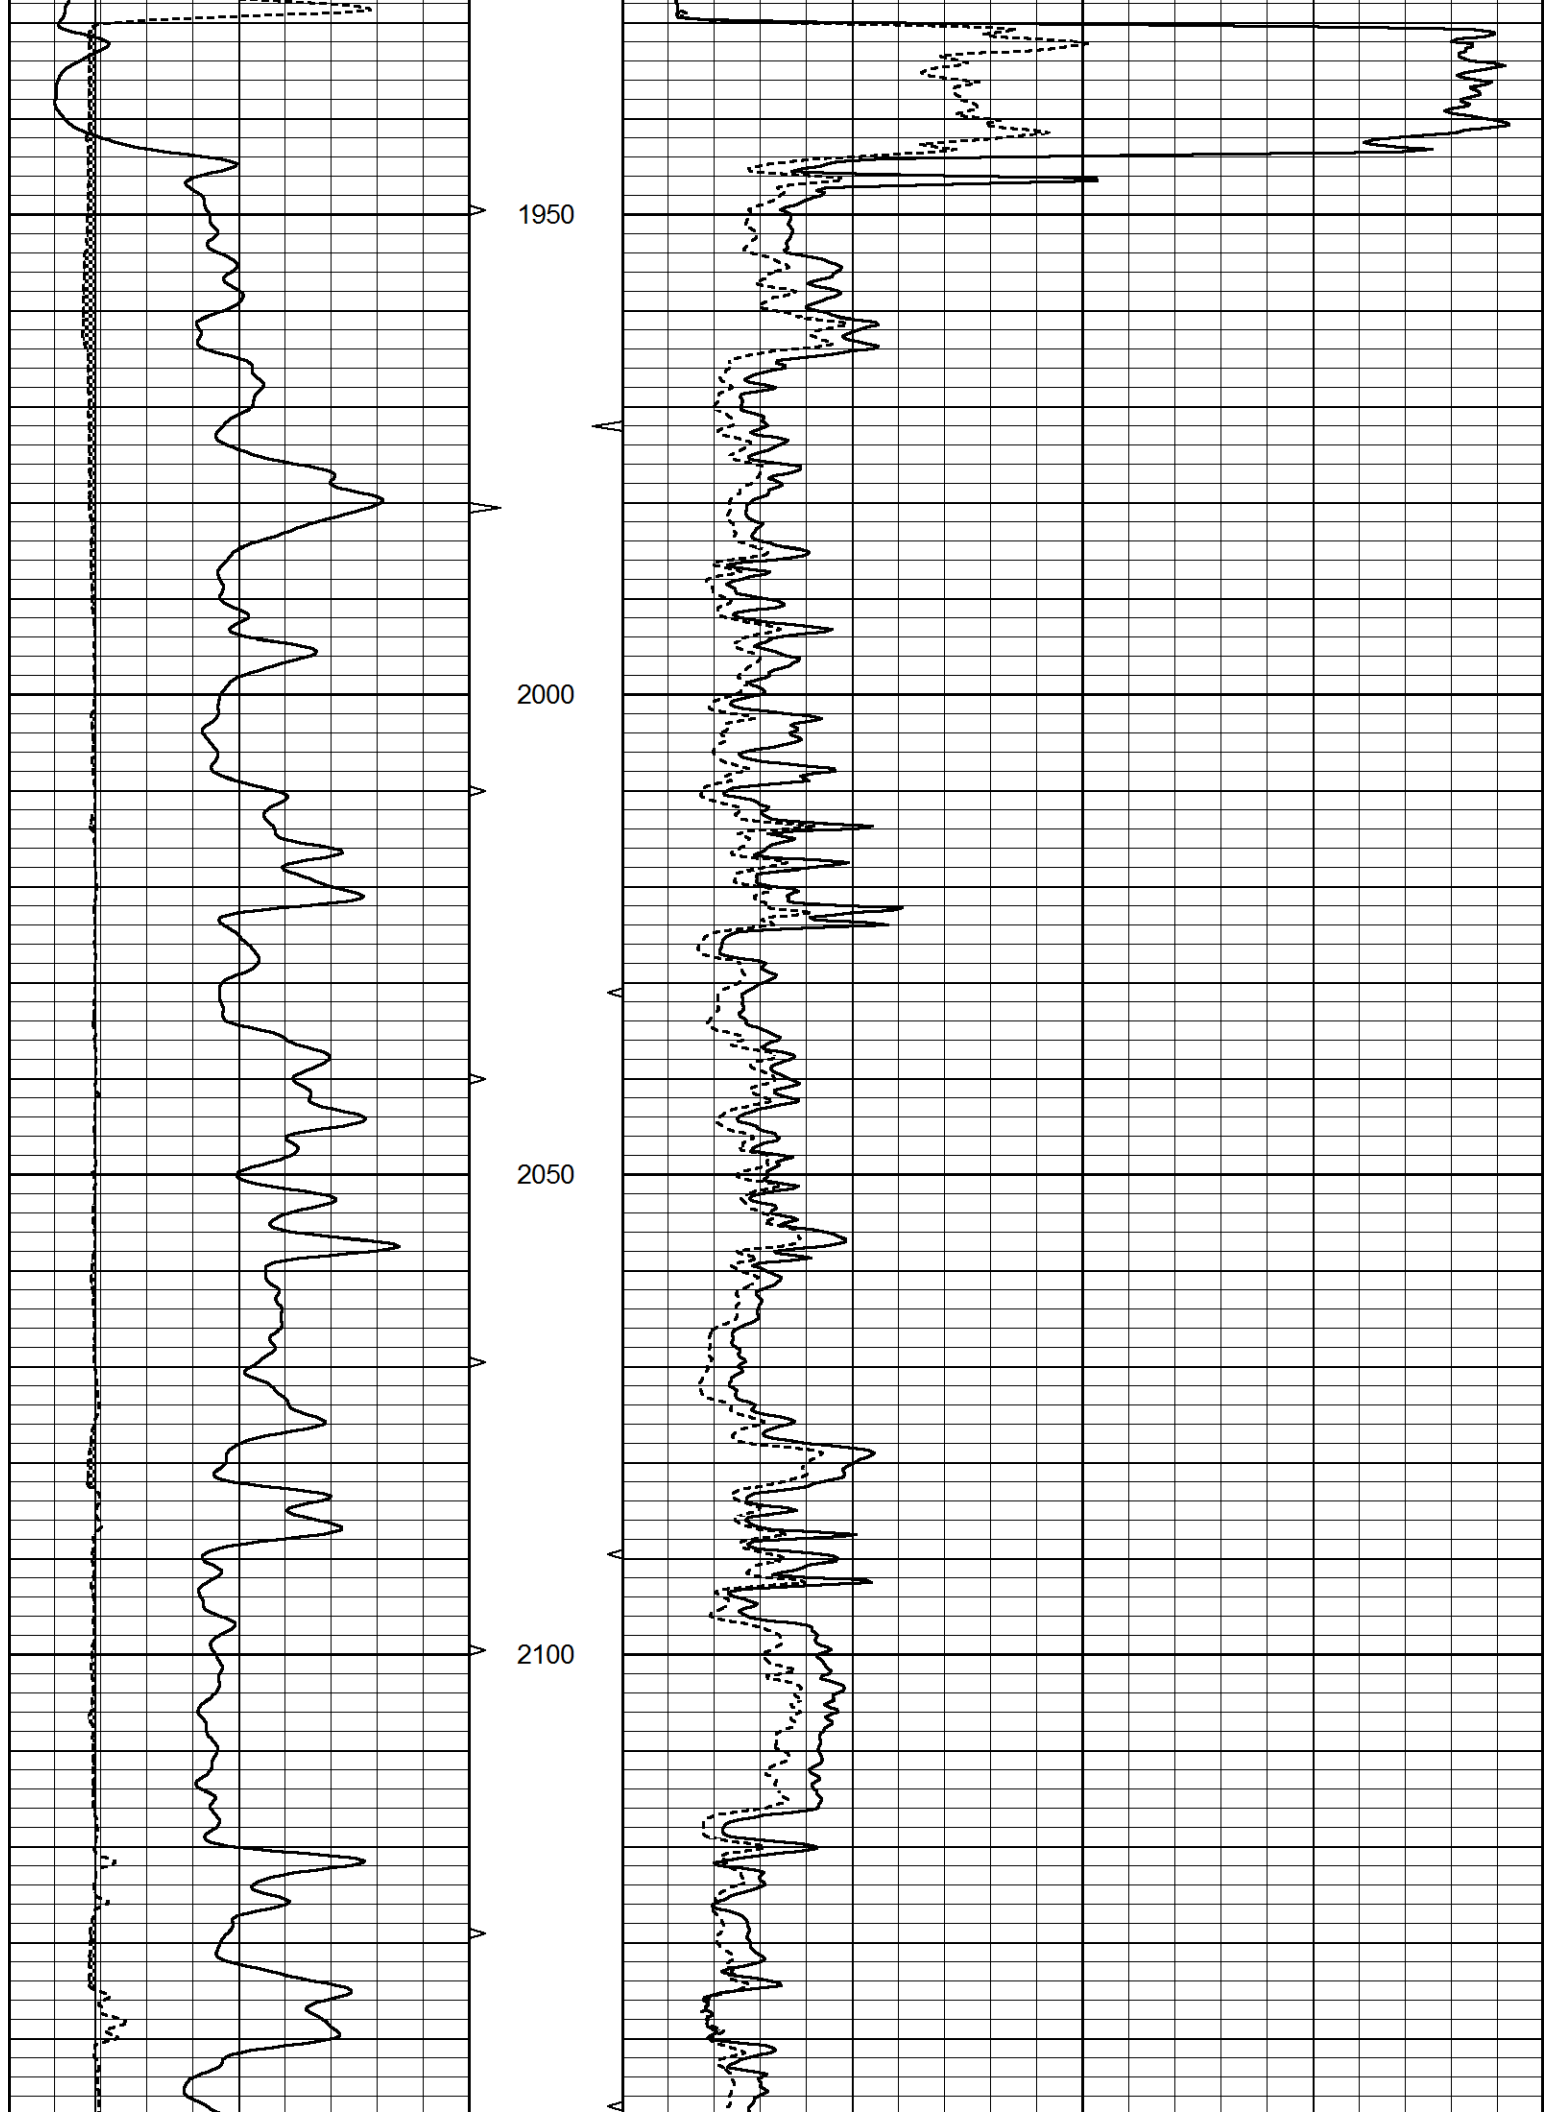

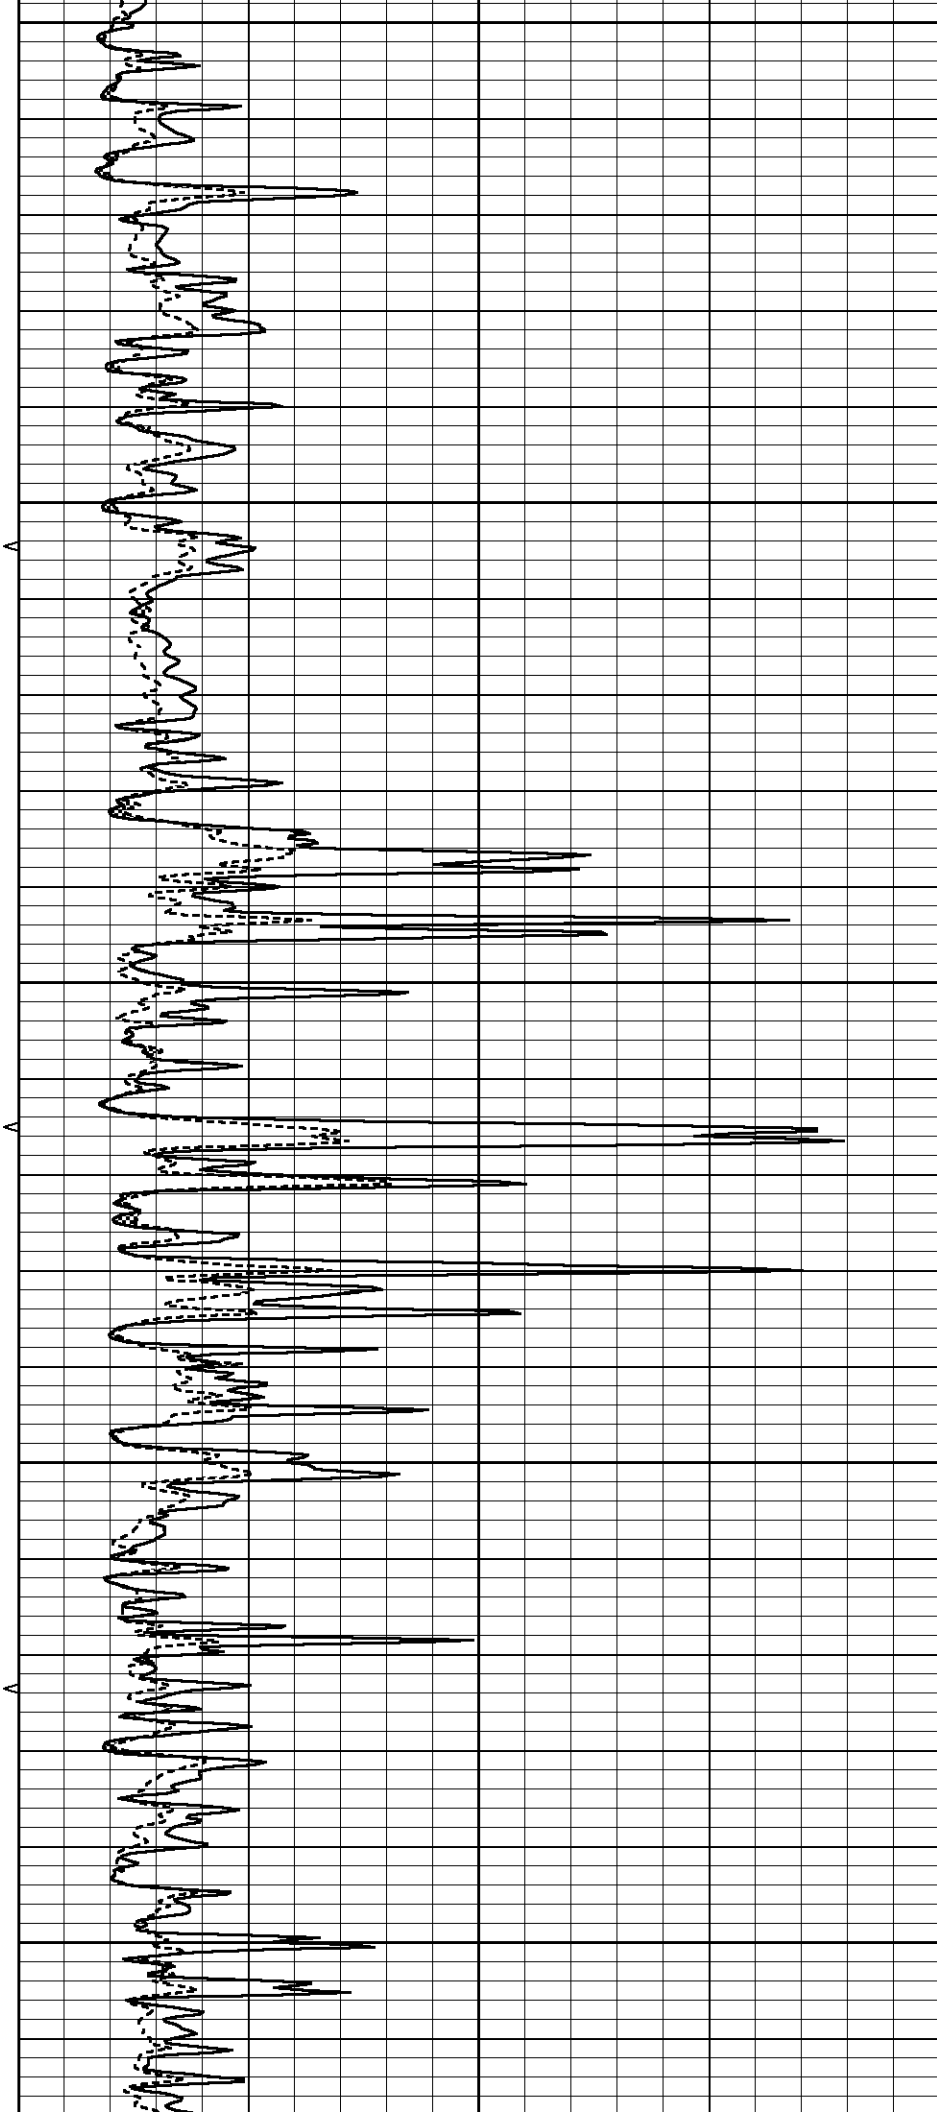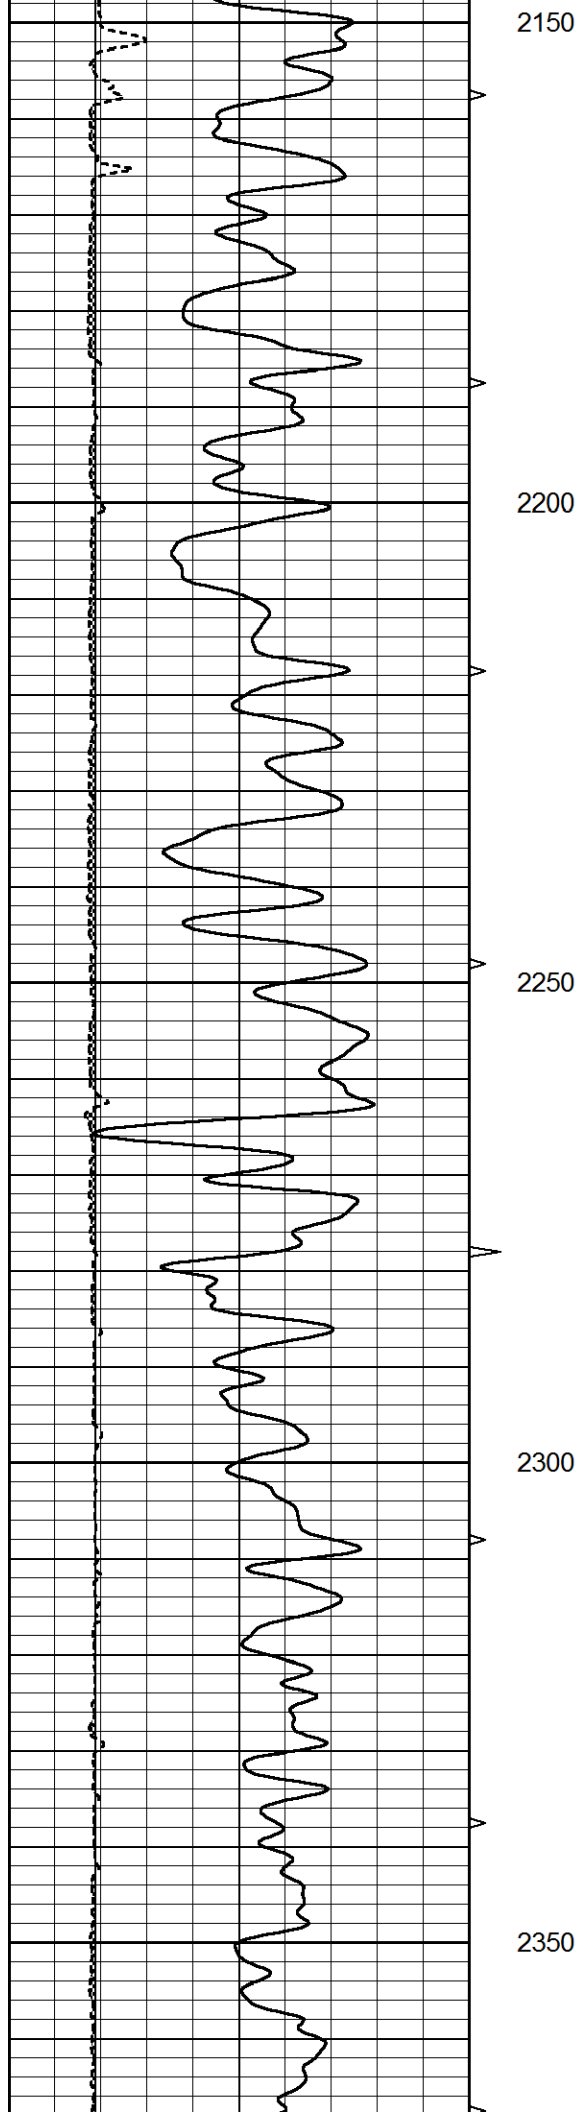

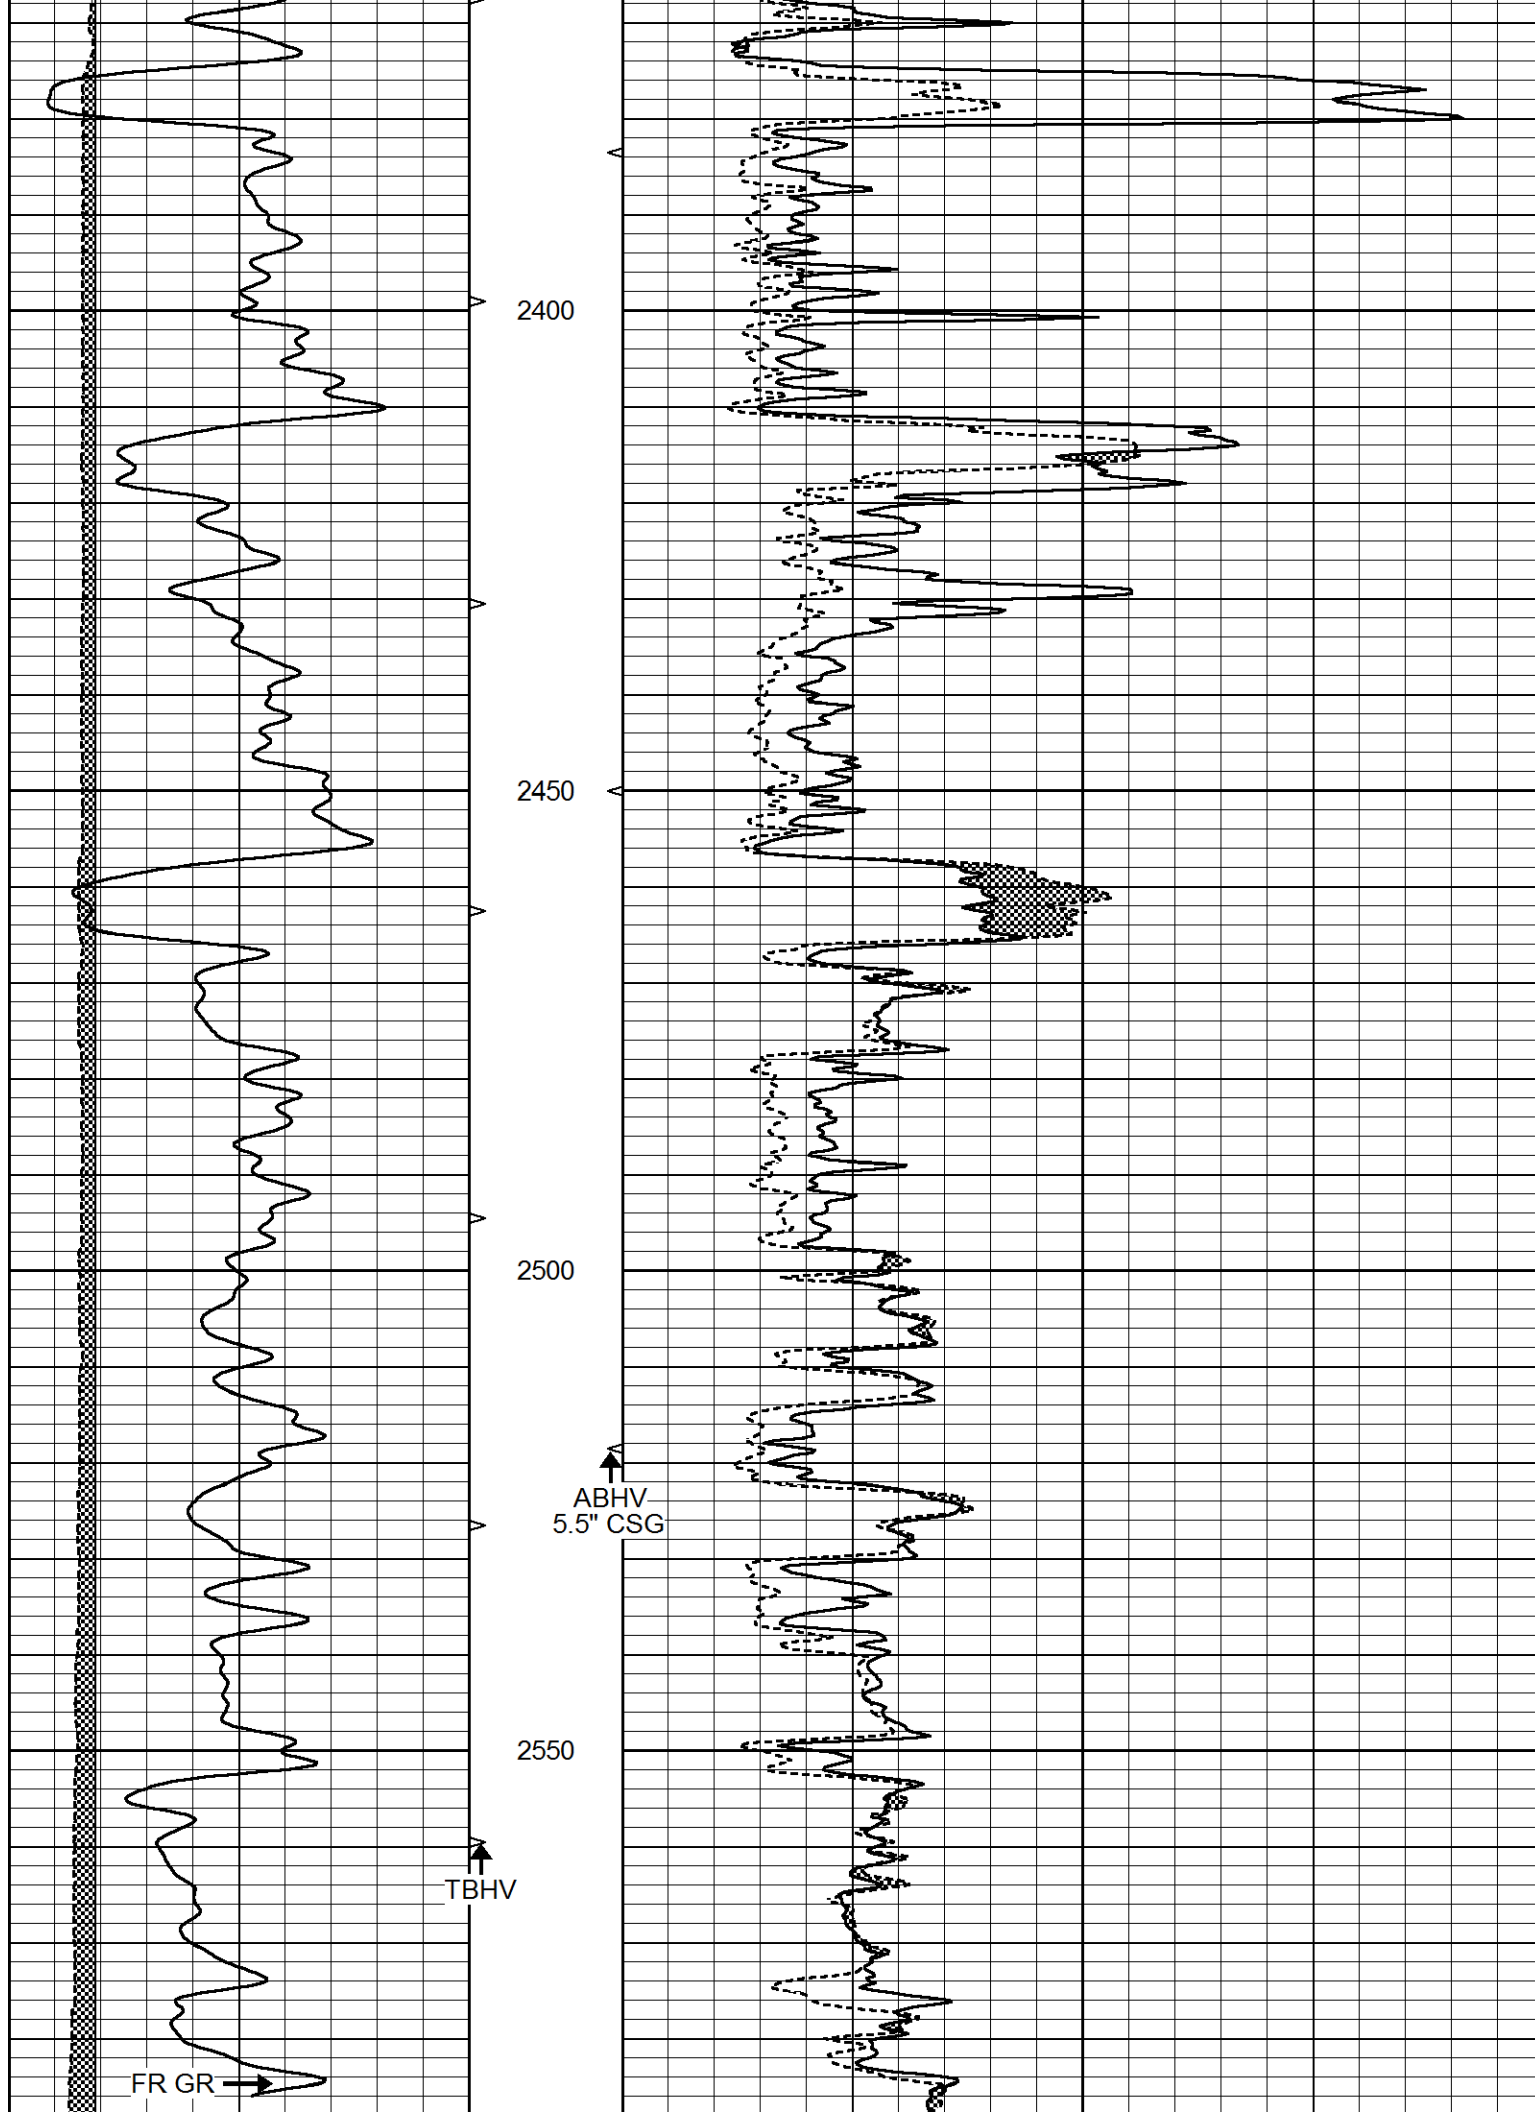




|                                                                               |                  |     |            |   |                |                                                                                |  |    |
|-------------------------------------------------------------------------------|------------------|-----|------------|---|----------------|--------------------------------------------------------------------------------|--|----|
|  |                  |     | LTD 2595   |   |                |  |  |    |
| 0                                                                             | GAMMA RAY (GAPI) | 150 | ABHV       | 0 | MEL1.5 (Ohm-m) |                                                                                |  | 40 |
| 6                                                                             | CALIPER (in)     | 16  | 10 (ft3) 0 | 0 | MEL2.0 (Ohm-m) |                                                                                |  | 40 |
|                                                                               |                  |     | TBHV       |   |                |                                                                                |  |    |
|                                                                               |                  |     | 0 (ft3) 10 |   |                |                                                                                |  |    |




# REPEAT SECTION

Database File 5642pe.db  
 Dataset Pathname pass5.1  
 Presentation Format \_micro  
 Dataset Creation Tue Aug 17 11:37:57 2021  
 Charted by Depth in Feet scaled 1:240

|   |                  |     |            |   |                |    |
|---|------------------|-----|------------|---|----------------|----|
| 0 | GAMMA RAY (GAPI) | 150 | ABHV       | 0 | MEL1.5 (Ohm-m) | 40 |
| 6 | CALIPER (in)     | 16  | 10 (ft3) 0 | 0 | MEL2.0 (Ohm-m) | 40 |
|   |                  |     | TBHV       |   |                |    |
|   |                  |     | 0 (ft3) 10 |   |                |    |

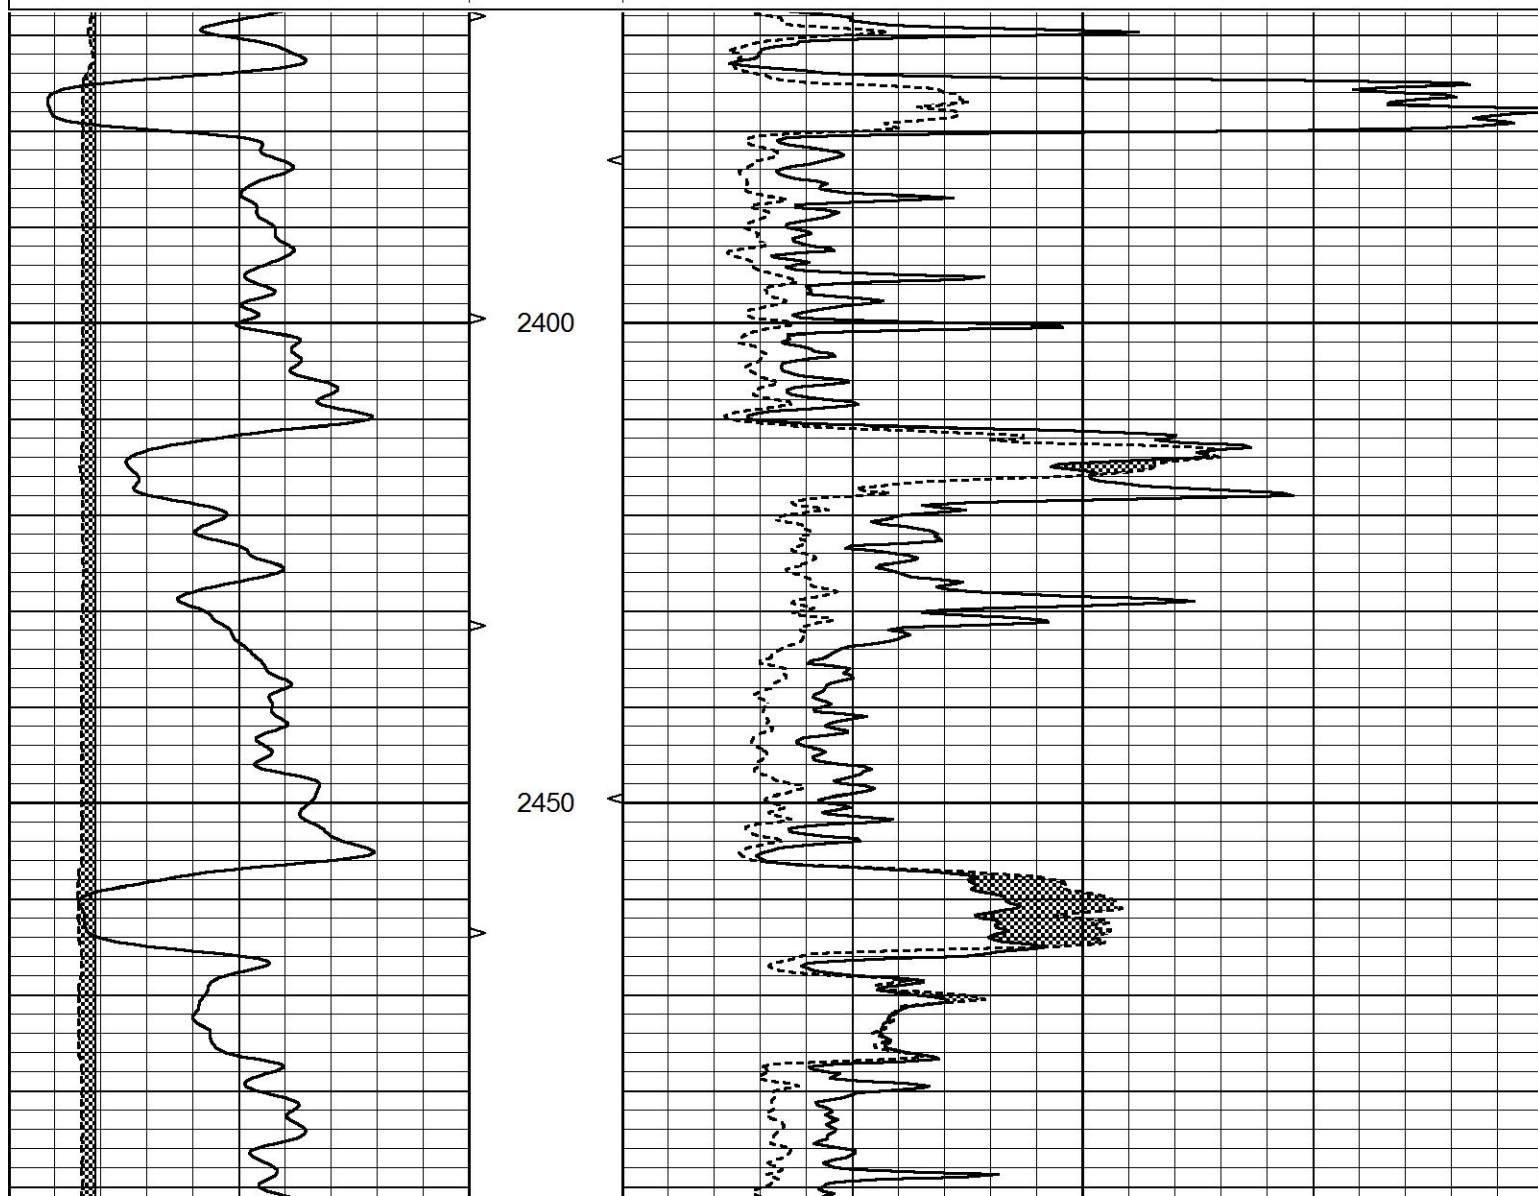

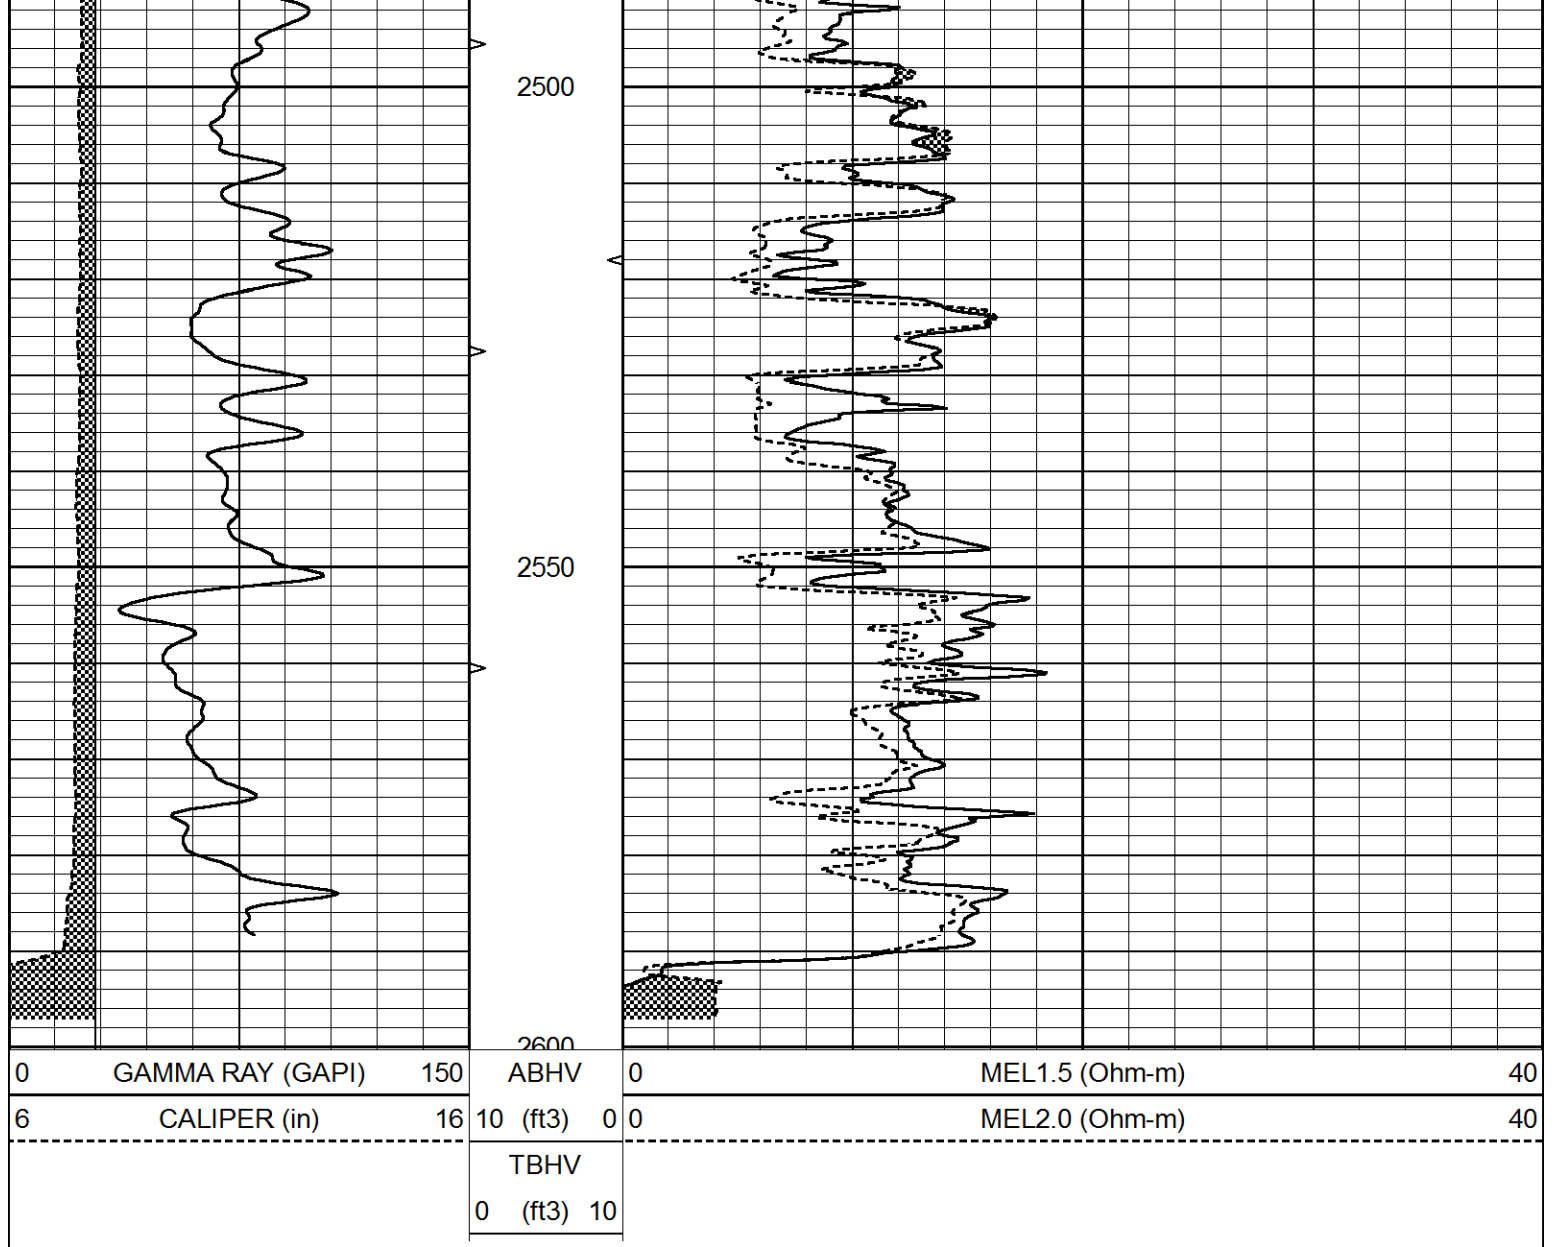

| Calibration Report           |                          |              |  |
|------------------------------|--------------------------|--------------|--|
| Database File                | 5642pe.db                |              |  |
| Dataset Pathname             | pass5.1                  |              |  |
| Dataset Creation             | Tue Aug 17 11:37:57 2021 |              |  |
| MICRO_USR Calibration Report |                          |              |  |
| Serial Number:               | 070910                   |              |  |
| Tool Model:                  | Probel                   |              |  |
| Performed:                   | Thu Jun 10 10:36:57 2021 |              |  |
| Caliper Calibration:         | Gain=7.192               | Offset=2.802 |  |
| References                   | Low Cal                  | High Cal     |  |
| Readings                     | 8.000                    | 14.000       |  |
|                              | 0.723                    | 1.557        |  |
| 1.5" Calibration:            | Gain=50.000              | Offset=1.567 |  |
| References                   | Low Cal                  | High Cal     |  |
| Readings                     | 0.000                    | 20.000       |  |
|                              | 0.004                    | 1.335        |  |
| 2" Calibration:              | Gain=85.000              | Offset=0.800 |  |
|                              | Low Cal                  | High Cal     |  |

|                              |        |                          |                                  |          |         |       |        |        |
|------------------------------|--------|--------------------------|----------------------------------|----------|---------|-------|--------|--------|
| References                   | 0.000  |                          | 20.000                           |          |         |       |        |        |
| Readings                     | 0.004  |                          | 1.029                            |          |         |       |        |        |
| Microlog Calibration Report  |        |                          |                                  |          |         |       |        |        |
| Serial-Model:<br>Performed:  |        |                          | 070910-ProbeL<br>(Not Performed) |          |         |       |        |        |
| Readings                     |        | References               |                                  |          | Results |       |        |        |
|                              | Zero   | Cal                      |                                  | Zero     | Cal     | m     | b      |        |
| Normal                       | 0.0000 | 1.0000                   | V                                | 0.0000   | 1.0000  | Ohm-m | 1.0000 | 0.0000 |
| Inverse                      | 0.0000 | 1.0000                   | V                                | 0.0000   | 1.0000  | Ohm-m | 1.0000 | 0.0000 |
| Caliper                      | 0.0000 | 1.0000                   | V                                | 0.0000   | 1.0000  | in    | 1.0000 | 0.0000 |
| Gamma Ray Calibration Report |        |                          |                                  |          |         |       |        |        |
| Serial Number:               |        | 070558                   |                                  |          |         |       |        |        |
| Tool Model:                  |        | Probe1                   |                                  |          |         |       |        |        |
| Performed:                   |        | Fri Oct 30 21:32:56 2020 |                                  |          |         |       |        |        |
| Calibrator Value:            |        | 1.0                      |                                  | GAPI     |         |       |        |        |
| Background Reading:          |        | 0.0                      |                                  | cps      |         |       |        |        |
| Calibrator Reading:          |        | 1.0                      |                                  | cps      |         |       |        |        |
| Sensitivity:                 |        | 0.2700                   |                                  | GAPI/cps |         |       |        |        |