



MICRO LOG

Company PLATEAU OPERATING CORPORATION

Well C DOUBLE #1-16

Field N/A

County HAMILTON State KANSAS

Location: API #: 15-075-20906-0000
1320' FNL & 1320' FEL

Other Services
CDL/CNL/PE
DIL/SONIC

SEC 16 TWP 25S RGE 40W

Elevation

K.B. 3460
D.F. 3458
G.L. 3453

Permanent Datum GROUND LEVEL Elevation 3453
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING

Date 2/10/22

Run Number TWO

Depth Driller 2663

Depth Logger 2688

Bottom Logged Interval 2672

Top Log Interval 800

Casing Driller 8 5/8" @ 830'

Casing Logger 826

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.4/36

pH / Fluid Loss 6.0/8.0

Source of Sample FLOWLINE

Rm @ Meas. Temp .160 @ 60F

Rmf @ Meas. Temp .120 @ 60F

Rmc @ Meas. Temp .192 @ 60F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .072 @ 104F

Time Circulation Stopped 3.5 HOURS

Time Logger on Bottom 11:15 P.M.

Maximum Recorded Temperature 104F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By JIM WELCH

CHLORIDES 48,000 PPM

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-075-20906-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
SYRACUSE, KS., 7S. ON HWY 27 TO "RD. 27", 3E., S. INTO





MAIN SECTION



Database File	5946pe.db
Dataset Pathname	pass6.2
Presentation Format	micro
Dataset Creation	Fri Feb 11 00:47:32 2022
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

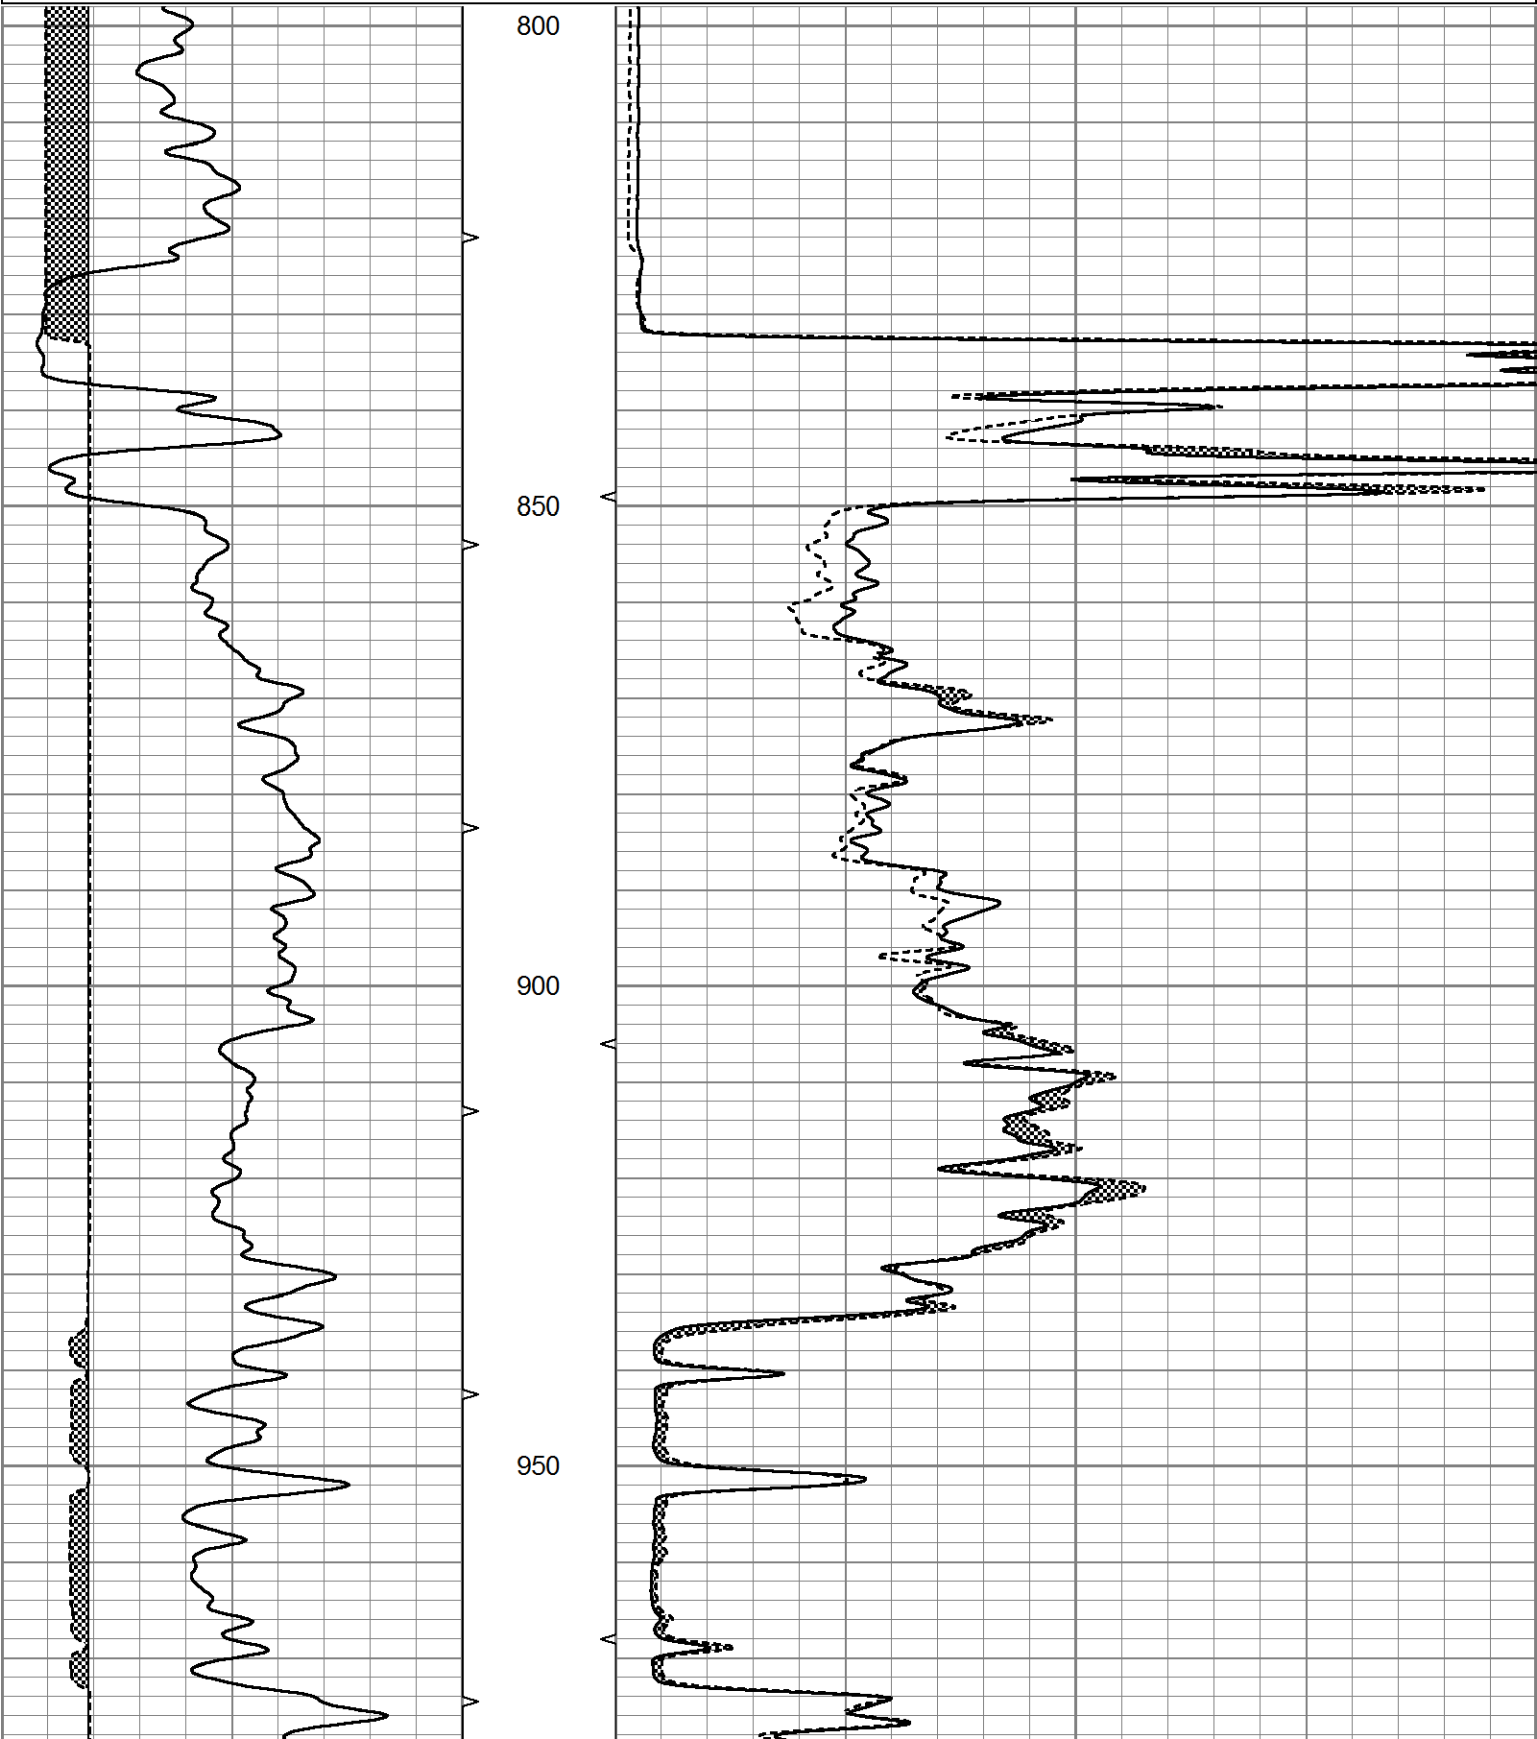


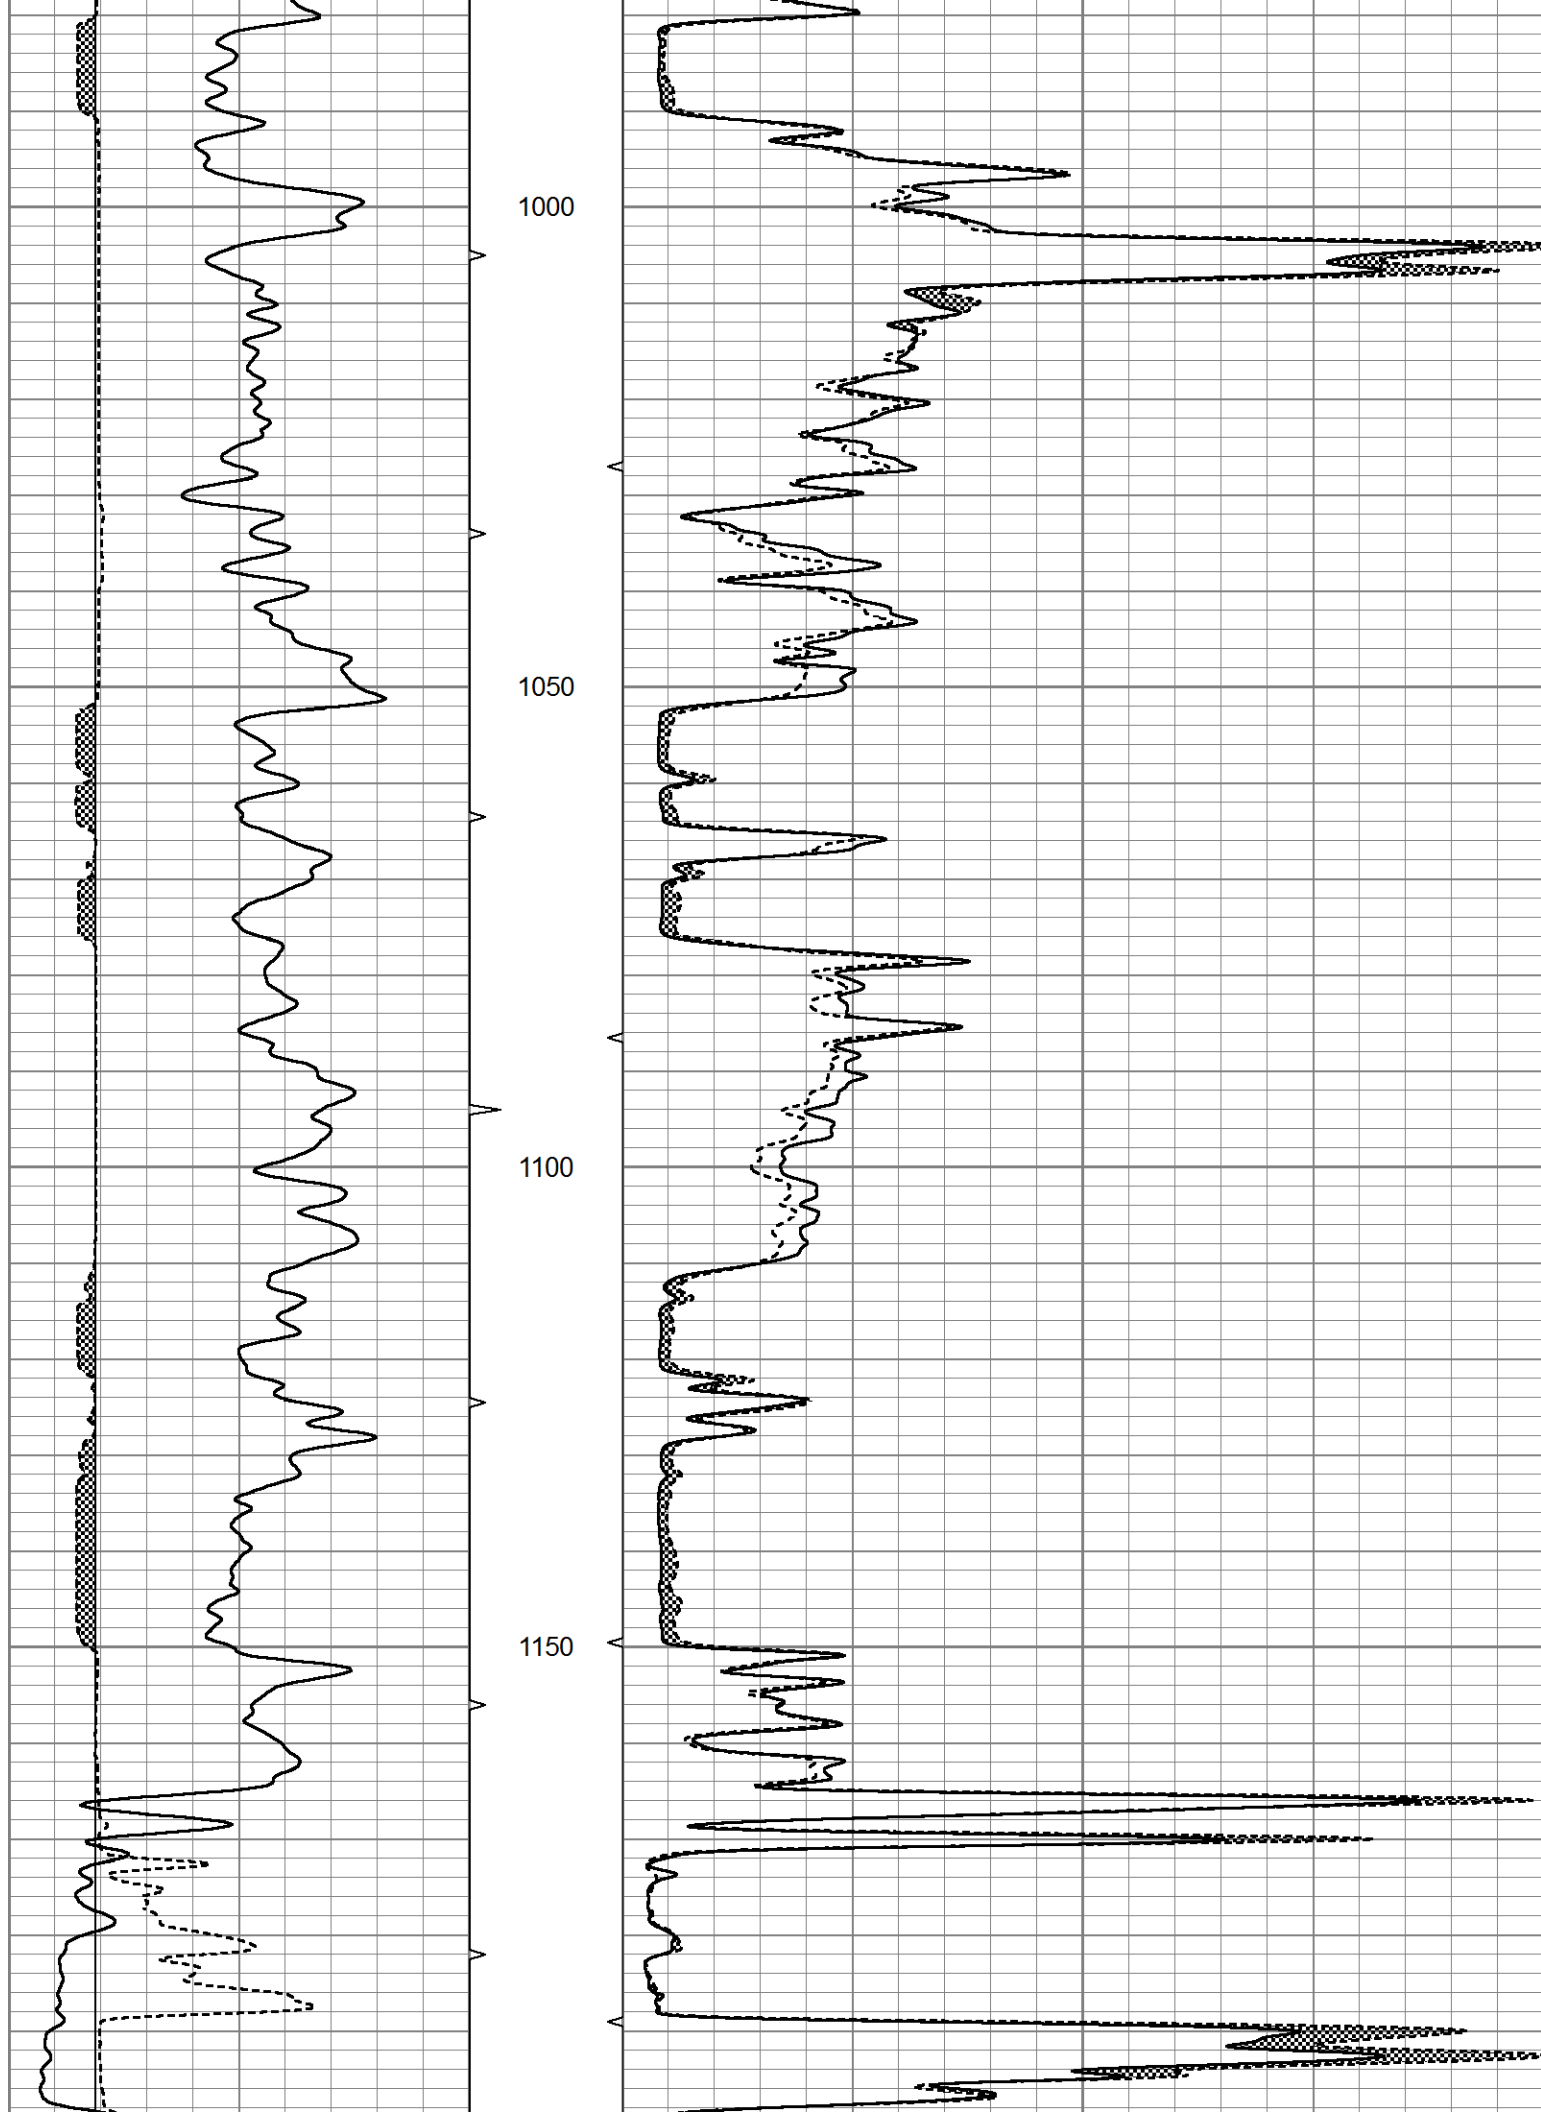


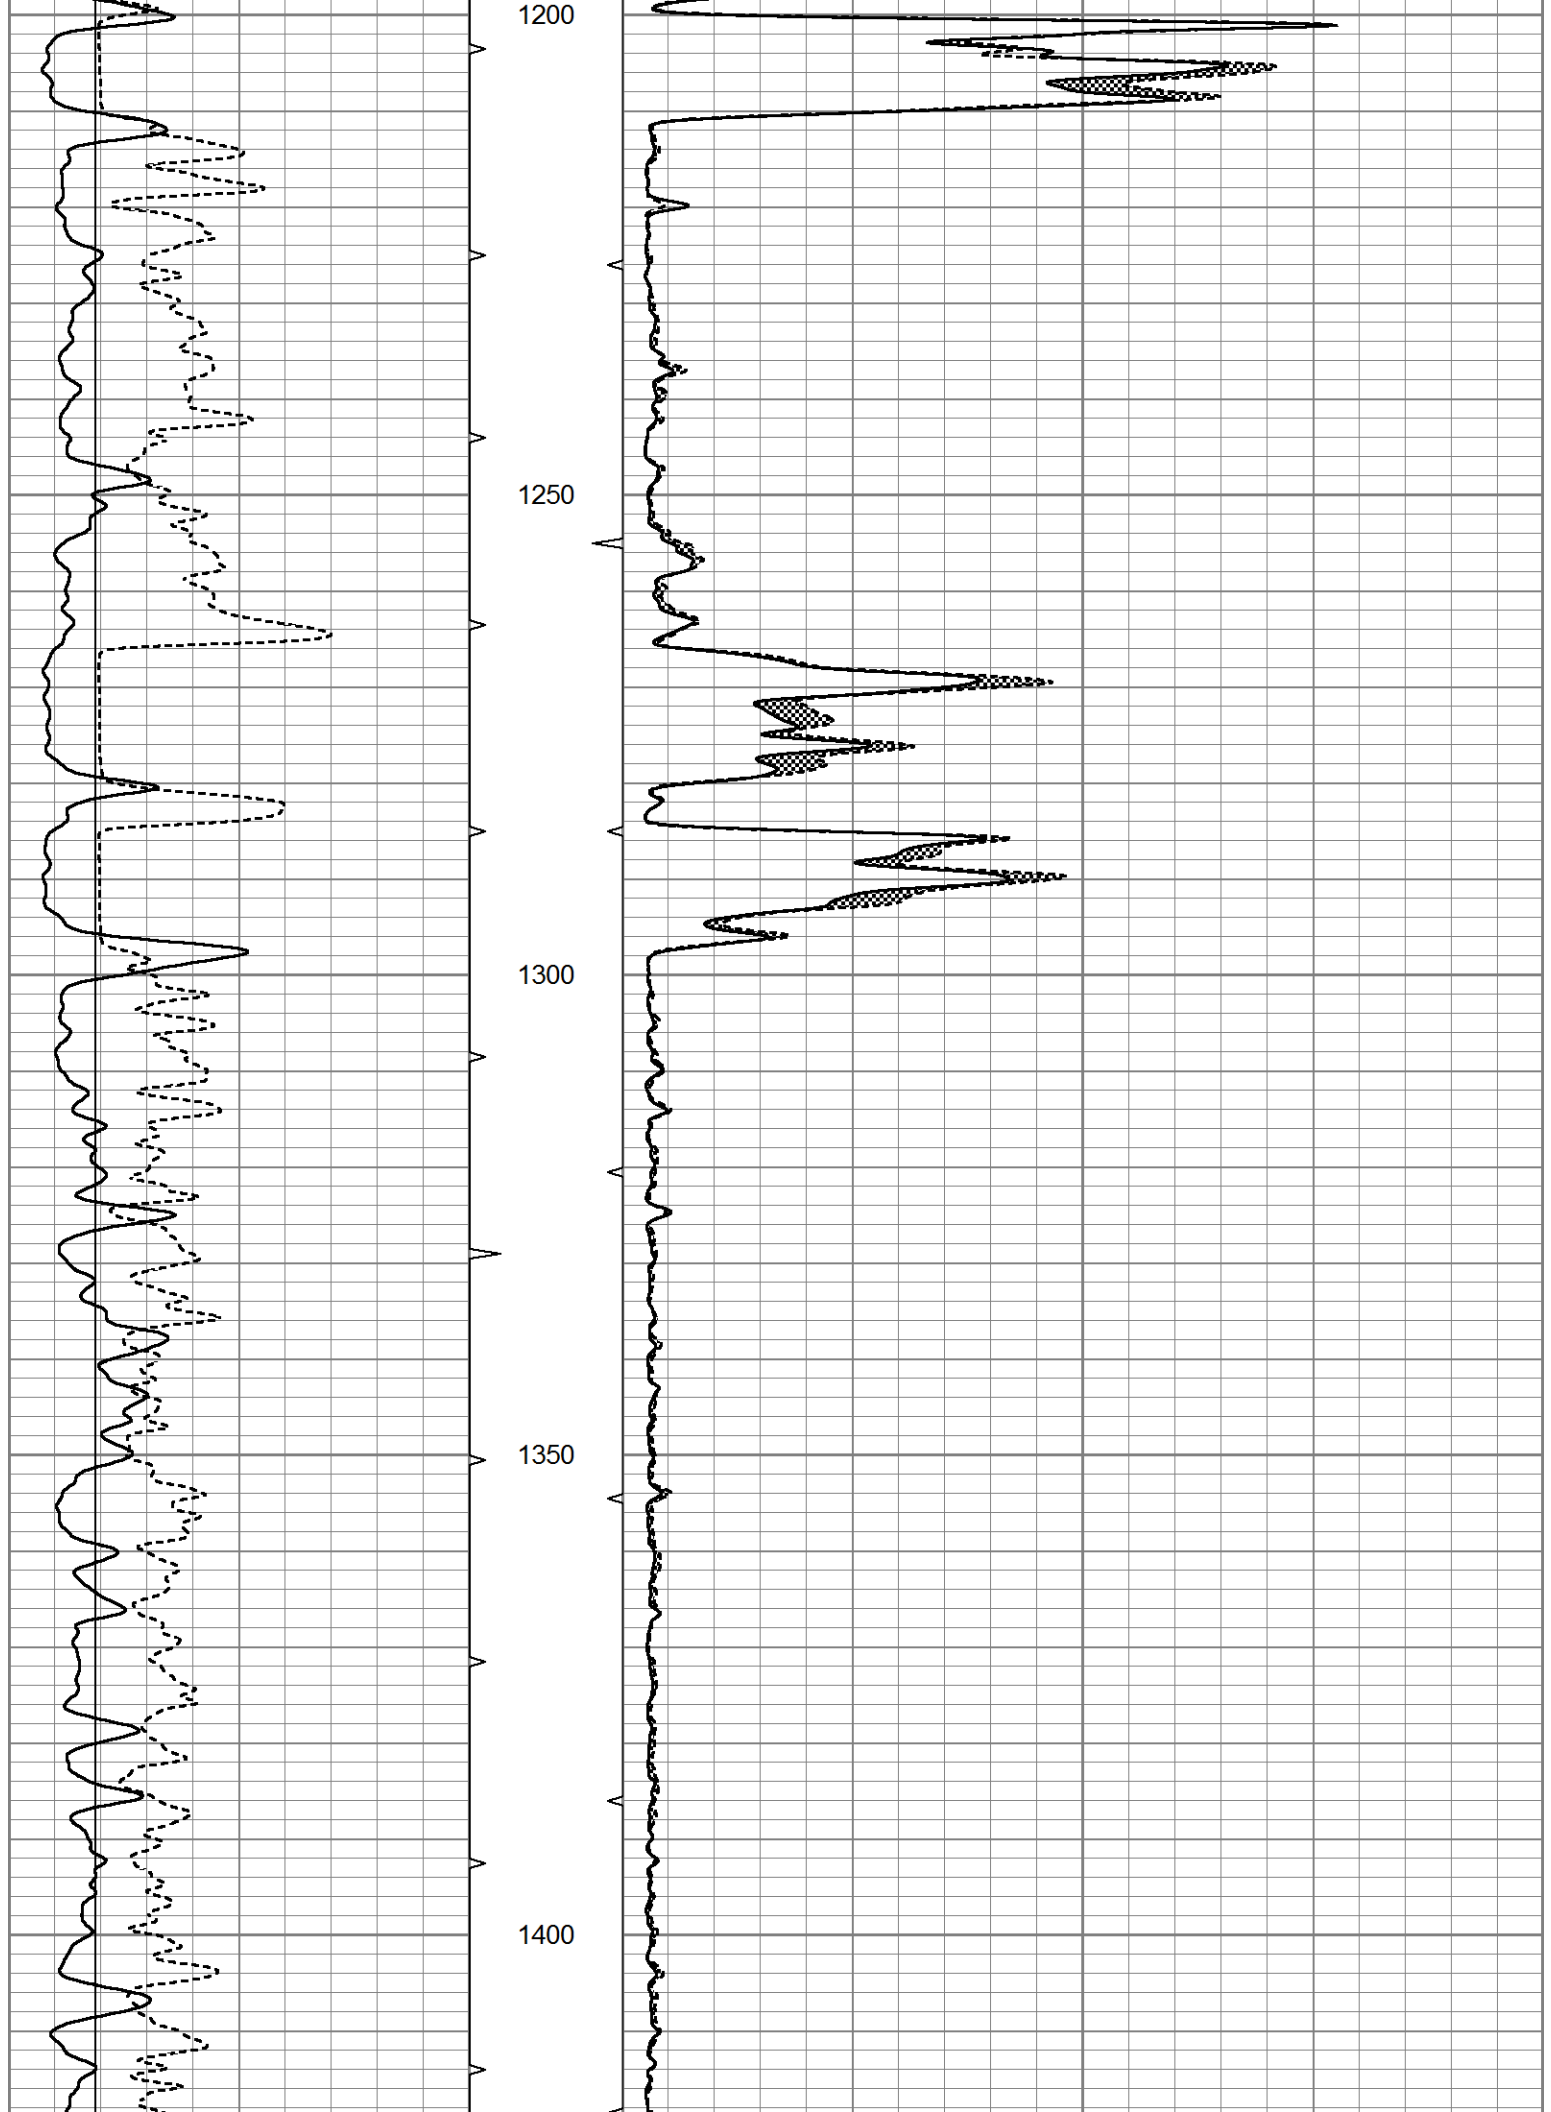


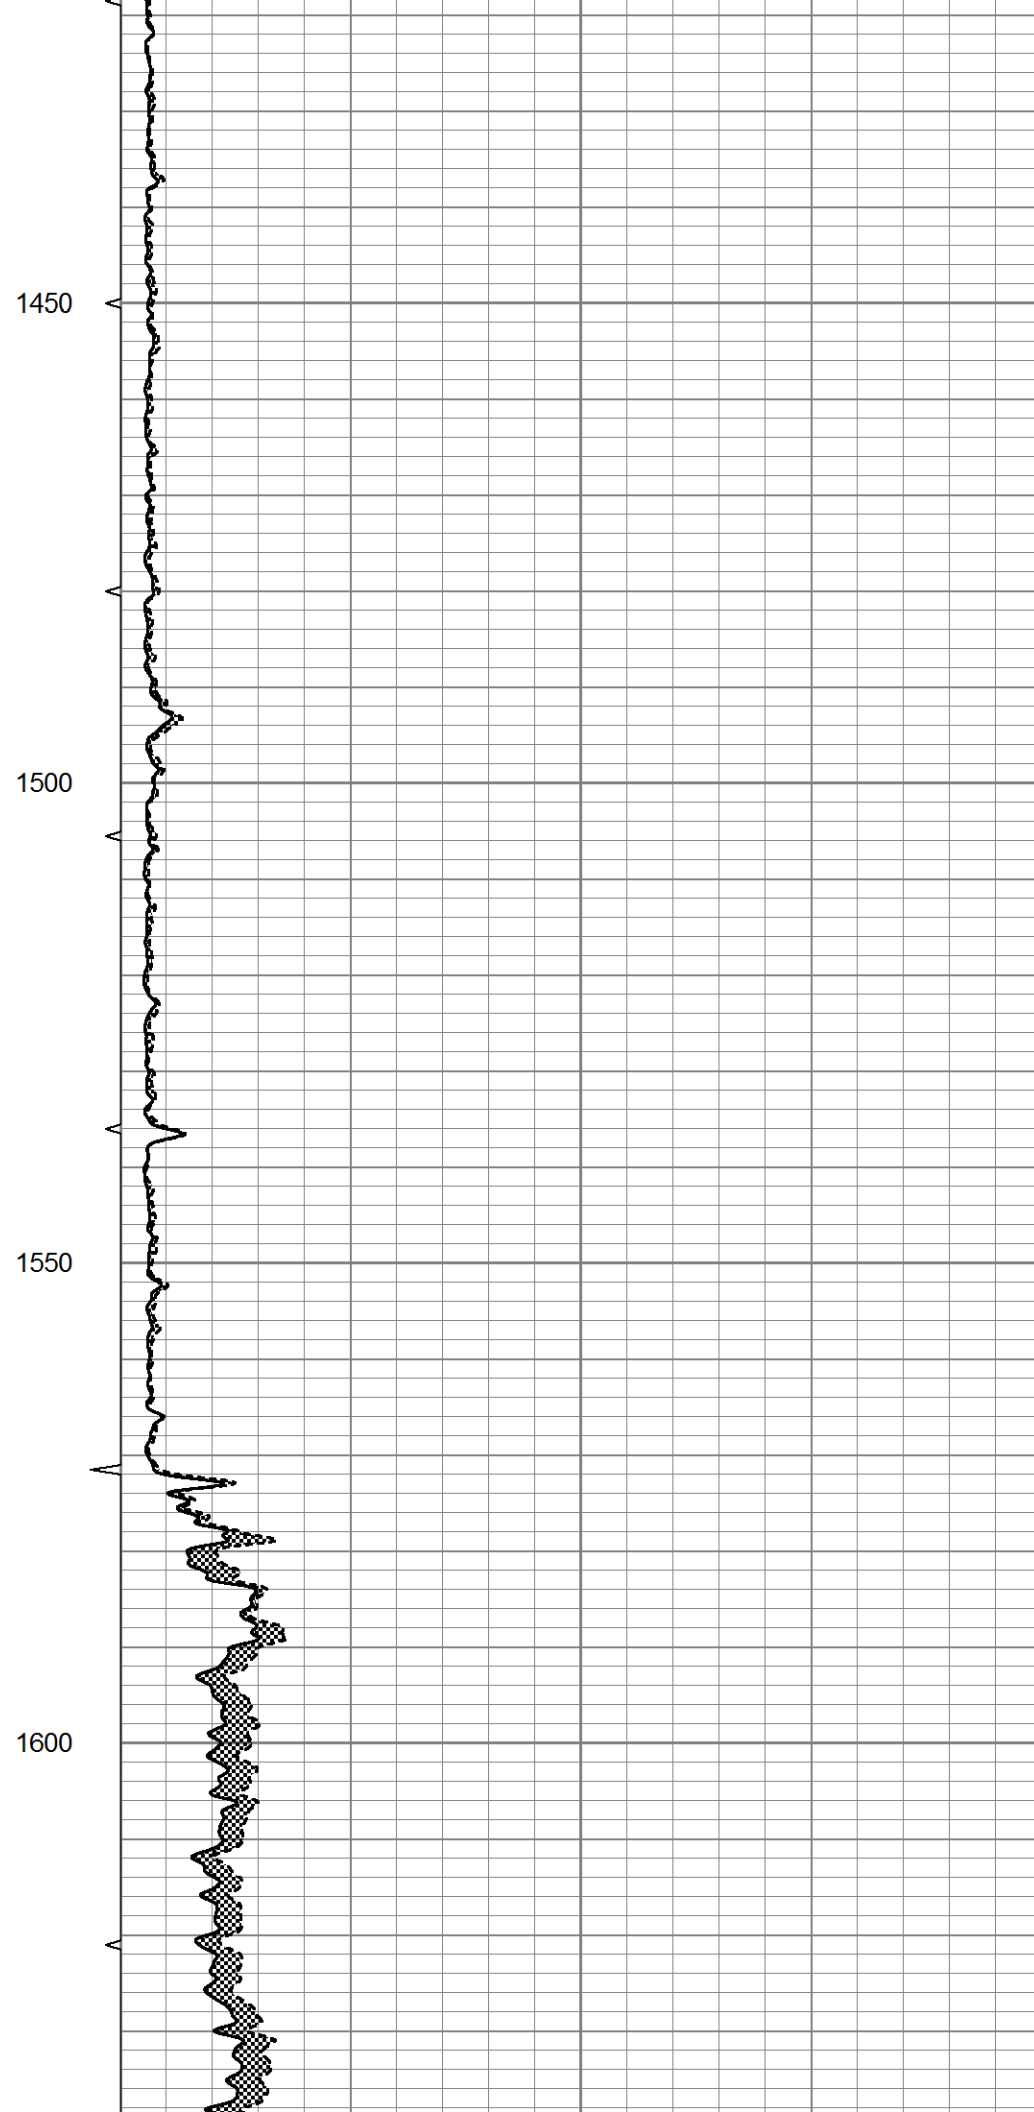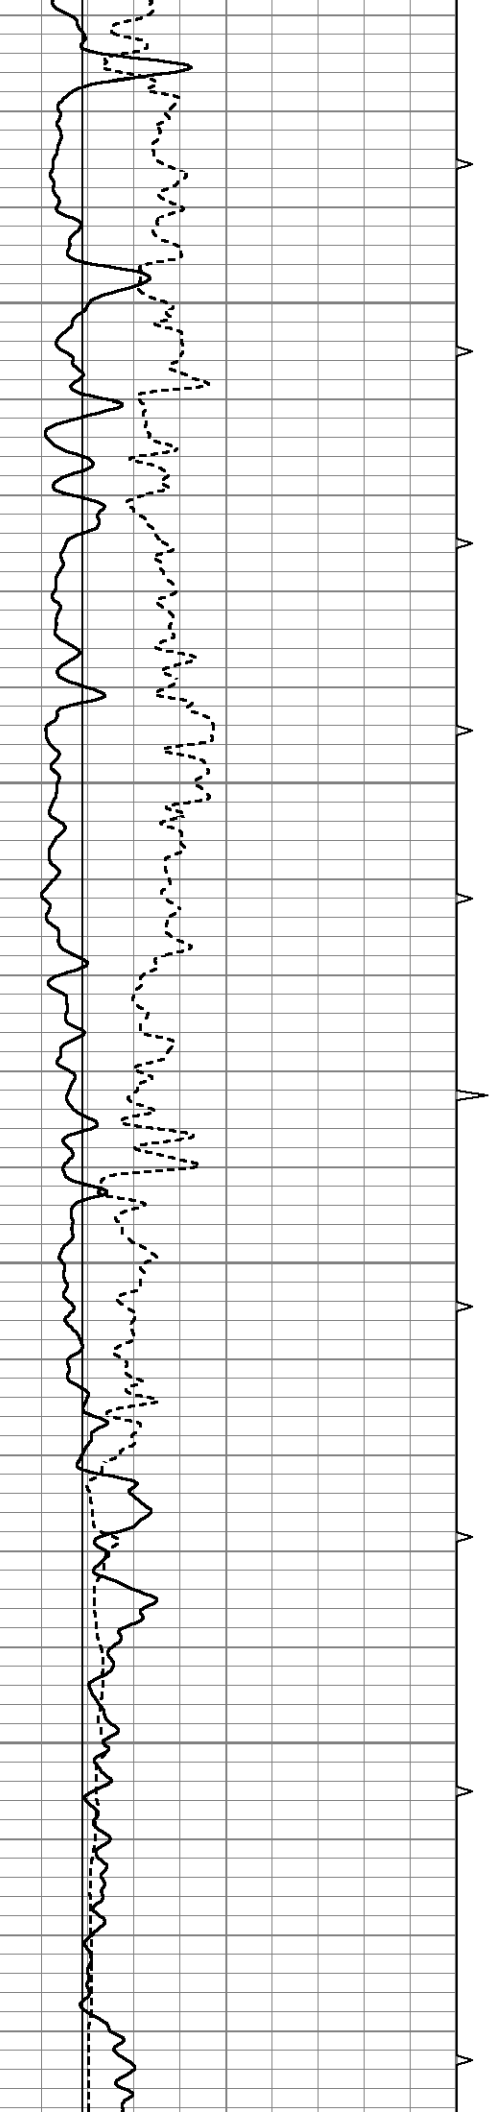


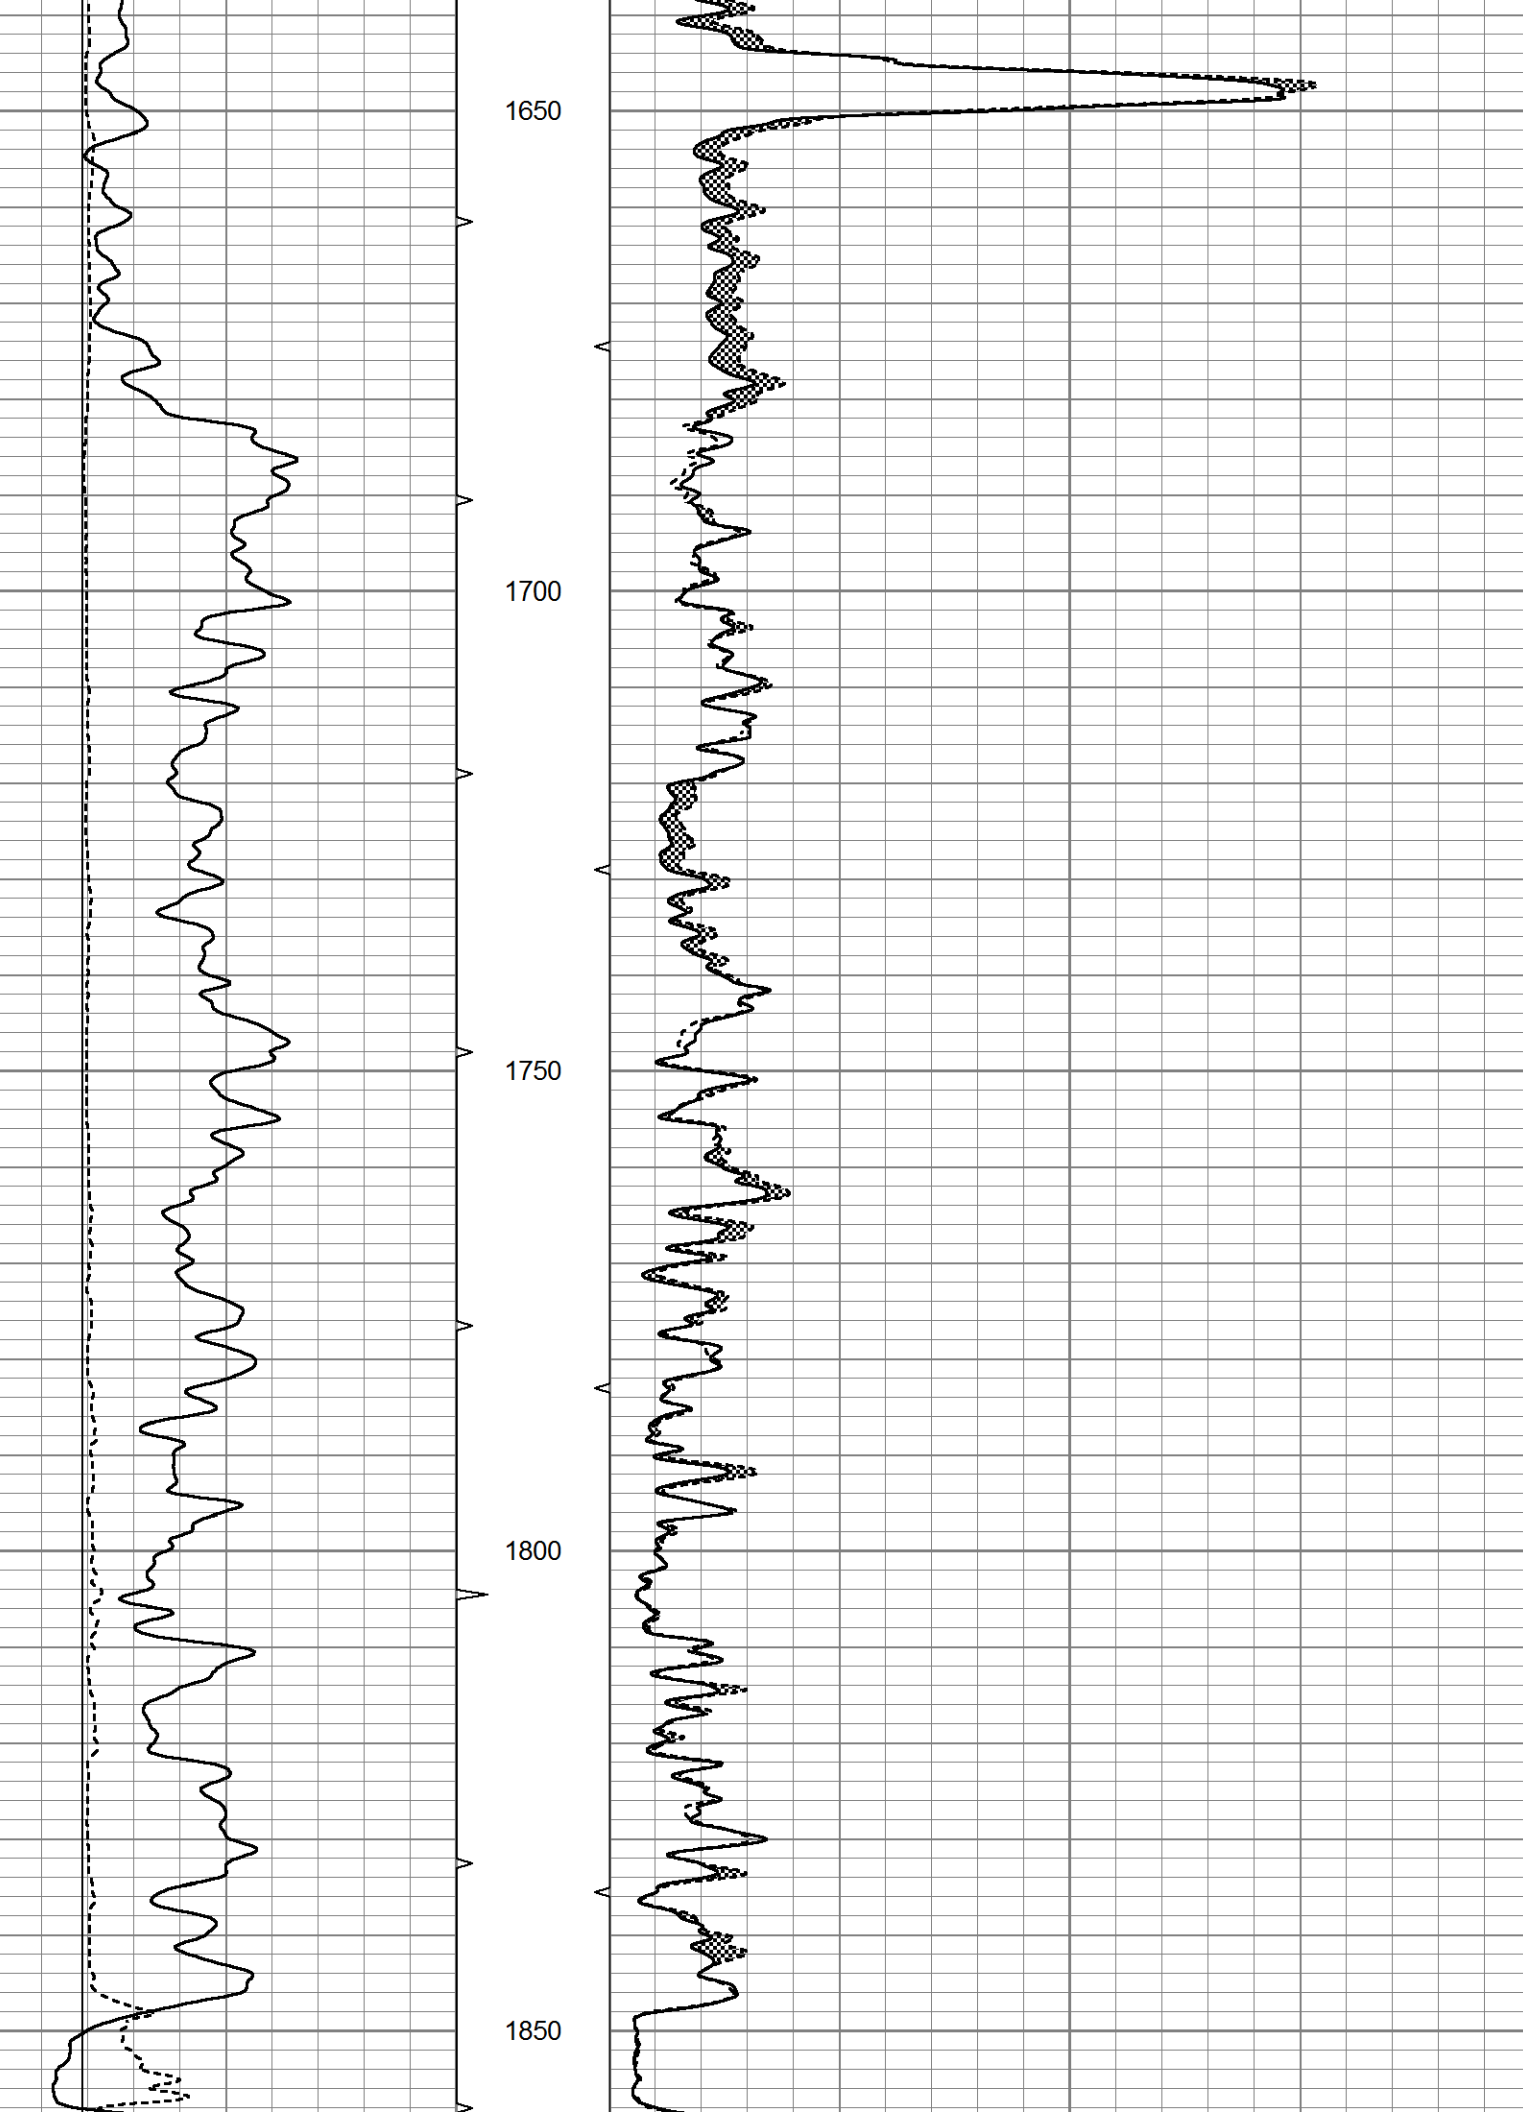

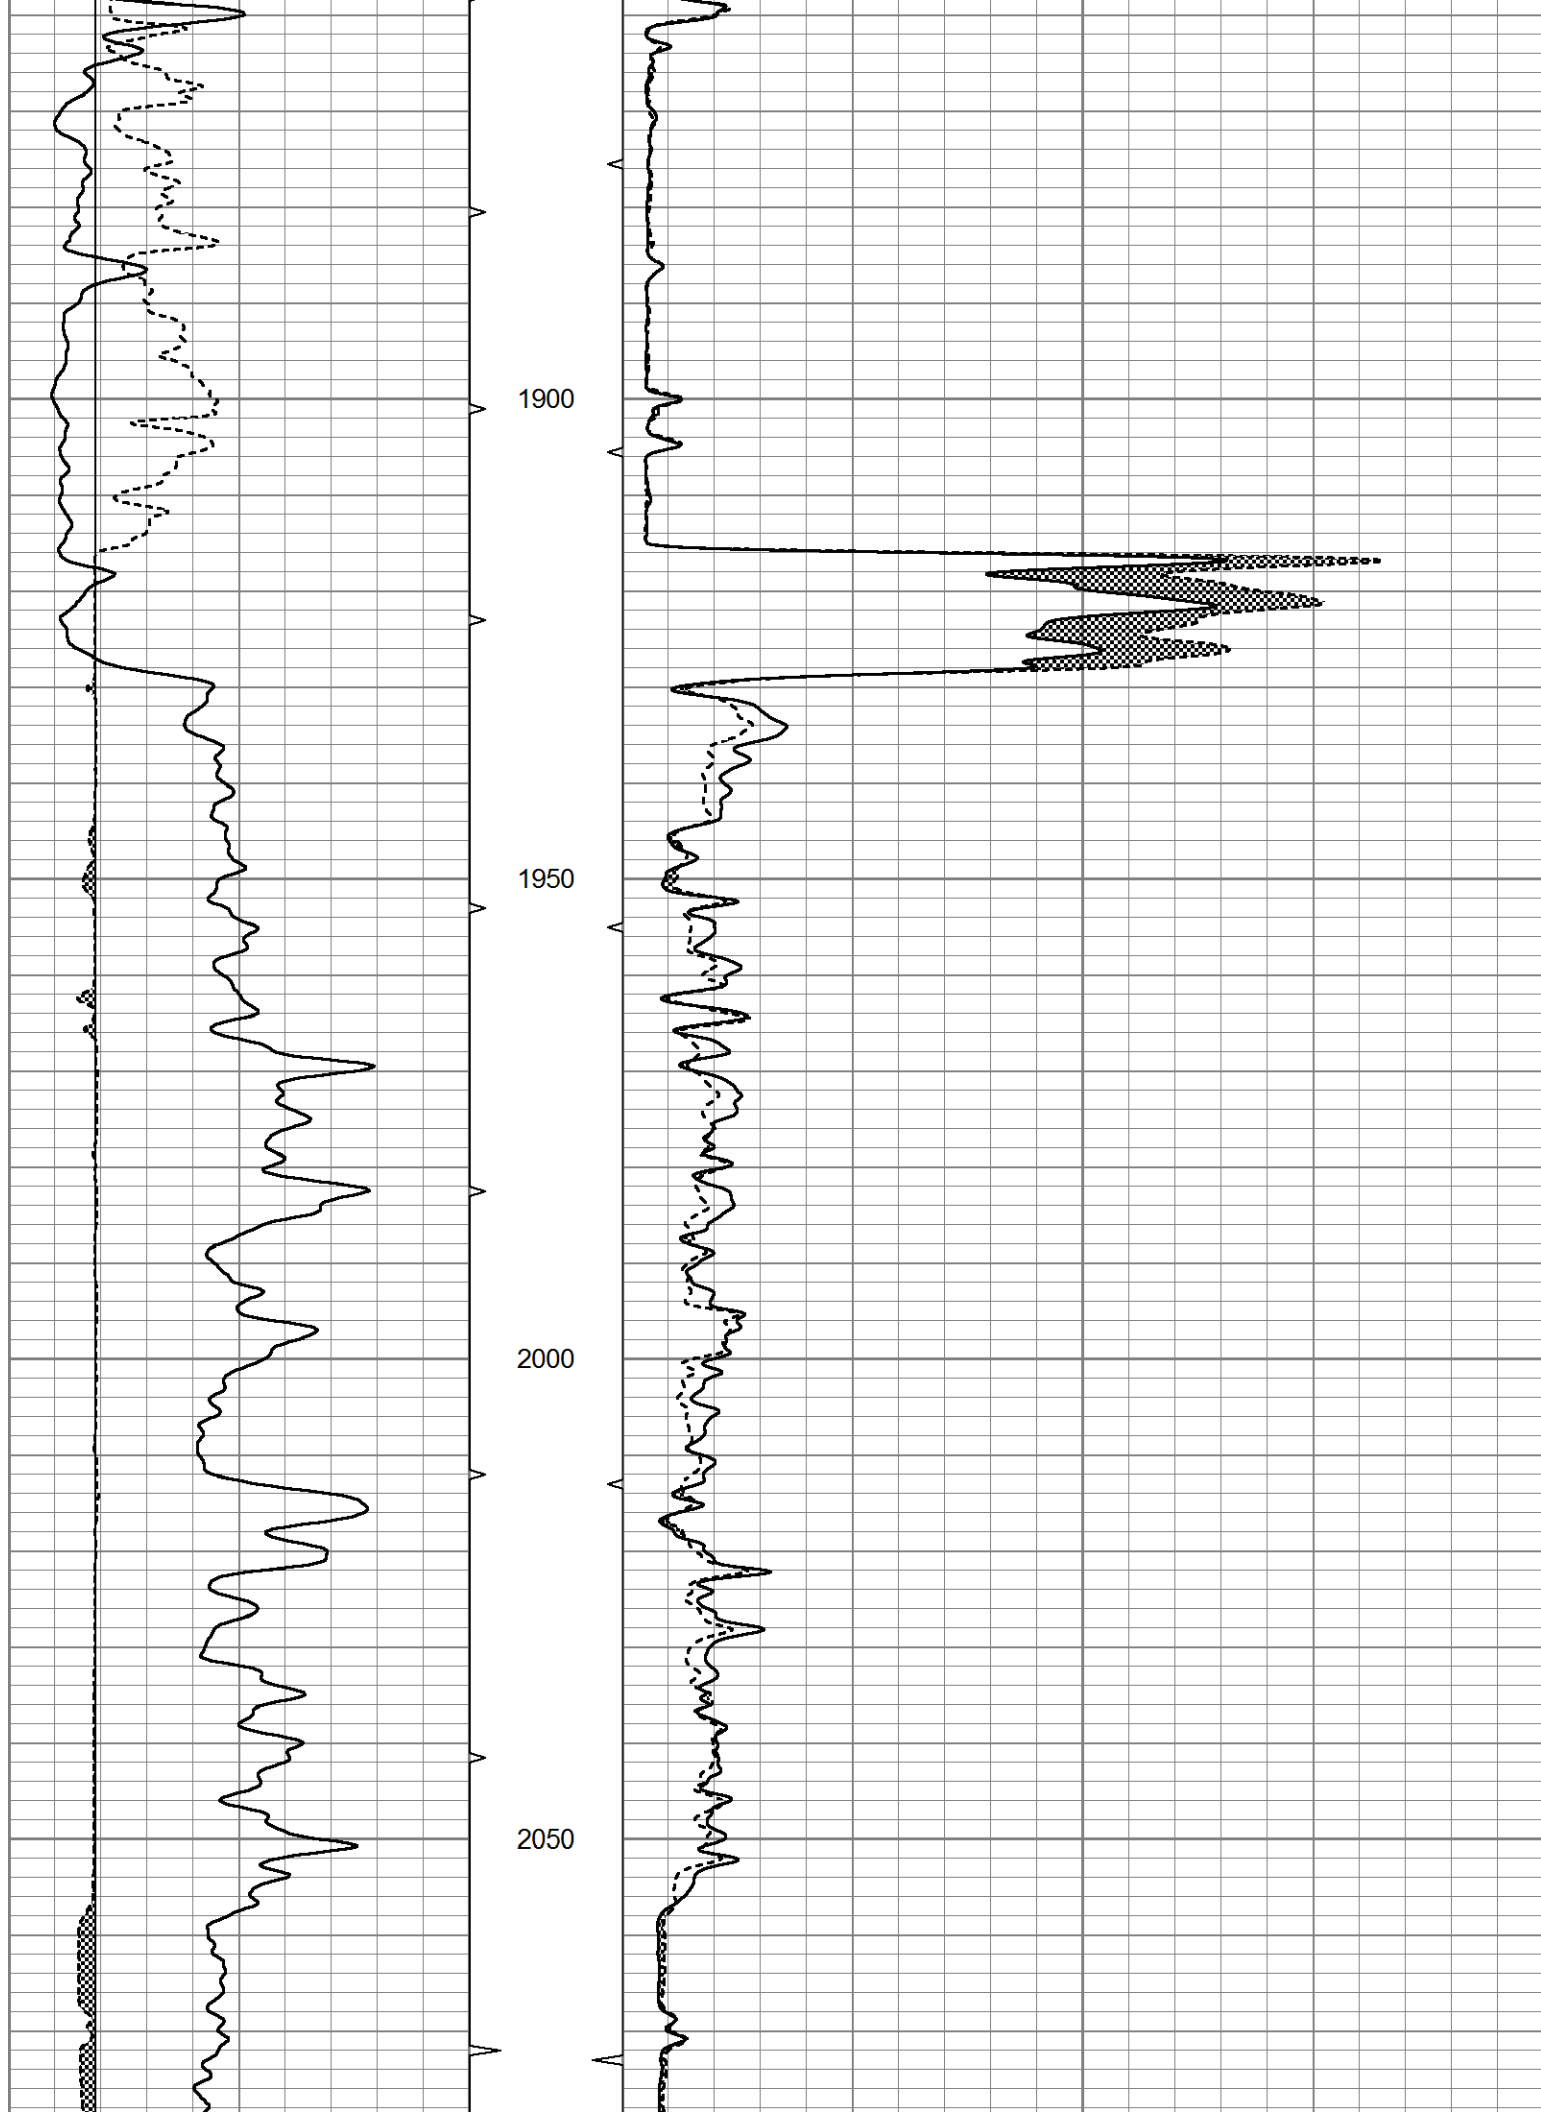

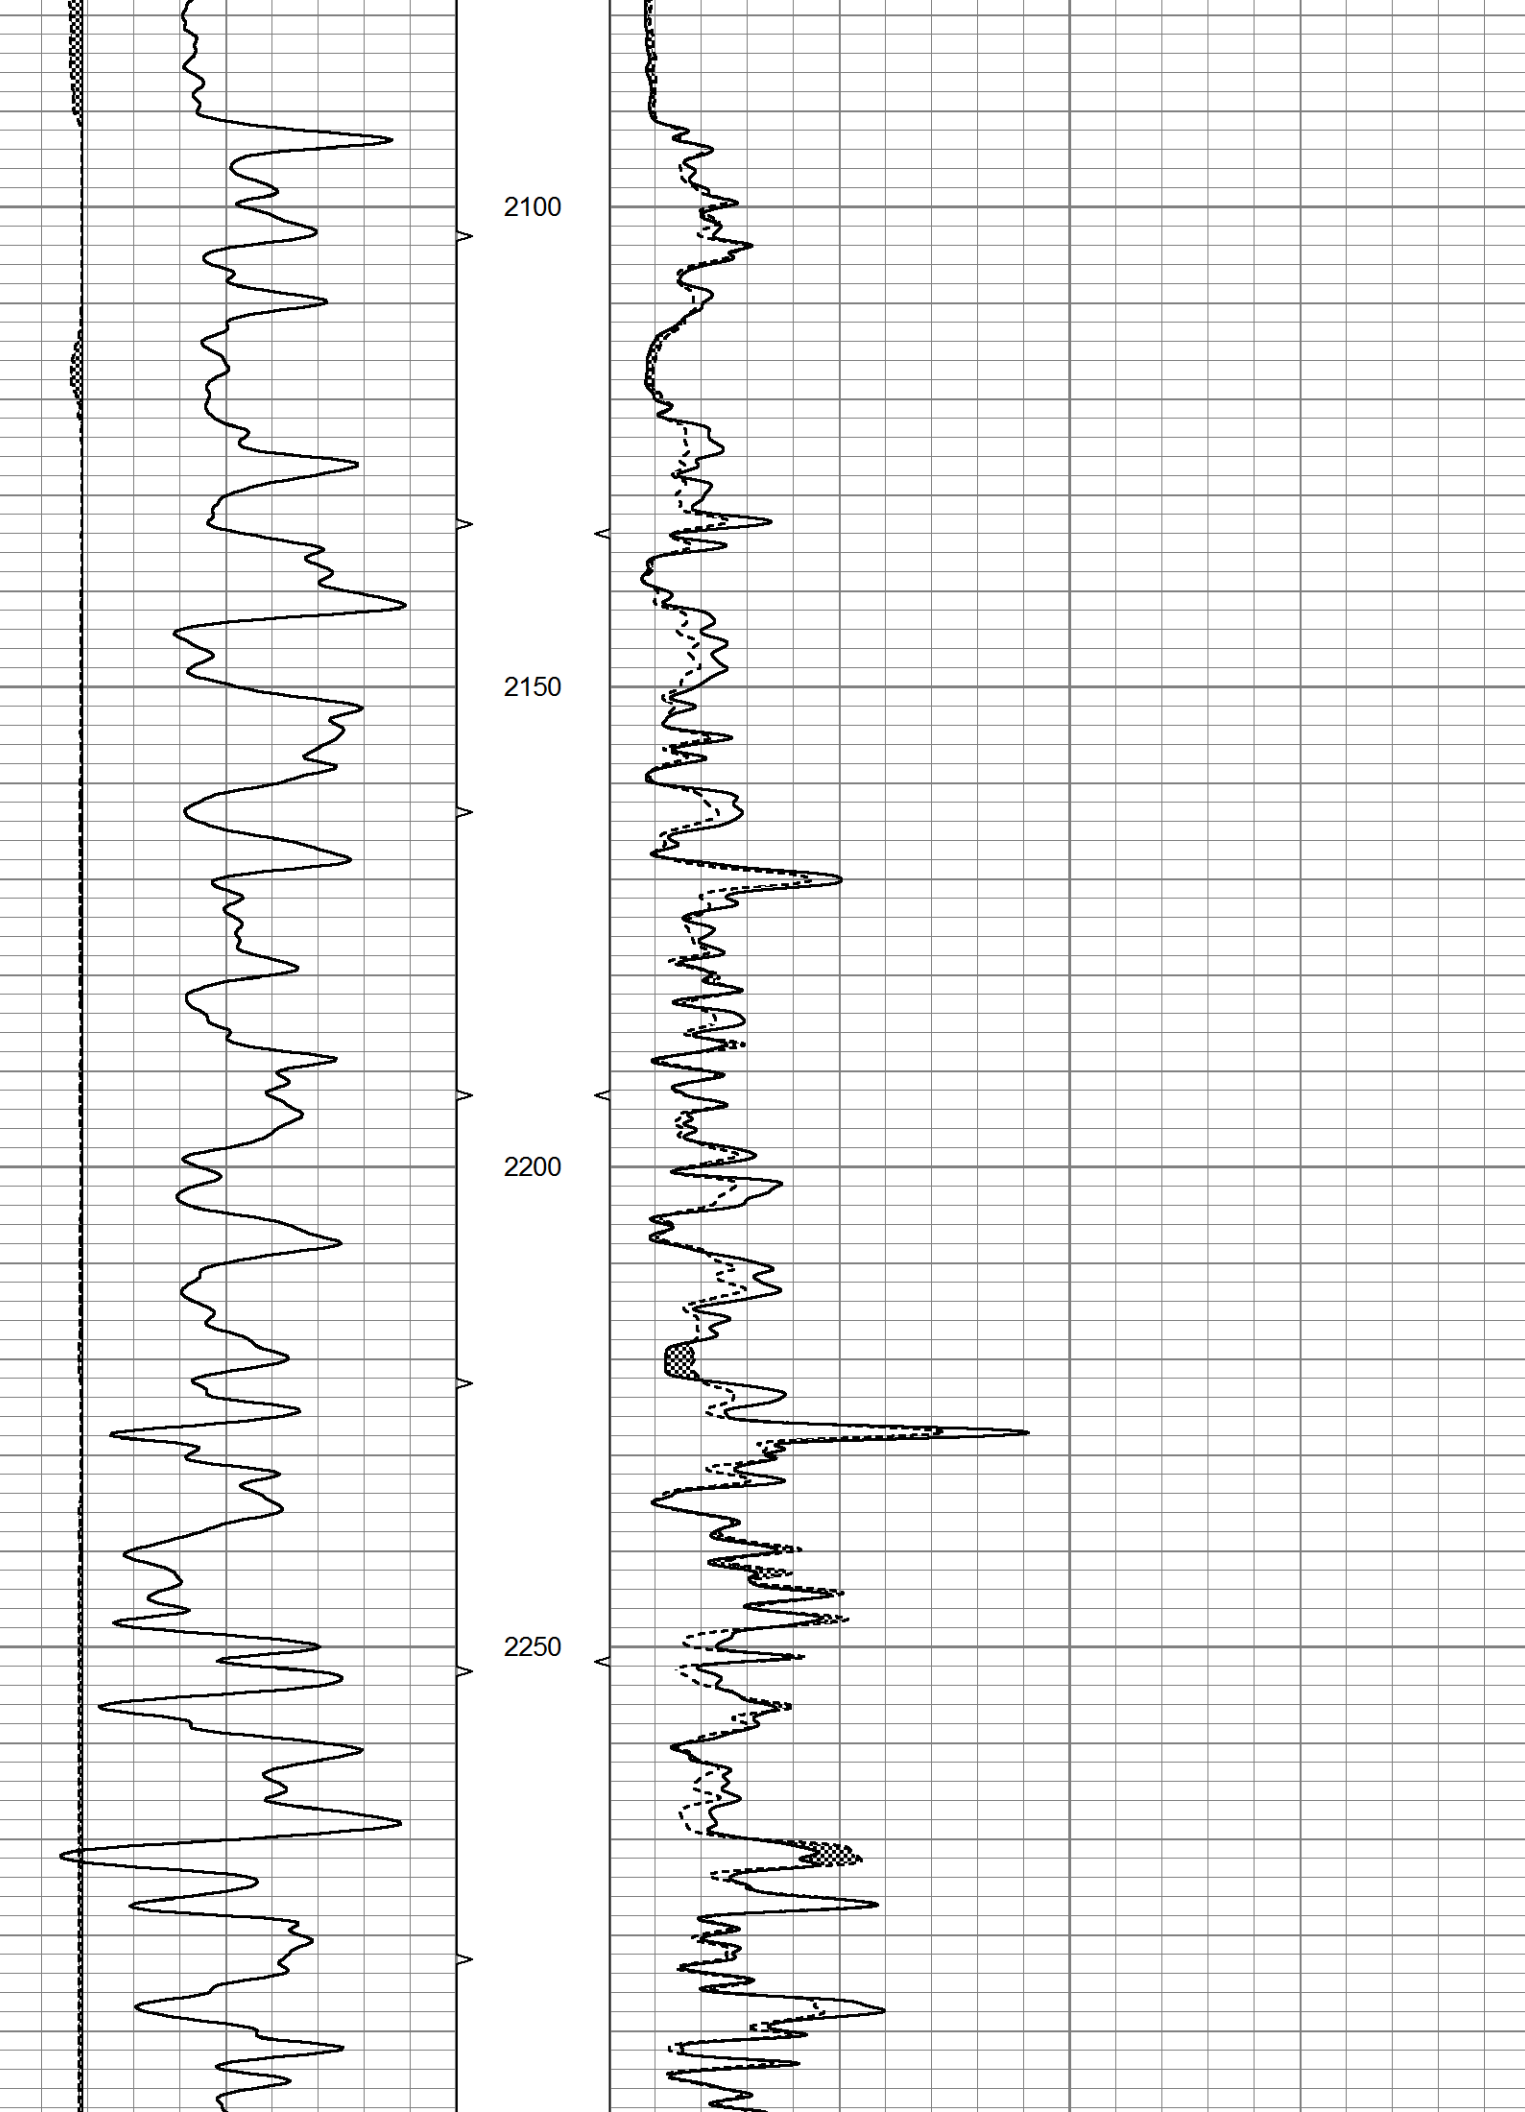

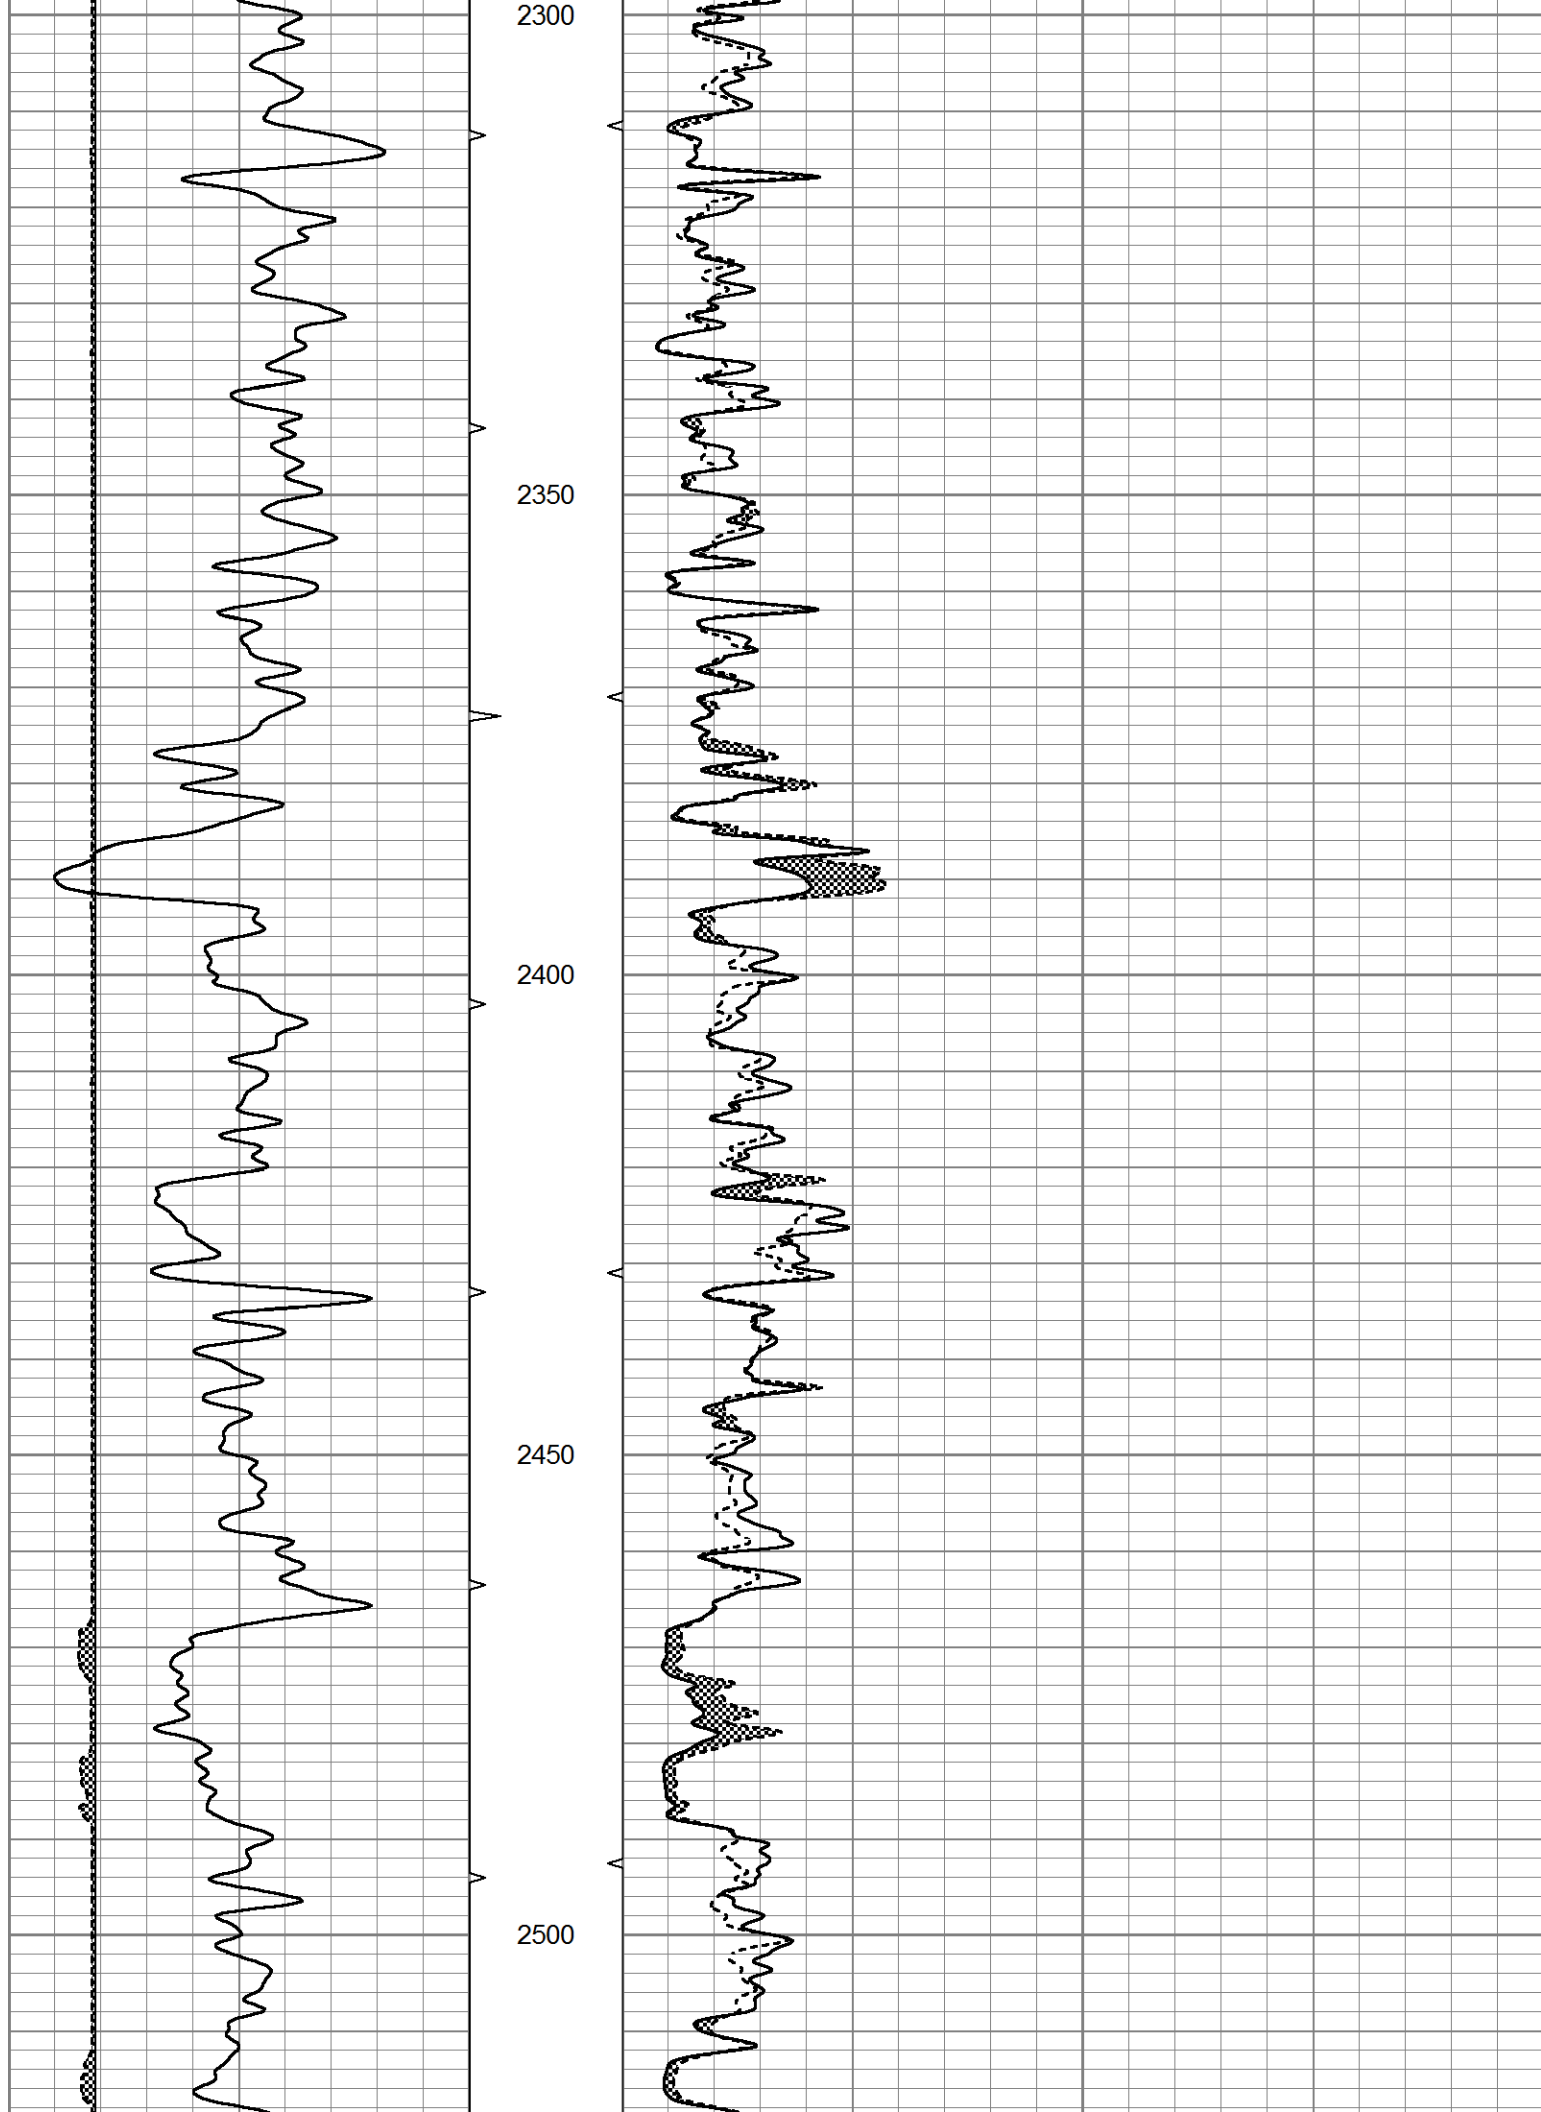

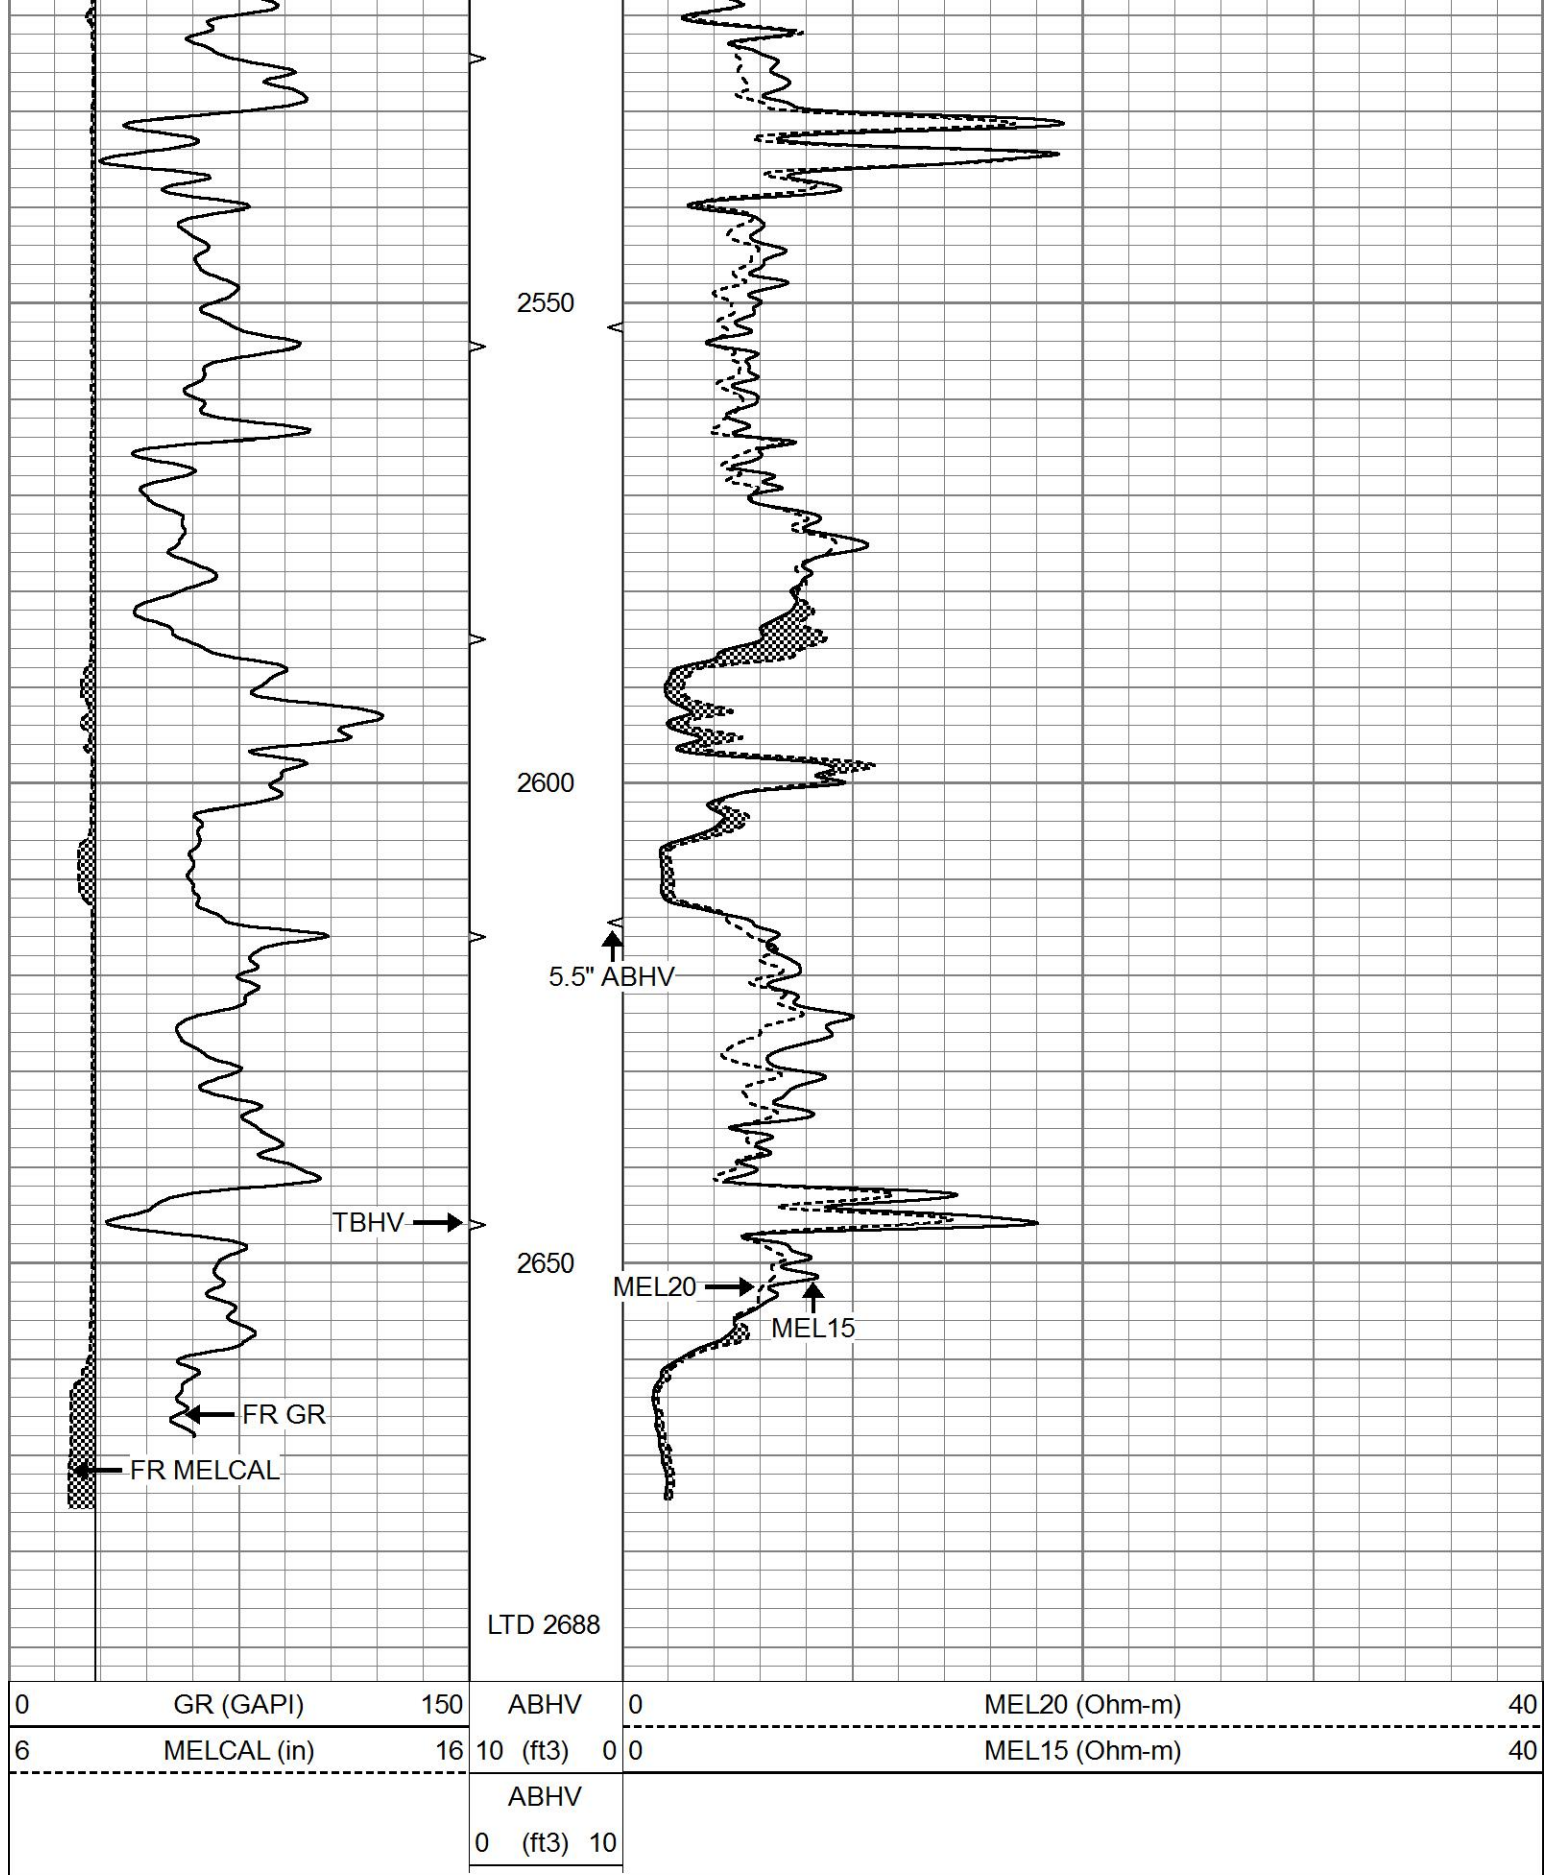

REPEAT SECTION

Database File5946pe.db


Dataset Pathnamepass5.1


Presentation Formatmicro

Dataset CreationThu Feb 10 23:56:04 2022

Charted byDepth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

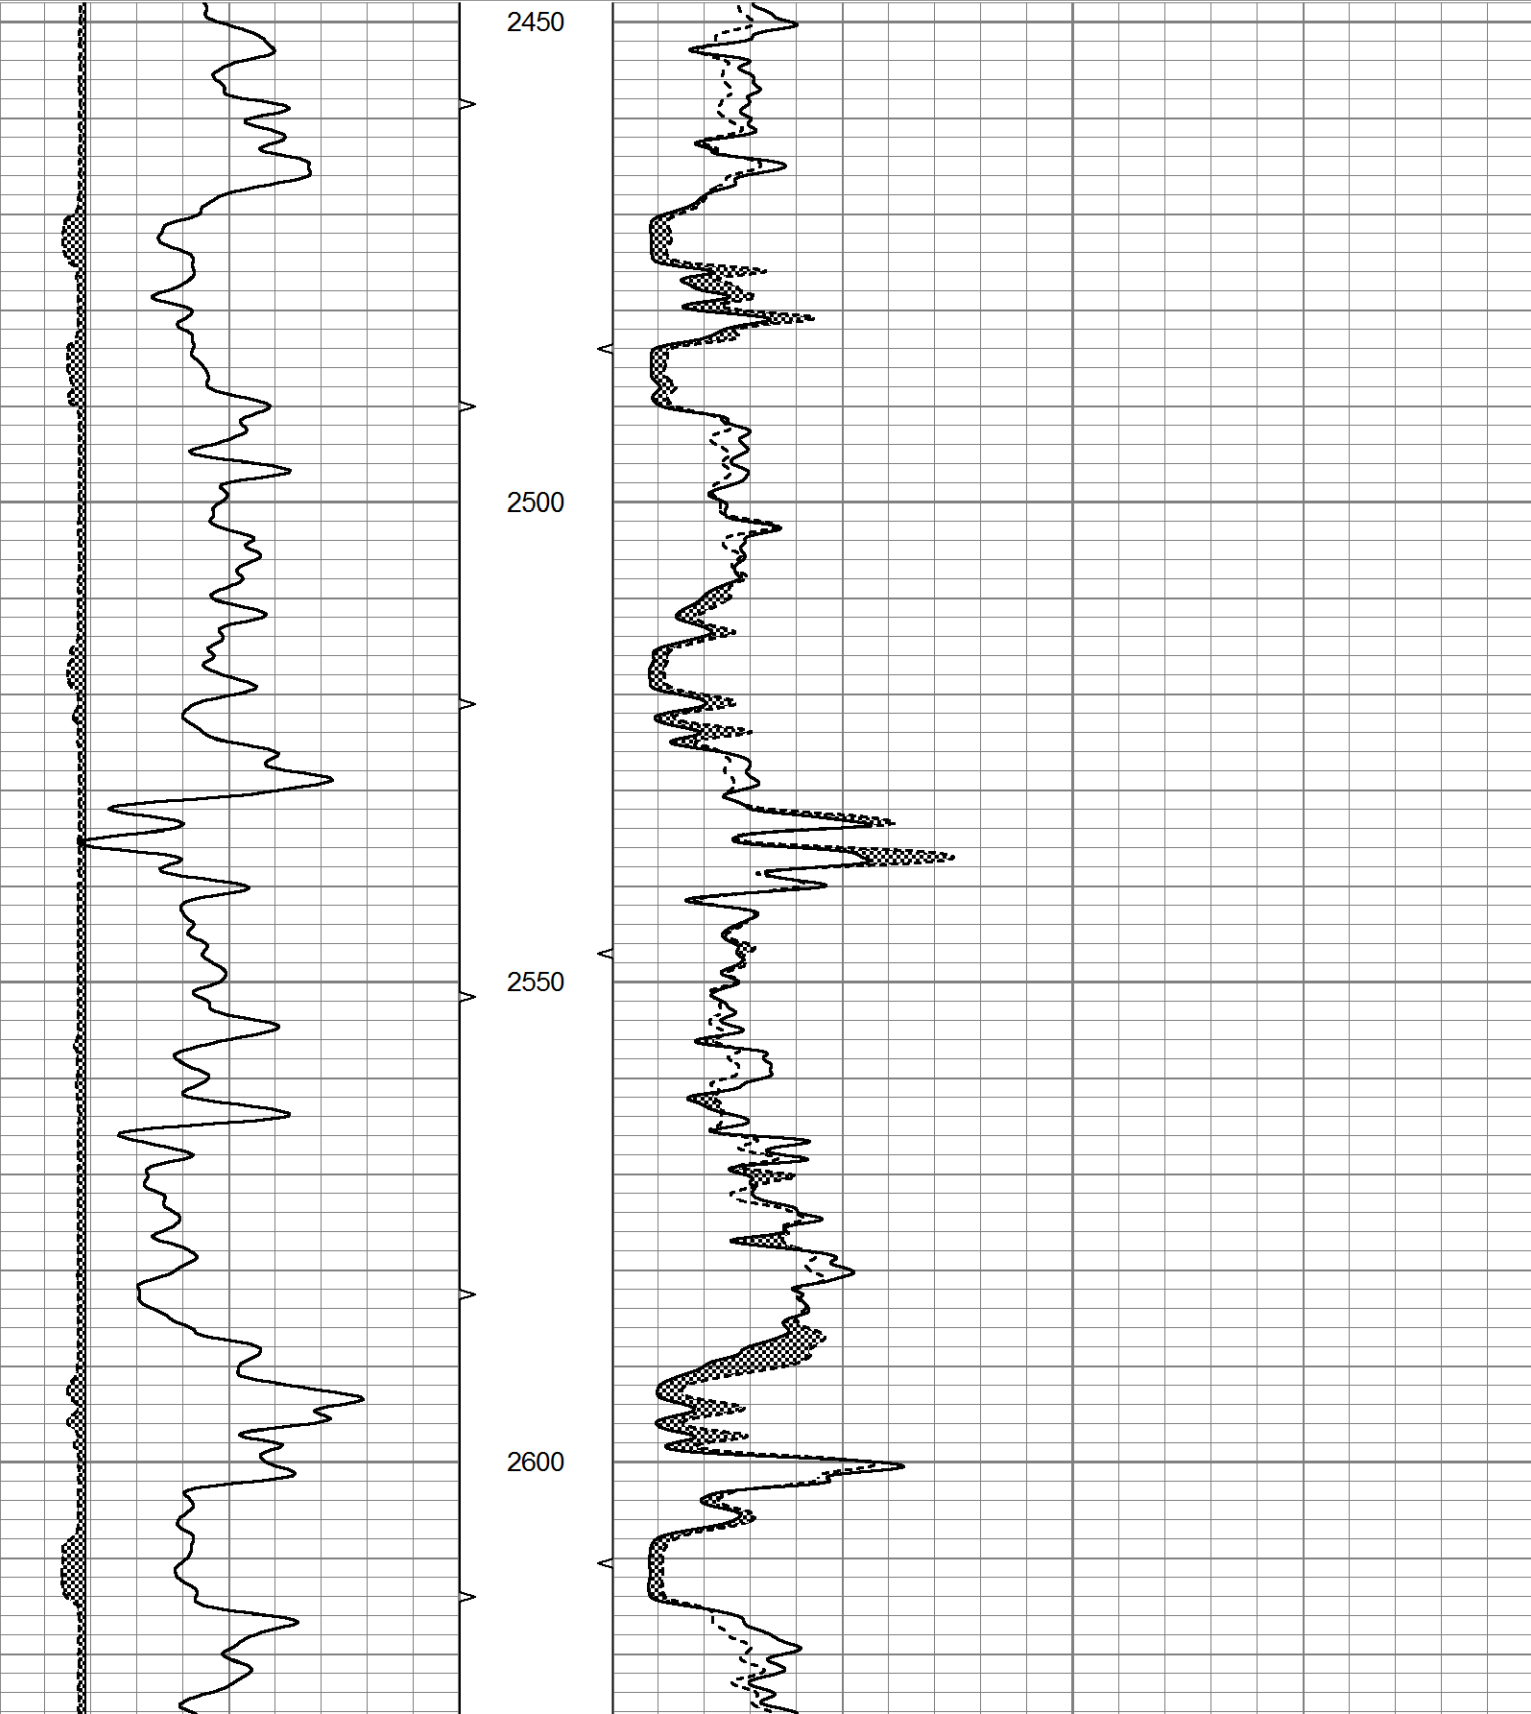

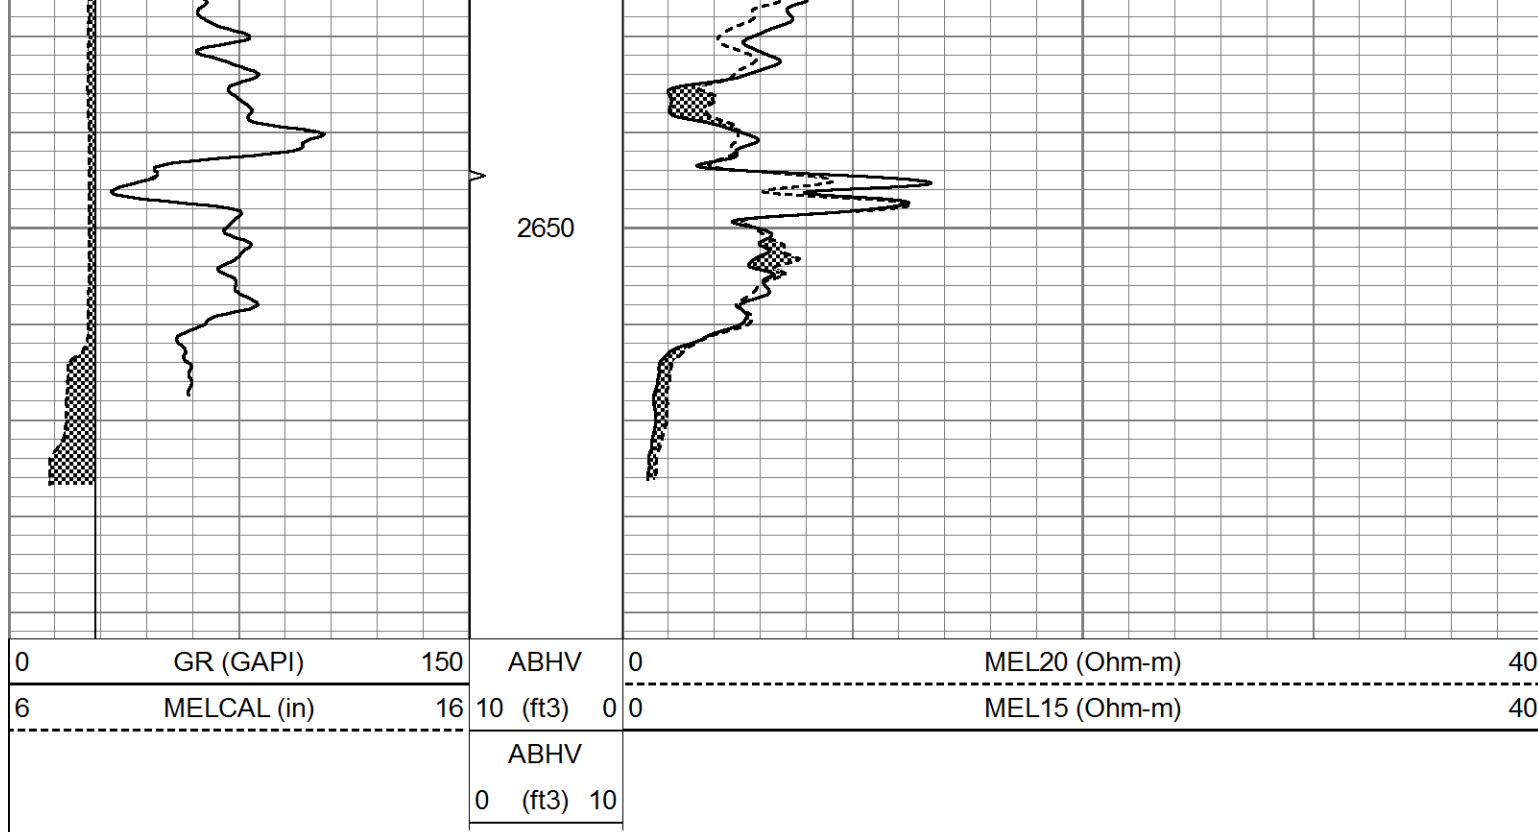

Database File		5946pe.db		Calibration Report	
Dataset Pathname		pass6.2			
Dataset Creation		Fri Feb 11 00:47:32 2022			
MICRO Calibration Report					
Serial Number:		070911			
Tool Model:		ProbeN			
Performed:		Wed Feb 02 03:04:30 2022			
Caliper Calibration:		Gain=3.179		Offset=3.676	
References		Low Cal		High Cal	
Readings		8.000		14.000	
		1.360		3.247	
1.5" Calibration:		Gain=45.000		Offset=1.000	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.001		1.291	
2" Calibration:		Gain=56.000		Offset=0.800	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.003		1.103	
Gamma Ray Calibration Report					
Serial Number:		070558			
Tool Model:		OPEN_GR			
Performed:		Sat Jan 29 13:06:40 2022			
Calibrator Value:		1.0		GAPI	
Background Reading:		0.0		cps	
Calibrator Reading:		1.0		cps	

Sensitivity:

0.3000

GAPI/cps