

MICRO LOG

Company TRIPLE CROWN OPERATING, LLC.

Well NEYSA #1-33

Field

County NESS

State KANSAS

Location: API # : 15-135-26128-0000

2000' FSL & 1870' FEL

SEC 33 TWP 20S RGE 21W

Permanent Datum GROUND LEVEL Elevation 2259
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SON
Elevation
K.B. 2264
D.F. 2262
G.L. 2259

Date 11/20/21

Run Number TWO

Depth Driller 4534

Depth Logger 4534

Bottom Logged Interval 4516

Top Log Interval 2200

Casing Driller 8 5/8" @ 1436

Casing Logger 1436

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD CHLORIDES 4000 PPM

Density / Viscosity 9.2/50

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .70 @ 56F

Rmf @ Meas. Temp .52 @ 56F

Rmc @ Meas. Temp .84 @ 56F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .32 @ 212F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom

Maximum Recorded Temperature 121F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By SEAN DEENIHAN

CHRIS JOHNSON

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
BAZINE, KS. - EAST TO RD. GG (CHRIST PILOT ME SIGN) - 12.5 SOUTH - WEST INTO




MAIN SECTION

Database File	6054pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Sat Nov 20 08:09:26 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3)	10		

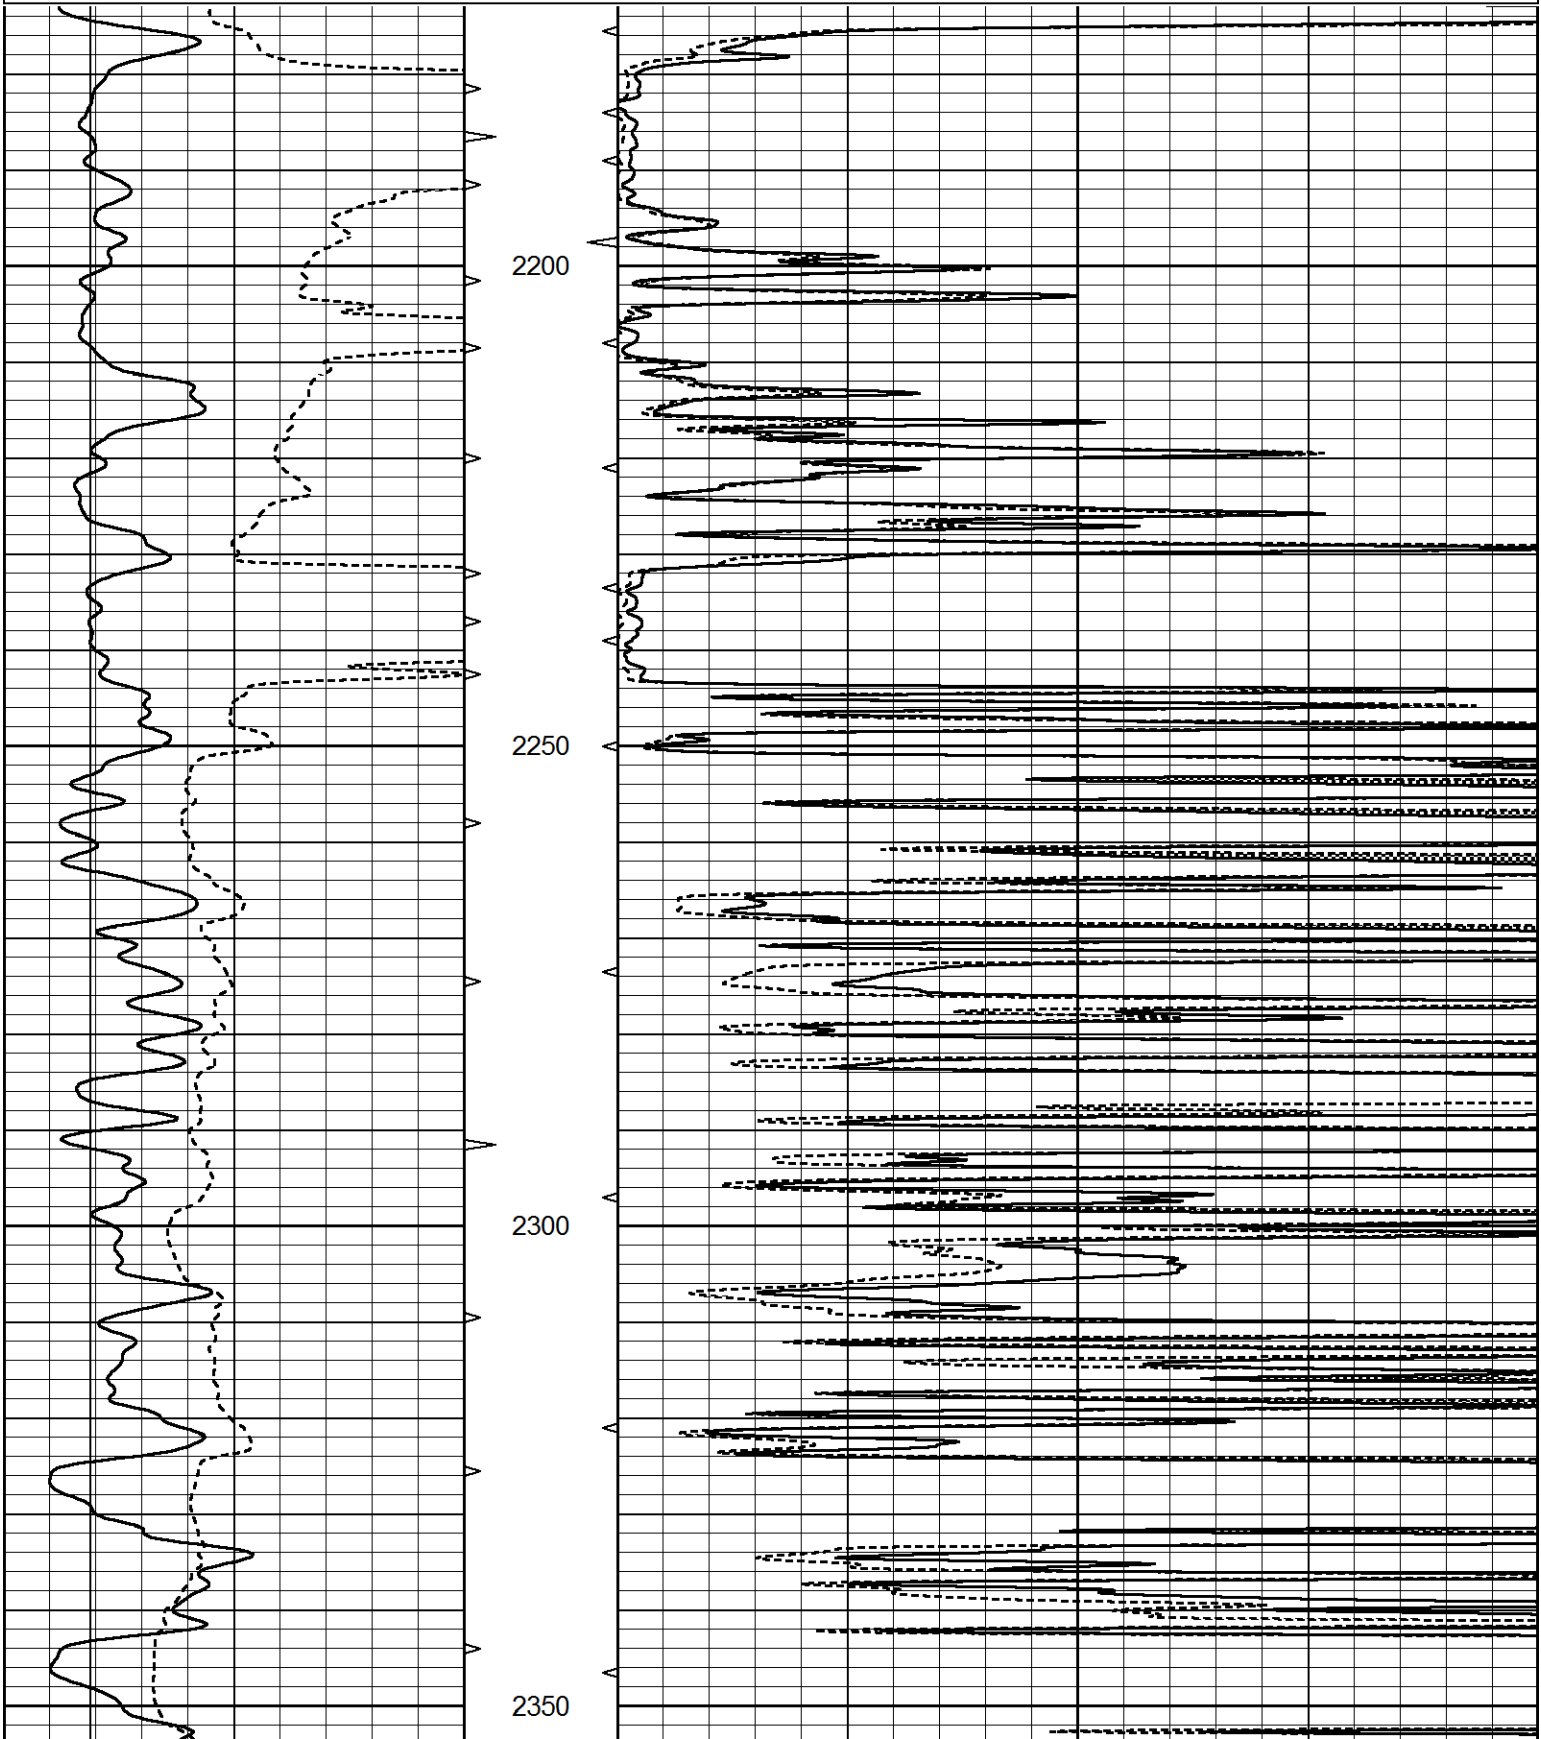

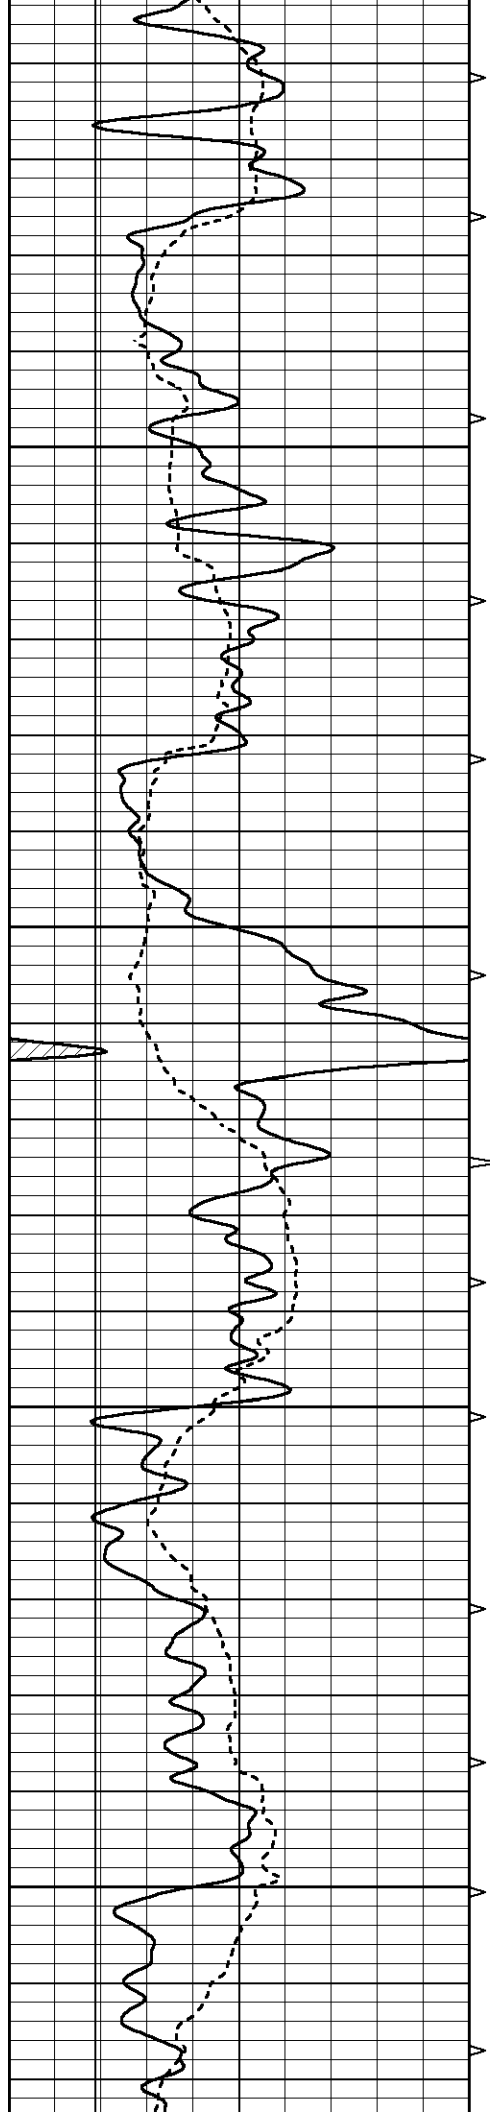



2400


2450



2500


2550

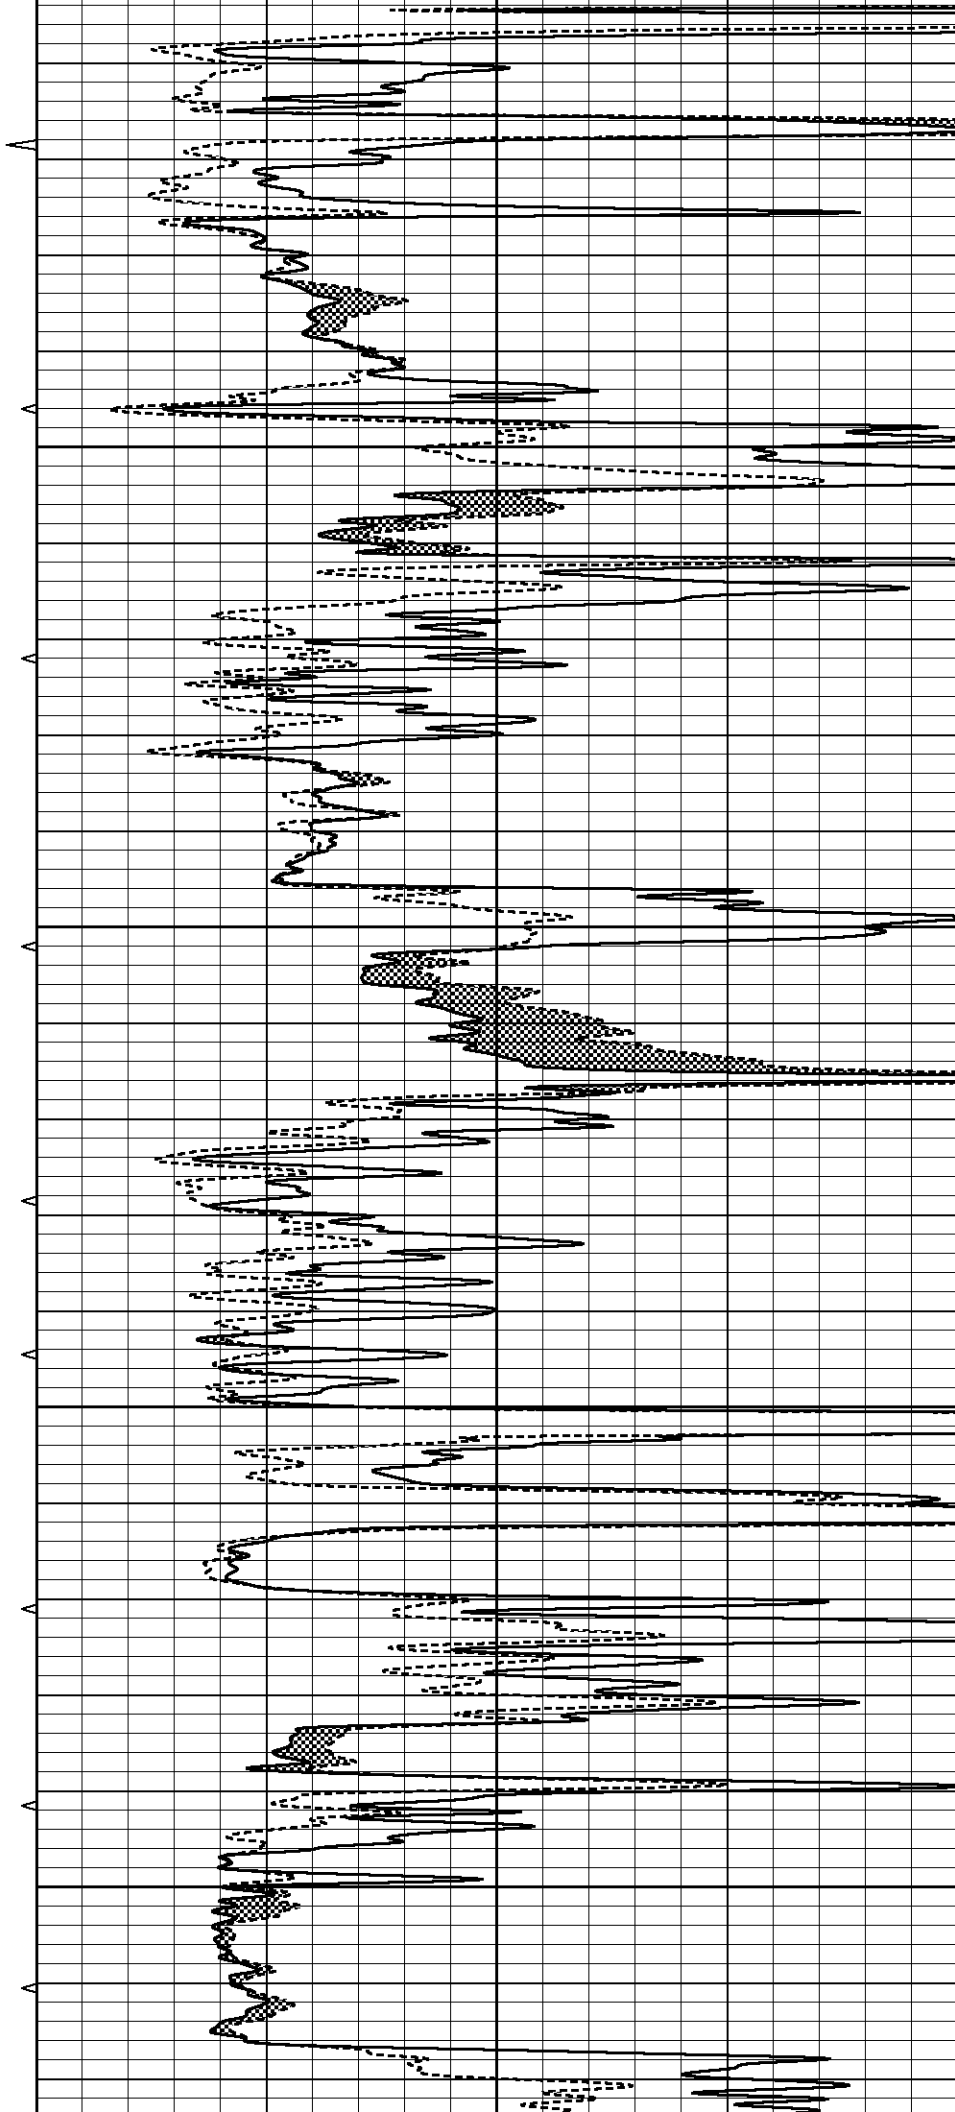


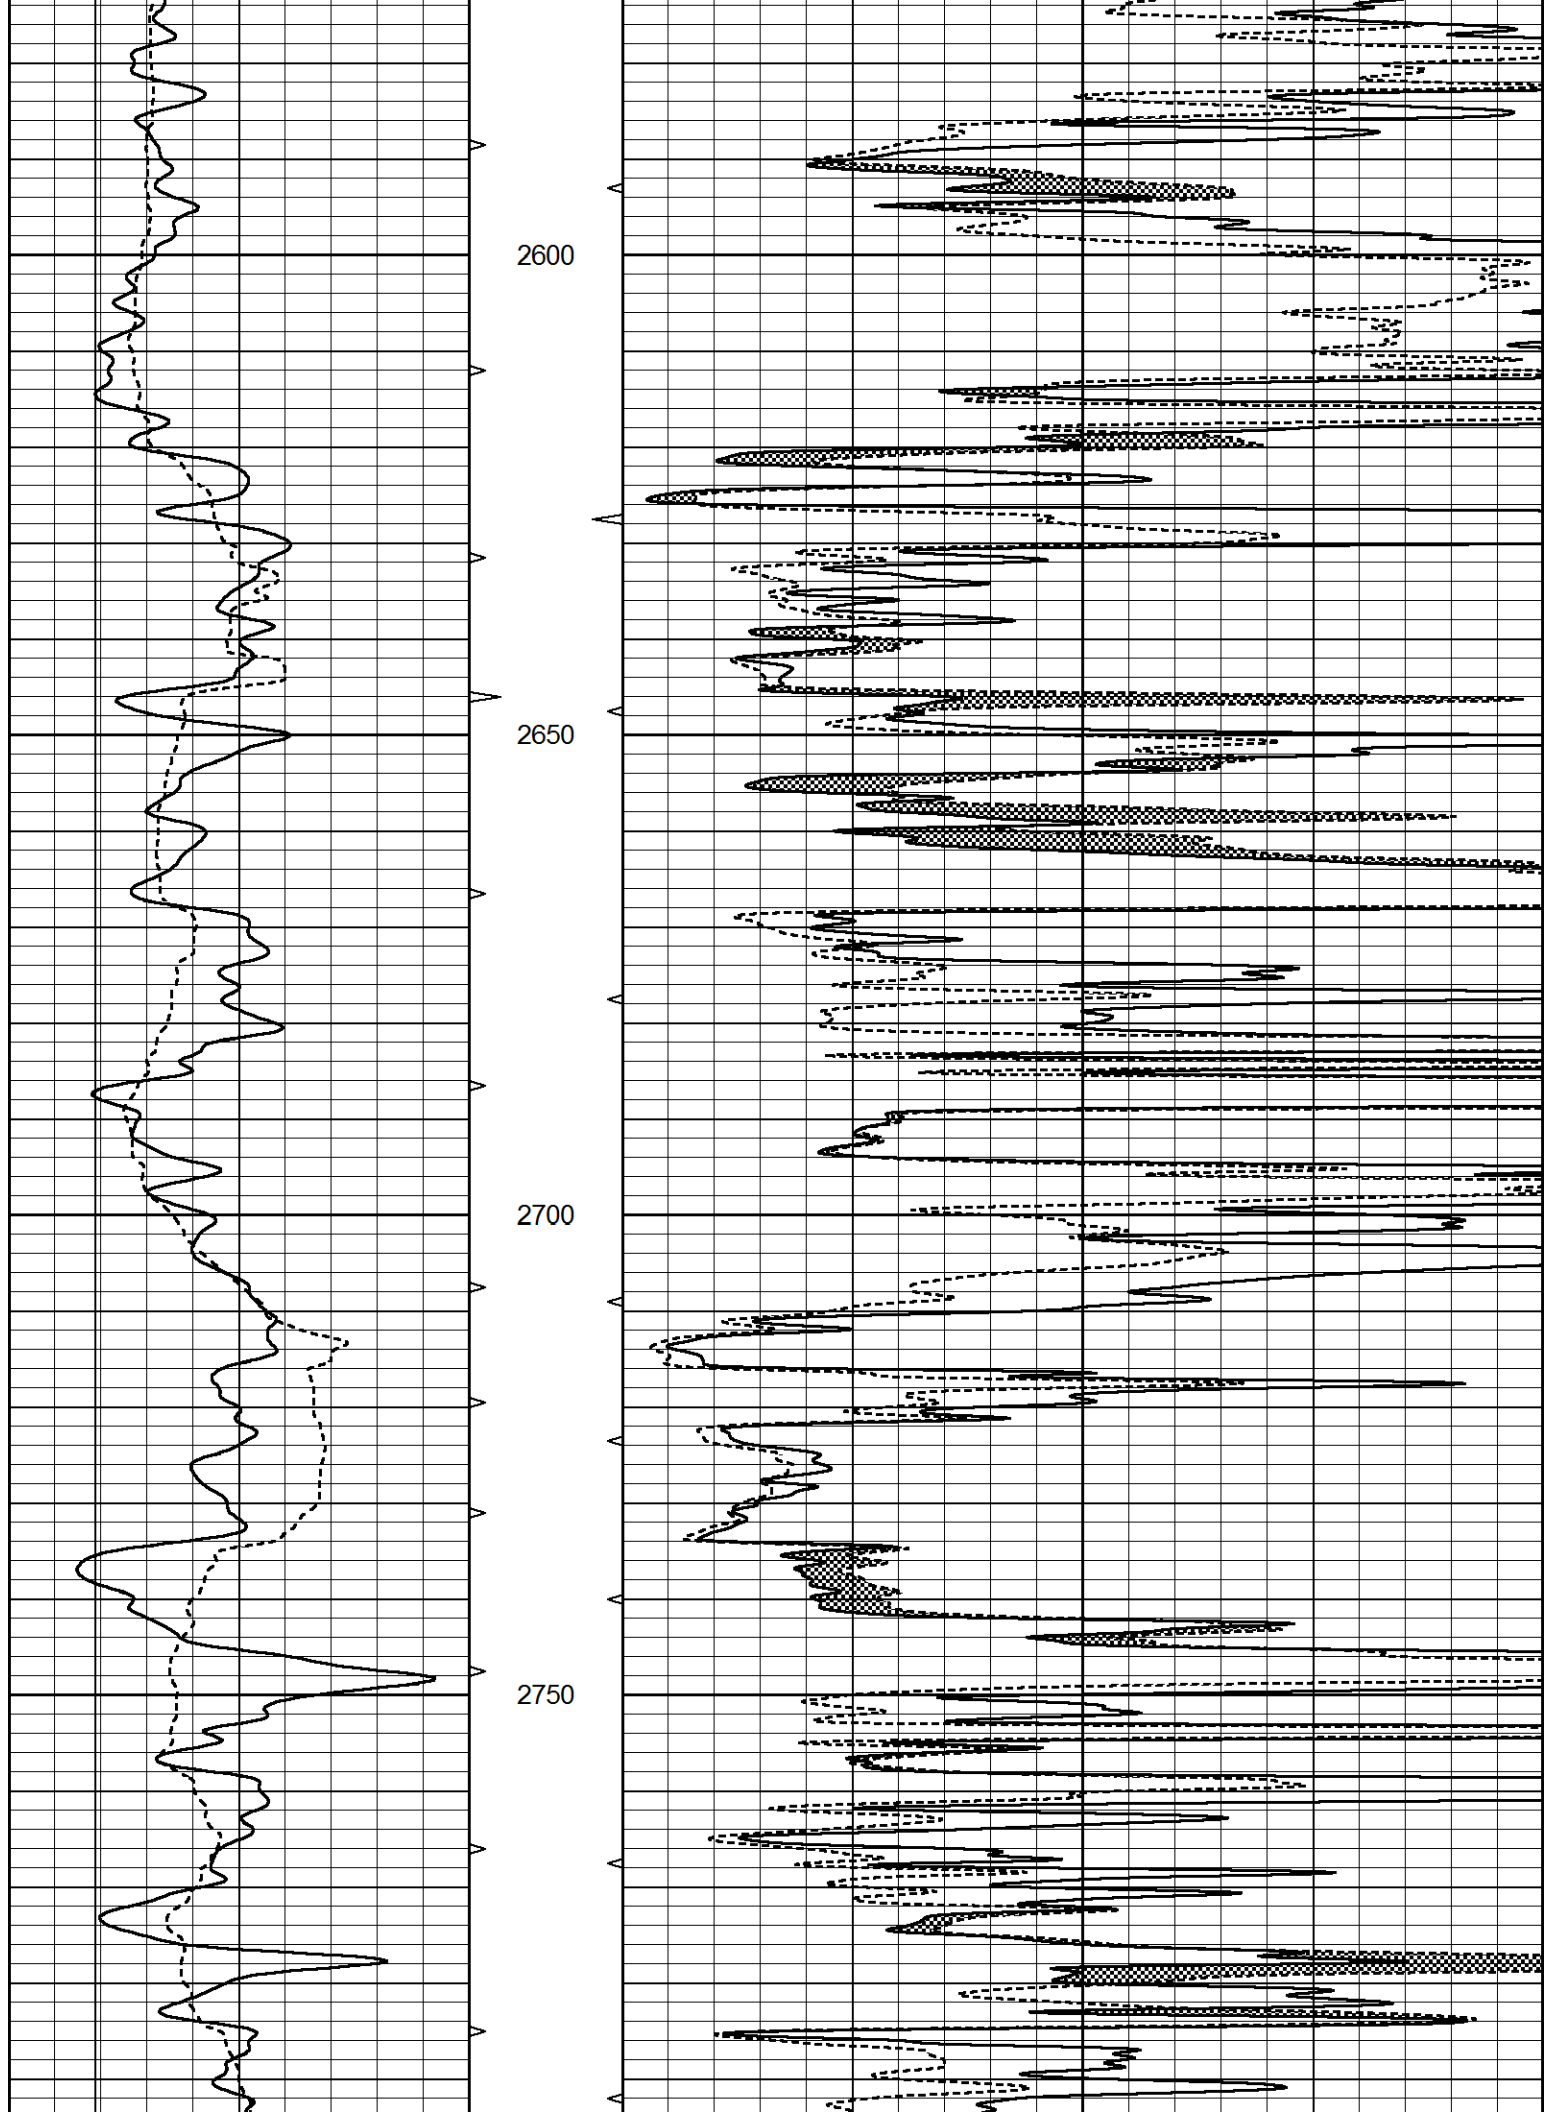


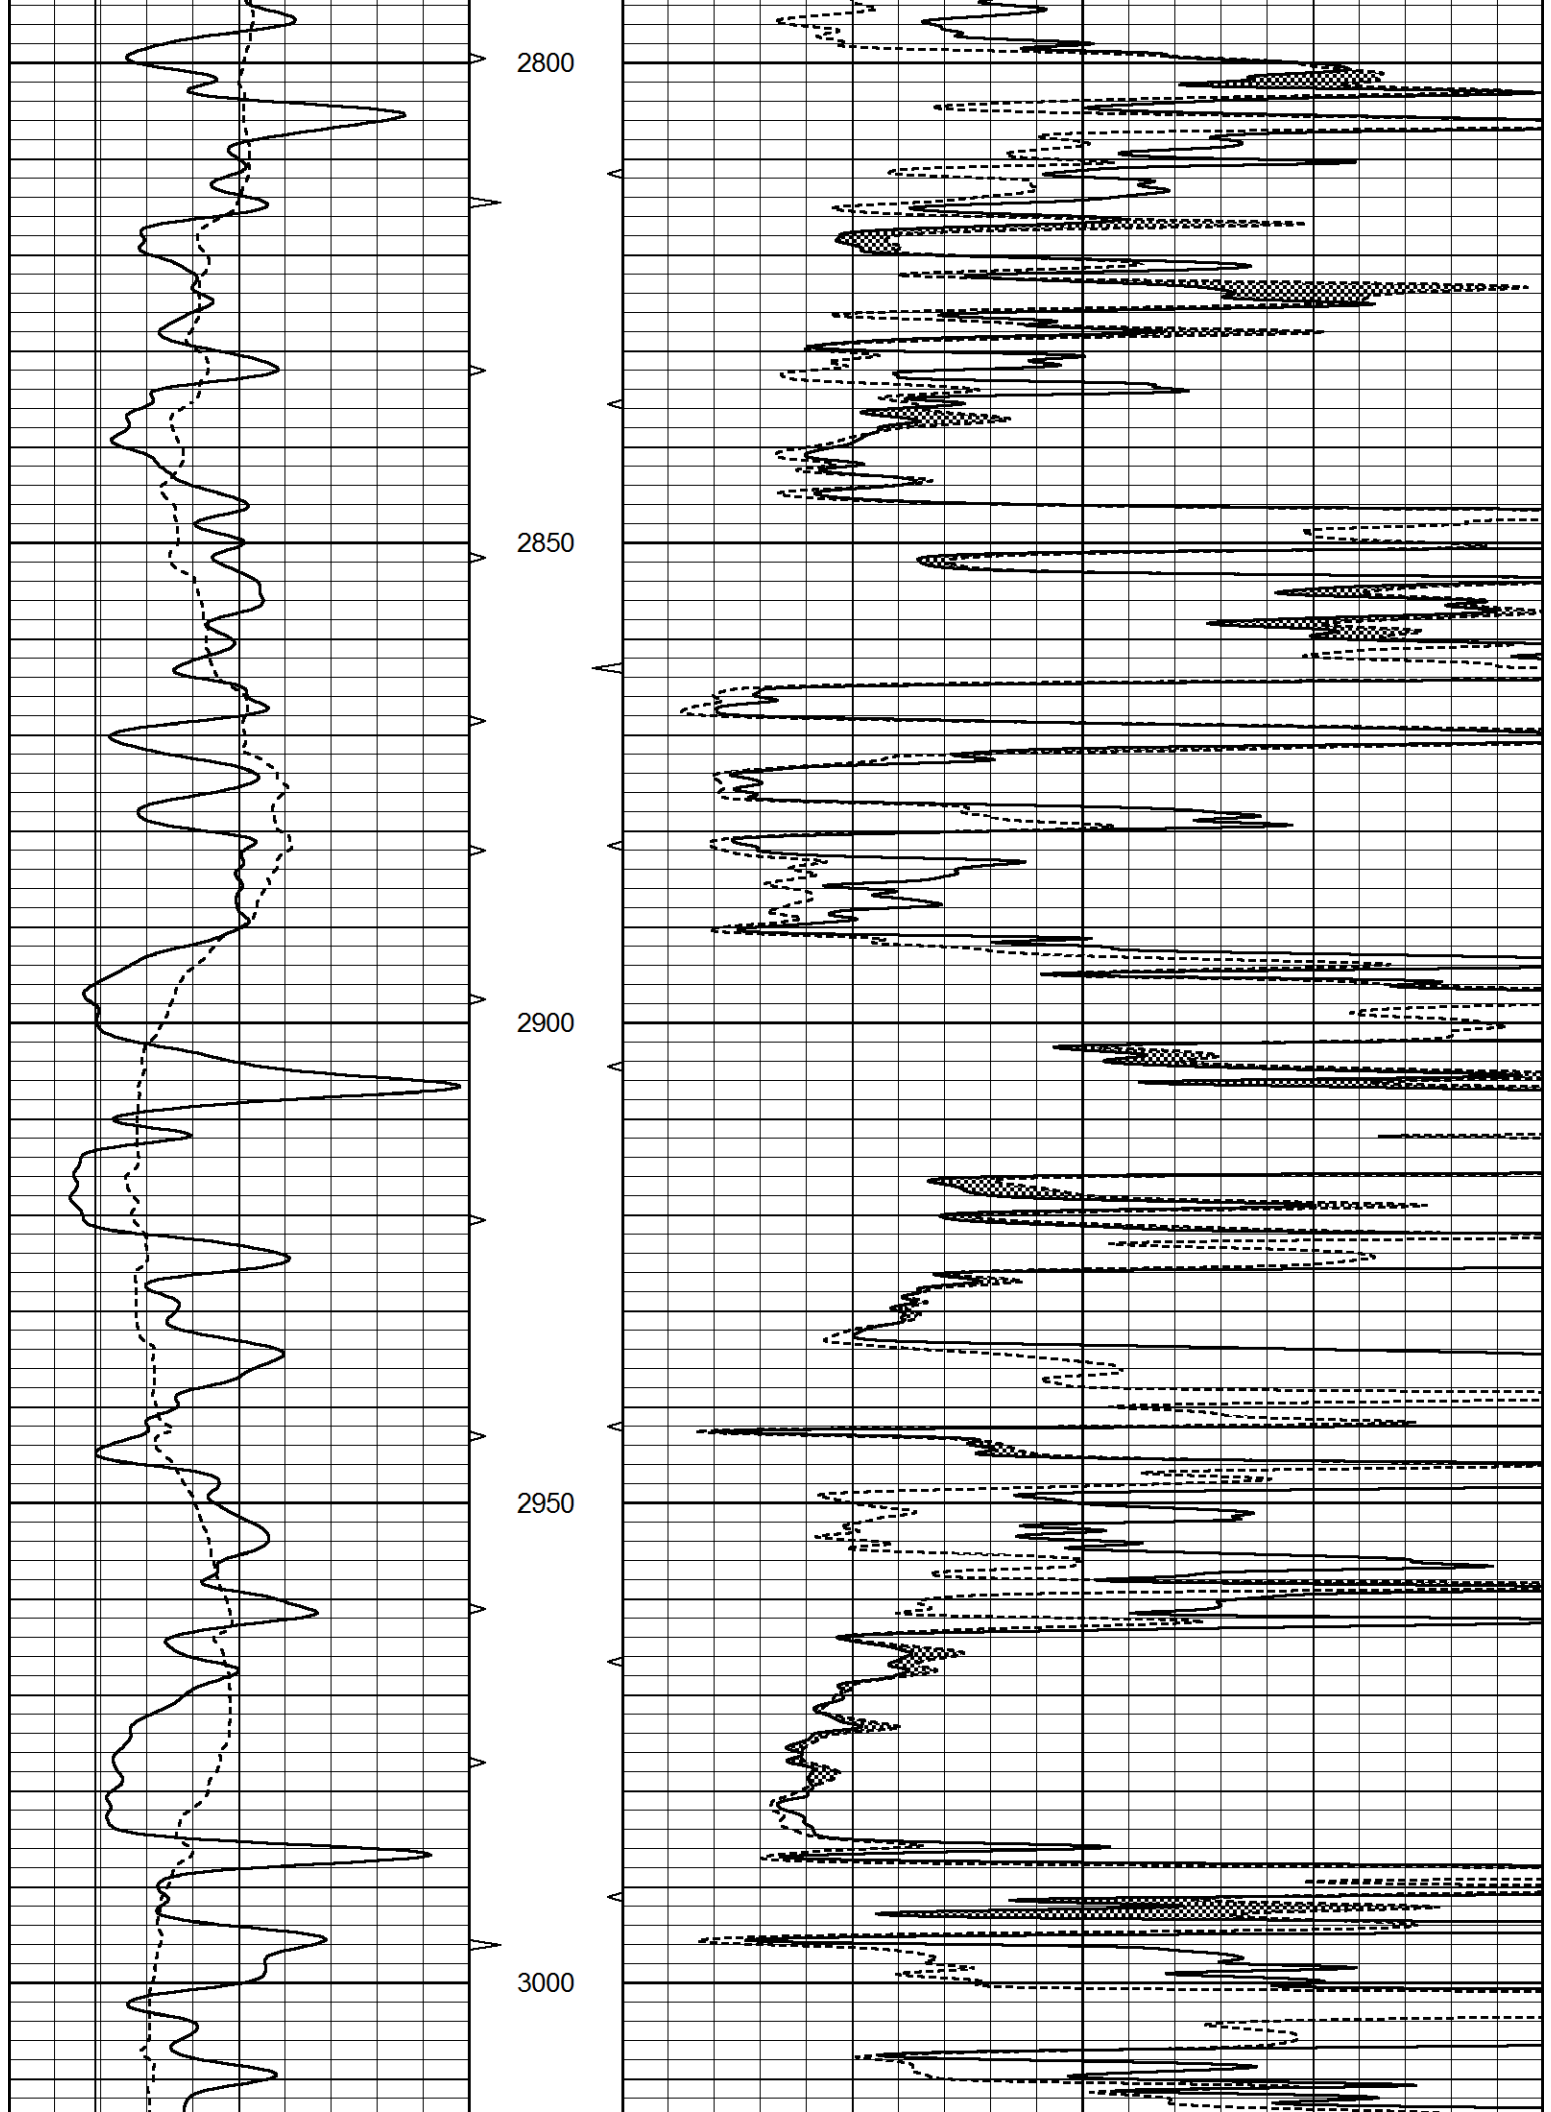

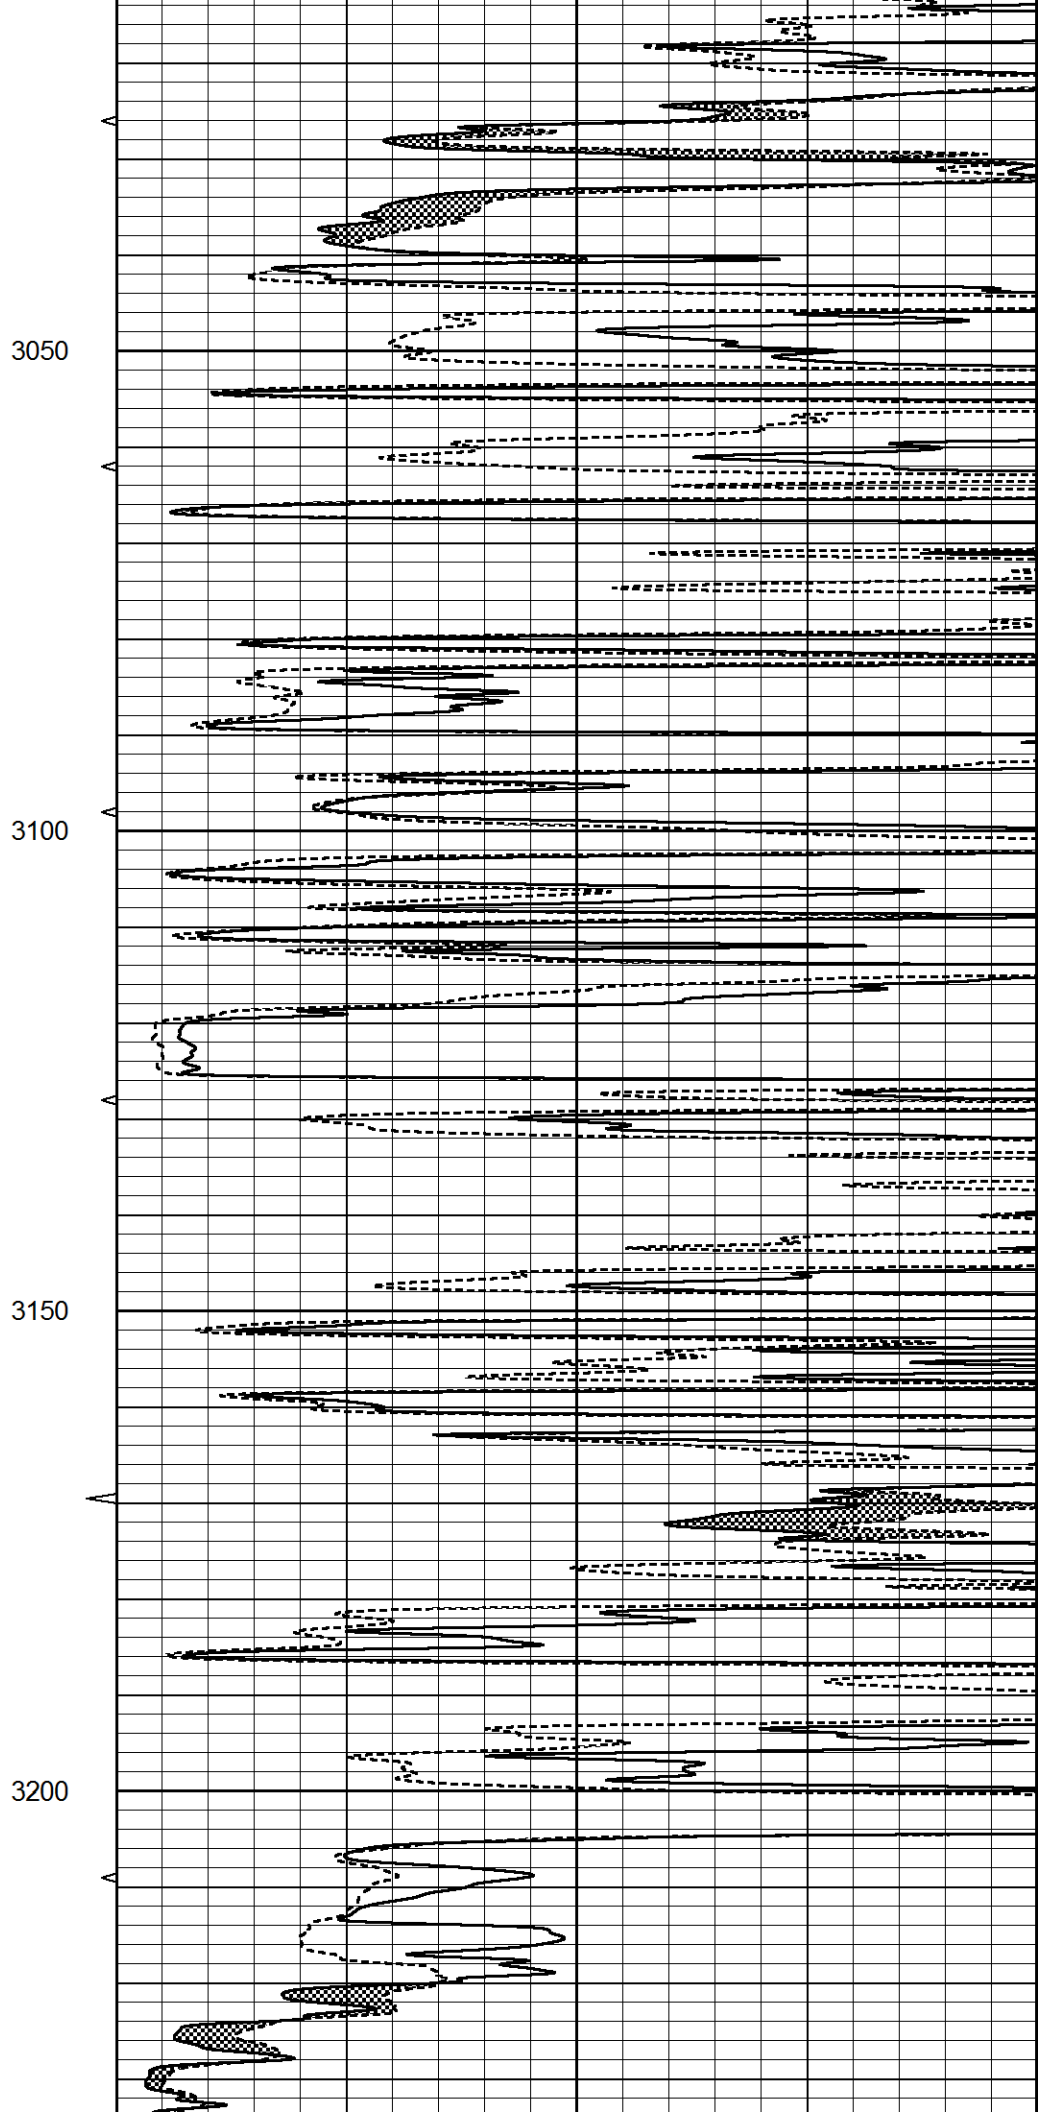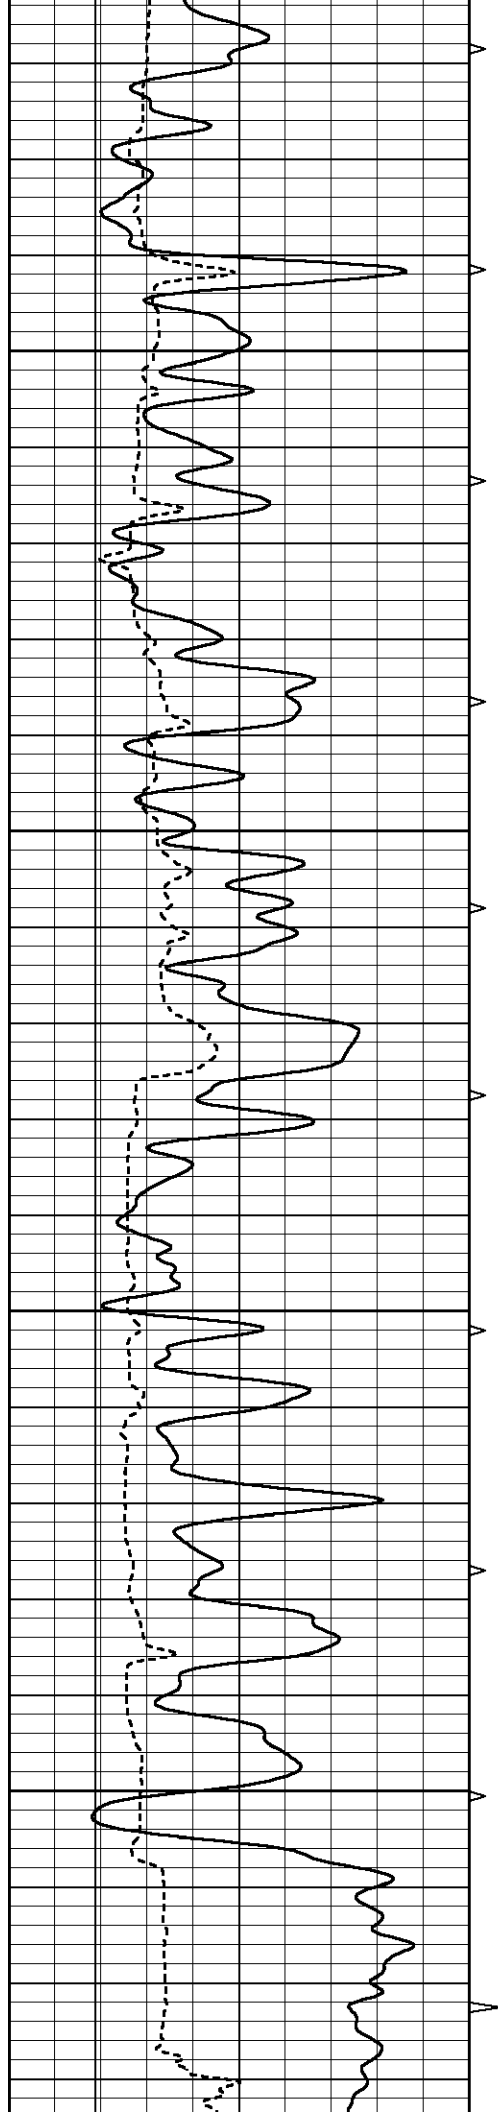

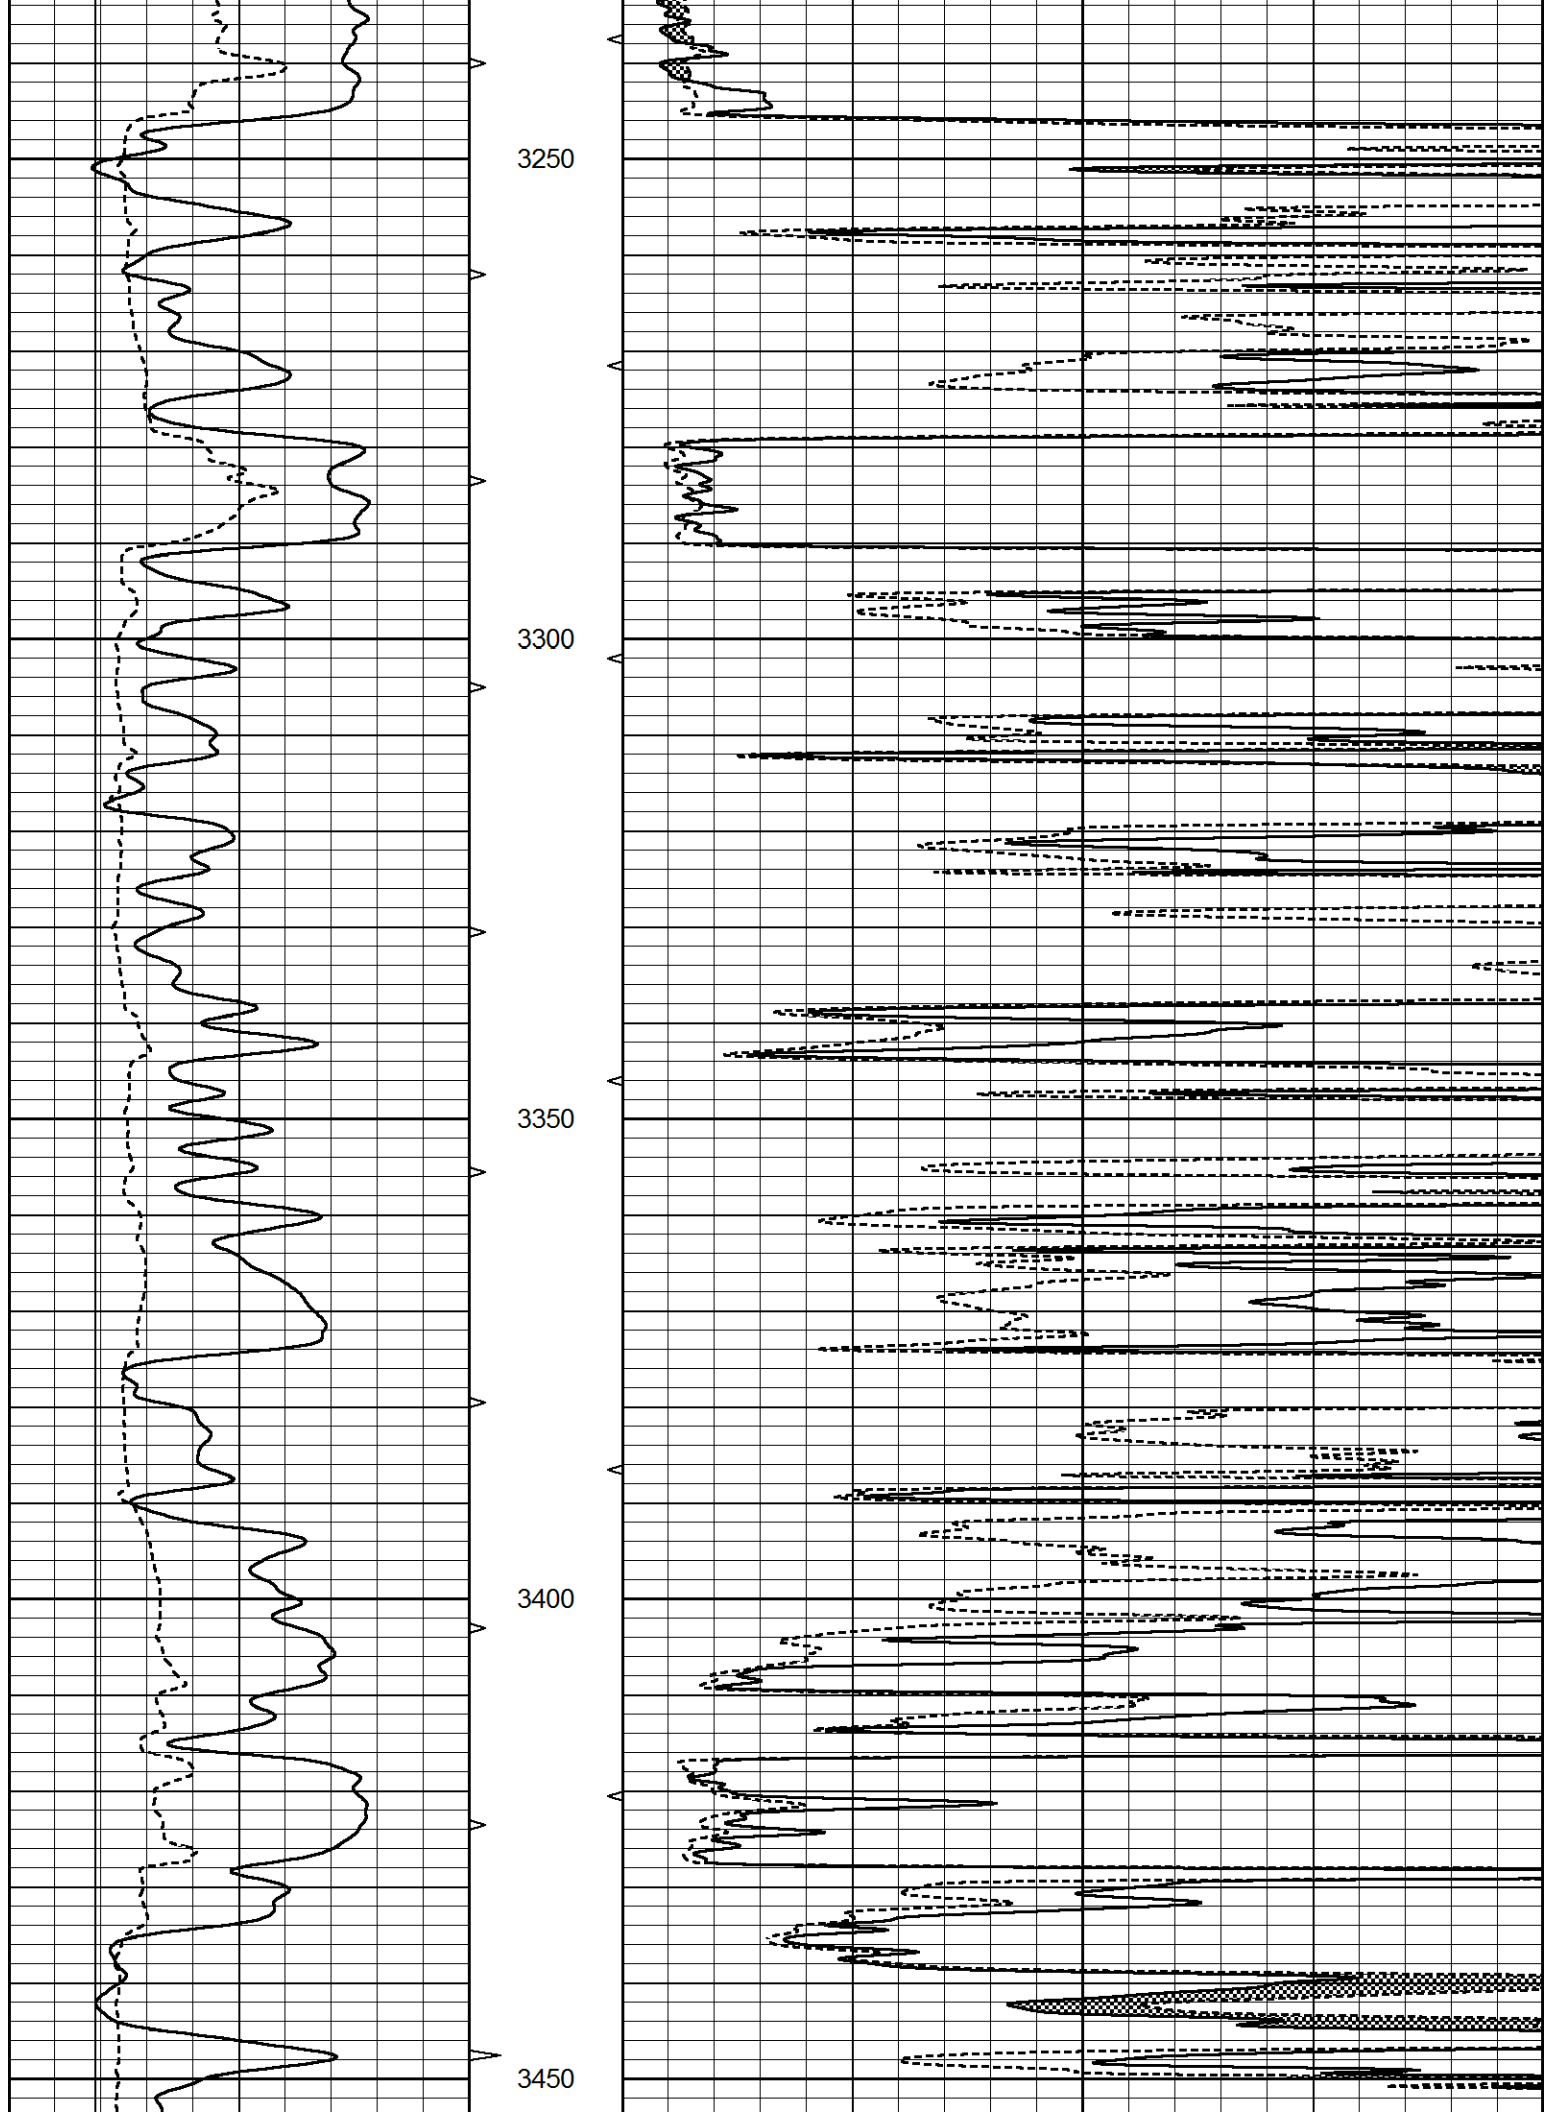

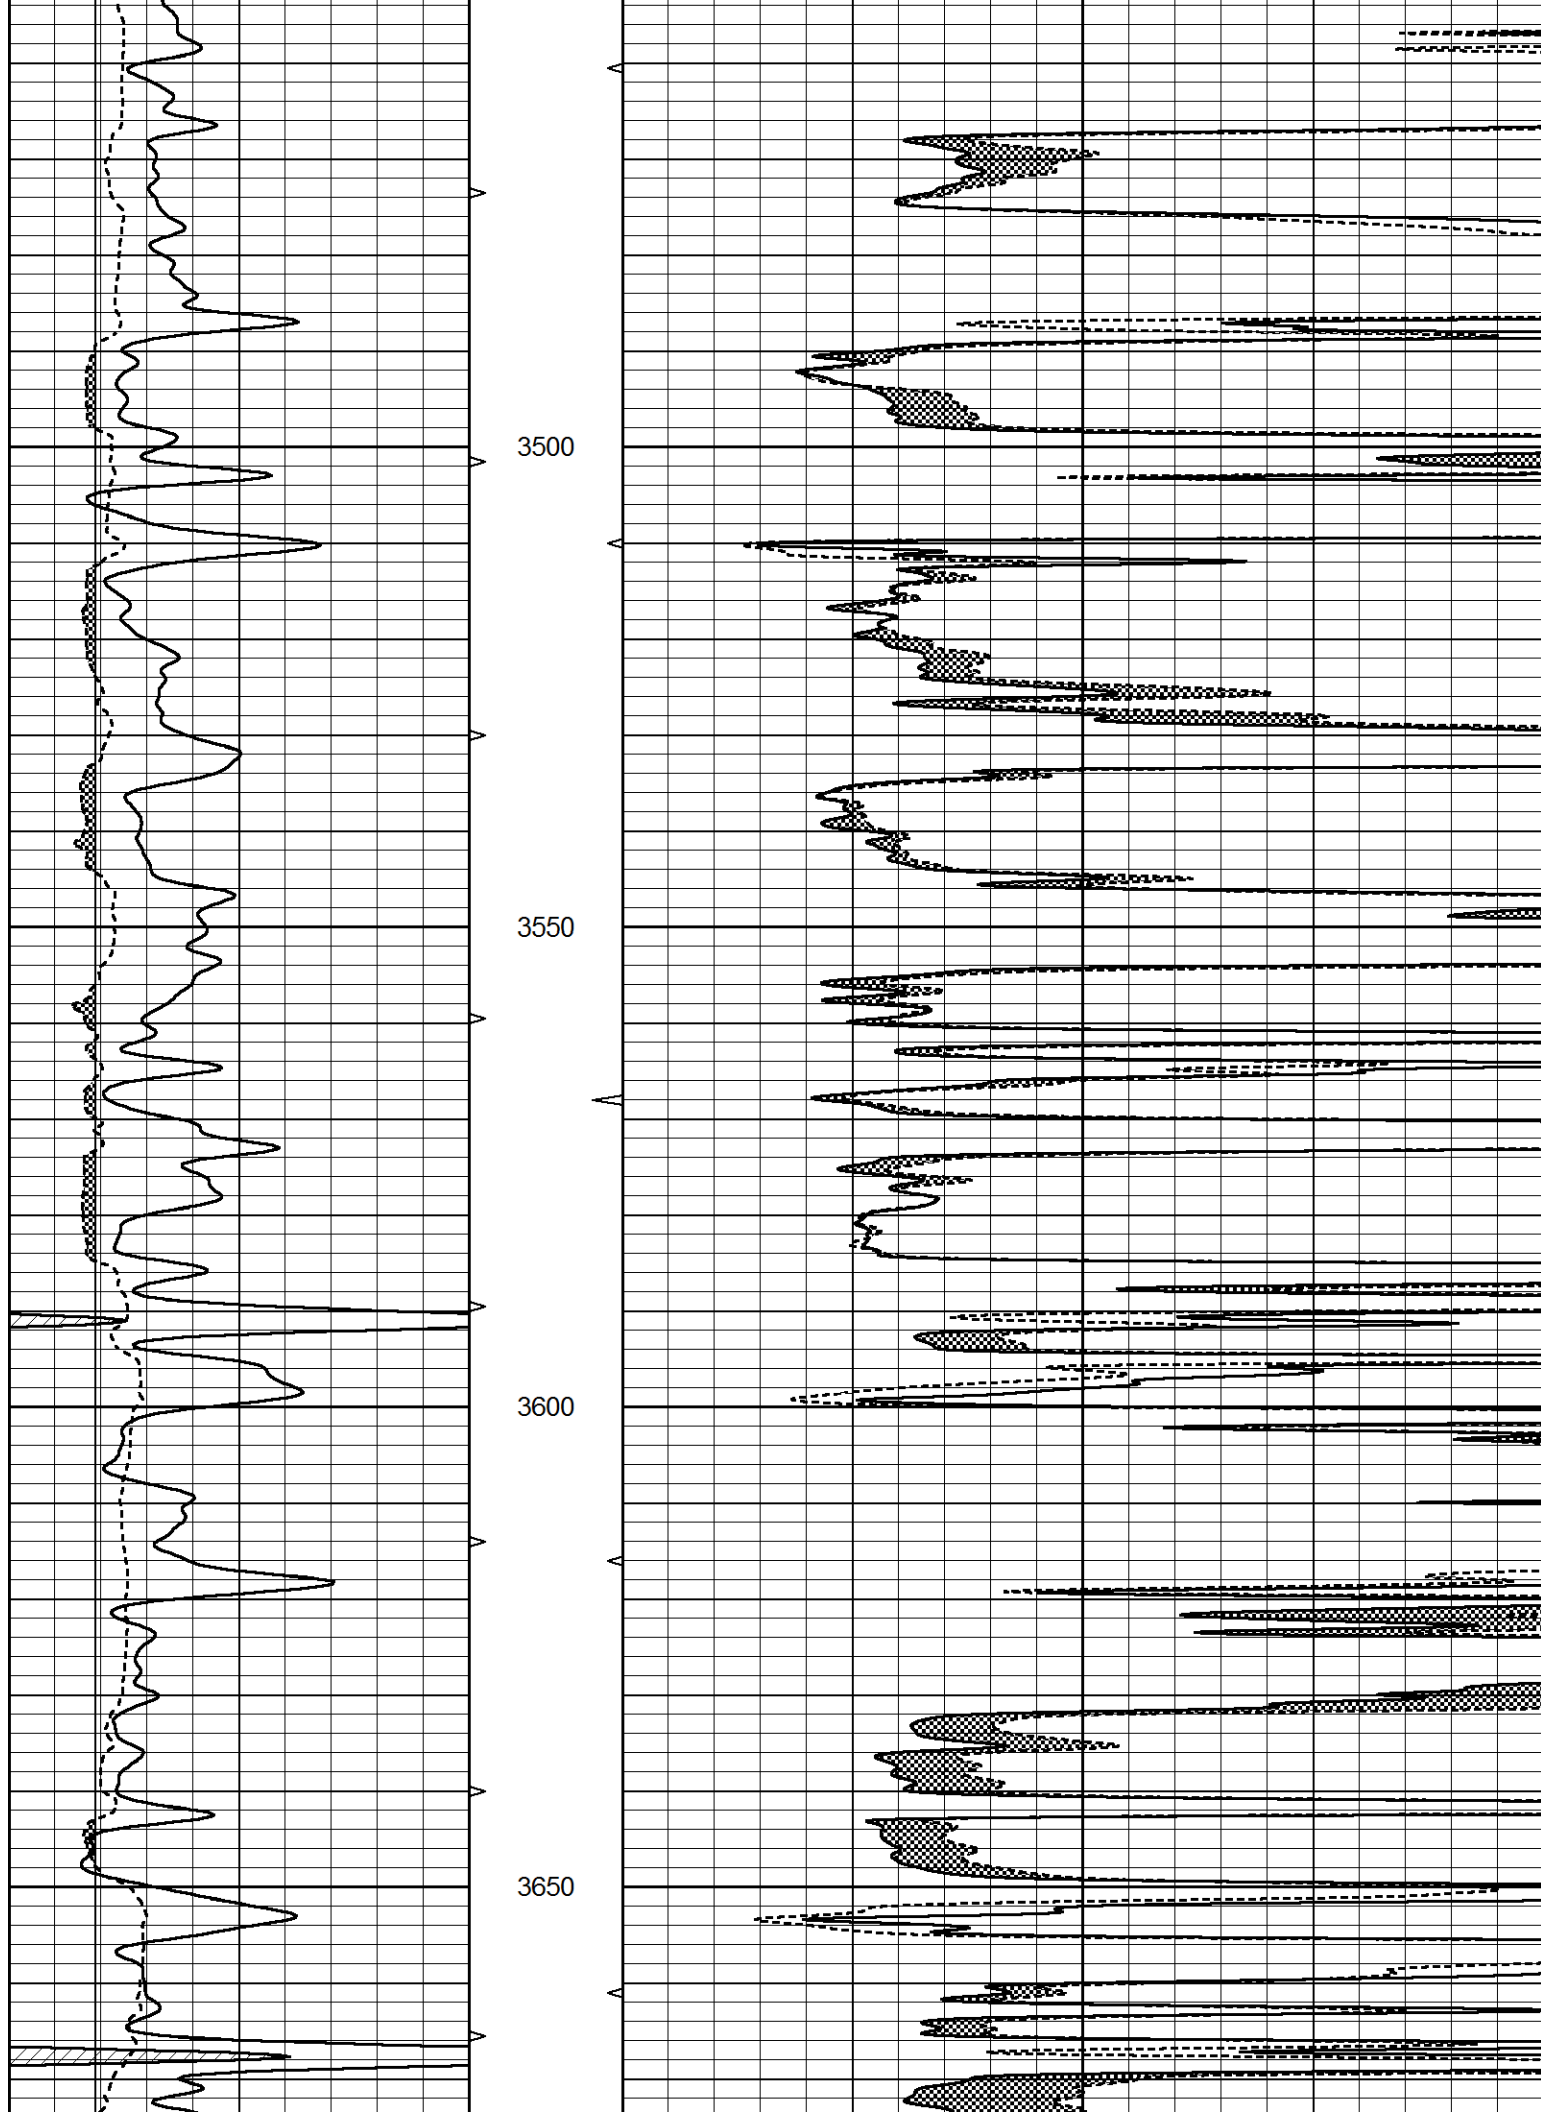

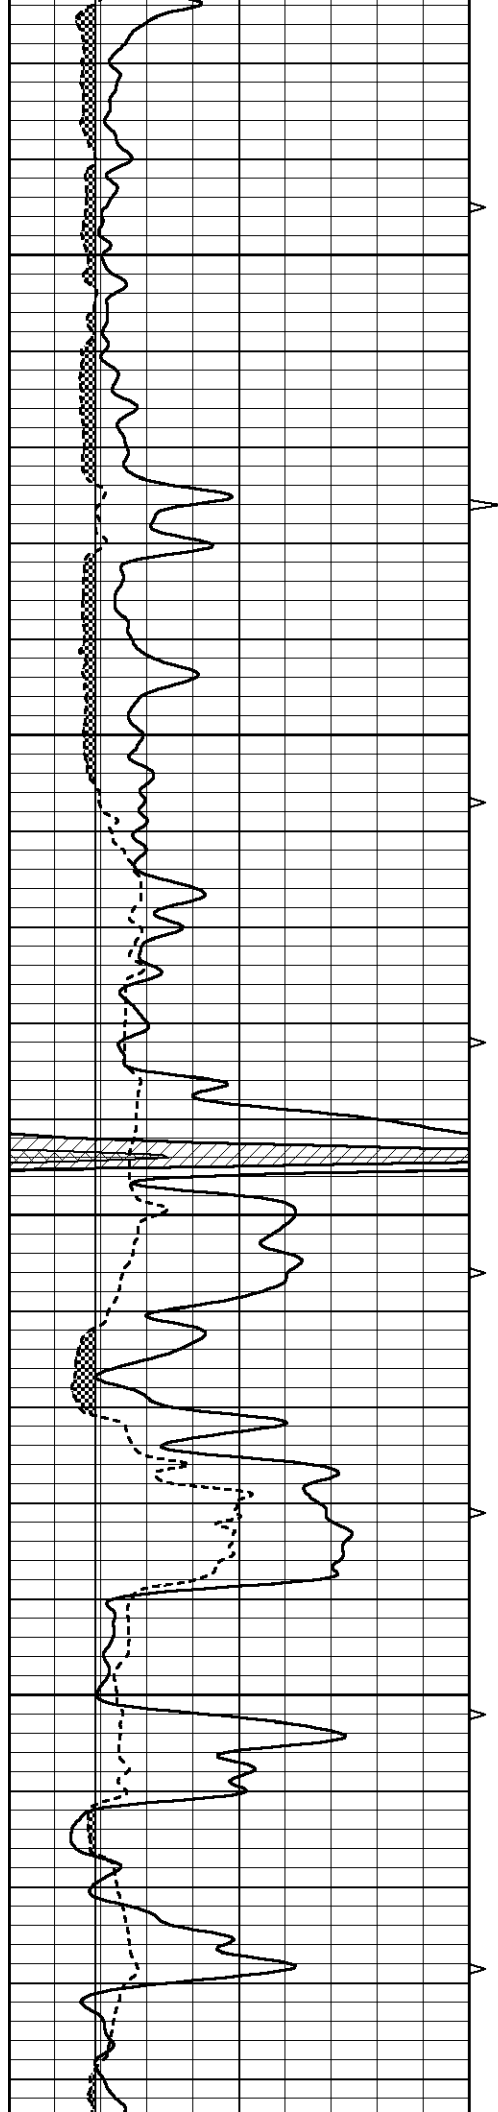



3700


3750

3800

3850

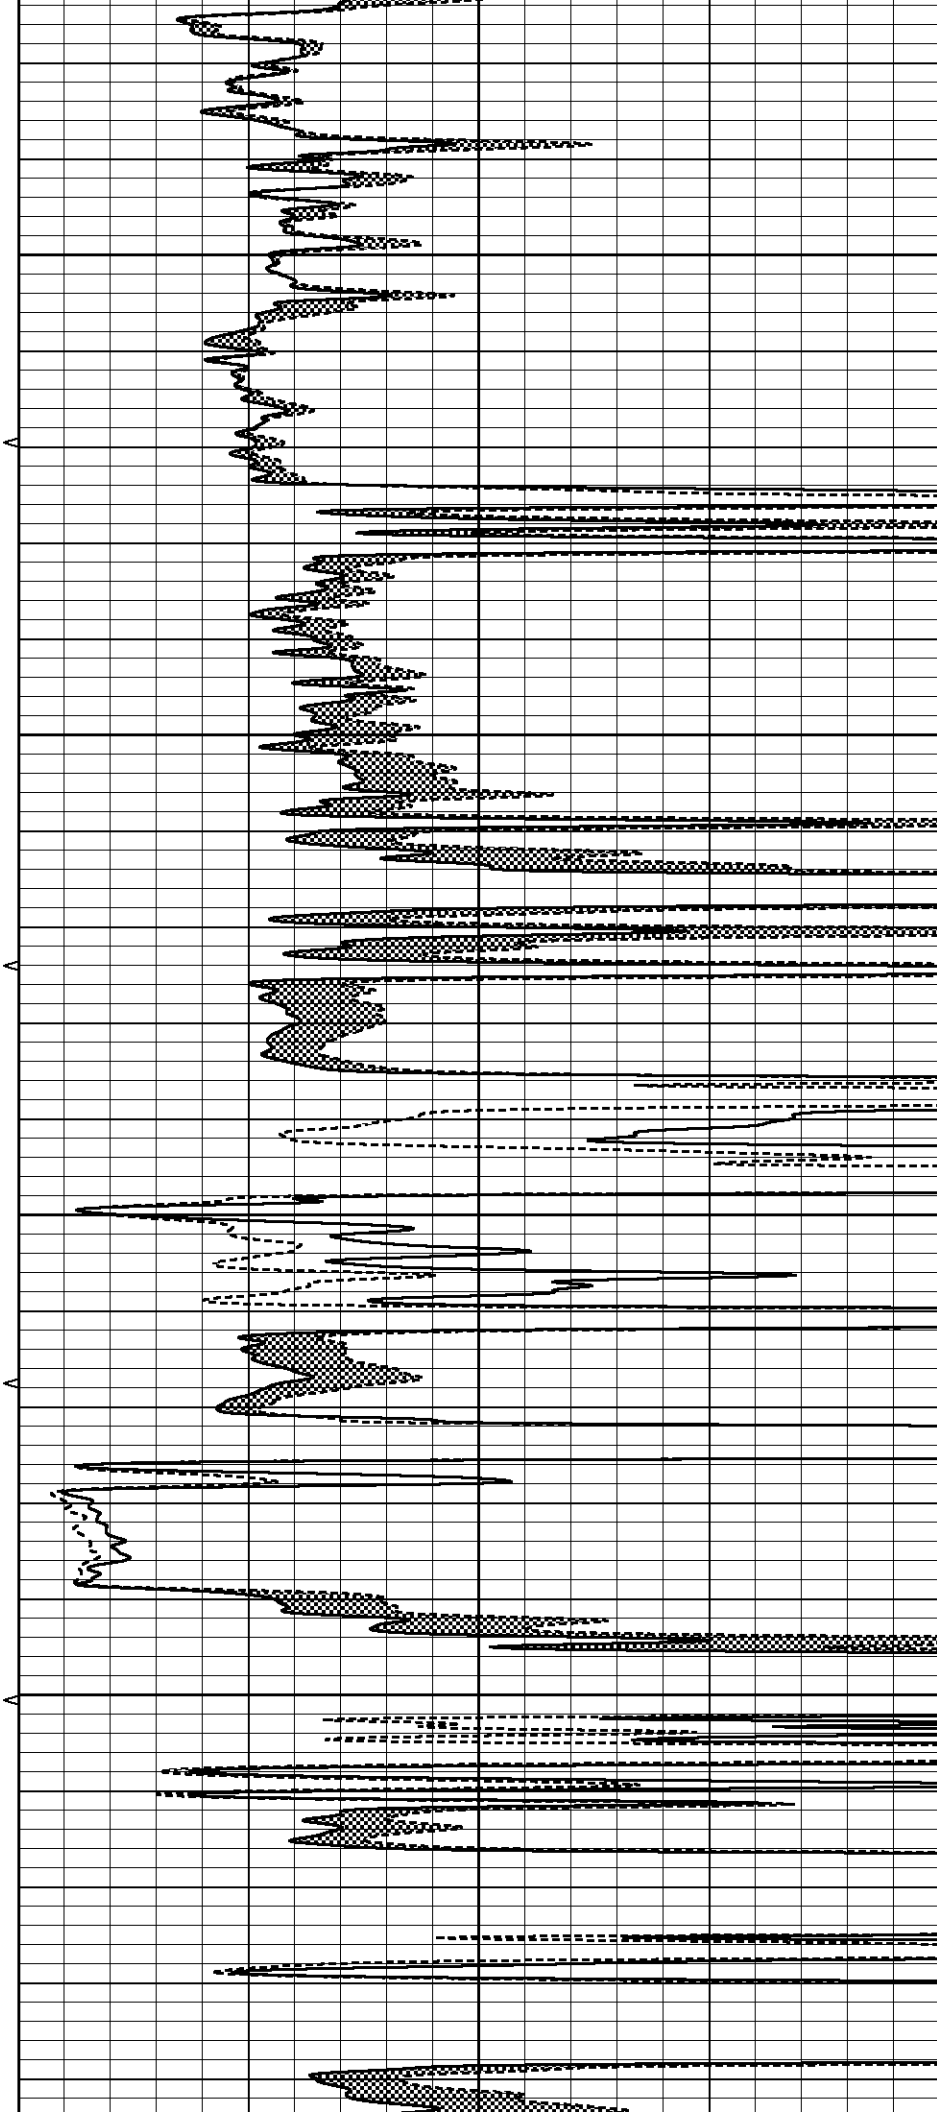

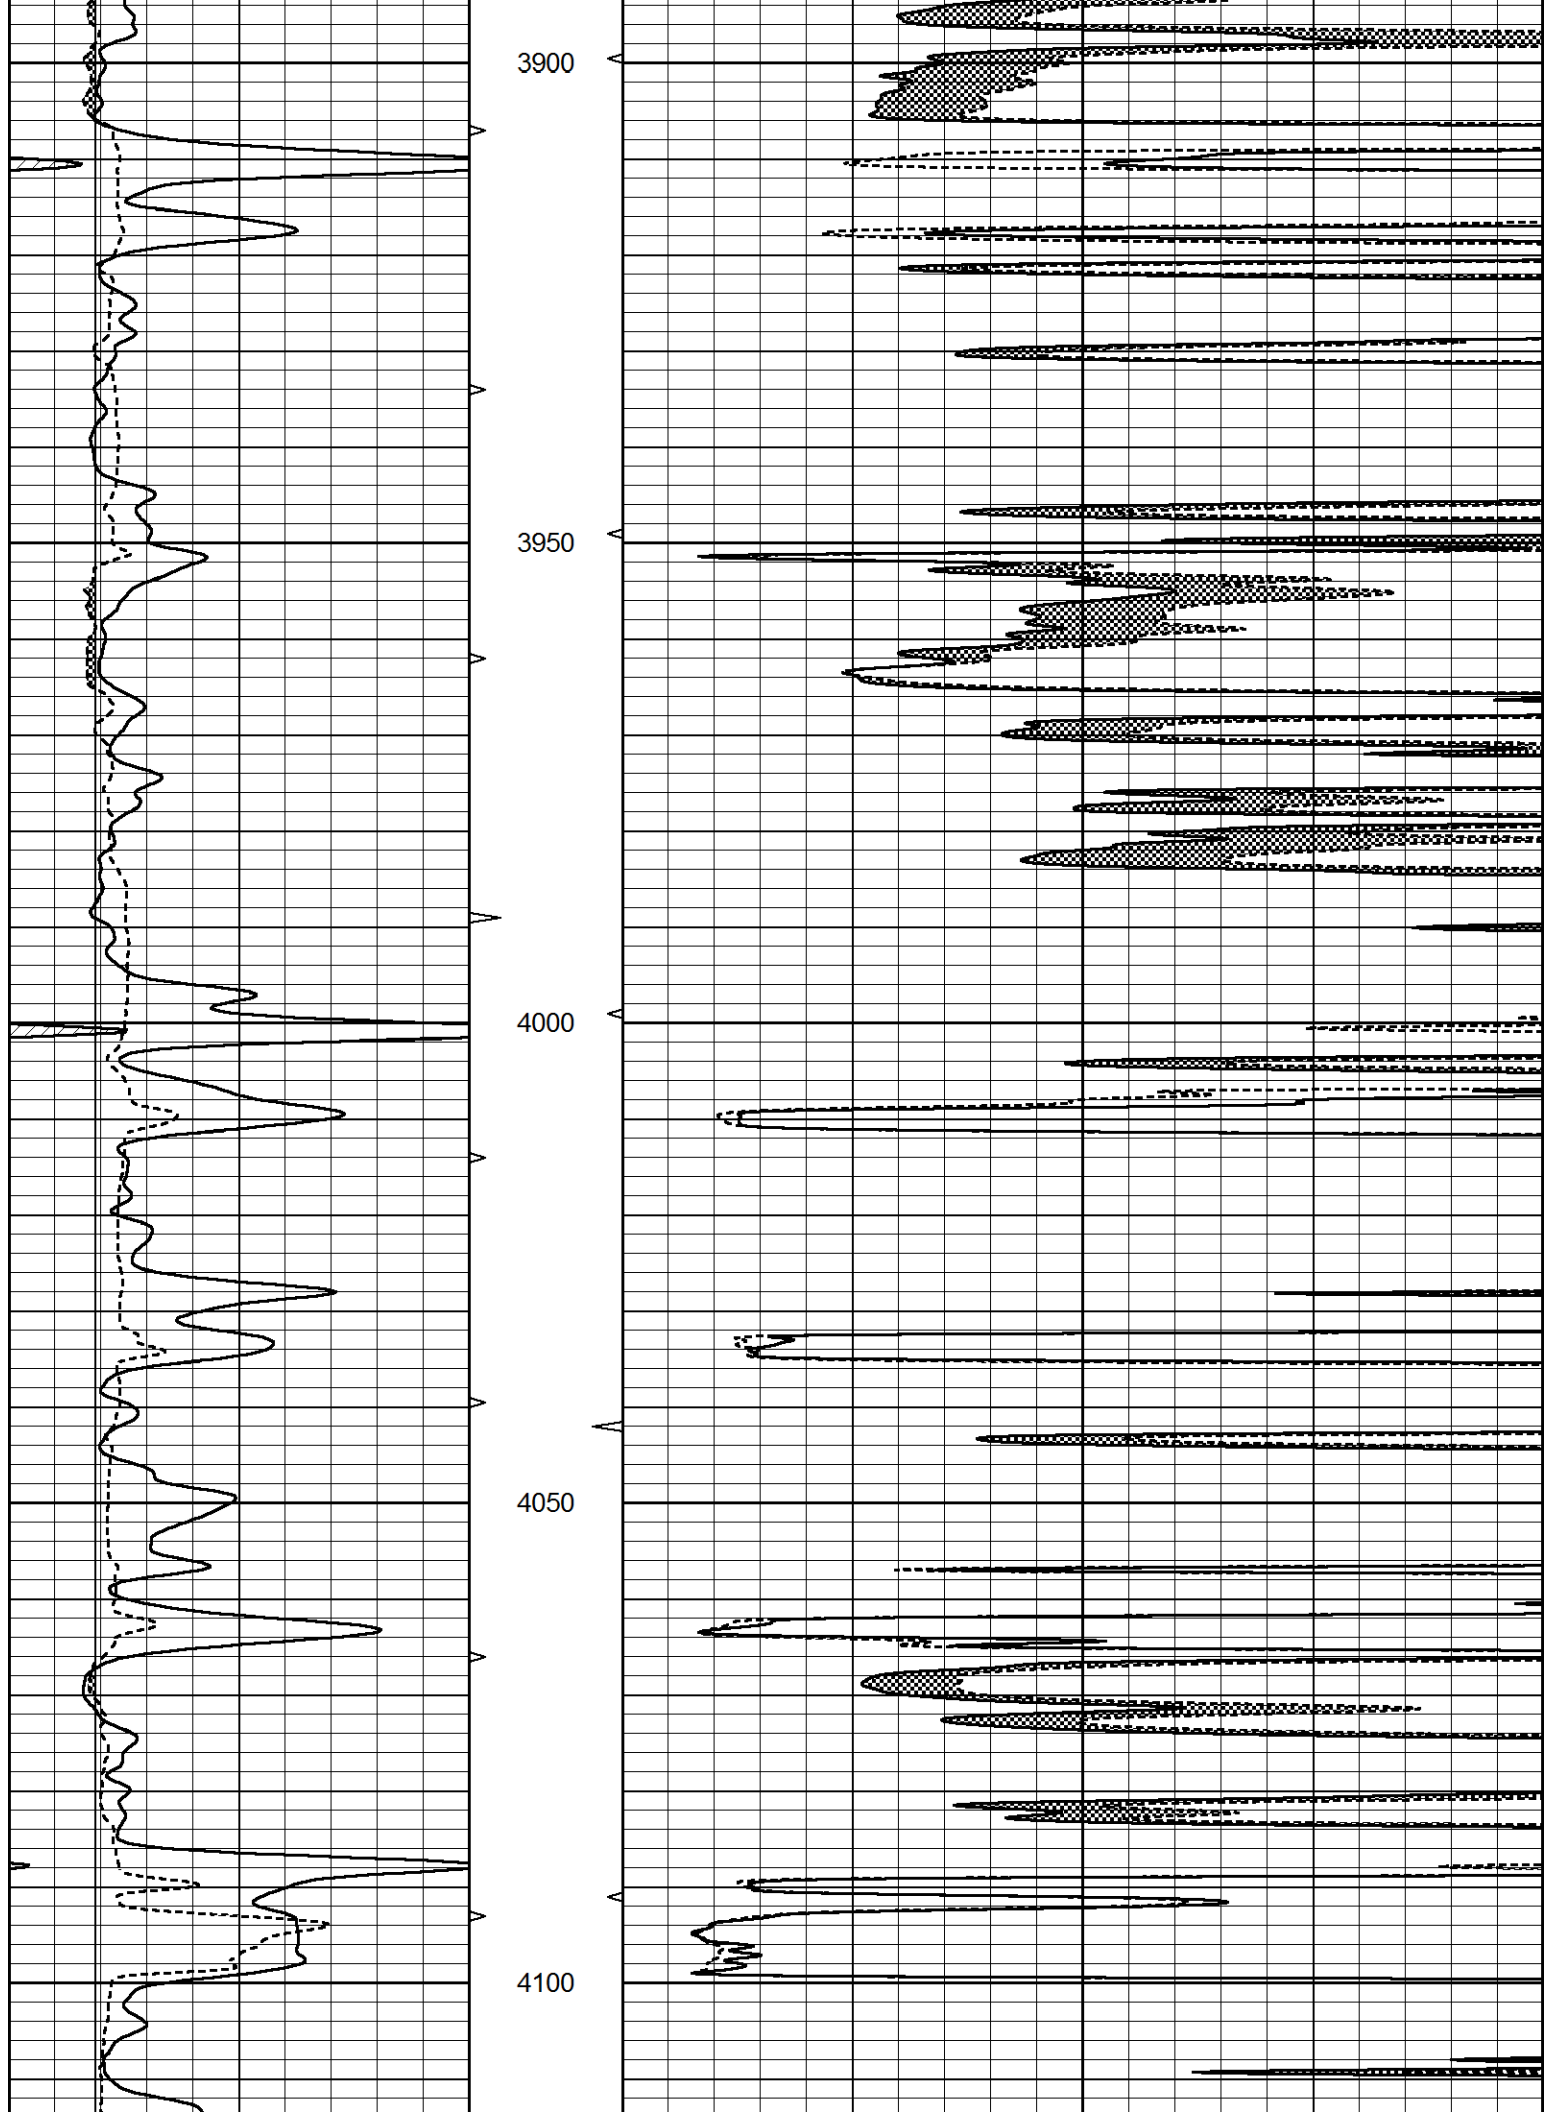

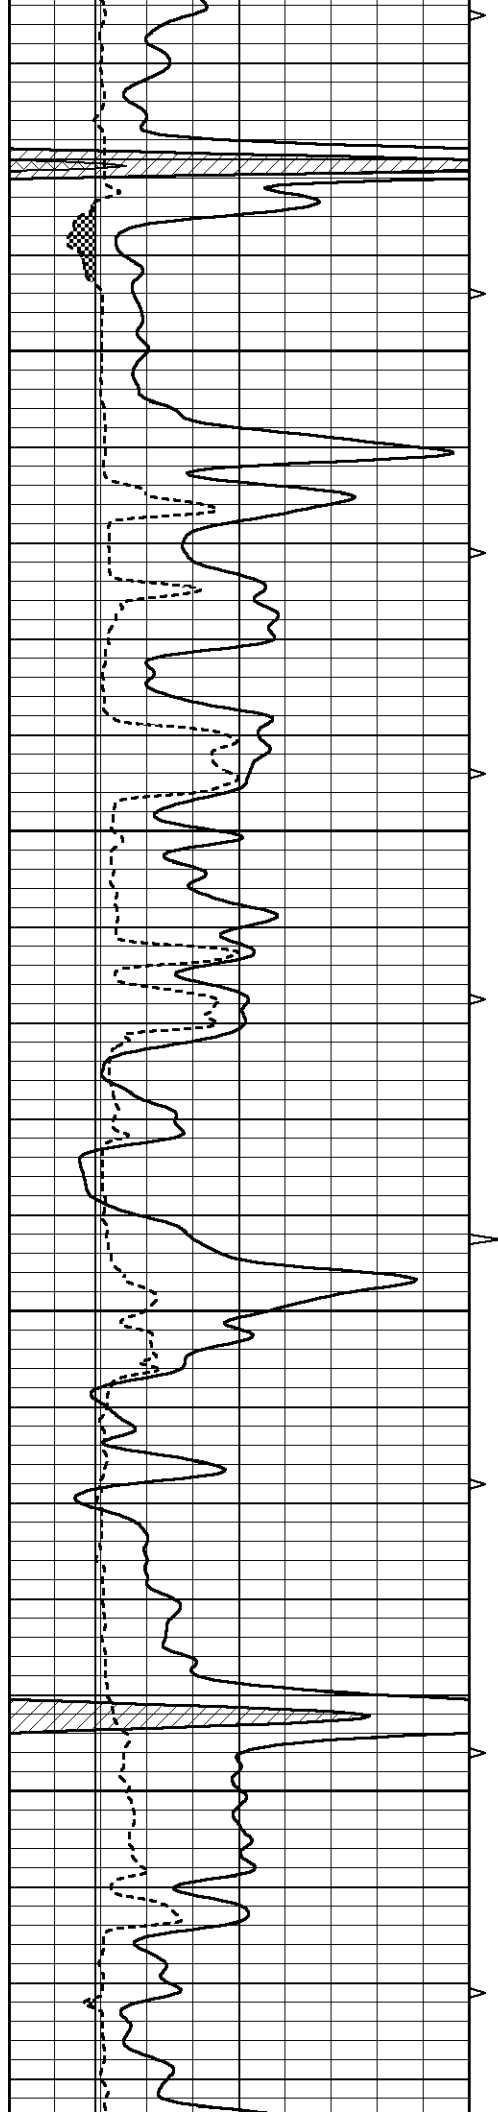



4150

4200

4250

4300

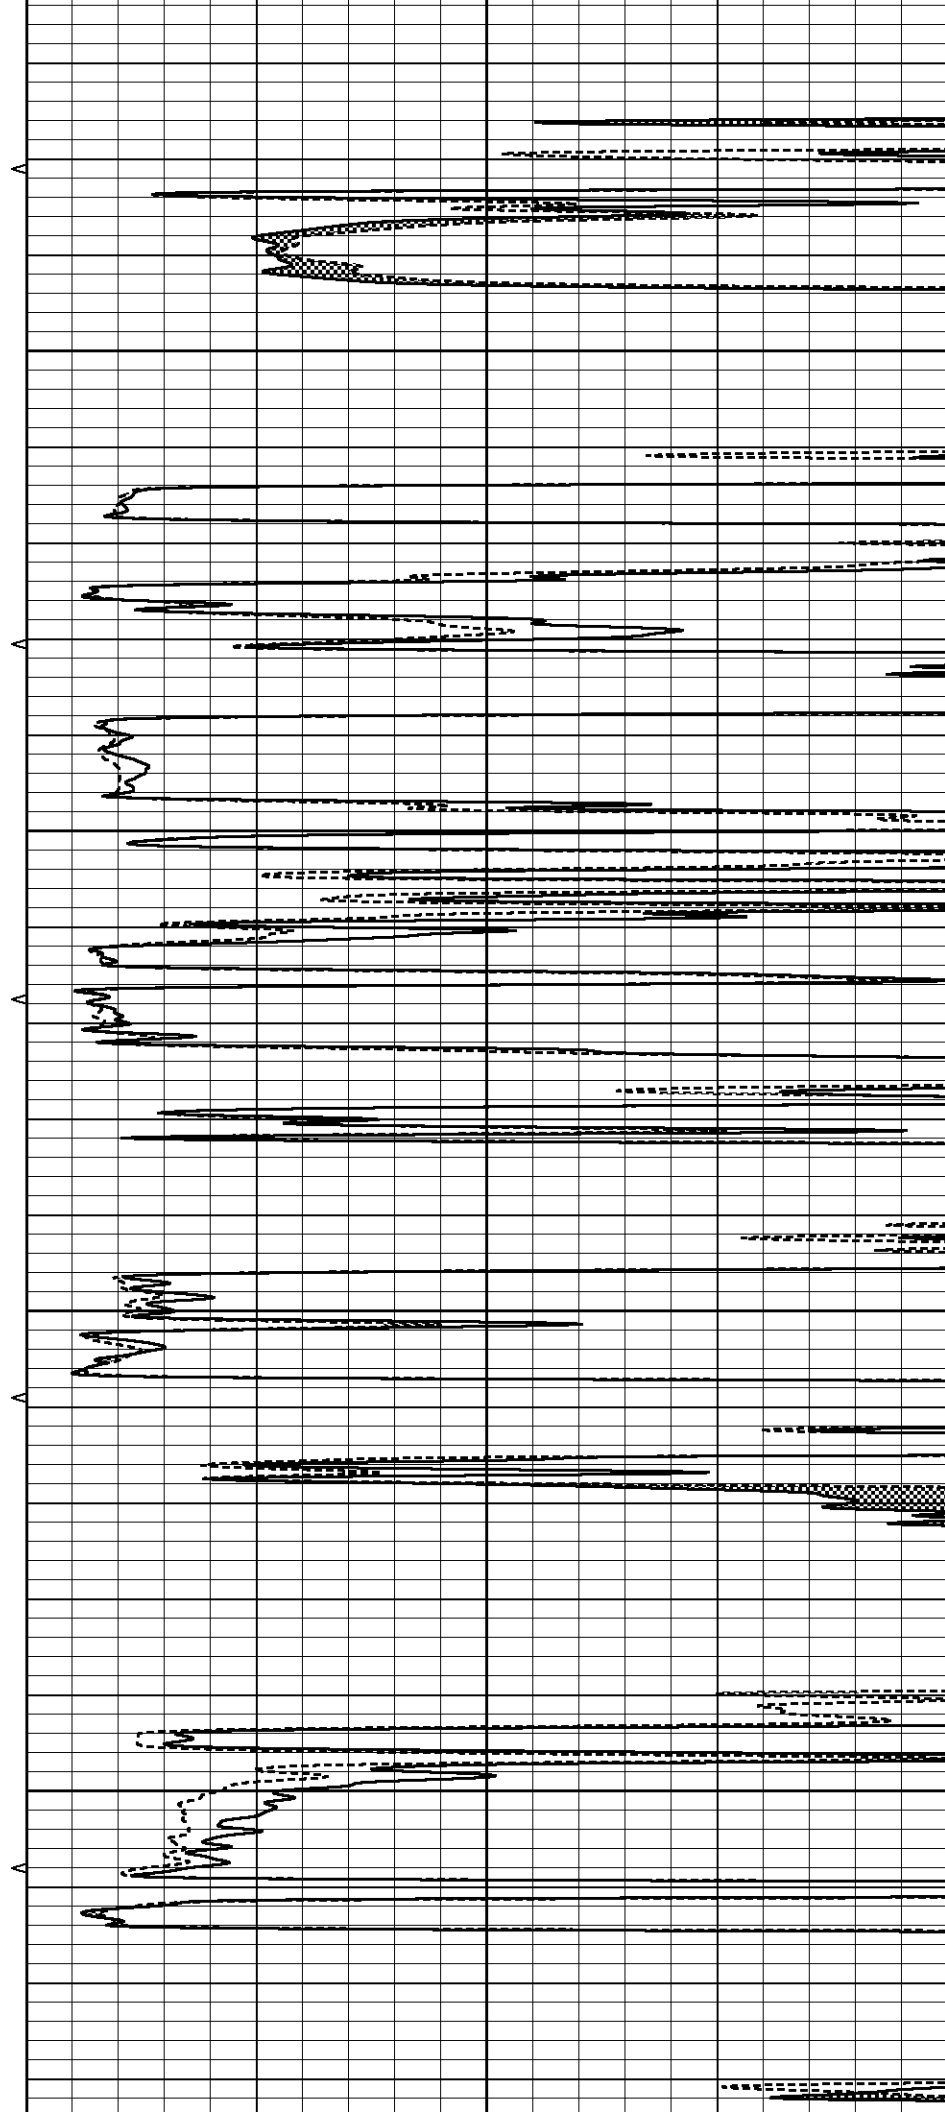

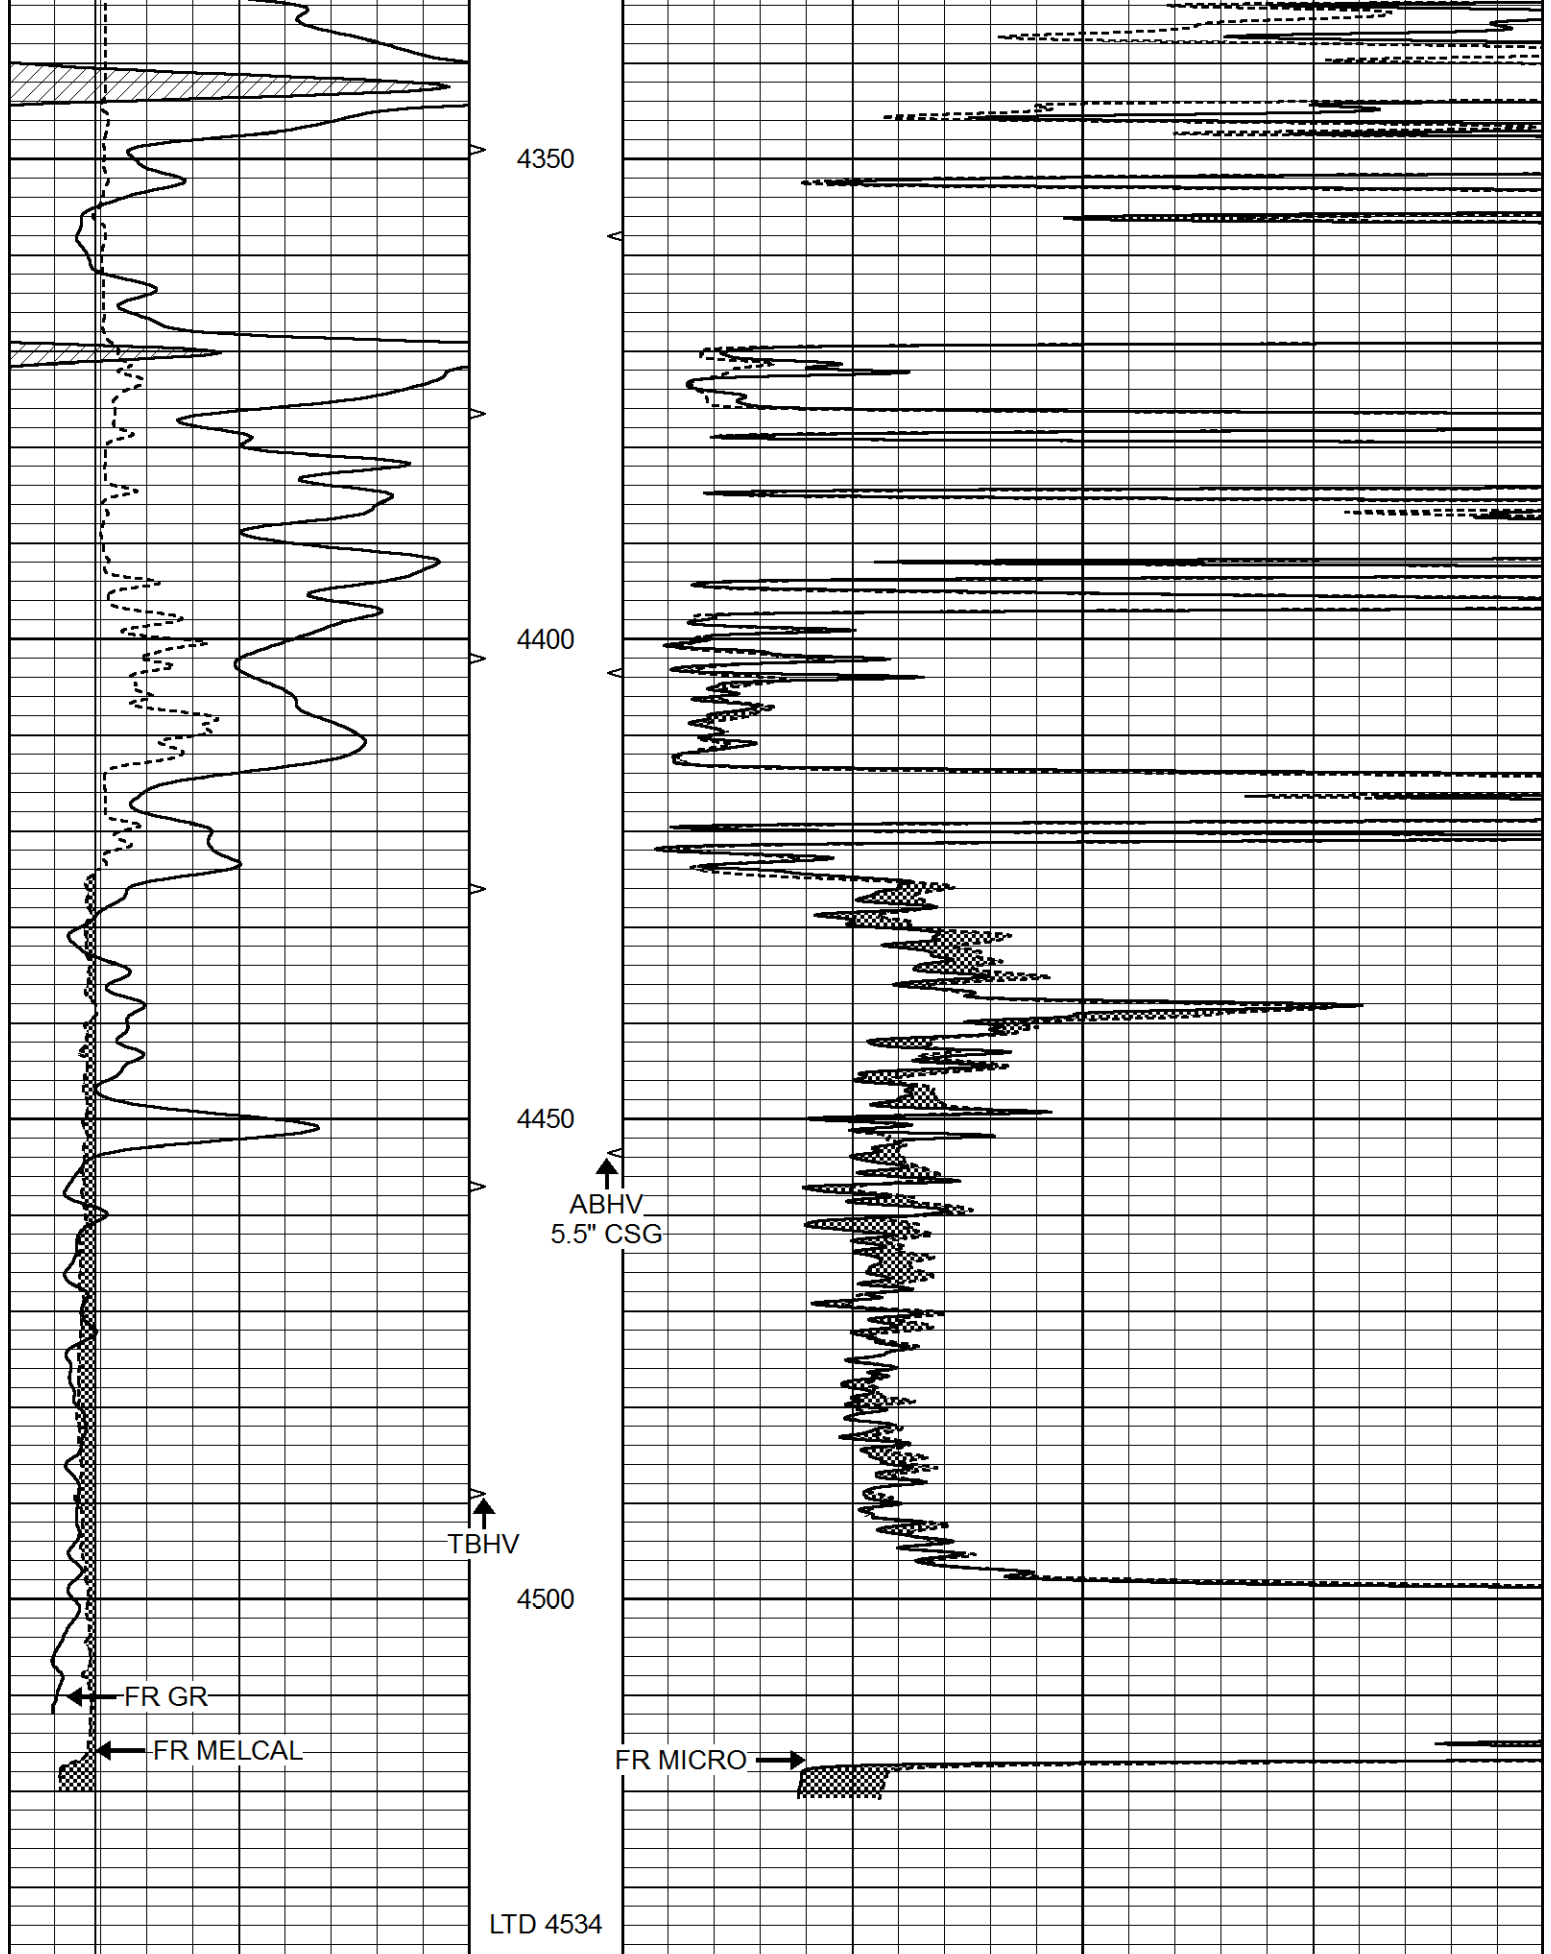


0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	20
			TBHV			




REPEAT SECTION

Database File 6054pe.db
Dataset Pathname pass5.1
Presentation Format _micro
Dataset Creation Sat Nov 20 07:48:22 2021
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	20
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	20
			TBHV			
			0 (ft3) 10			

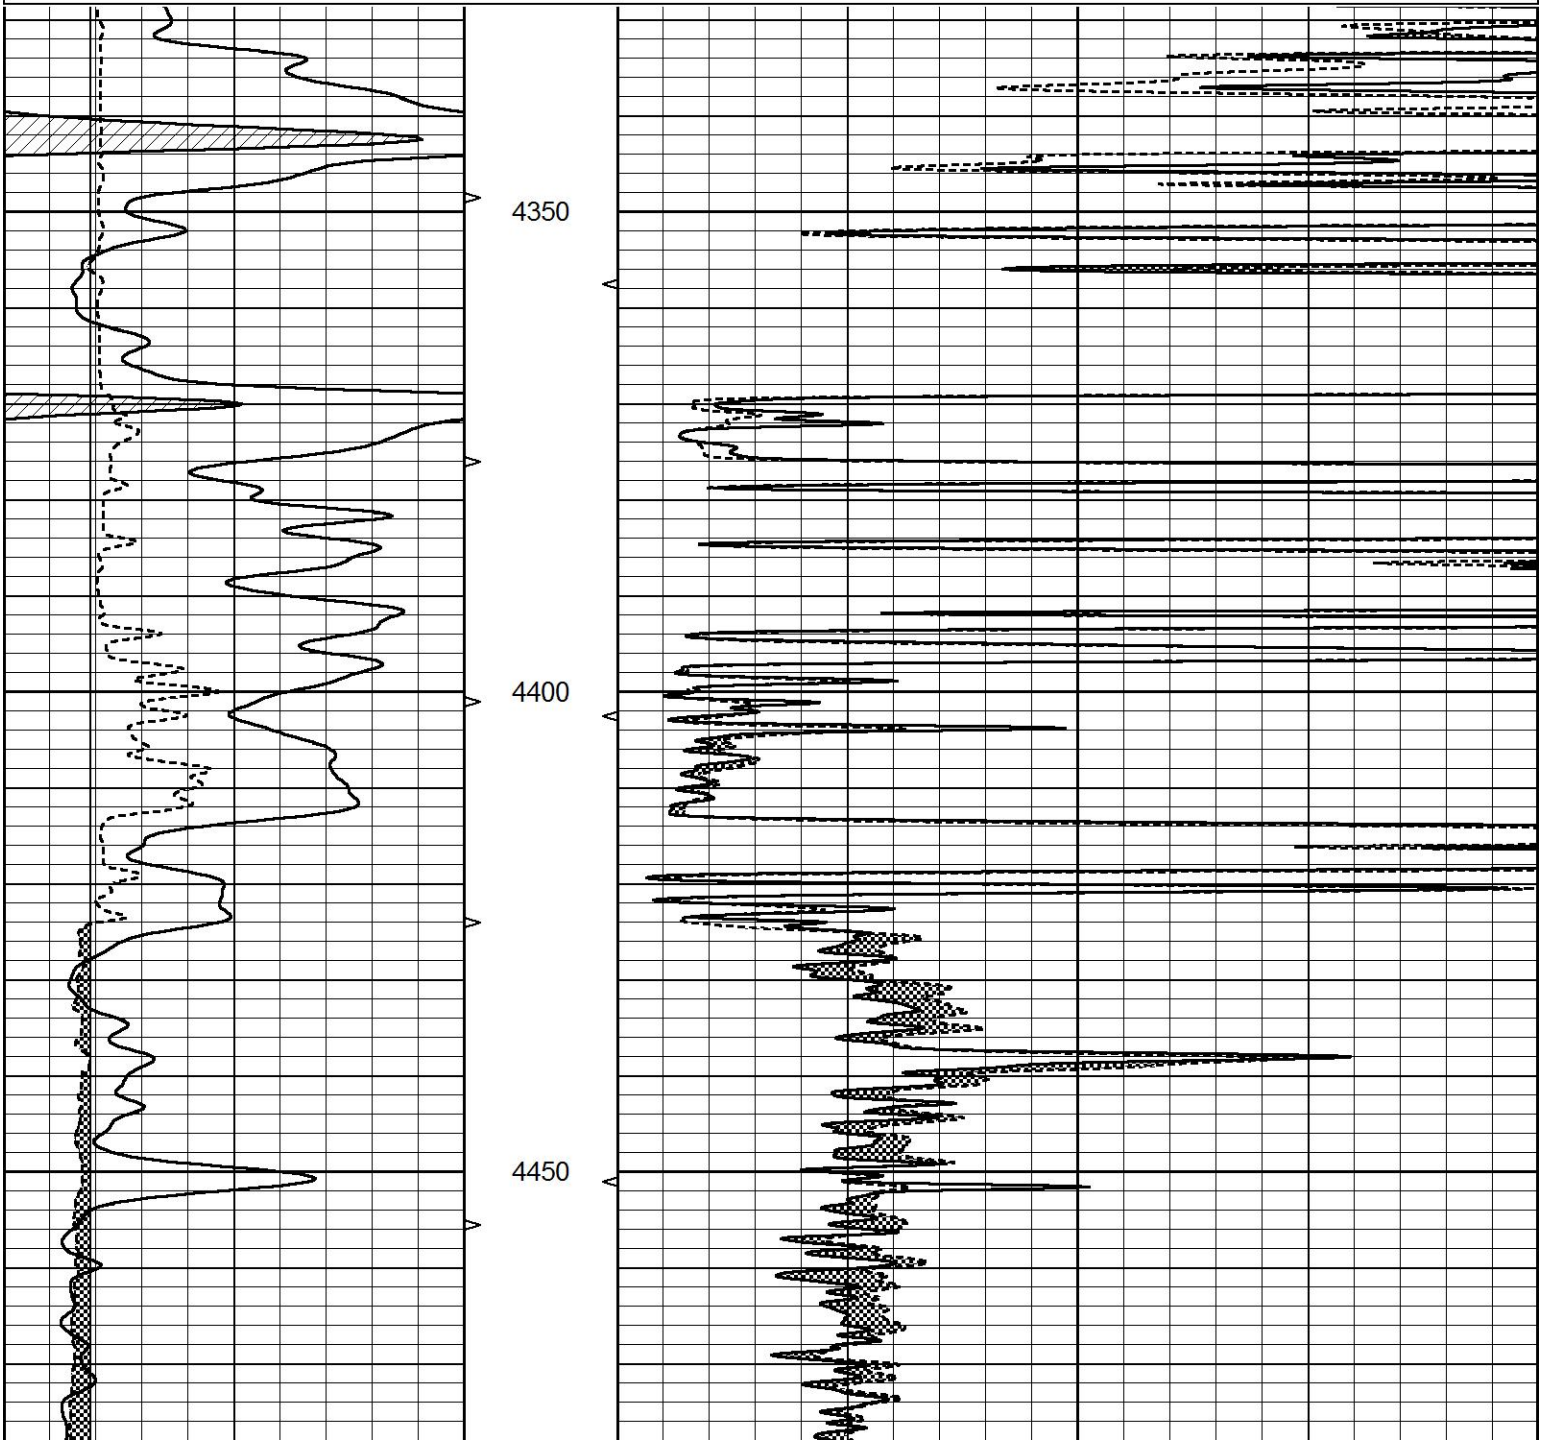

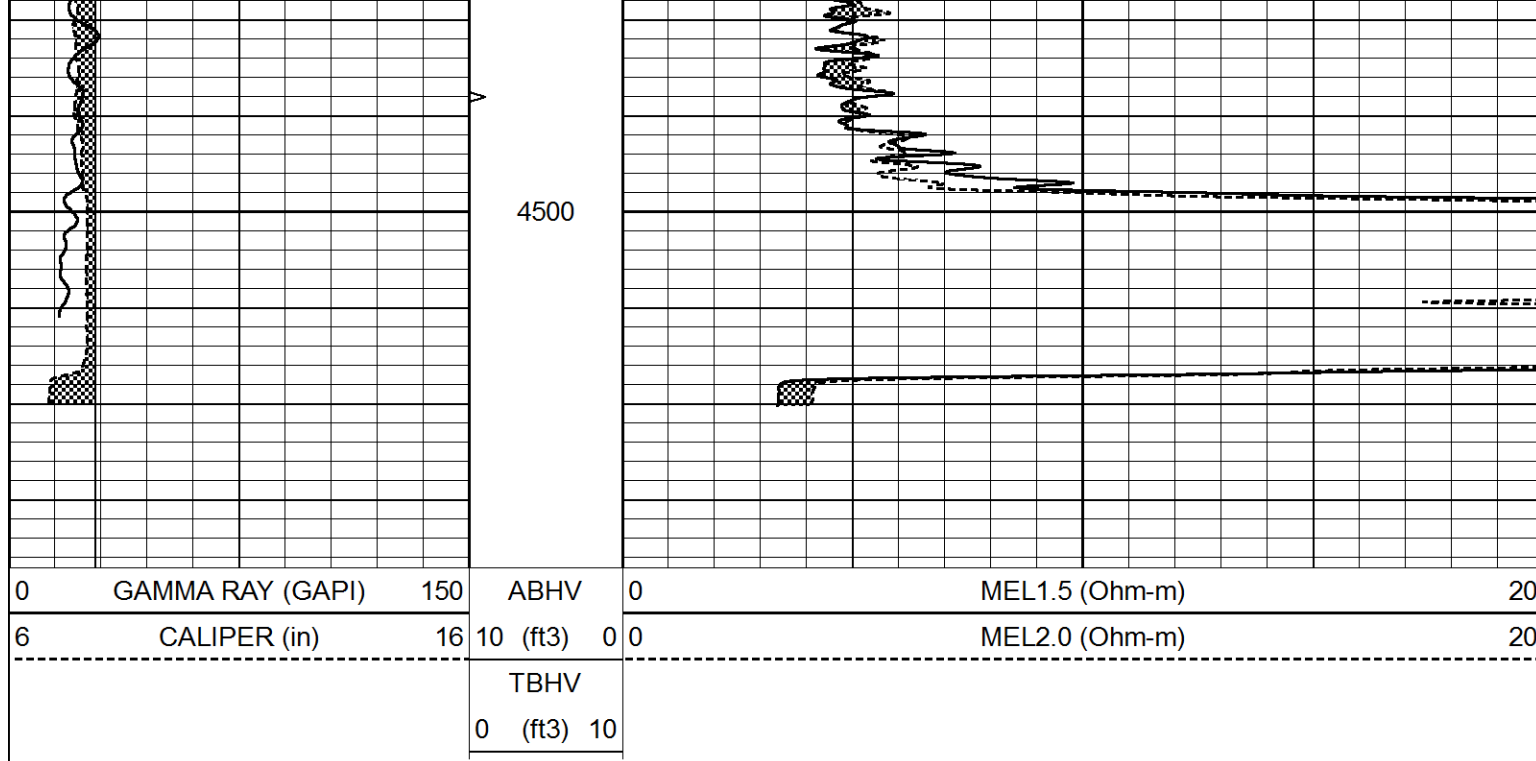

Calibration Report		
Database File	6054pe.db	
Dataset Pathname	pass5.1	
Dataset Creation	Sat Nov 20 07:48:22 2021	

MICRO_USR Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeL		
Performed:	Sun Dec 13 14:24:22 2020		
Caliper Calibration:	Gain=3.755	Offset=2.050	
References	Low Cal	High Cal	
Readings	8.000	14.000	
	1.451	3.049	
1.5" Calibration:	Gain=55.000	Offset=-0.700	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.843	
2" Calibration:	Gain=50.000	Offset=-0.650	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.021	0.810	

Microlog Calibration Report			
-----------------------------	--	--	--

Serial-Model:	070911-ProbeL		
Performed:	Sat Apr 11 01:13:01 2015		

	Readings				References			Results	
	Zero	Cal			Zero	Cal		m	b
Normal	0.0002	0.4836	V		0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V		0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V		0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps