



DUAL INDUCTION LOG

Company TRIPLE CROWN OPERATING, LLC.

Well NEYSA #1-33

Field

County NESS

State KANSAS

Location: API # : 15-135-26128-0000

2000' FSL & 1870' FEL

Other Services
CDL/CNL/PE
MEL/SON

SEC 33 TWP 20S RGE 21W

Elevation

K.B. 2264

D.F. 2262

G.L. 2259

Permanent Datum GROUND LEVEL Elevation 2259
Log Measured From KELLY BUSHING 5' A.G.L.
Drilling Measured From KELLY BUSHING

Date 11/20/21

Run Number ONE

Depth Driller 4534

Depth Logger 4534

Bottom Logged Interval 4532

Top Log Interval 00

Casing Driller 8 5/8" @ 1436

Casing Logger 1436

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD CHLORIDES 4000 PPM

Density / Viscosity 9.2/50

pH / Fluid Loss 10.0/8.8

Source of Sample FLOWLINE

Rm @ Meas. Temp .70 @ 56F

Rmf @ Meas. Temp .52 @ 56F

Rmc @ Meas. Temp .84 @ 56F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .32 @ 212F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 1111

Maximum Recorded Temperature 121F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By SEAN DEENIHAN CHRIS JOHNSON

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
BAZINE, KS. - EAST TO RD. GG (CHRIST PILOT ME SIGN) - 12.5 SOUTH - WEST INTO








MAIN SECTION



Database File	6054pe.db
Dataset Pathname	pass3.3
Presentation Format	_dil2
Dataset Creation	Sat Nov 20 06:29:13 2021
Charted by	Depth in Feet scaled 1:600



0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500


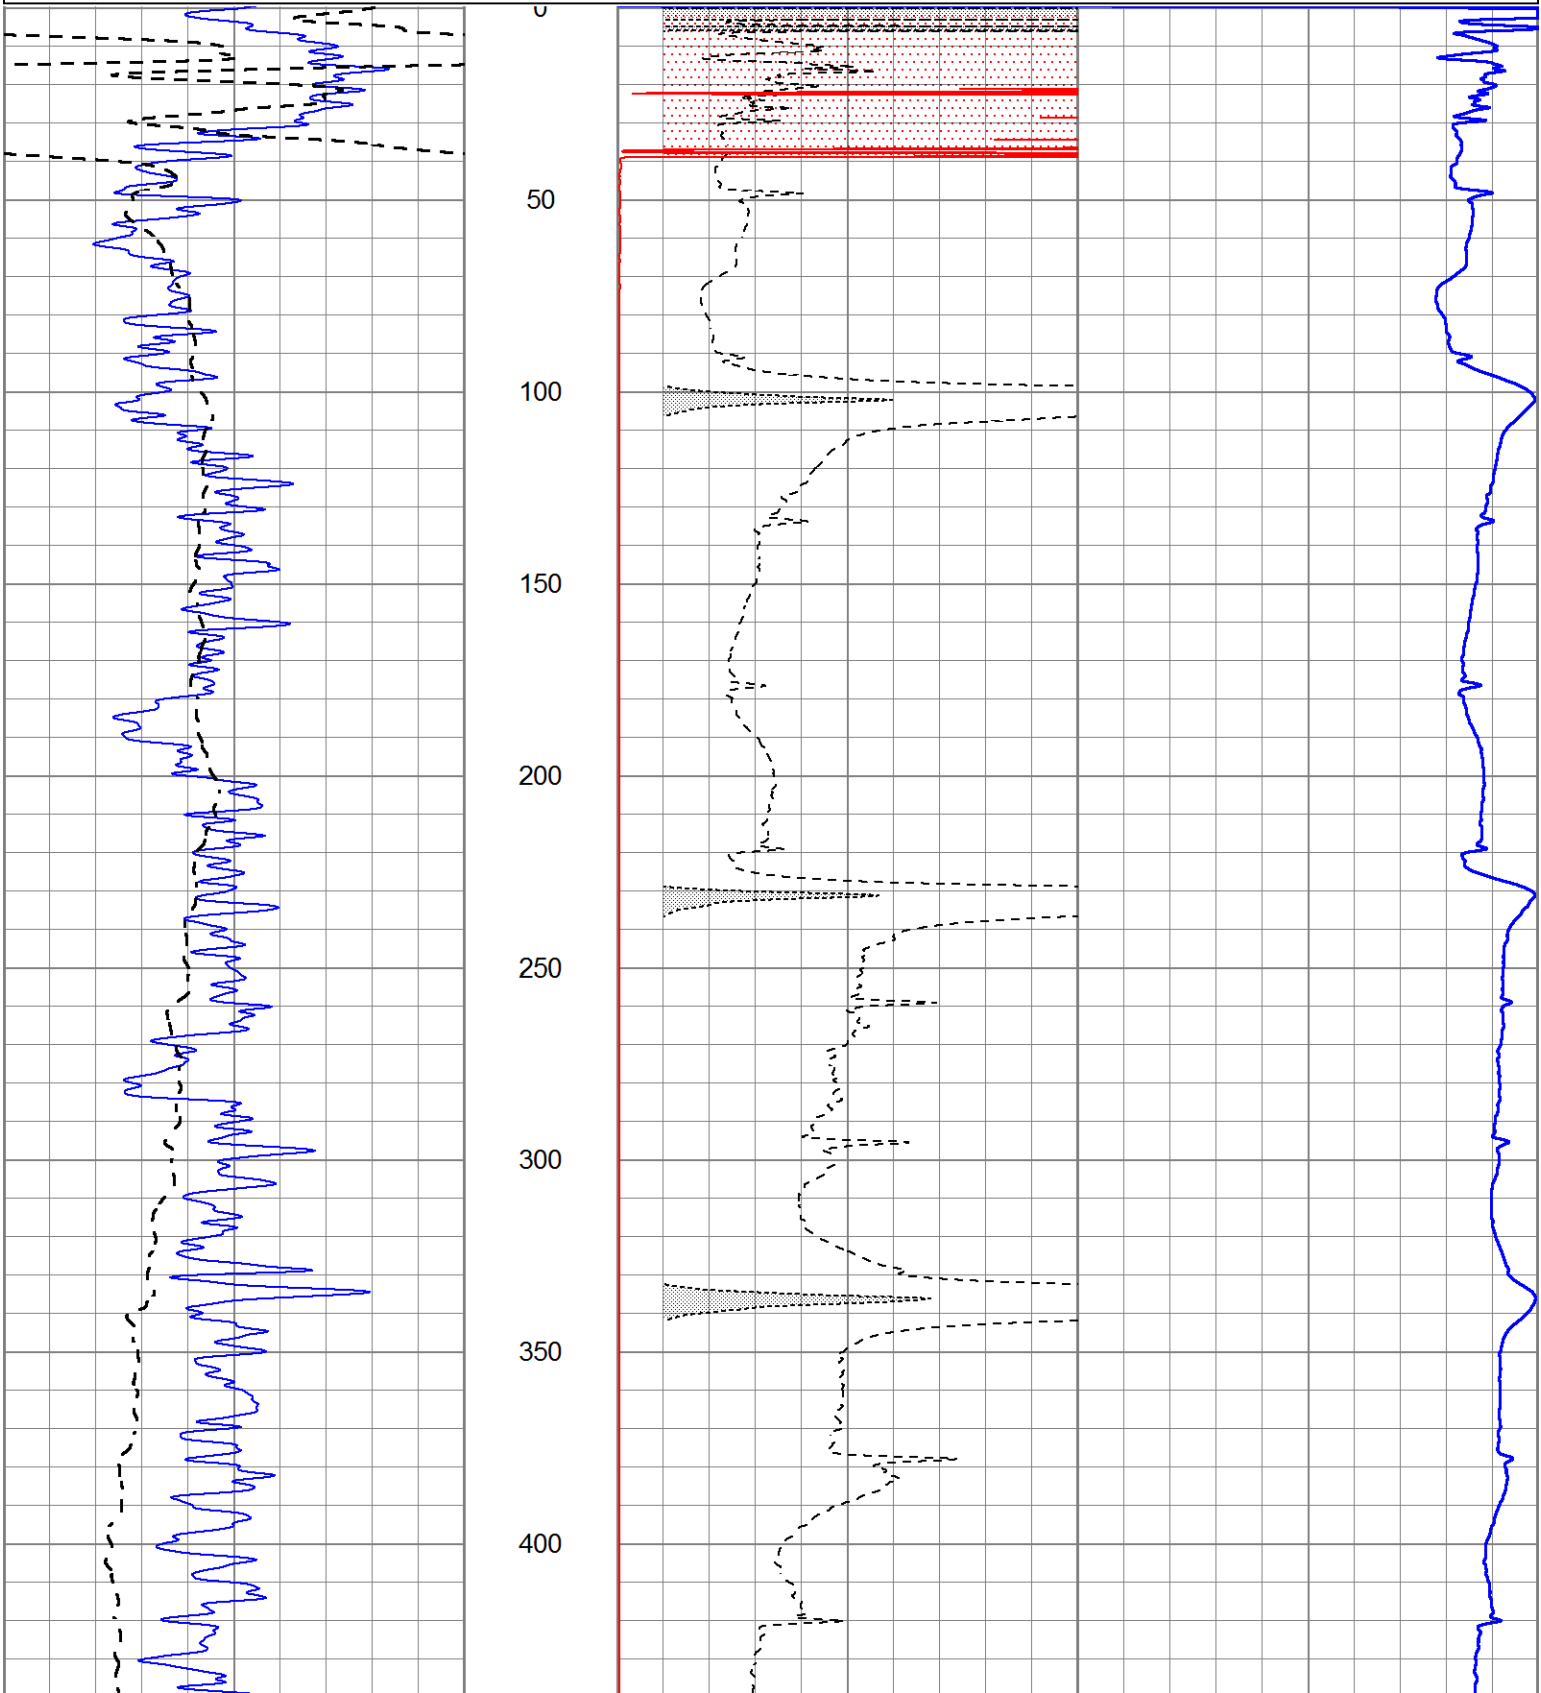


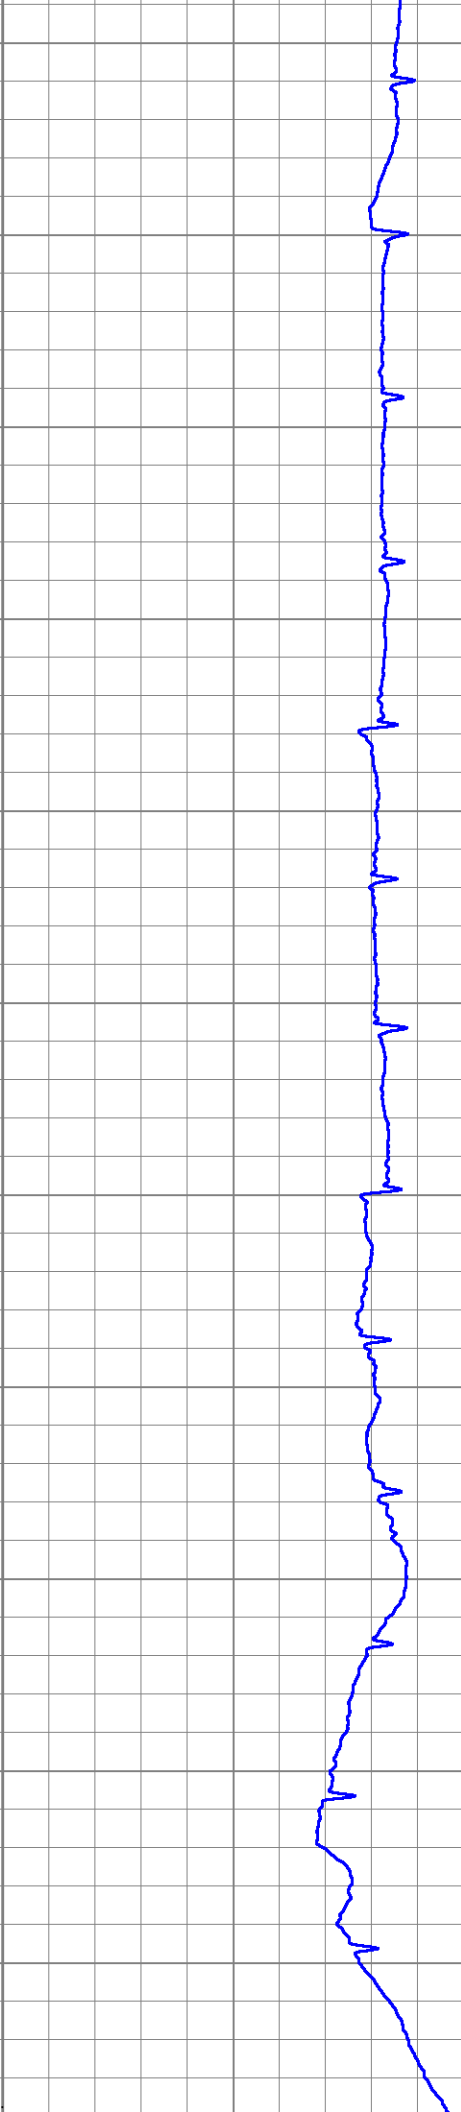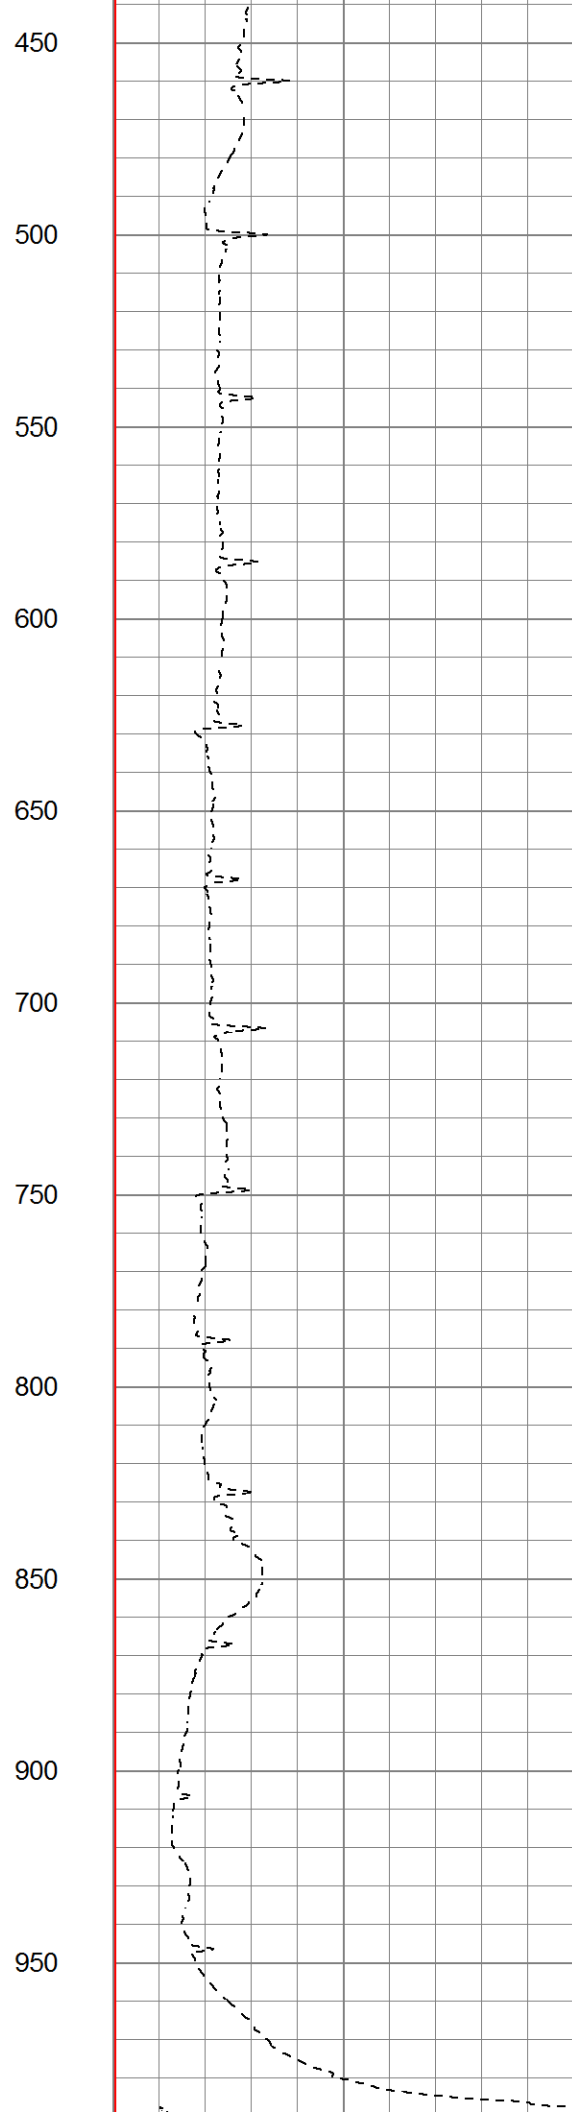
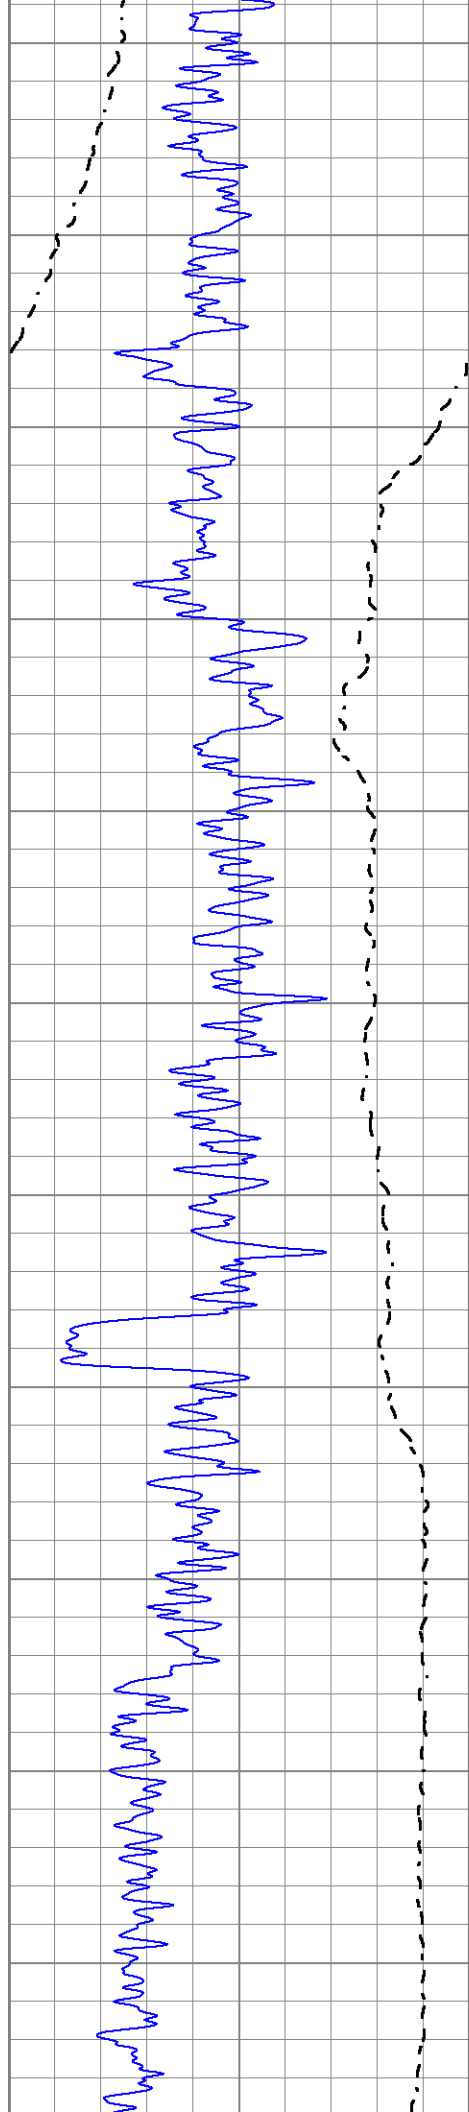


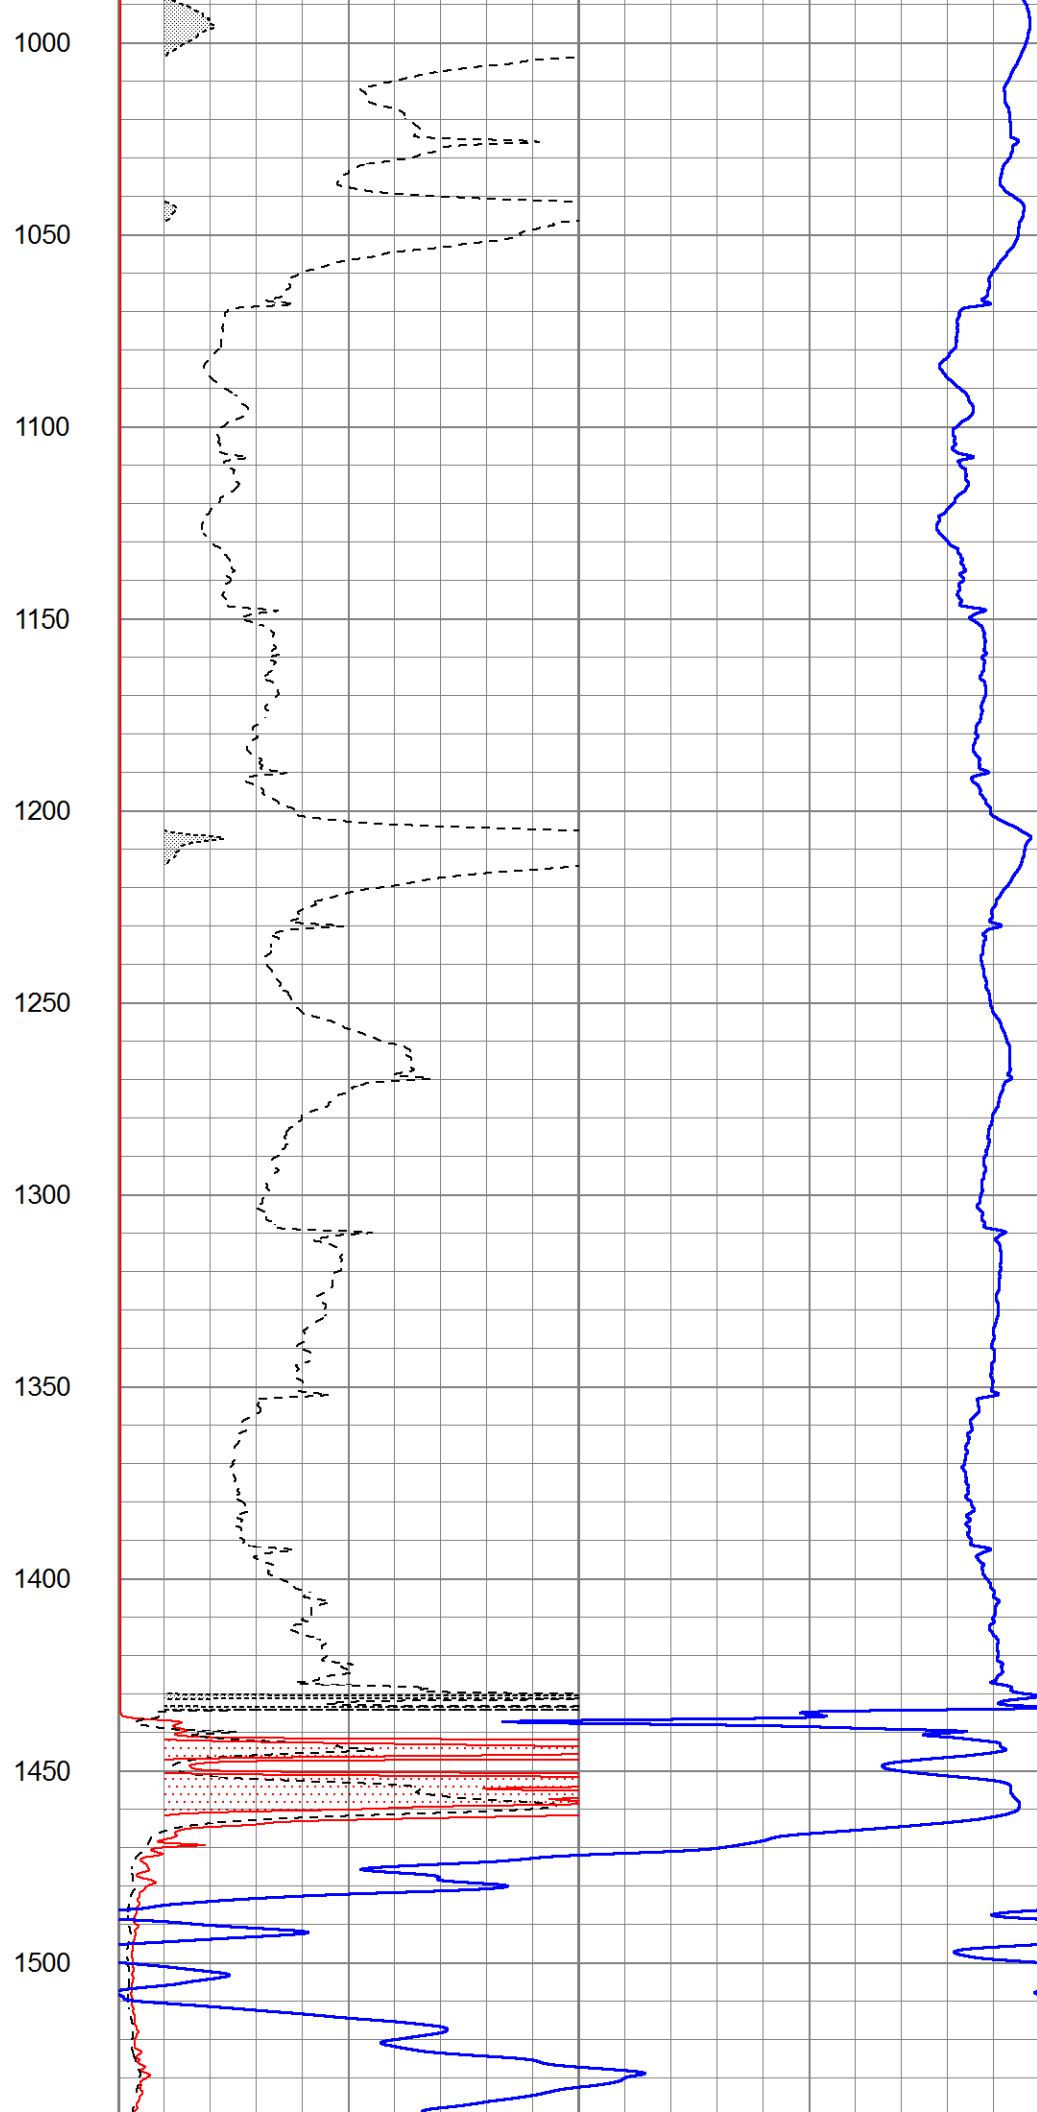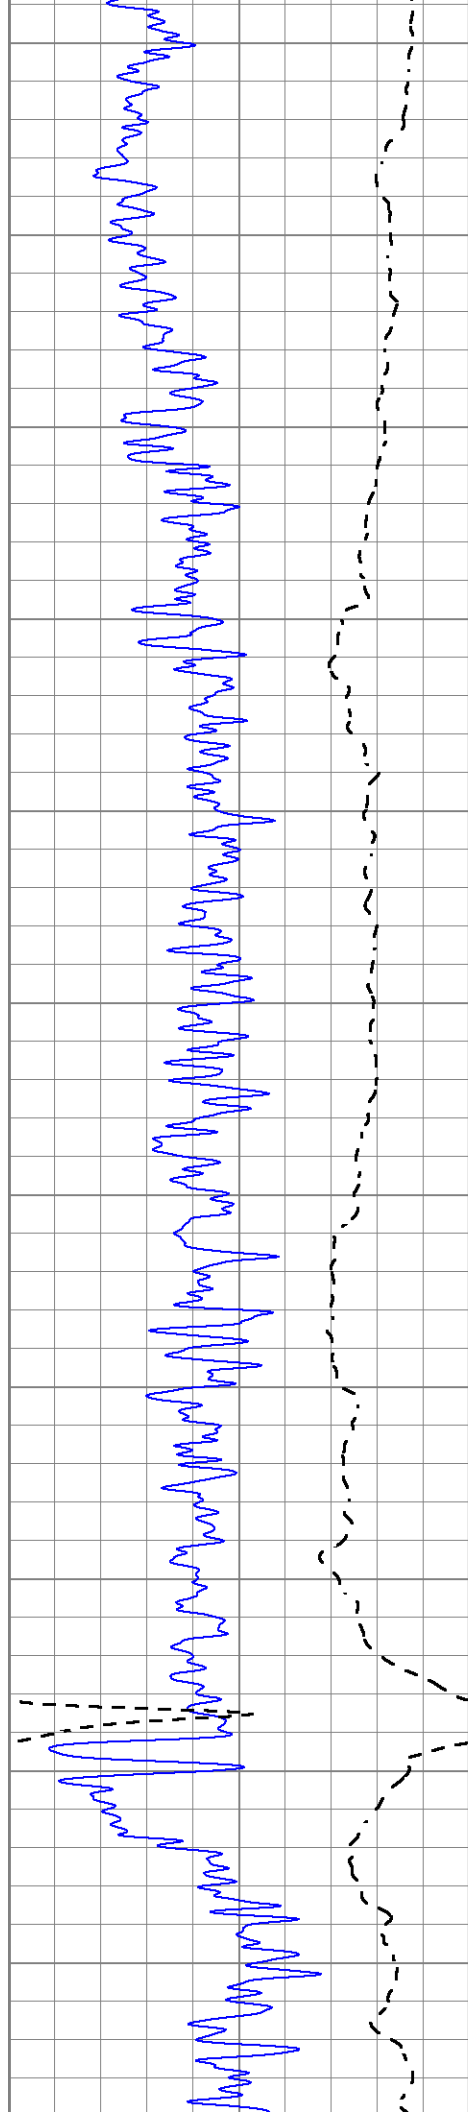


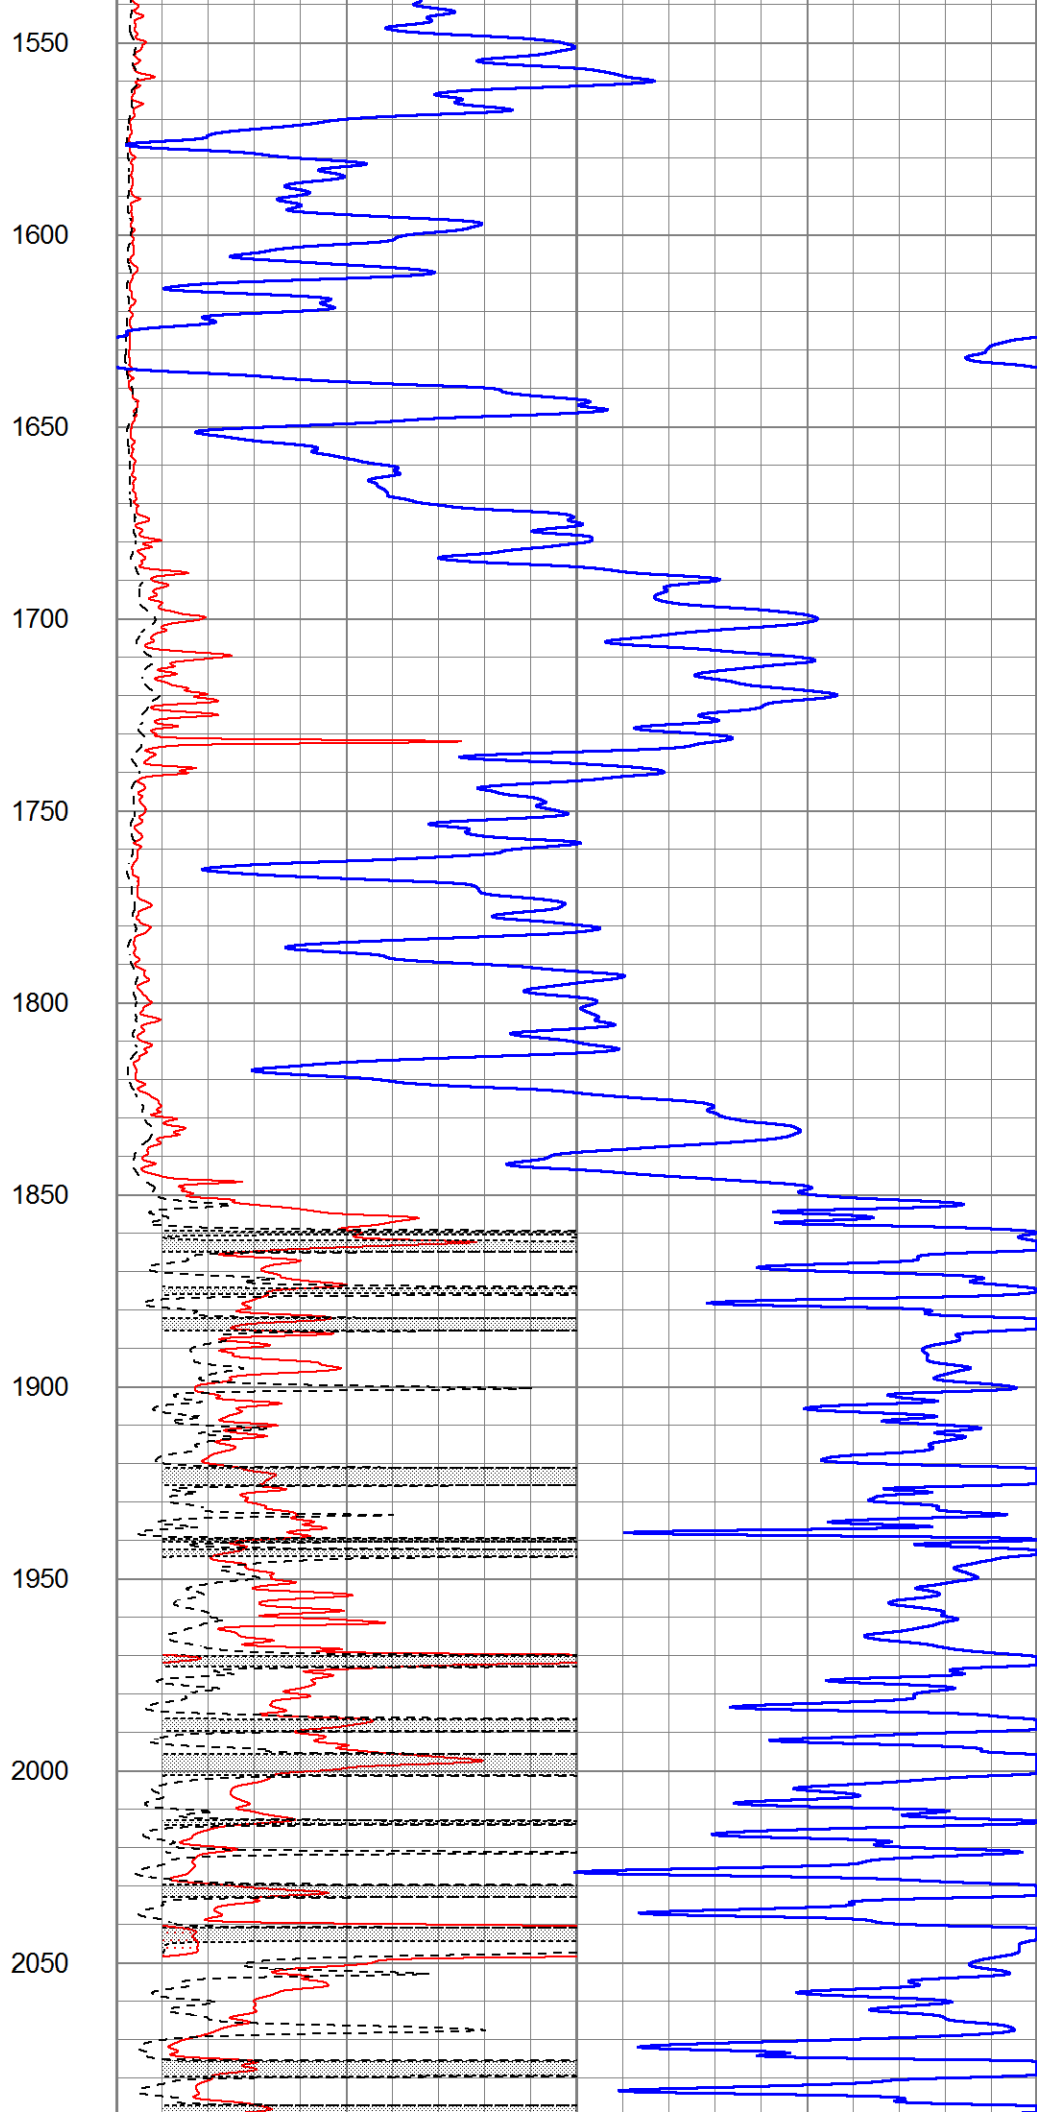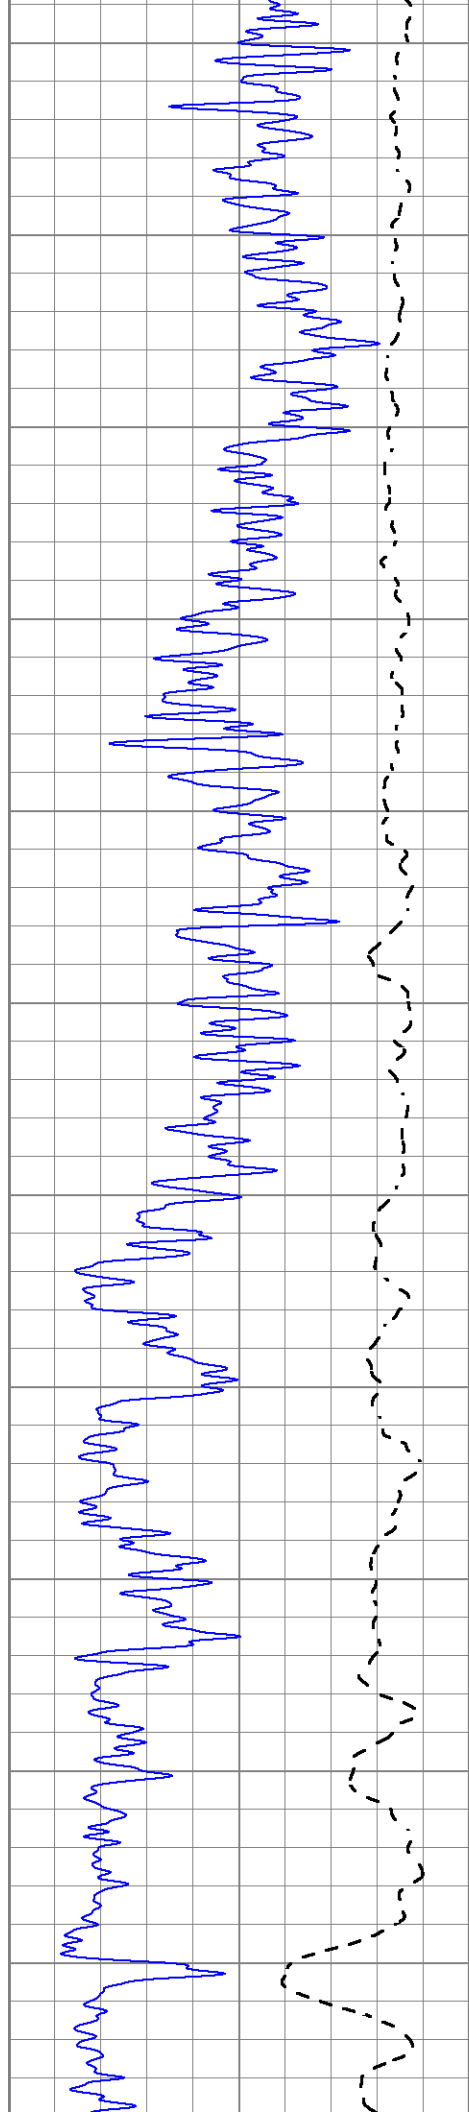

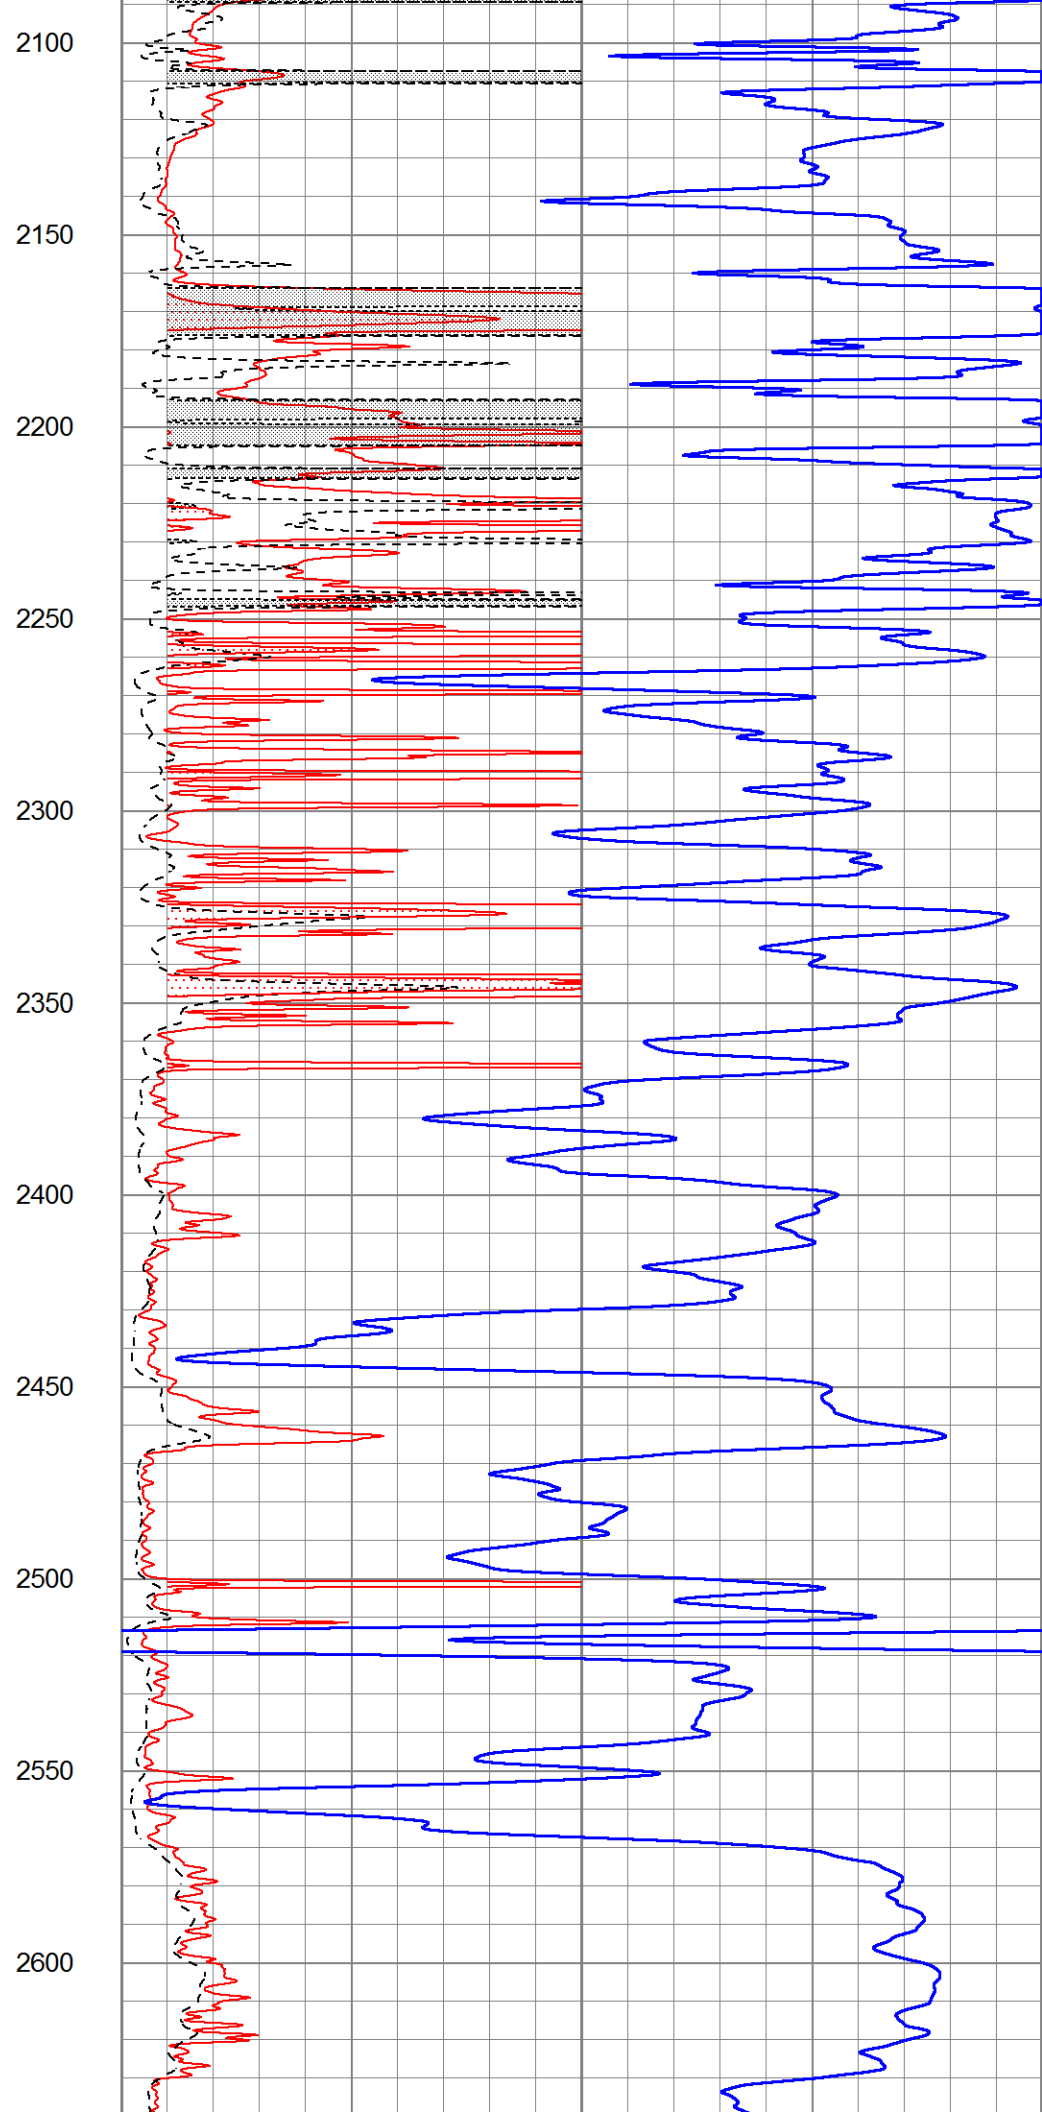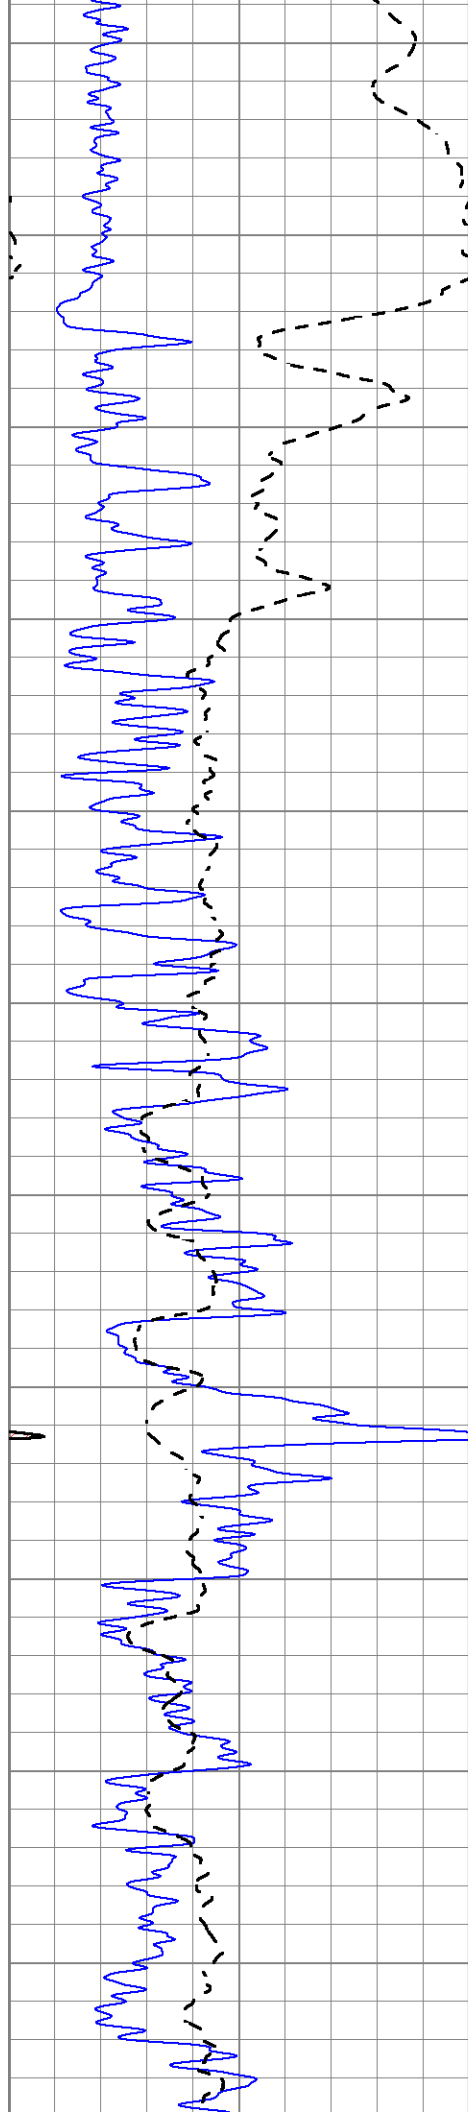

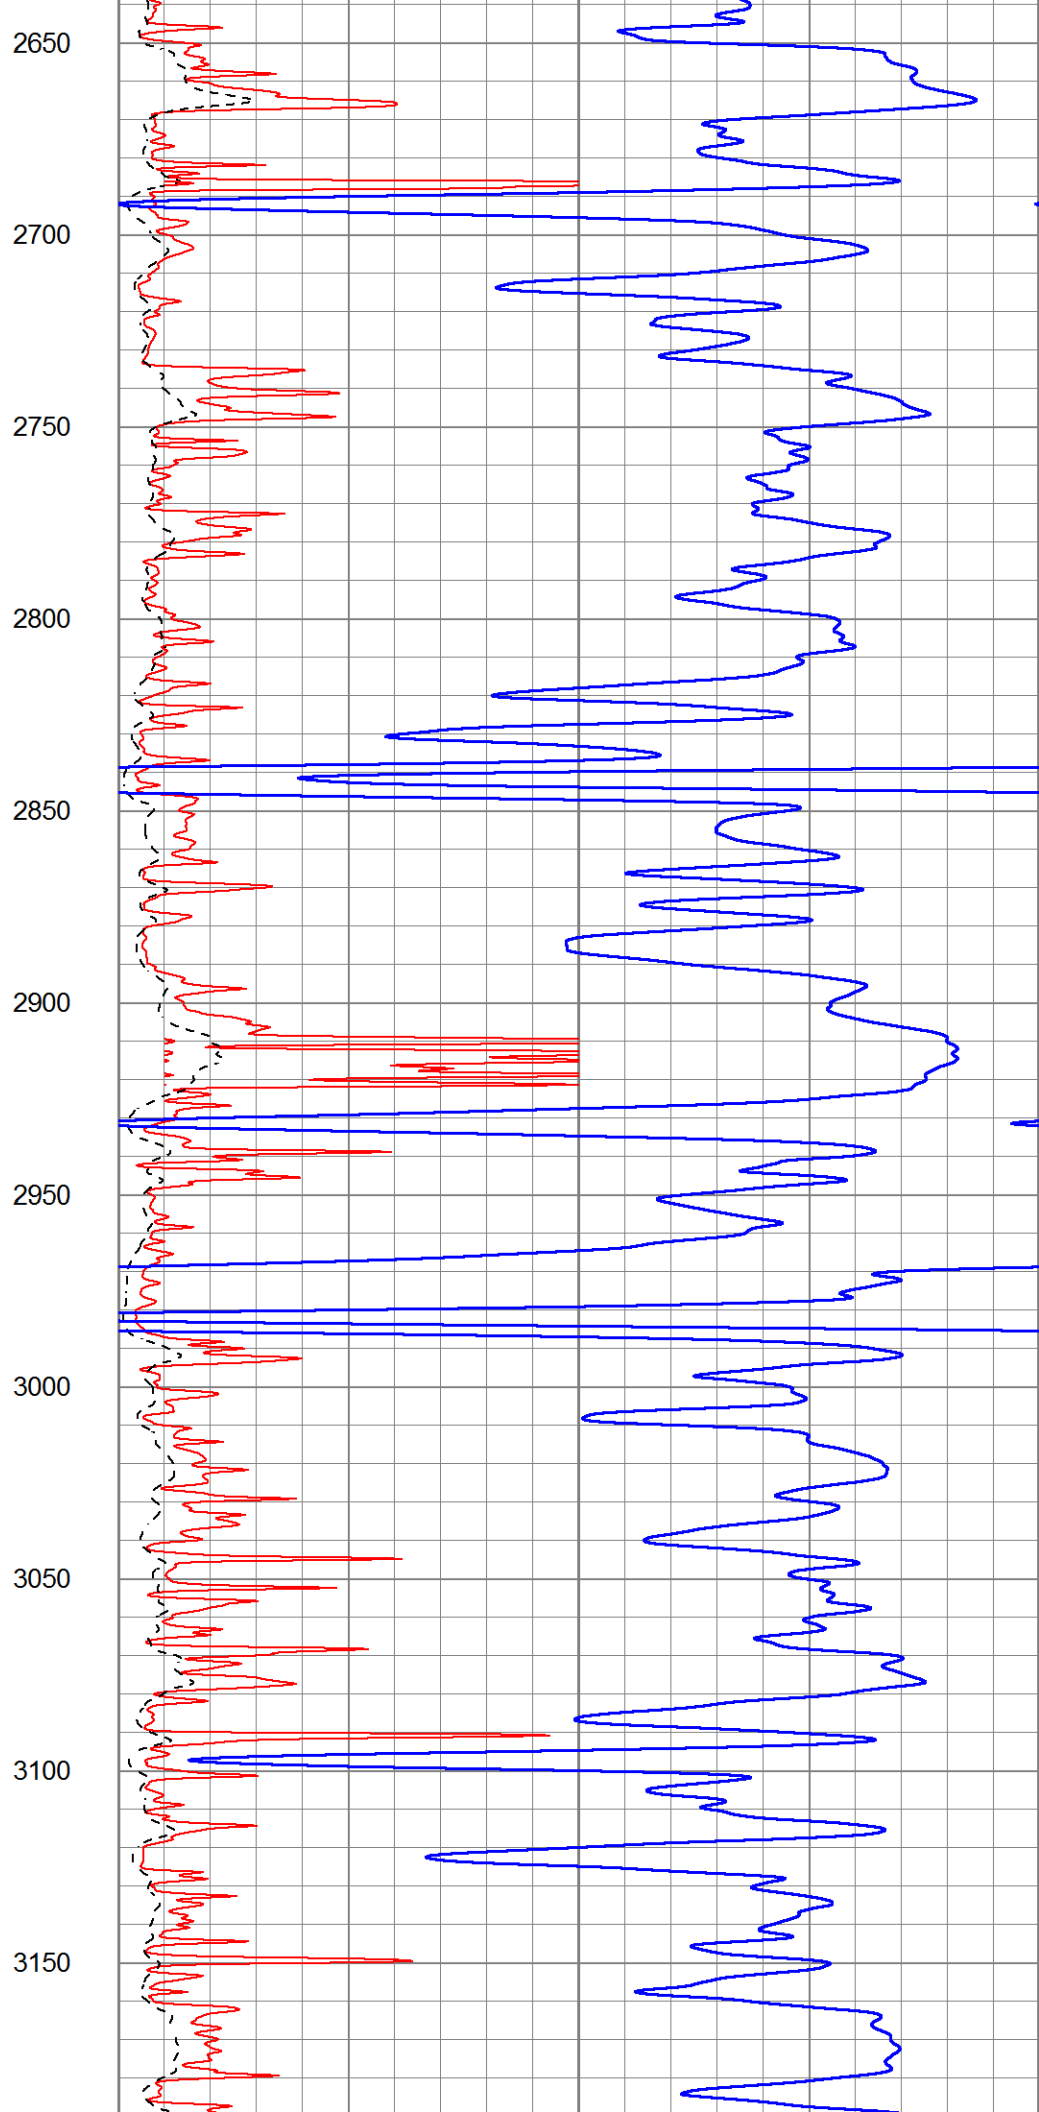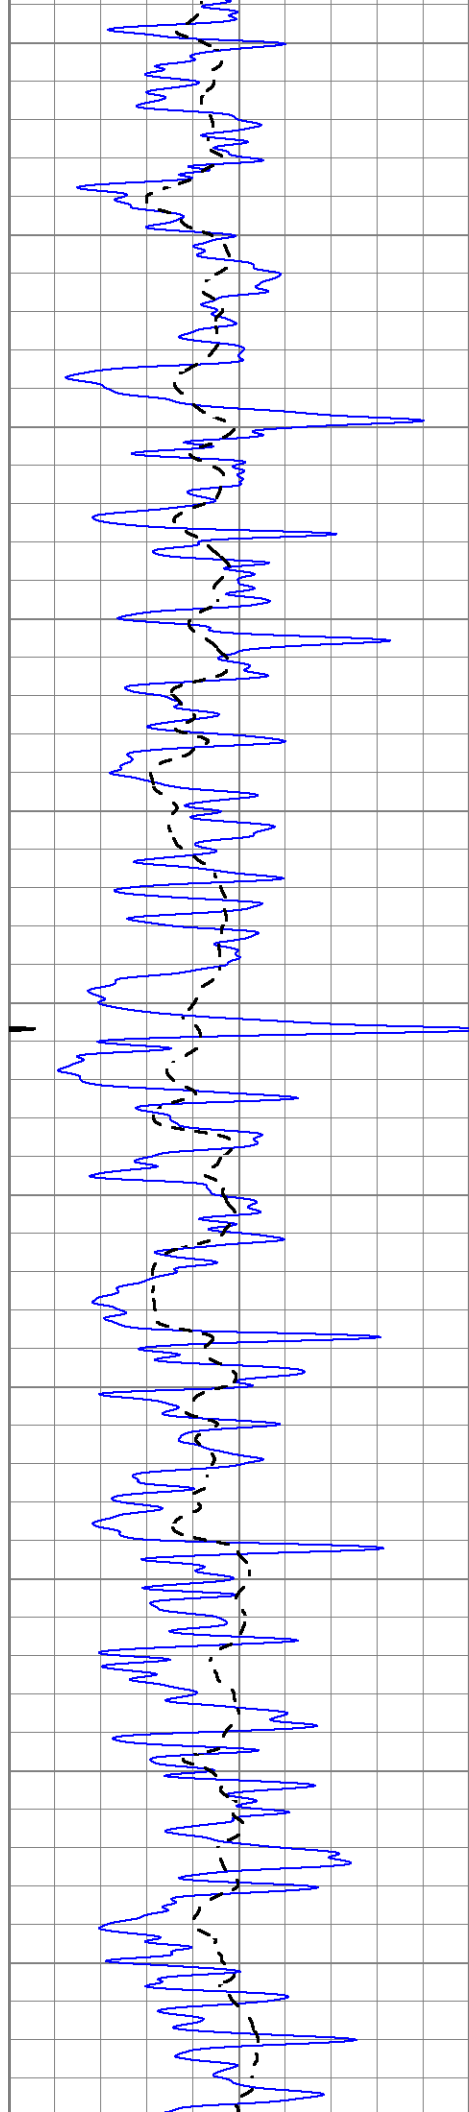

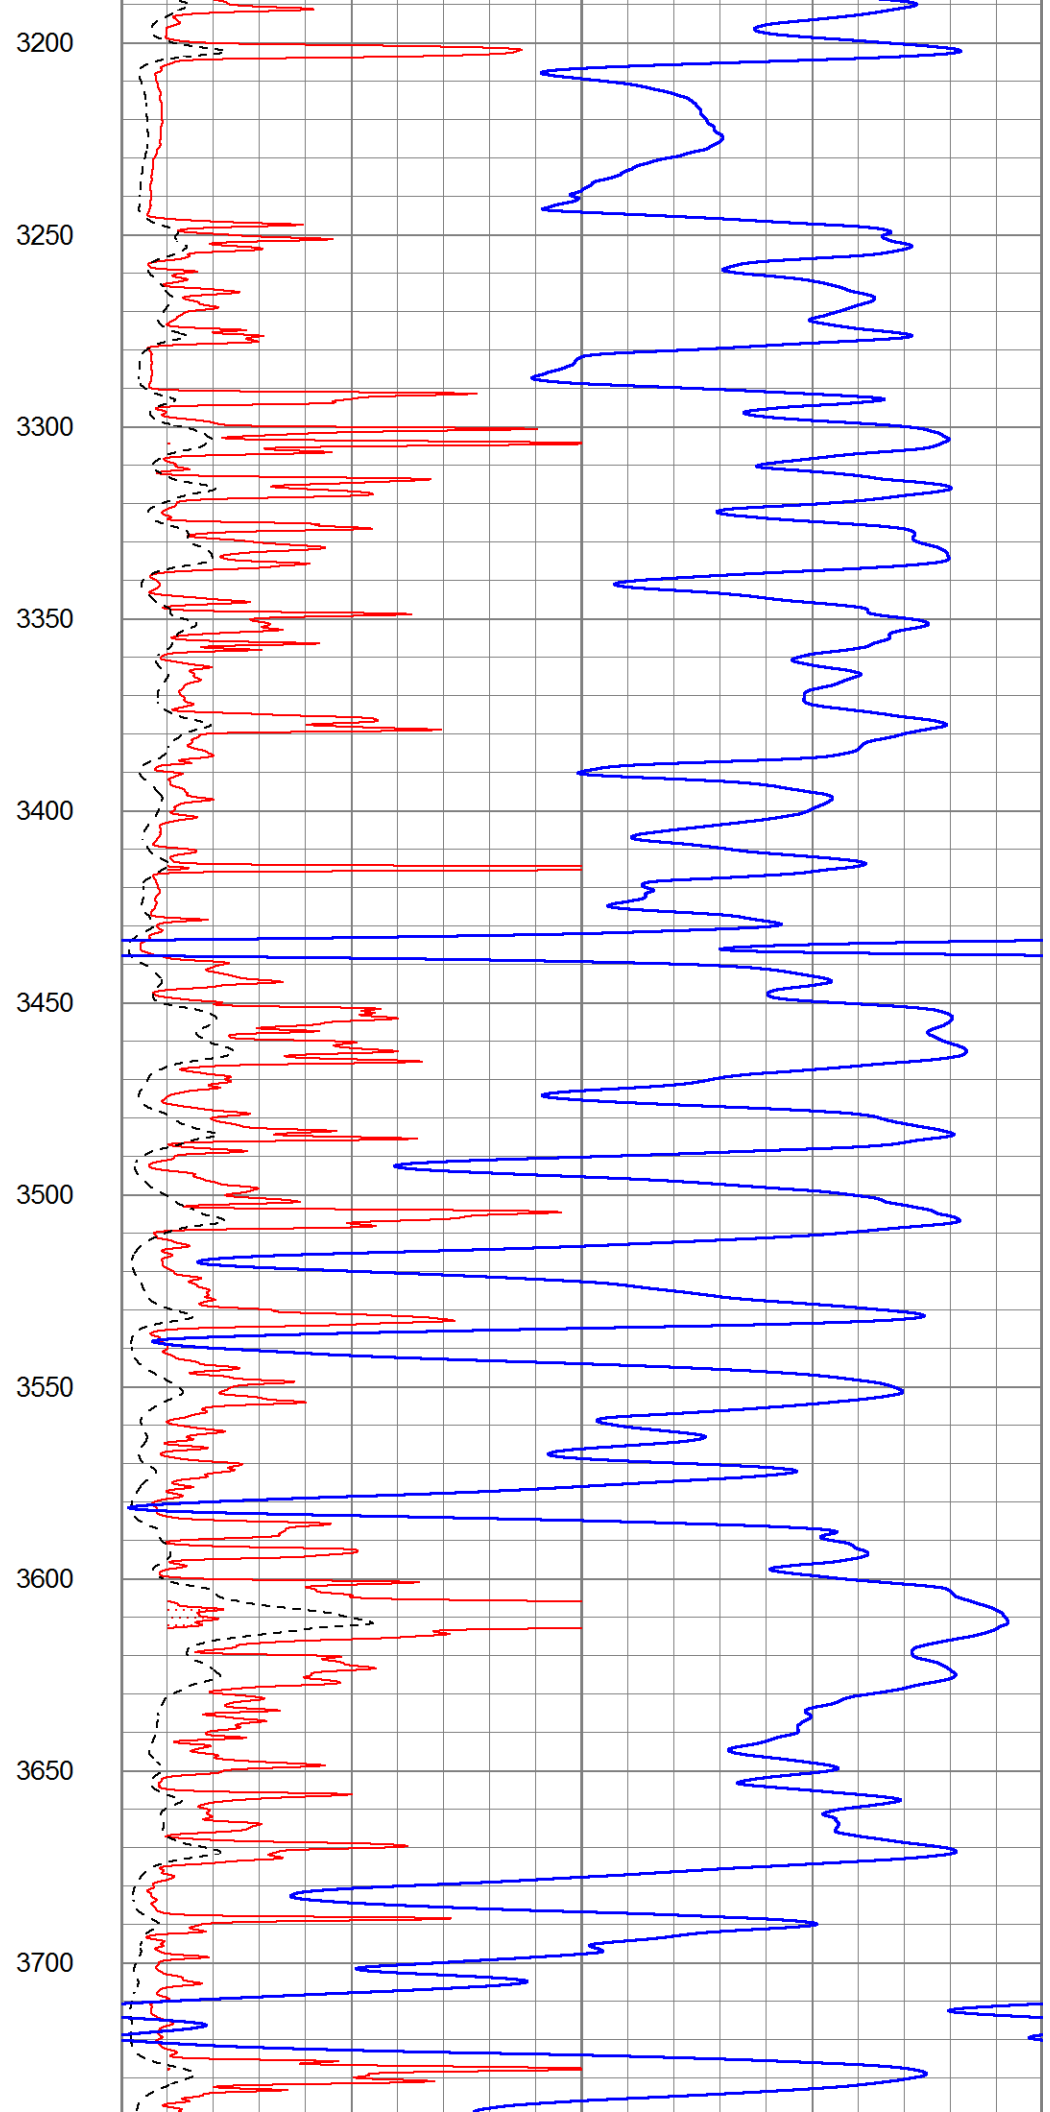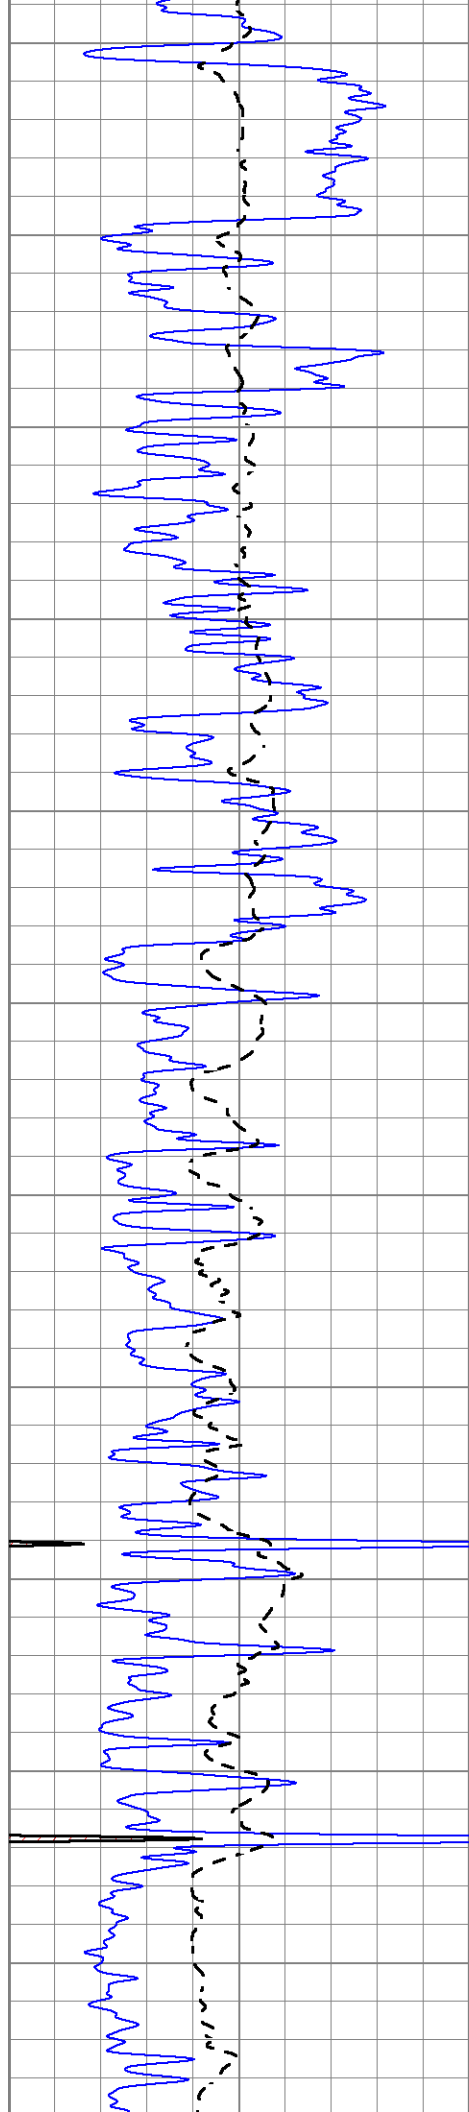

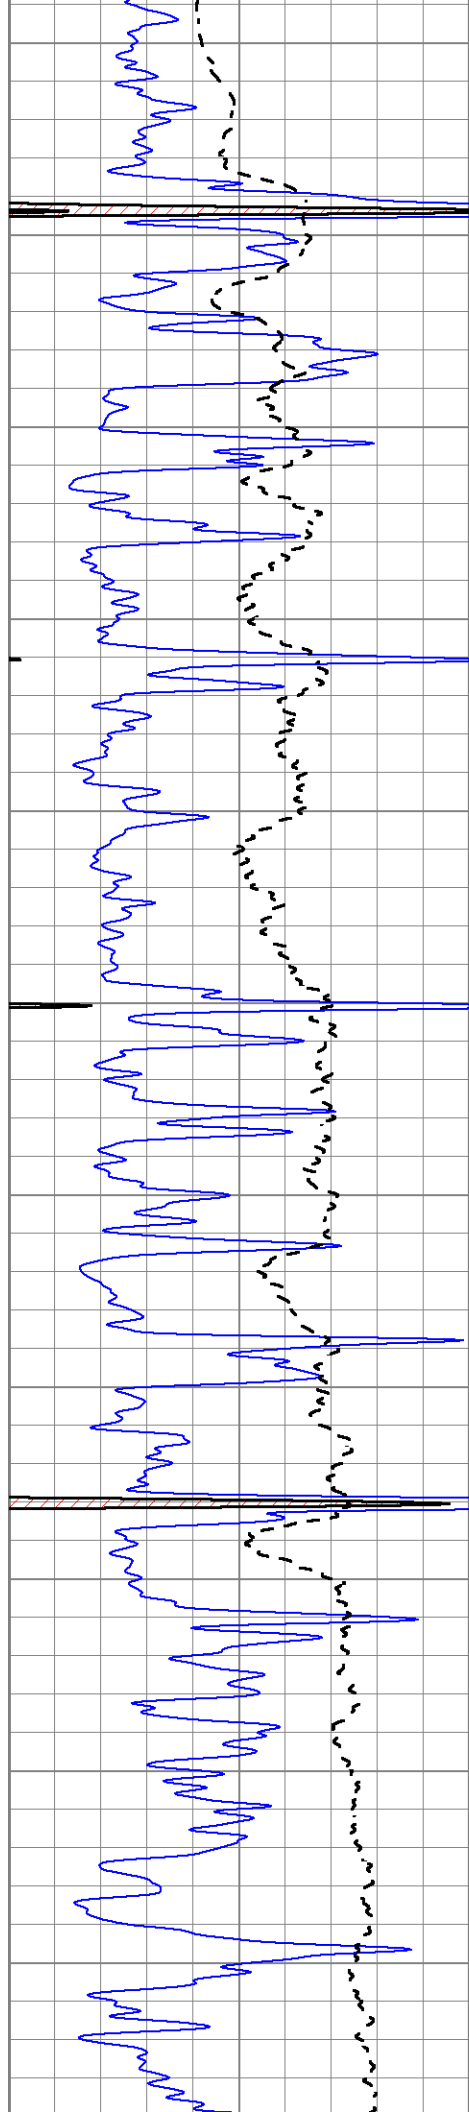

3750

3800

3850

3900

3950

4000



4050


4100

4150

4200


4250

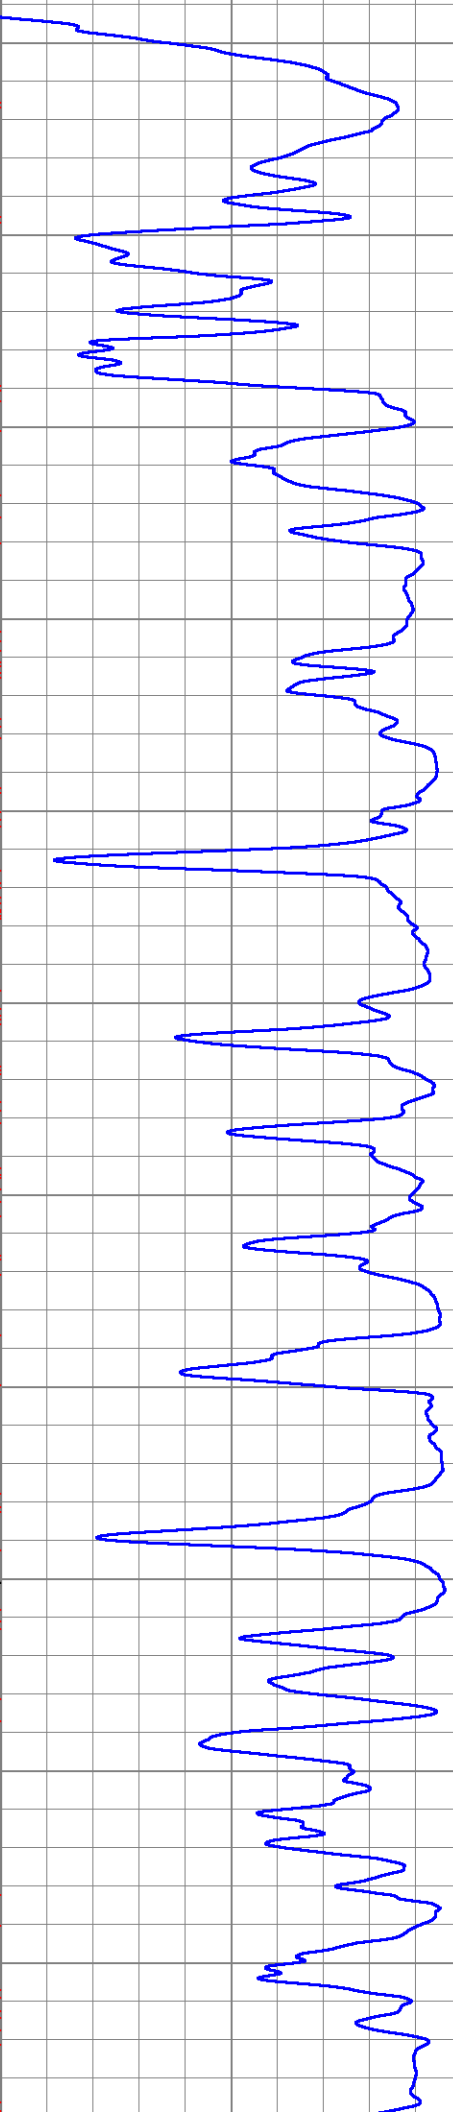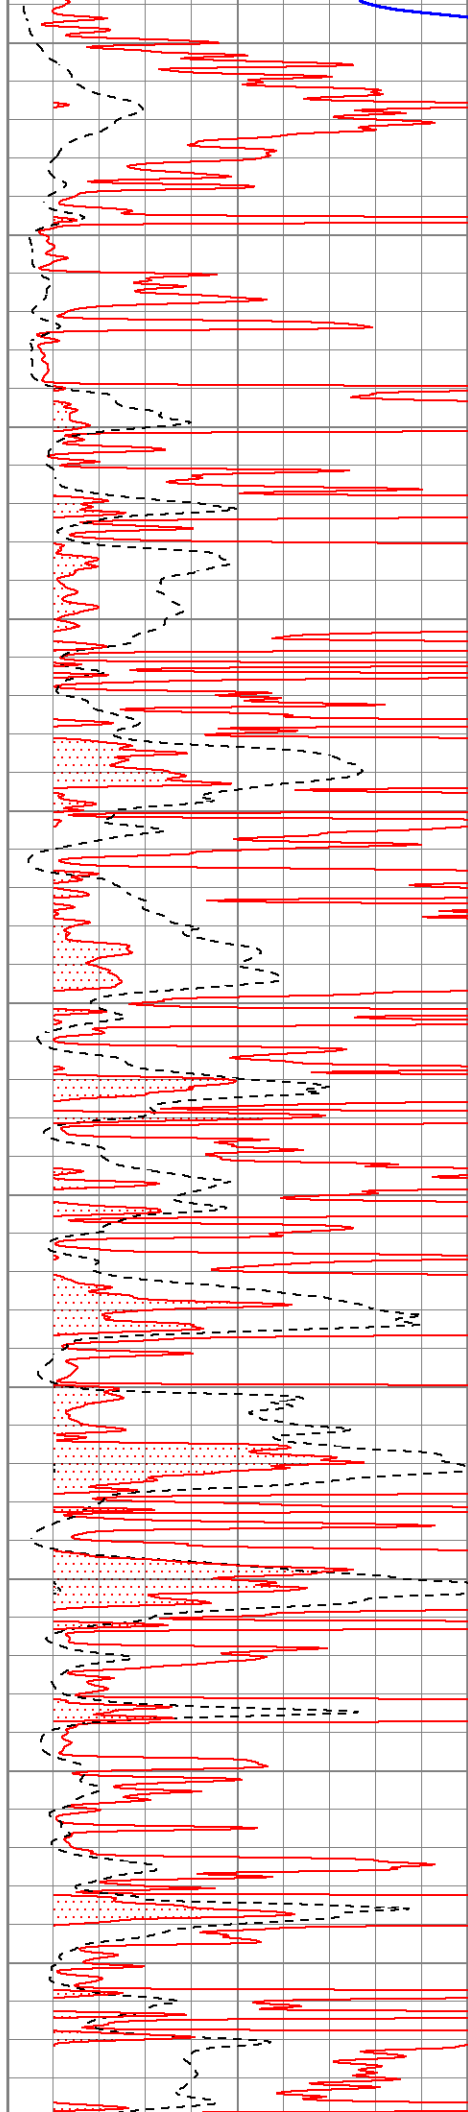


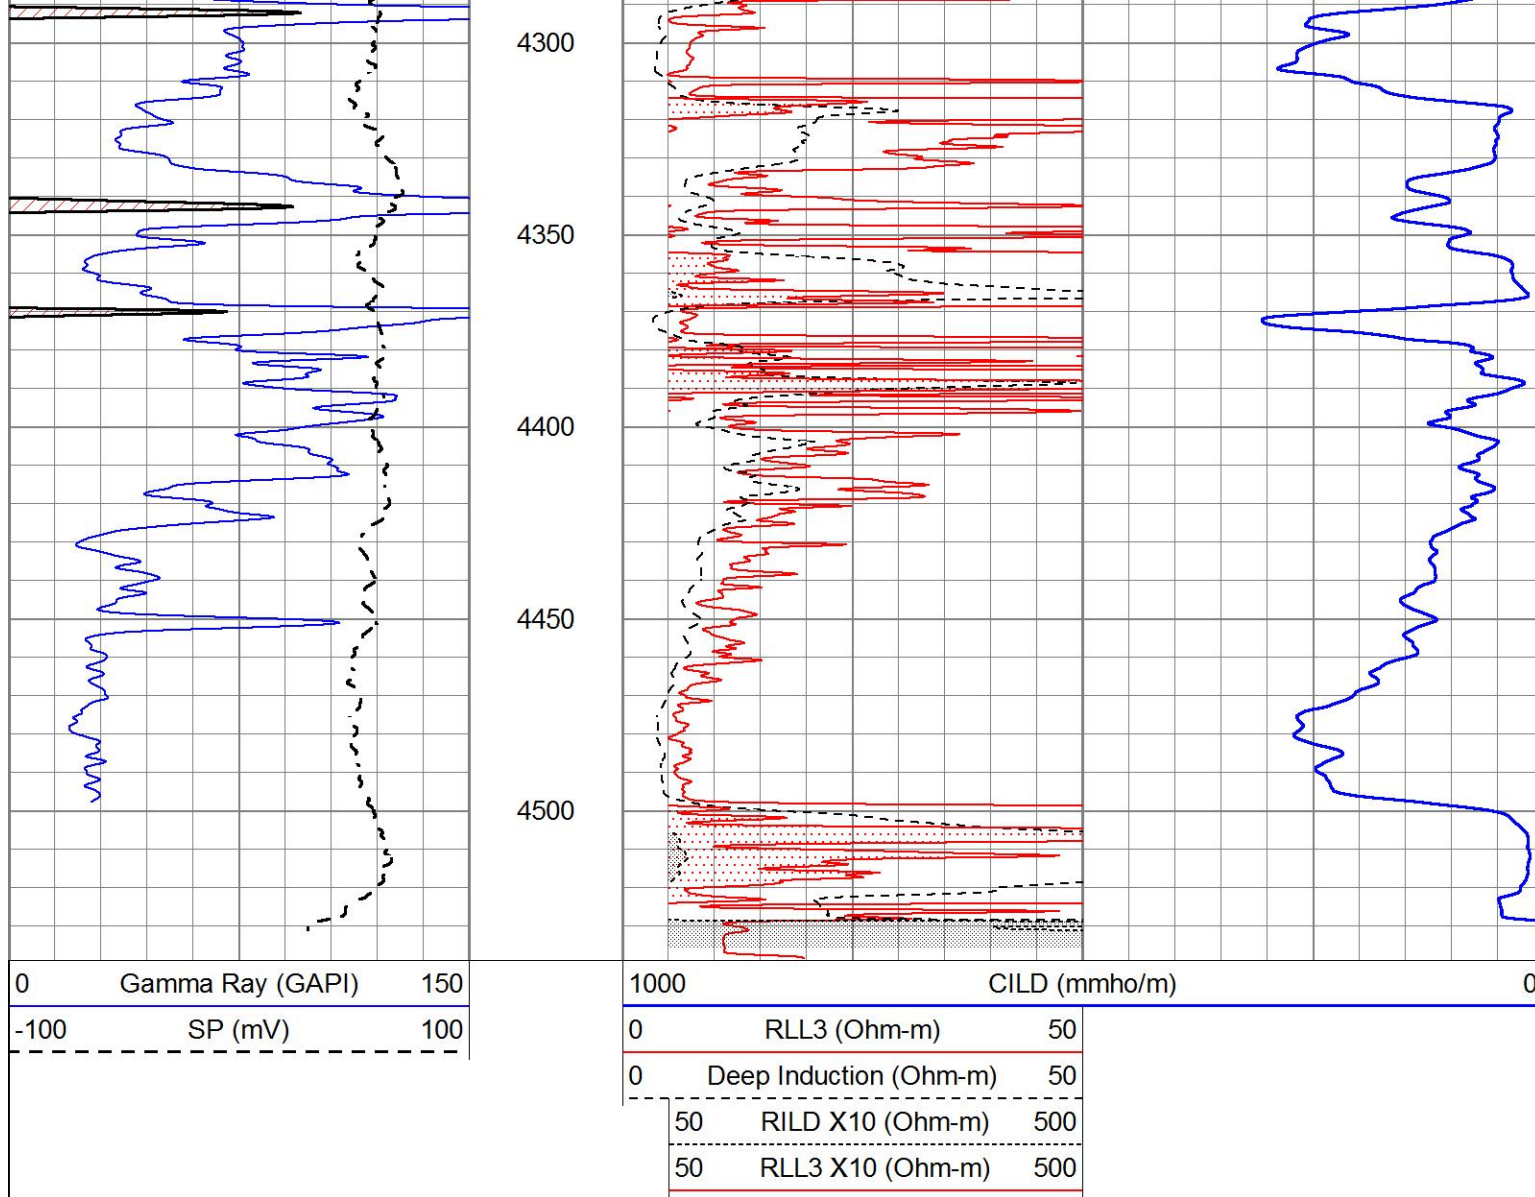

ANHYDRITE

Database File: 6054pe.db
 Dataset Pathname: pass3.2
 Presentation Format: _dil
 Dataset Creation: Sat Nov 20 05:53:54 2021
 Charted by: Depth in Feet scaled 1:240

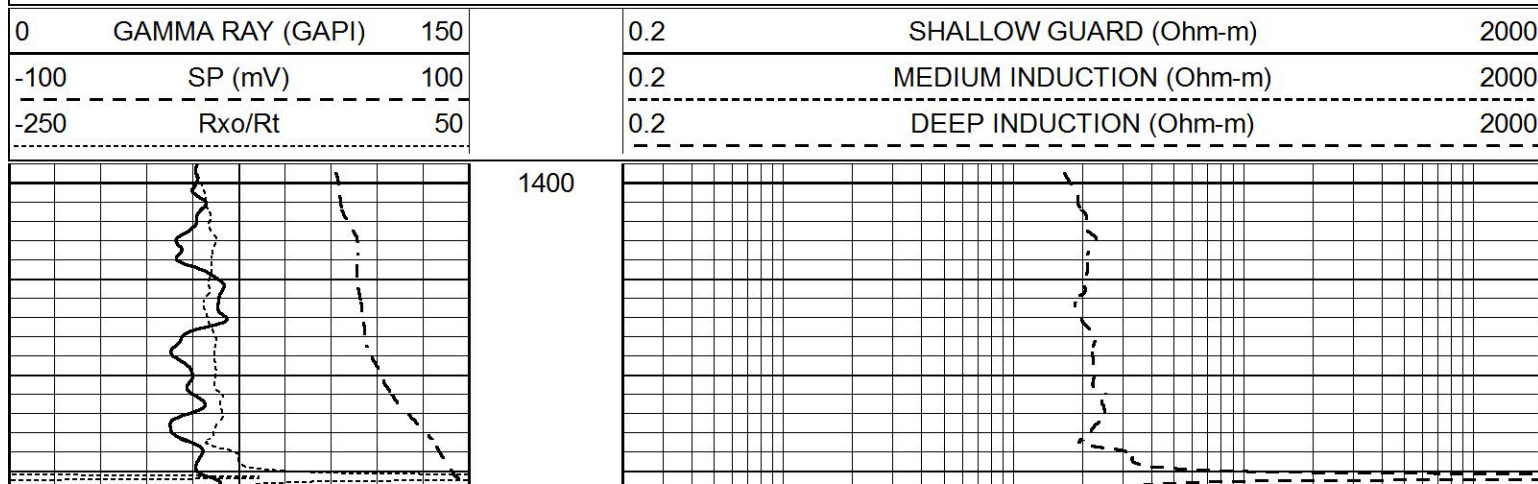


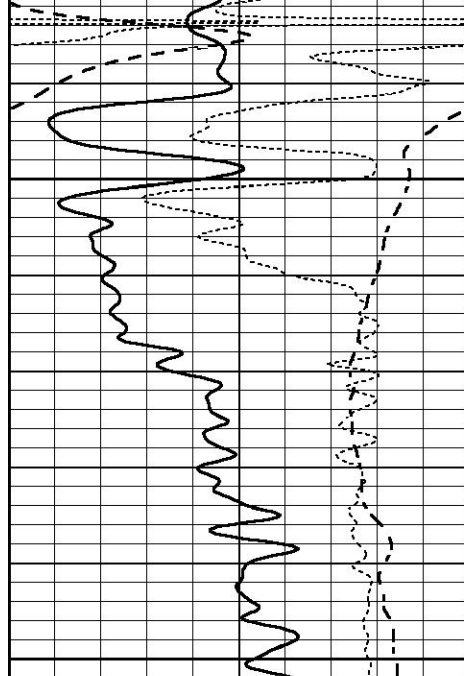

1450

1500

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

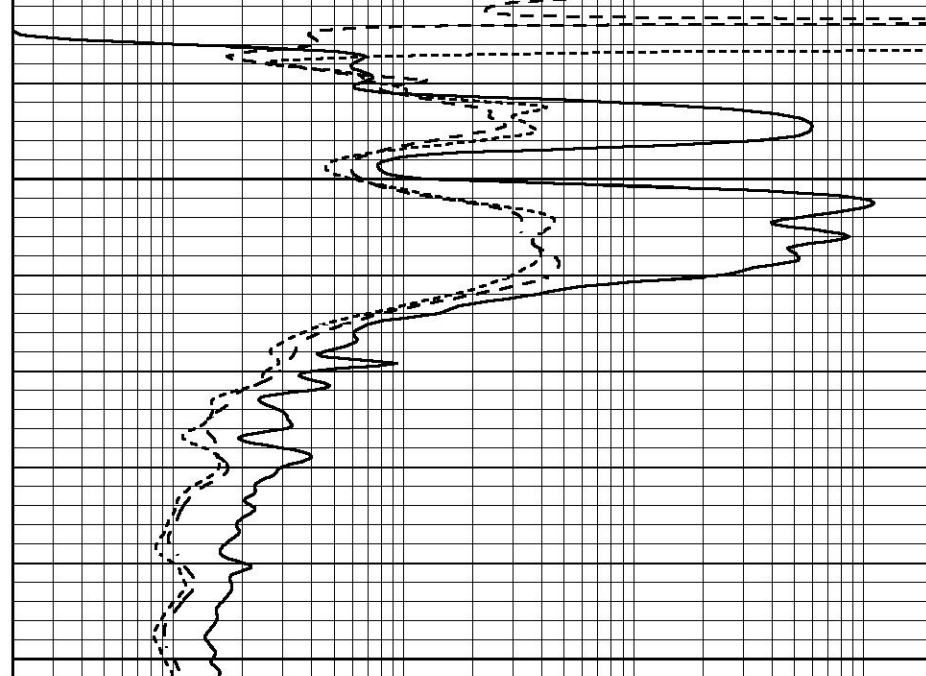

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000




MAIN SECTION

Database File 6054pe.db
 Dataset Pathname pass3.1
 Presentation Format _dil
 Dataset Creation Sat Nov 20 05:44:11 2021
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

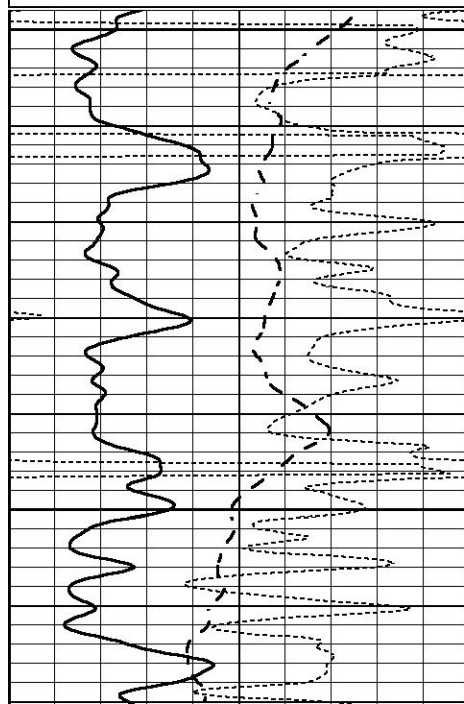

2200

2250

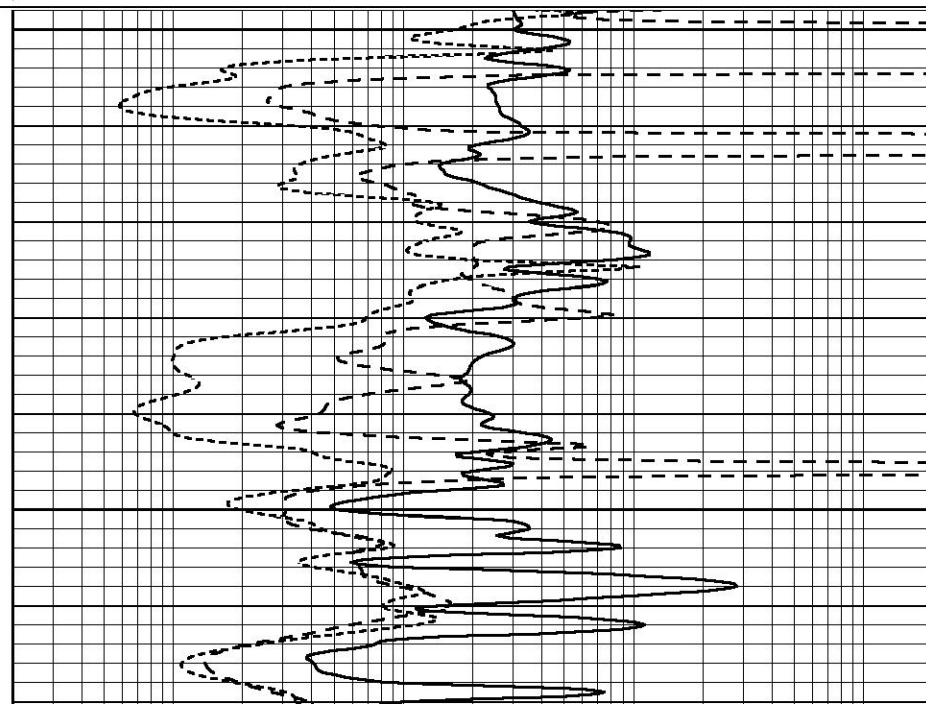

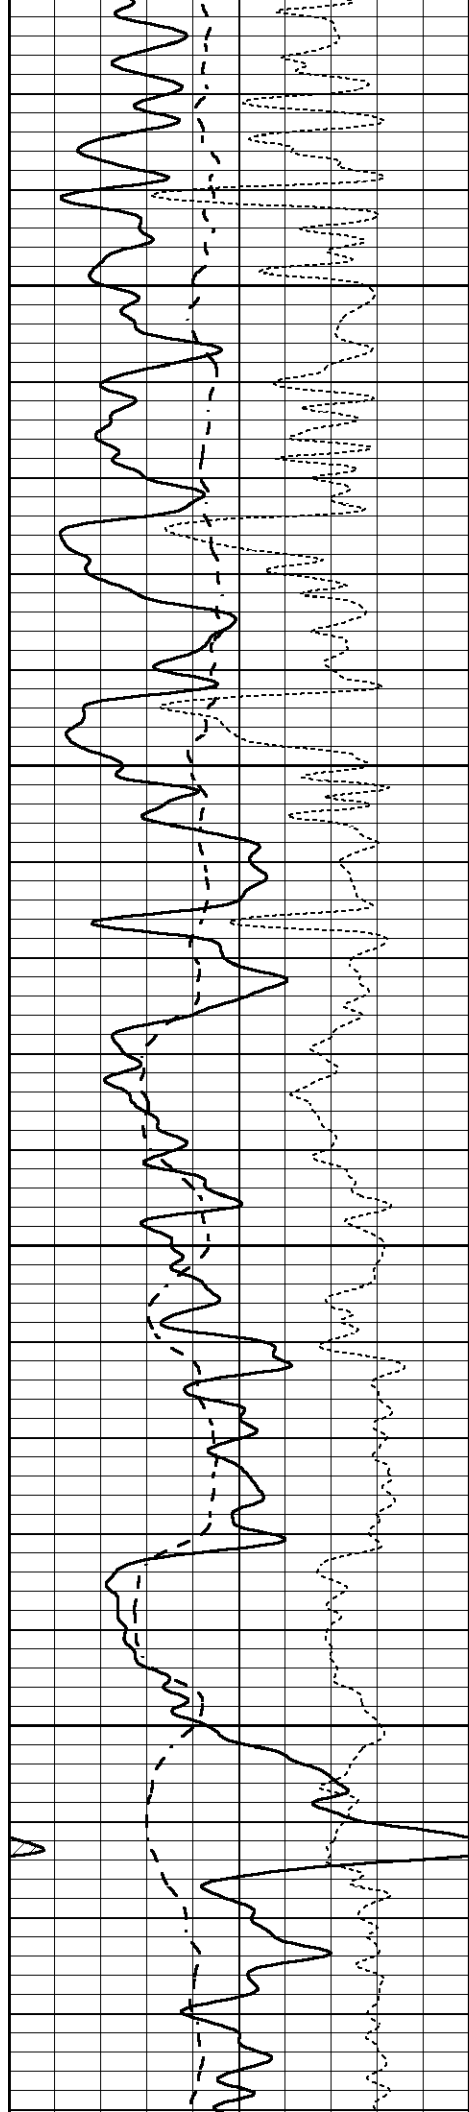



2300

2350

2400

2450

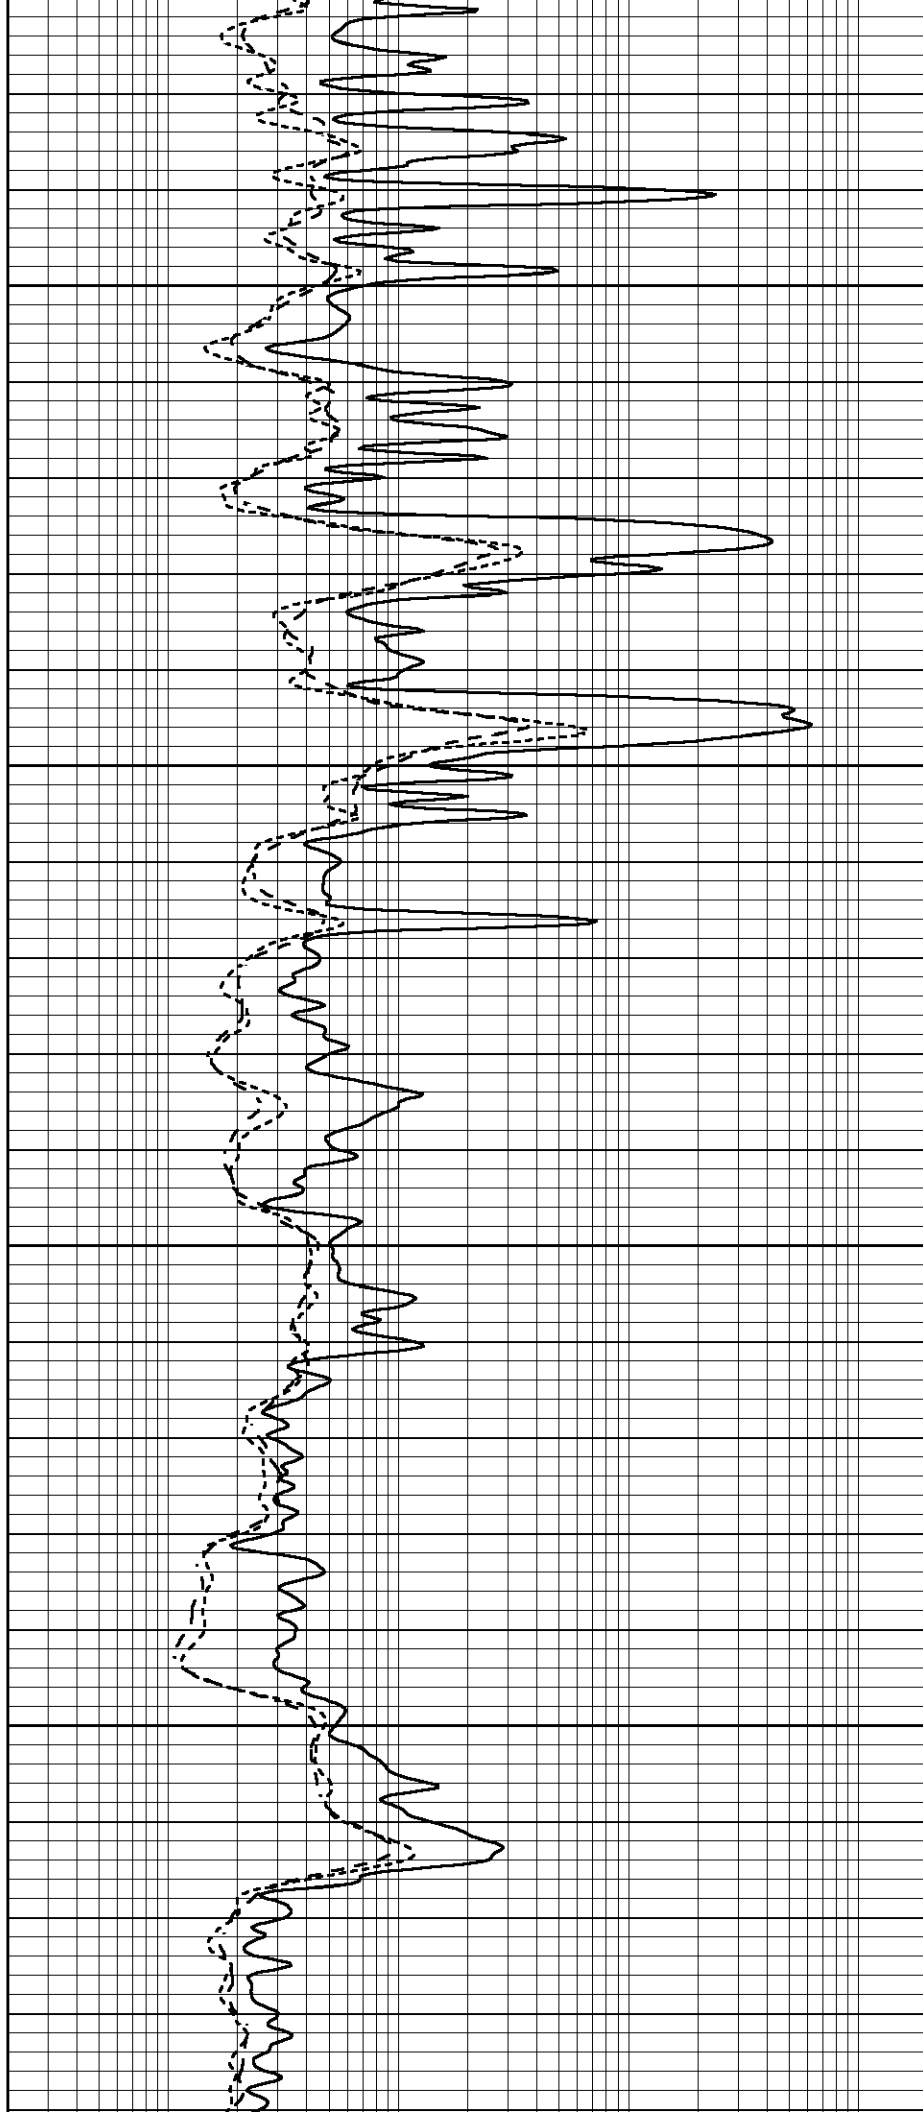

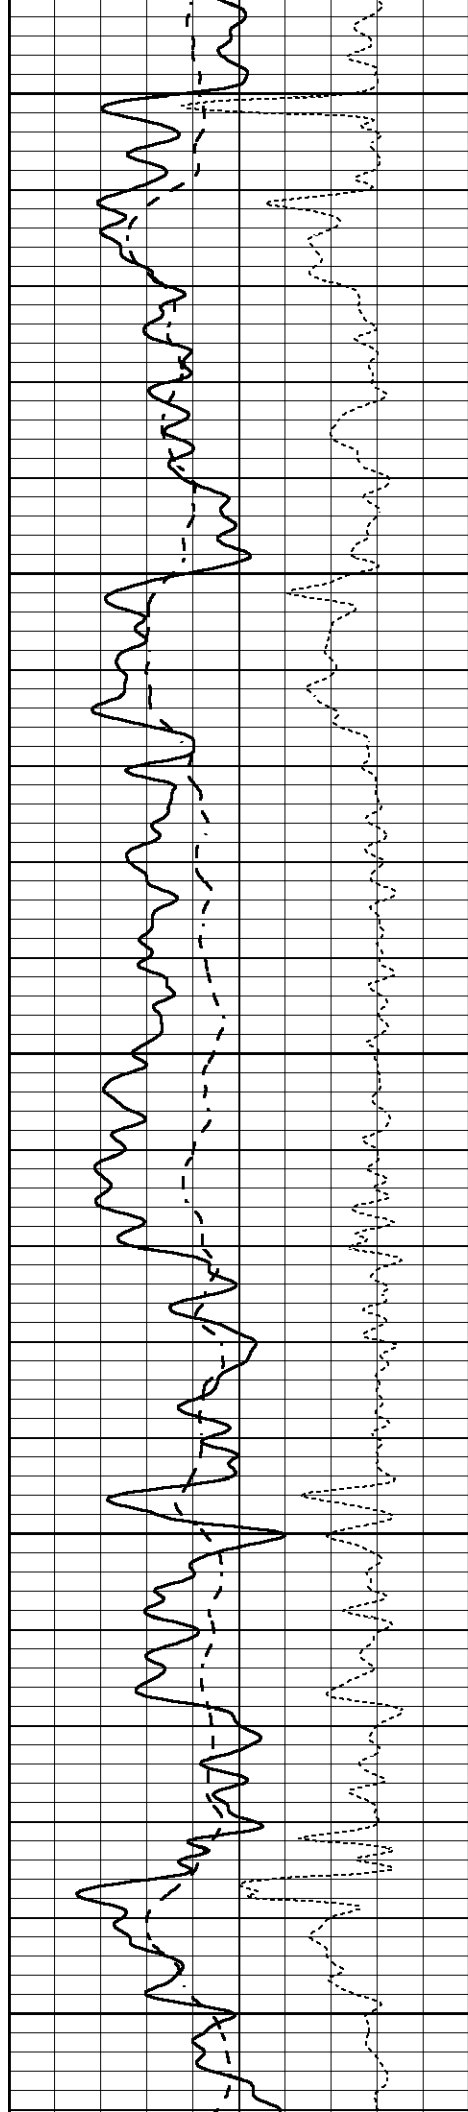


2500


2550

2600

2650

2700

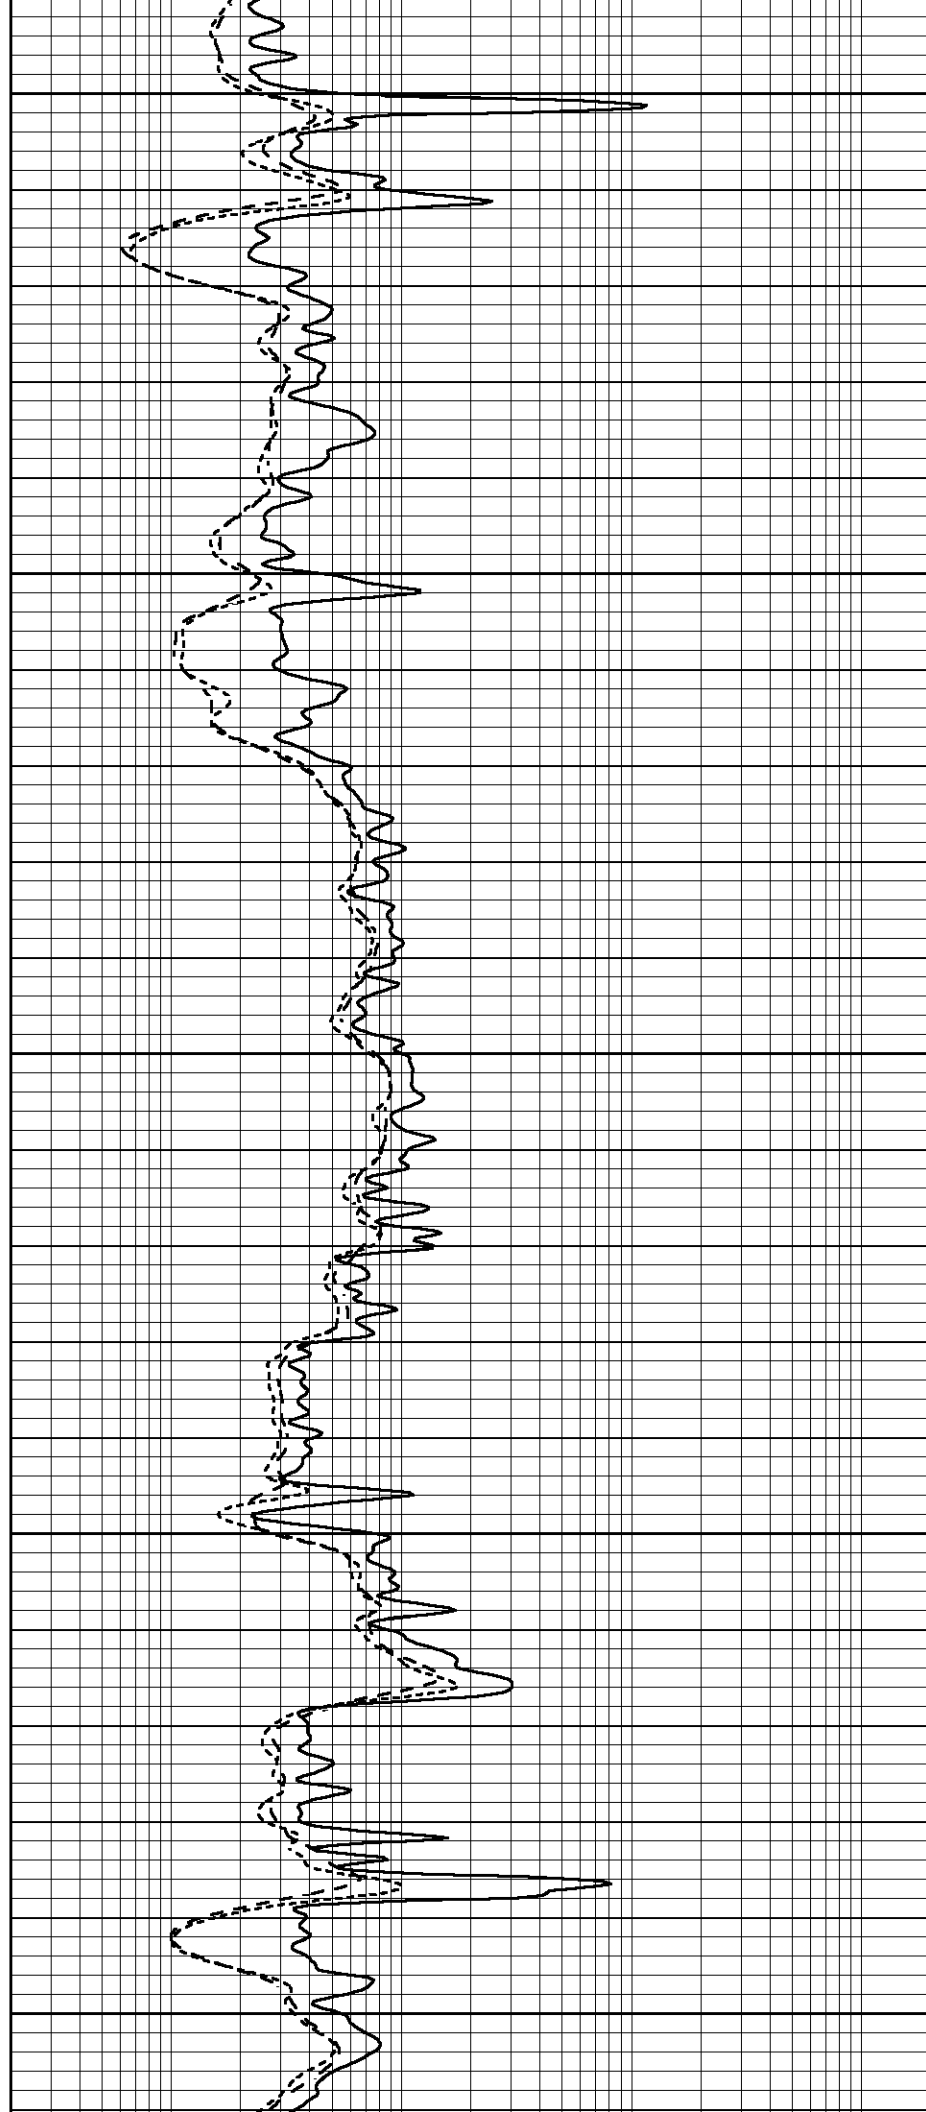

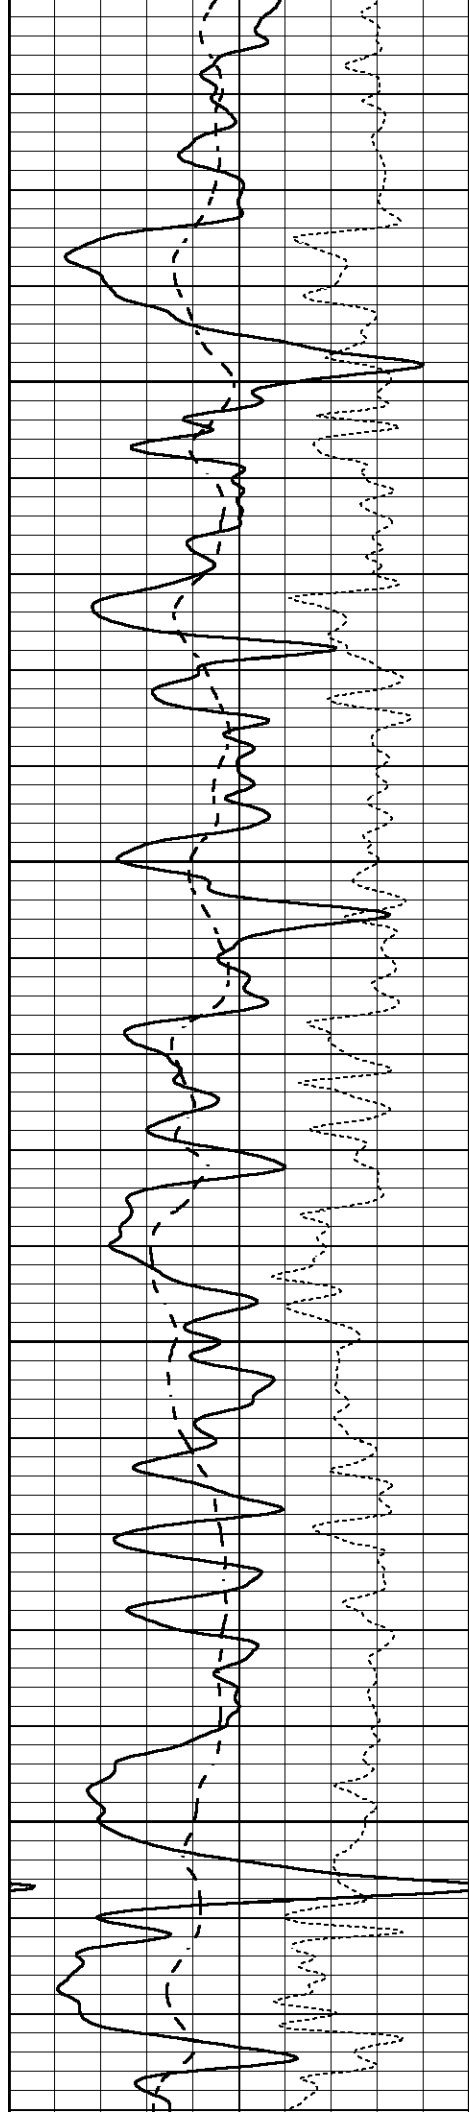



2750

2800

2850

2900

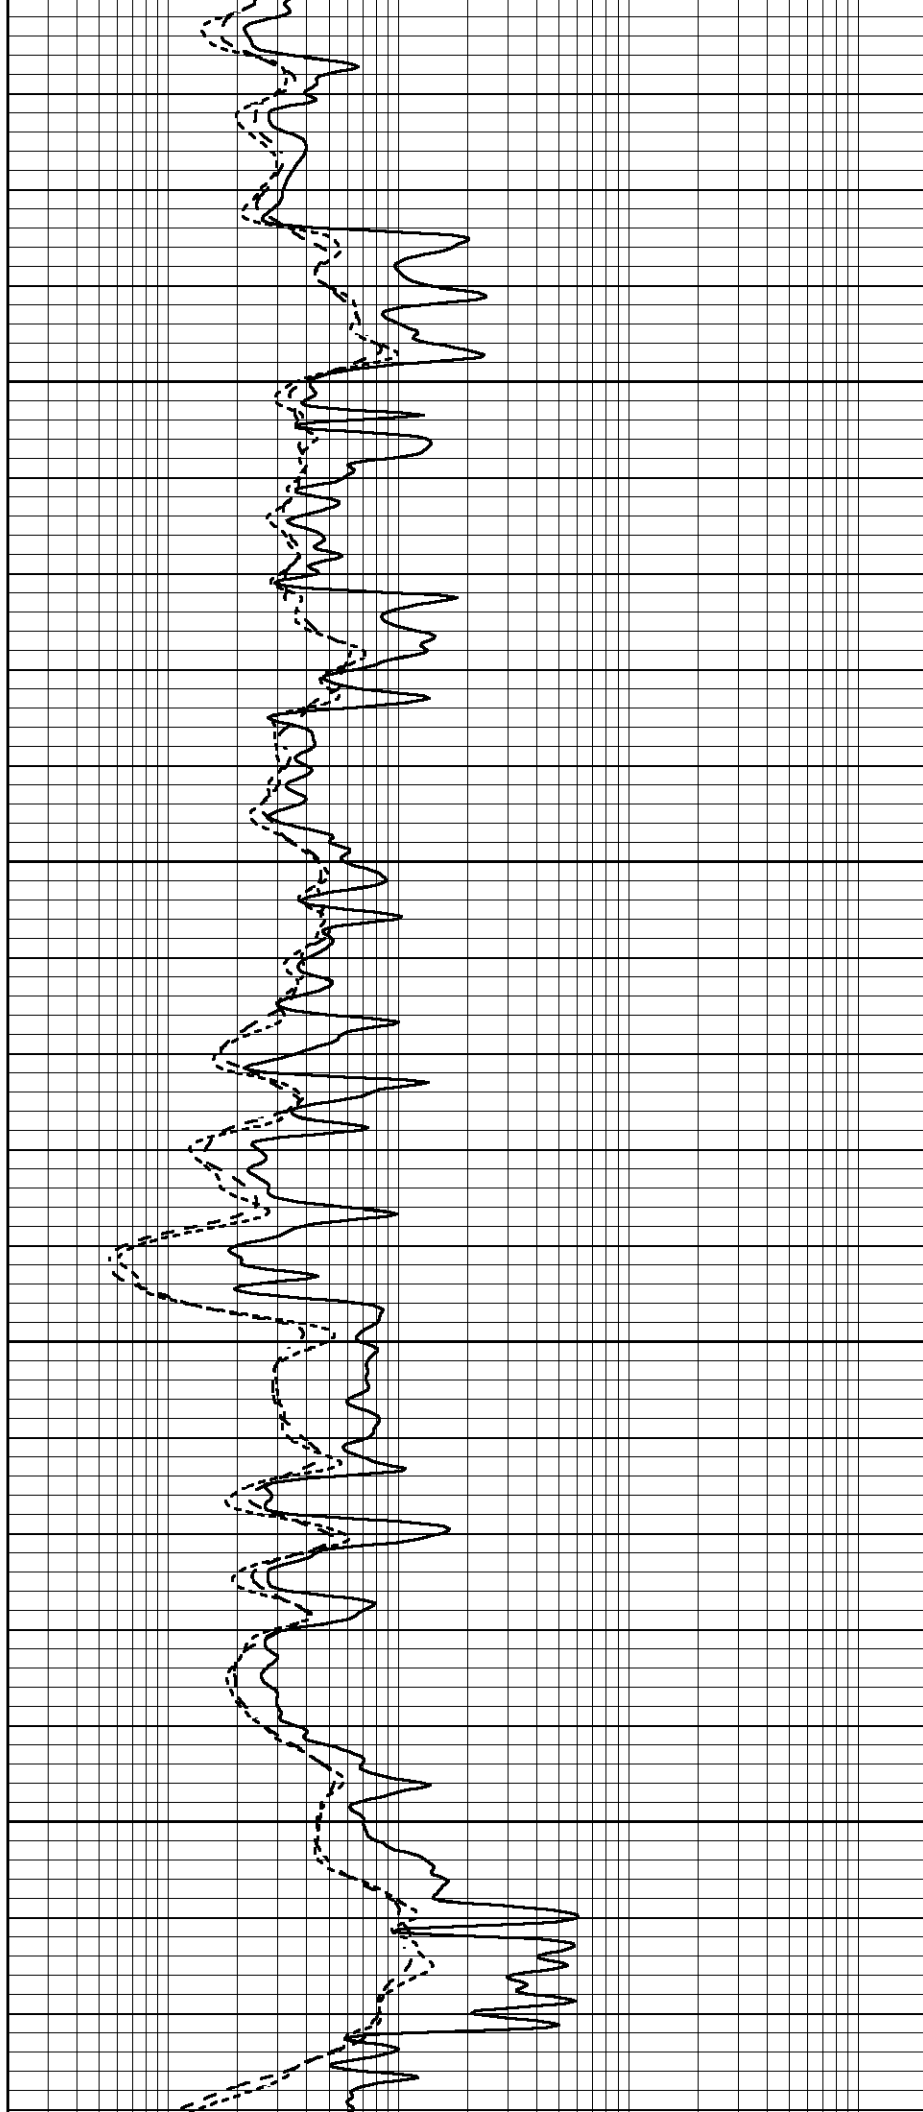

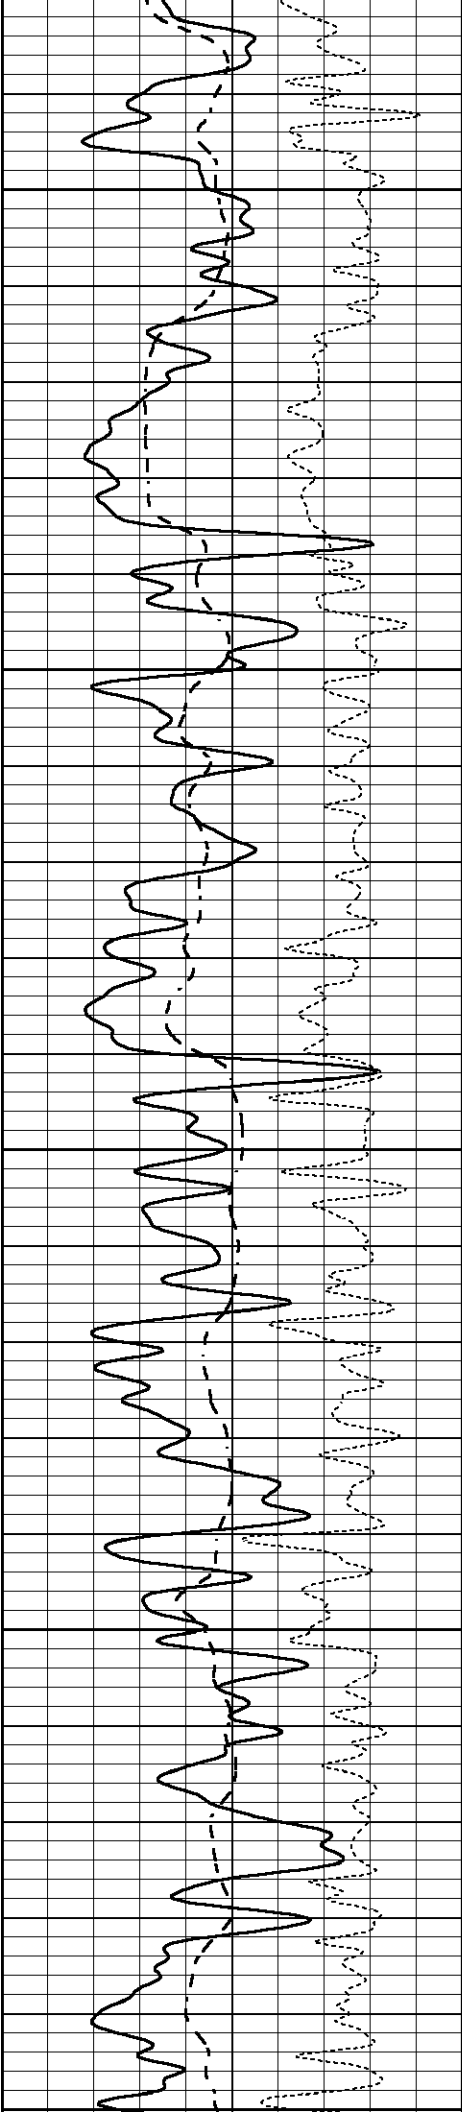


2950


3000

3050

3100

3150

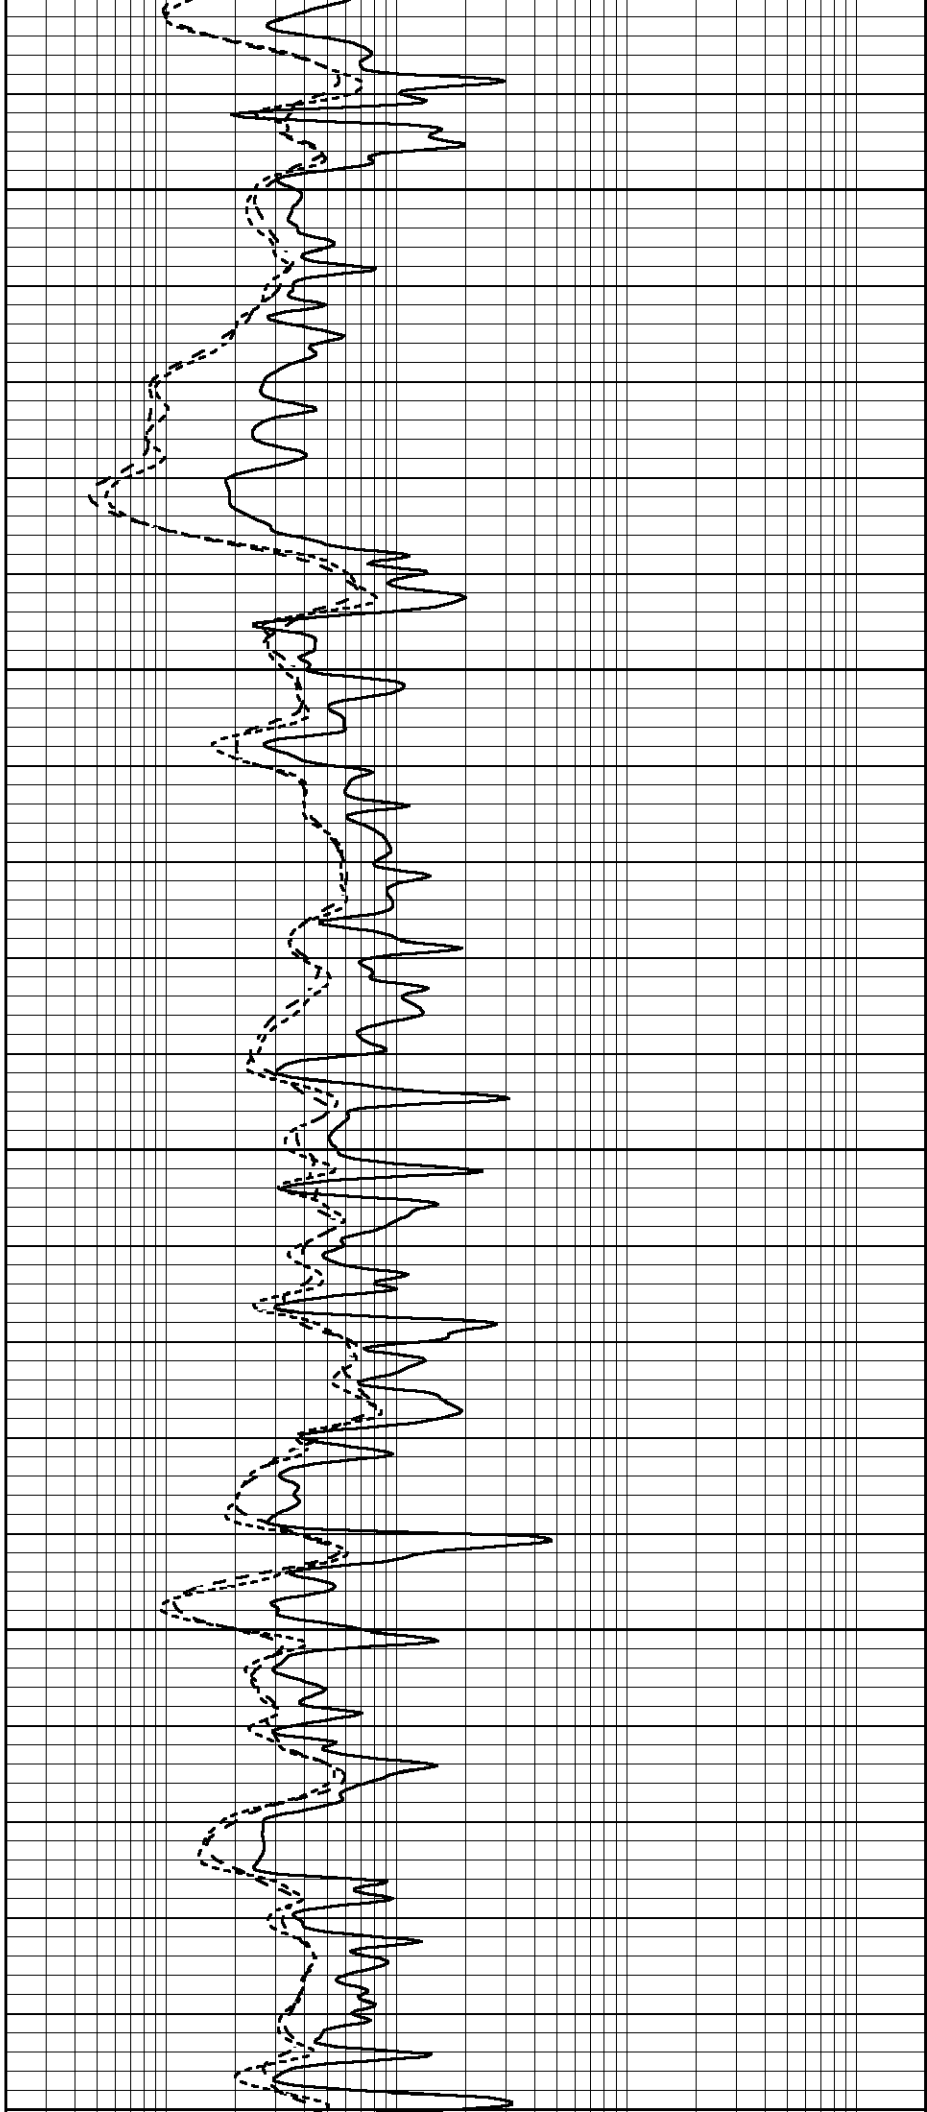

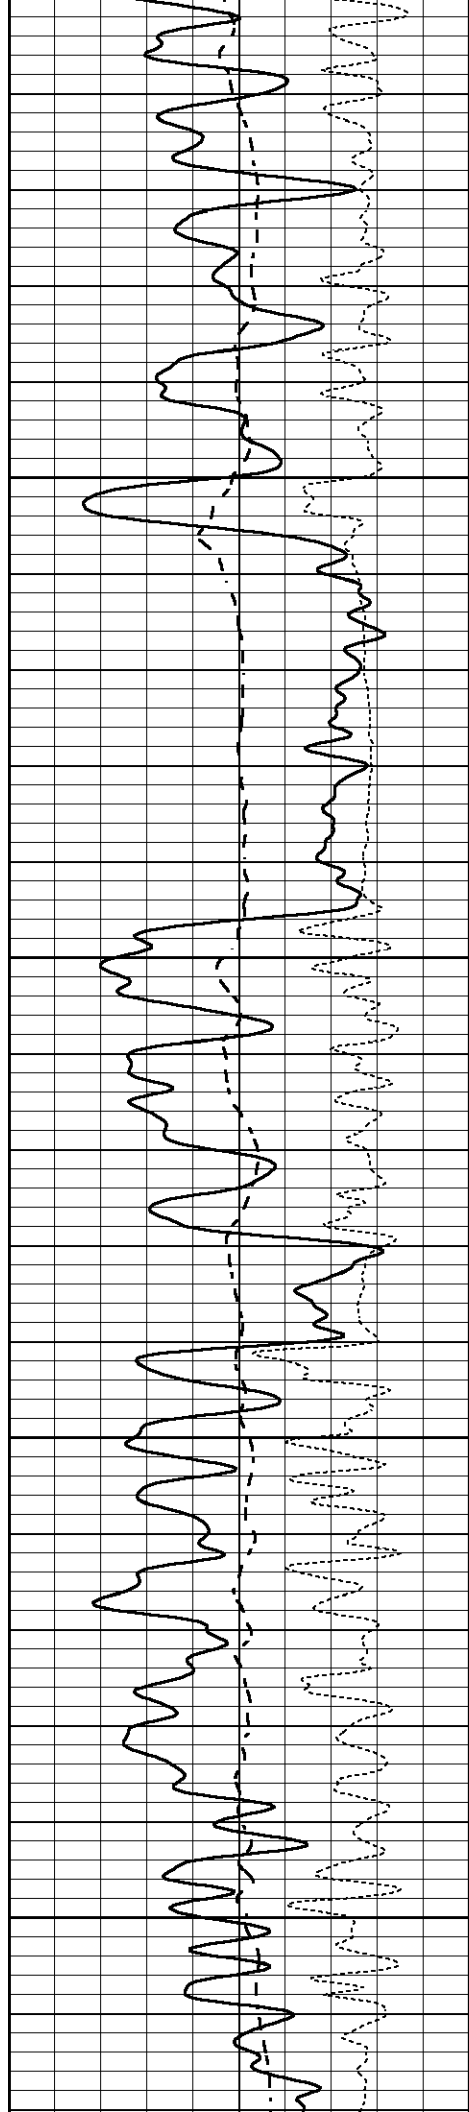


3150


3200

3250

3300

3350

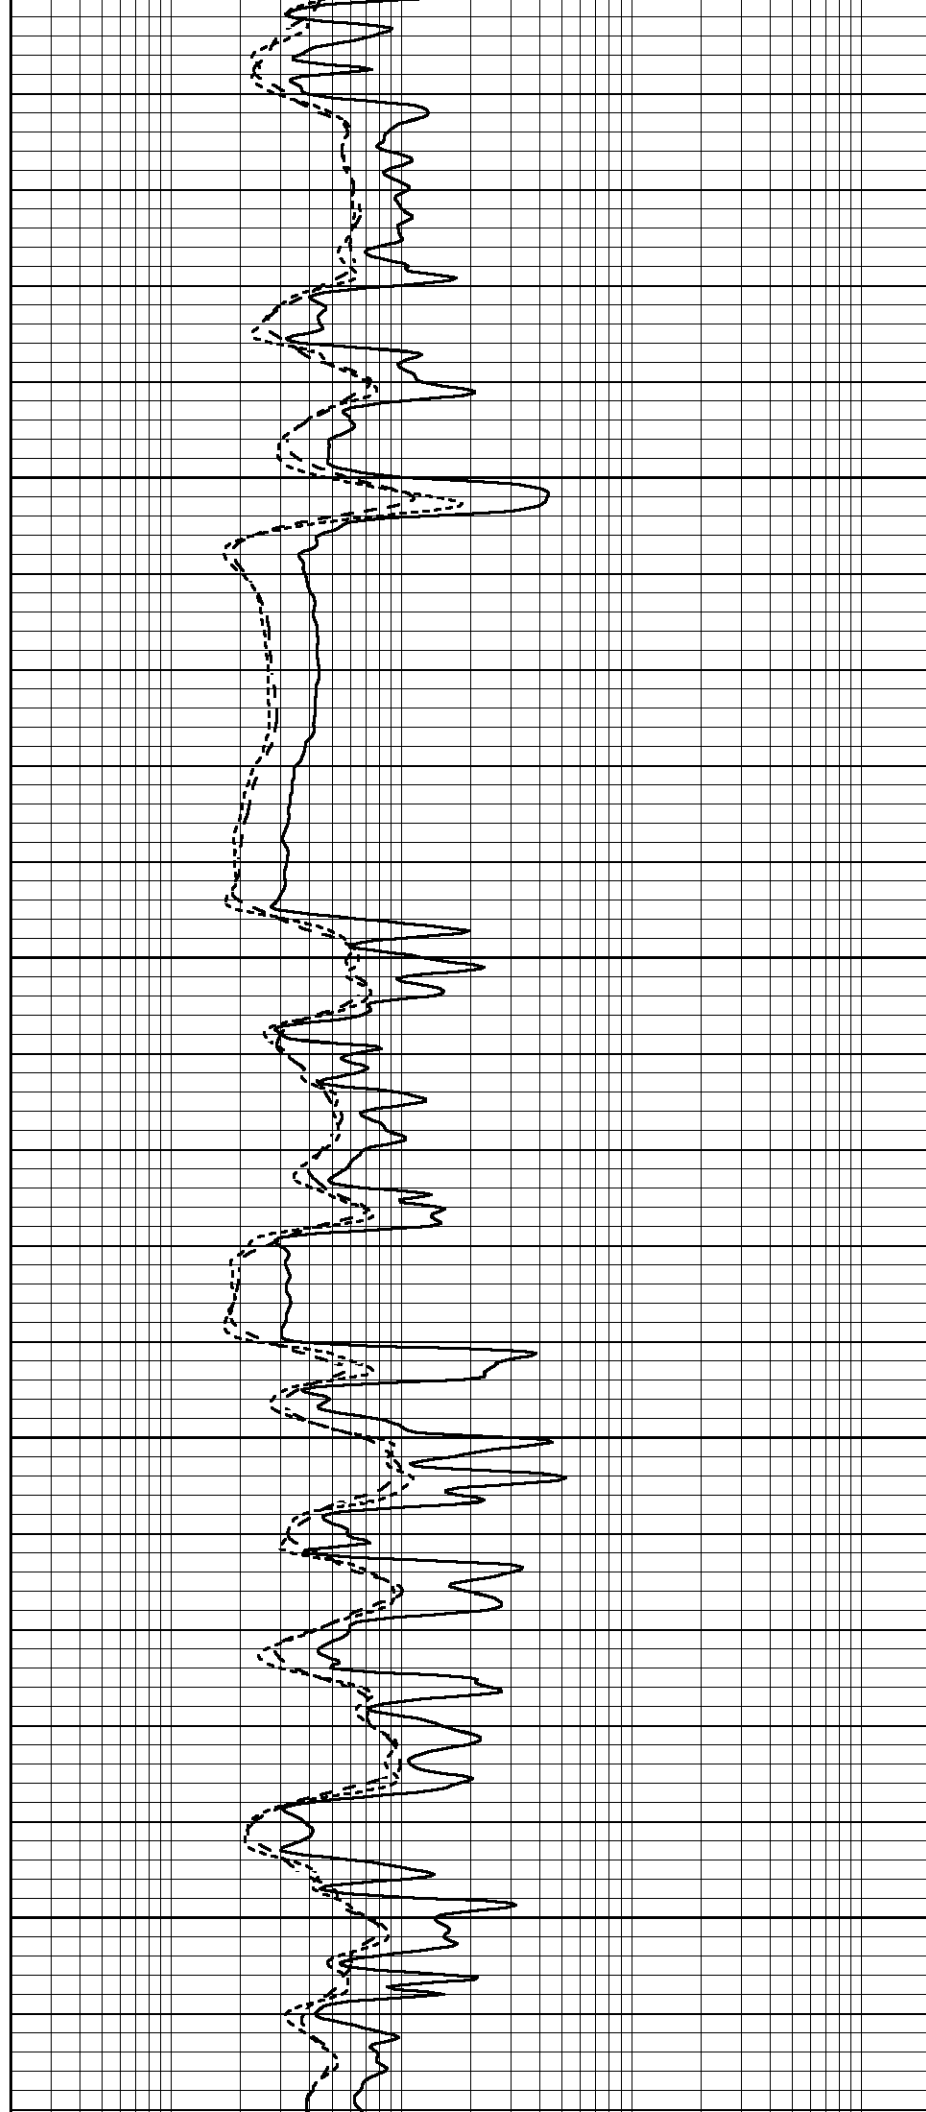

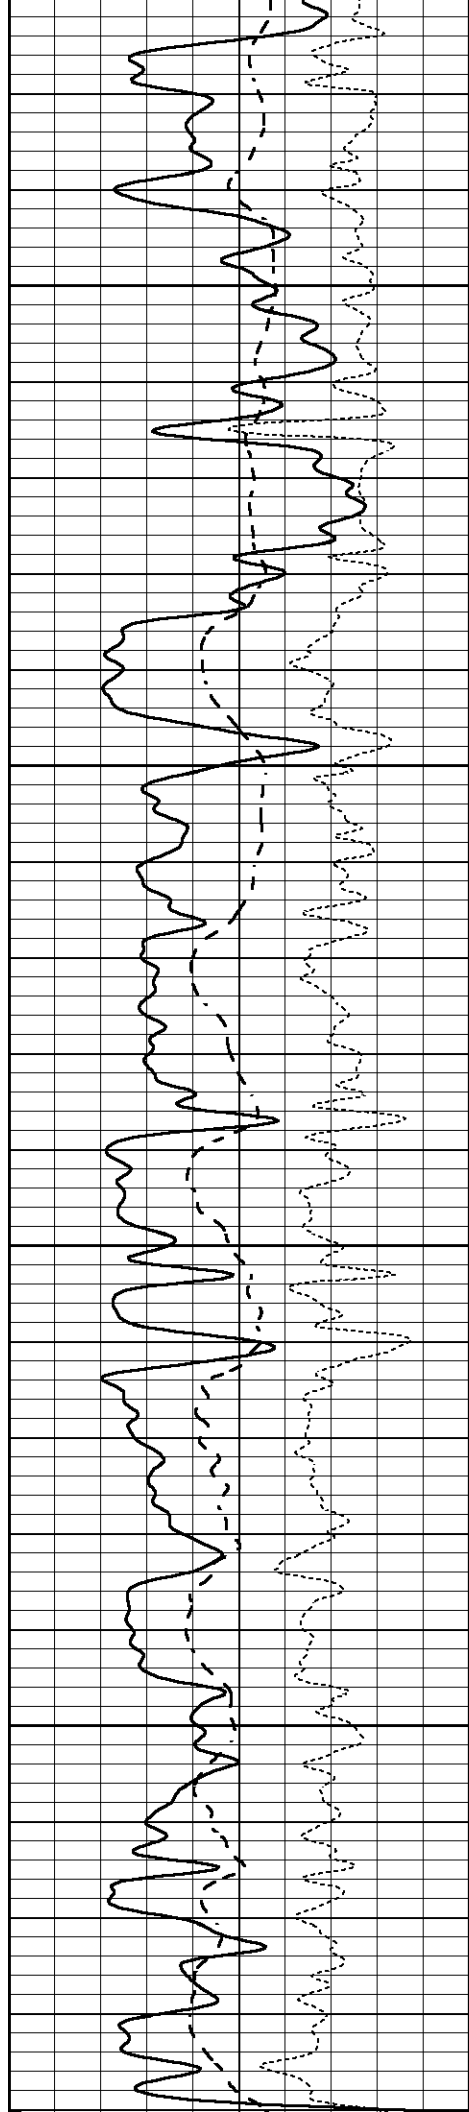



3400

3450

3500

3550

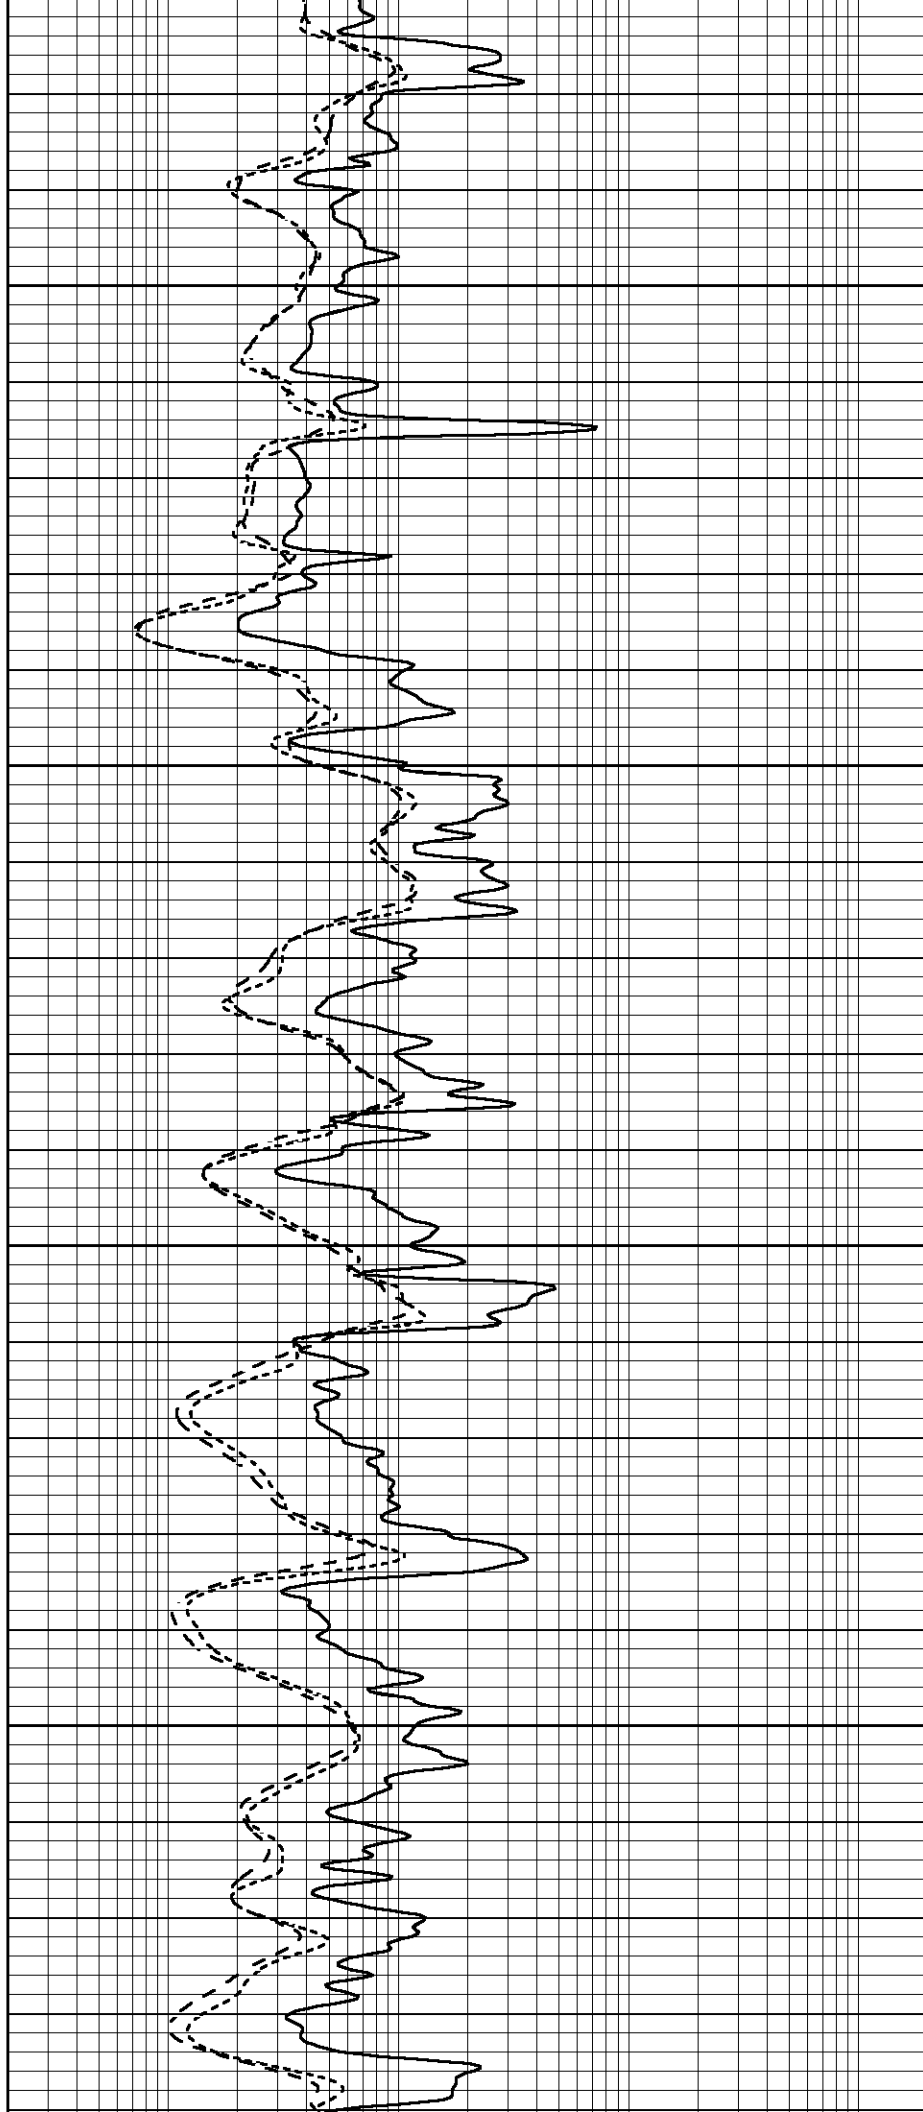

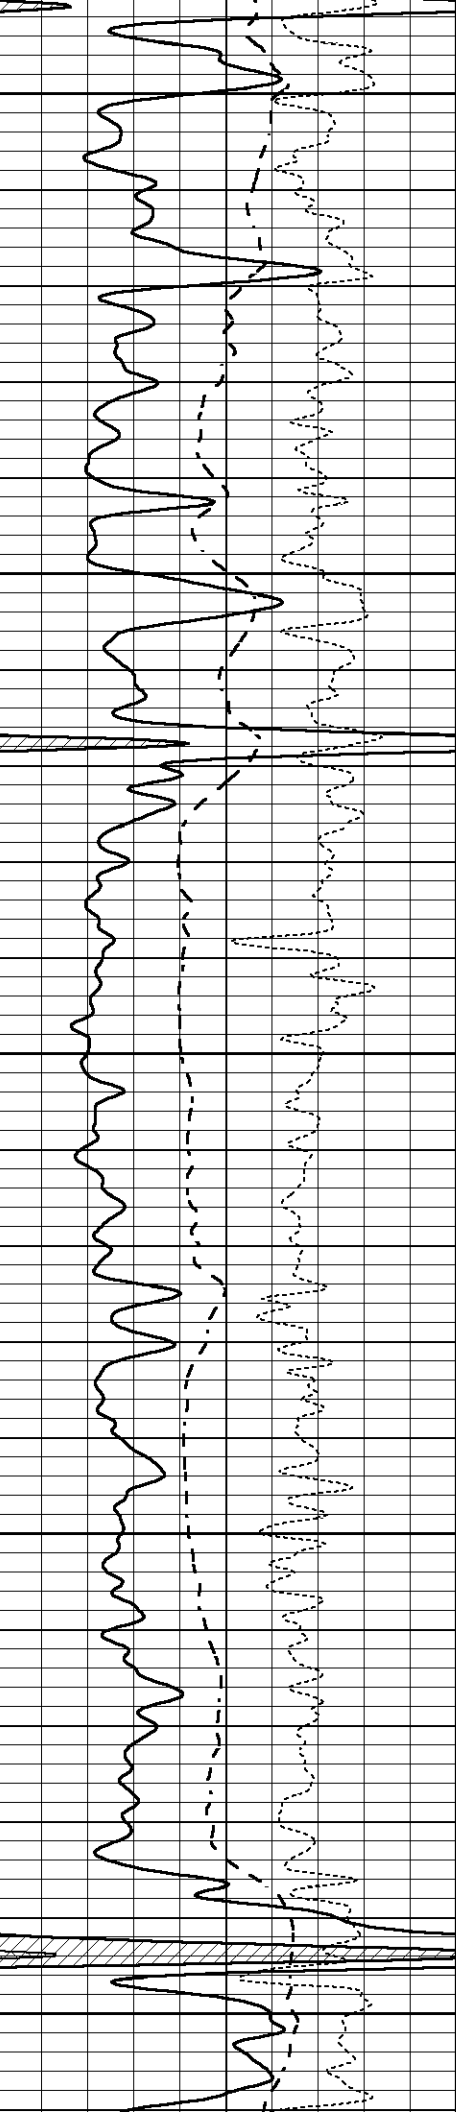


3600


3650

3700

3750

3800

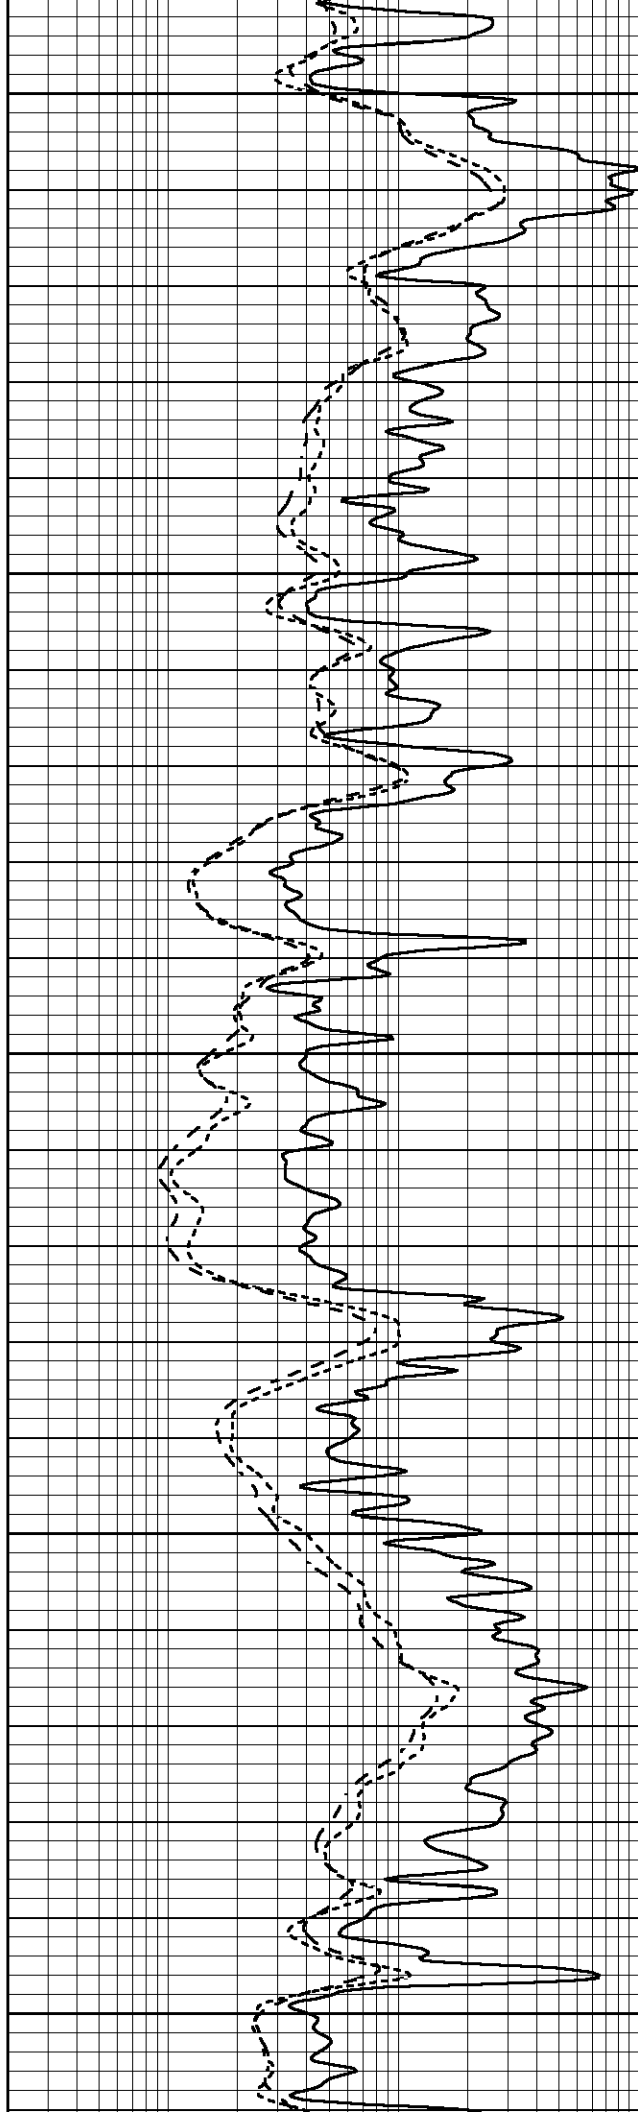

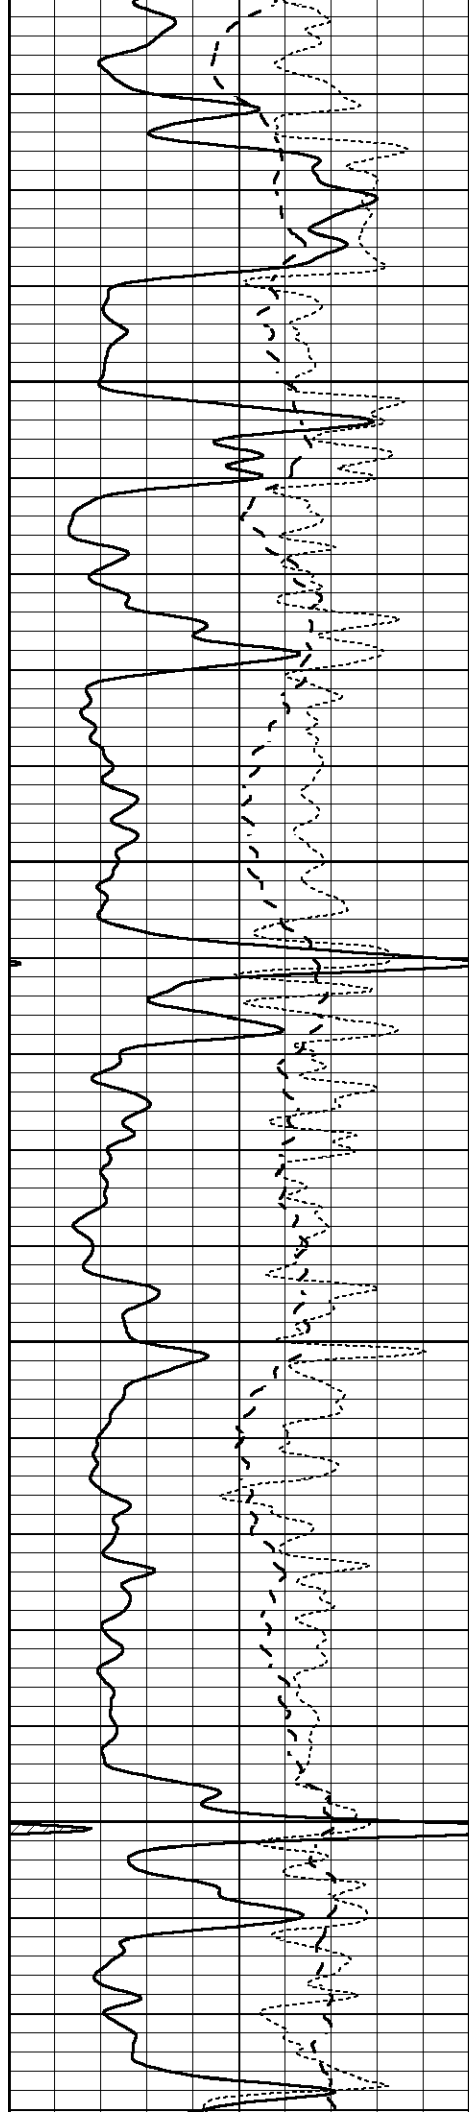



3850

3900

3950

4000

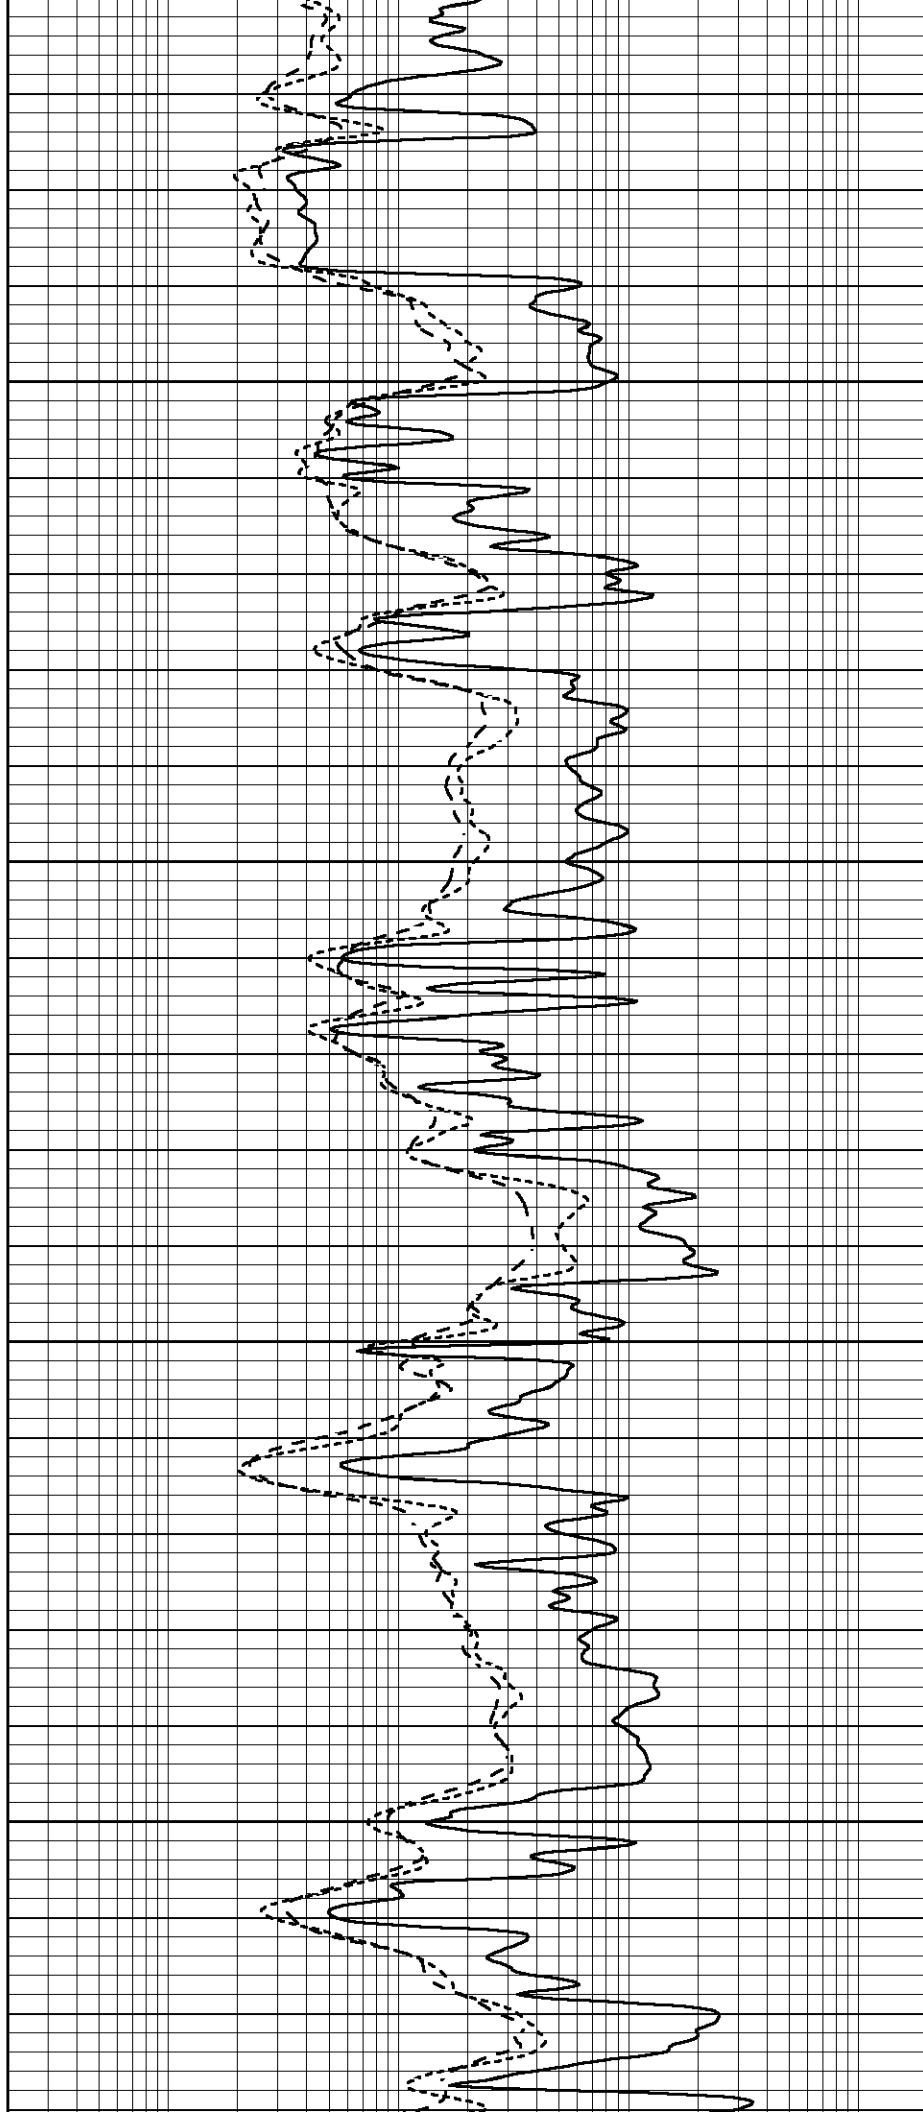

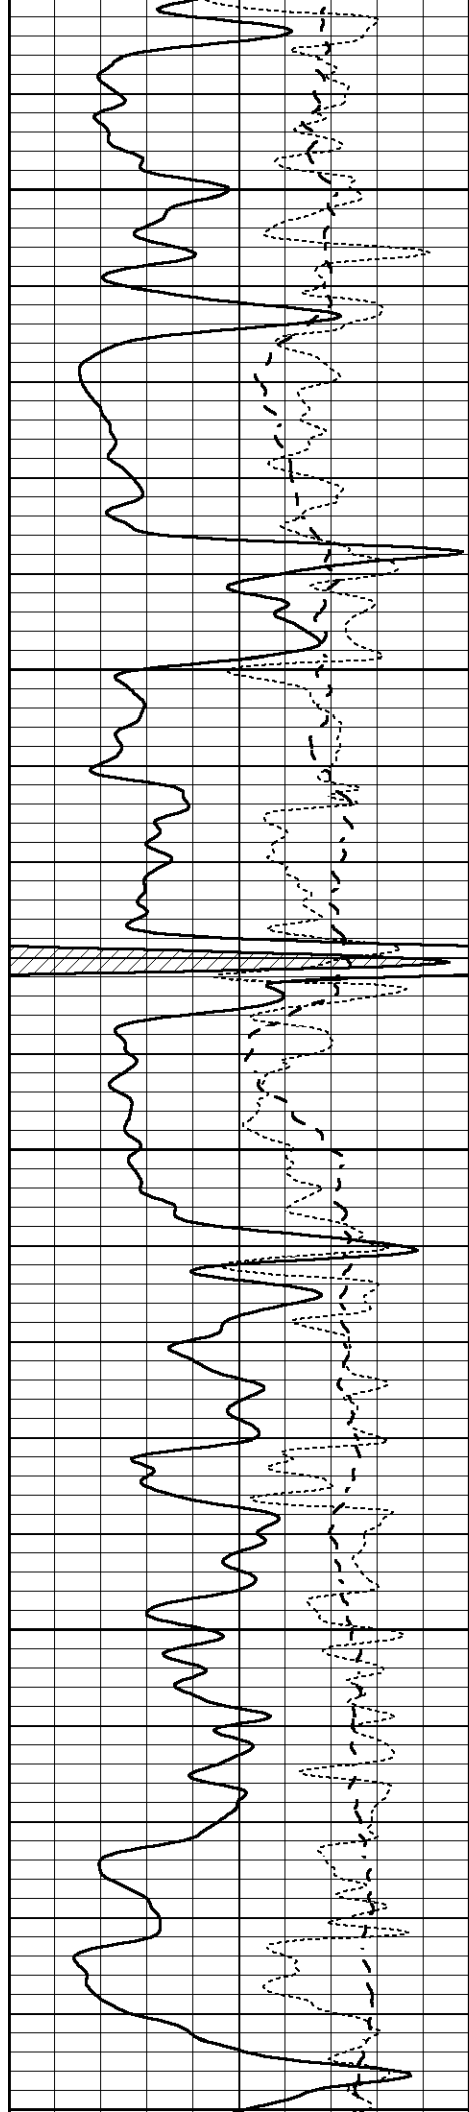


4050


4100

4150

4200

4250

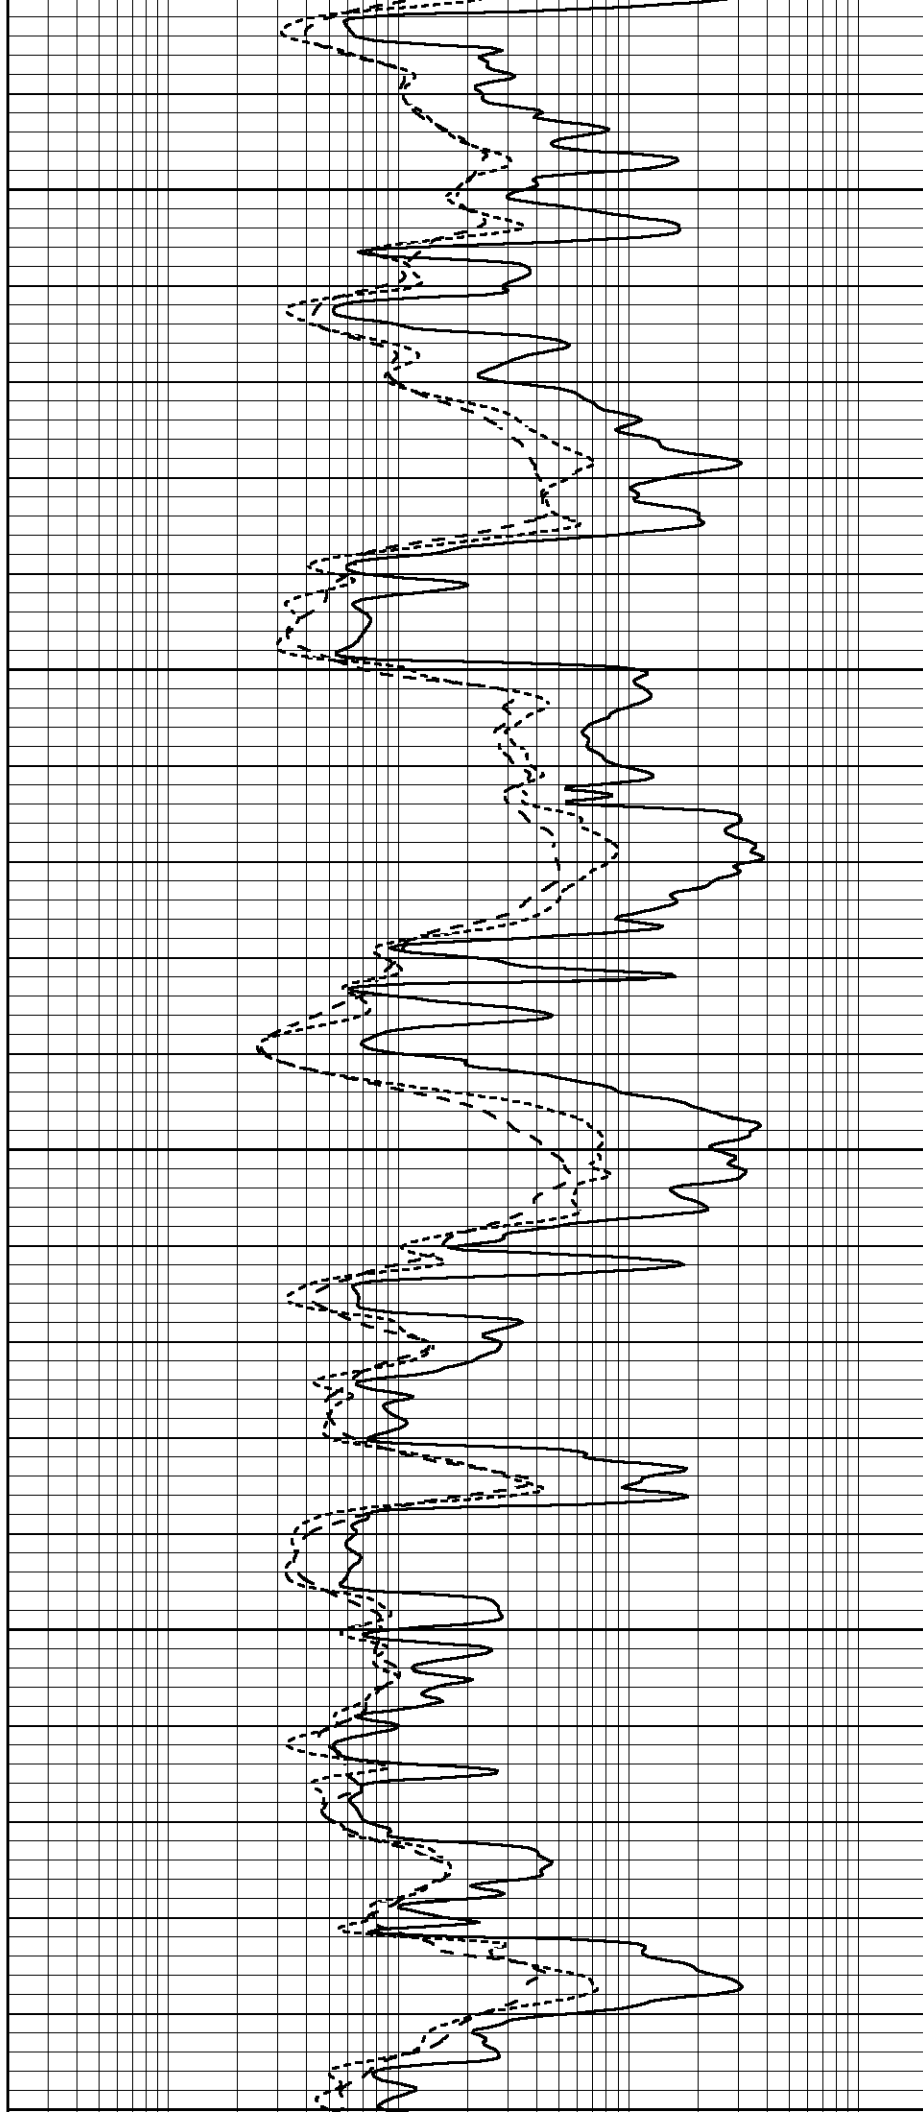

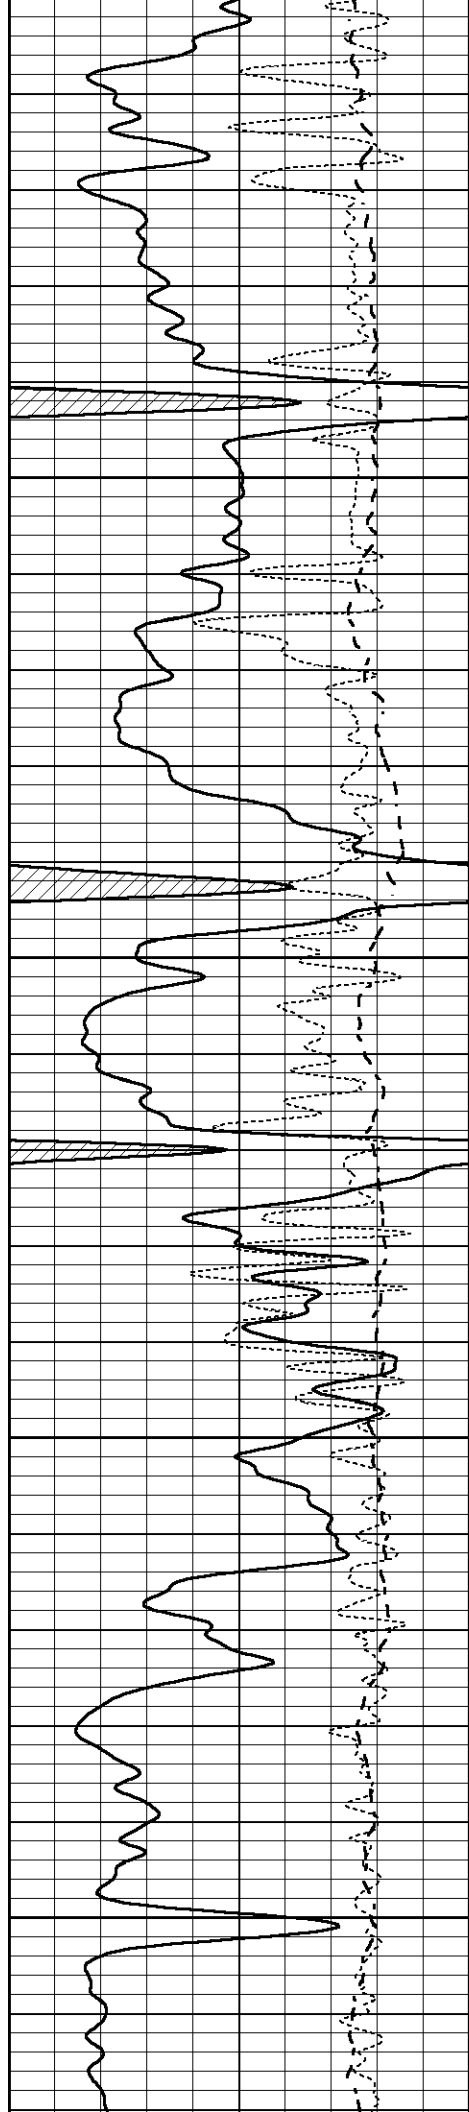


4250


4300

4350

4400


4450

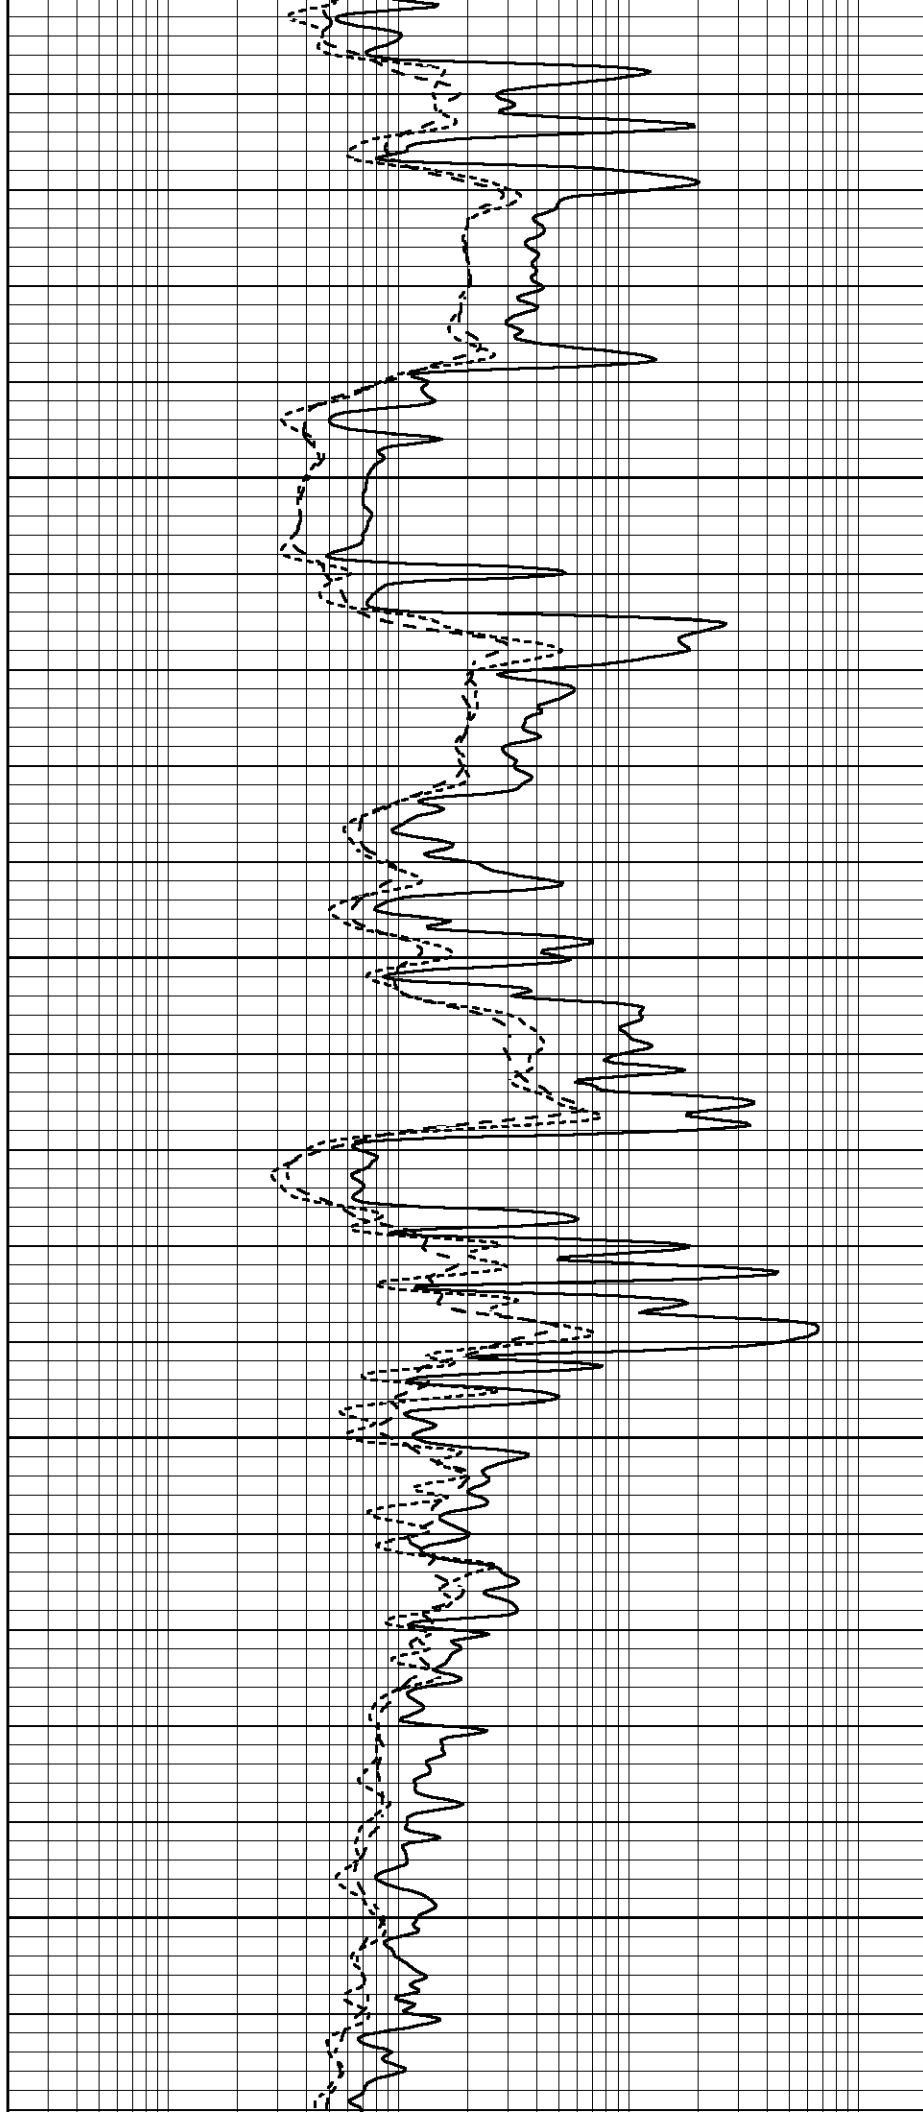

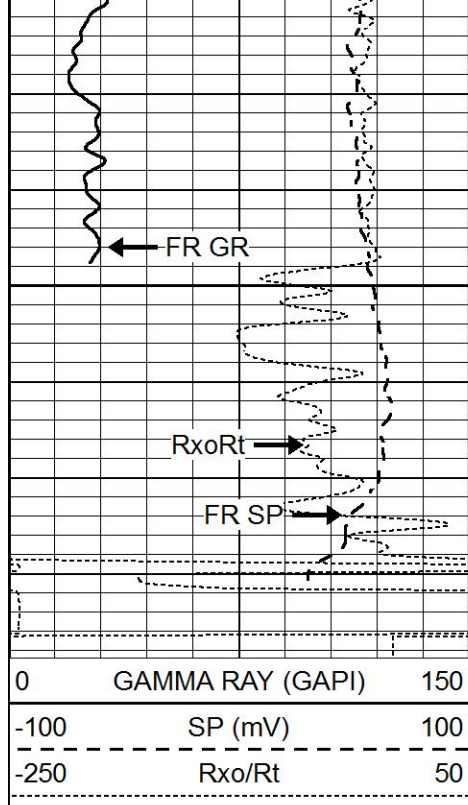


4500

LTD 4534

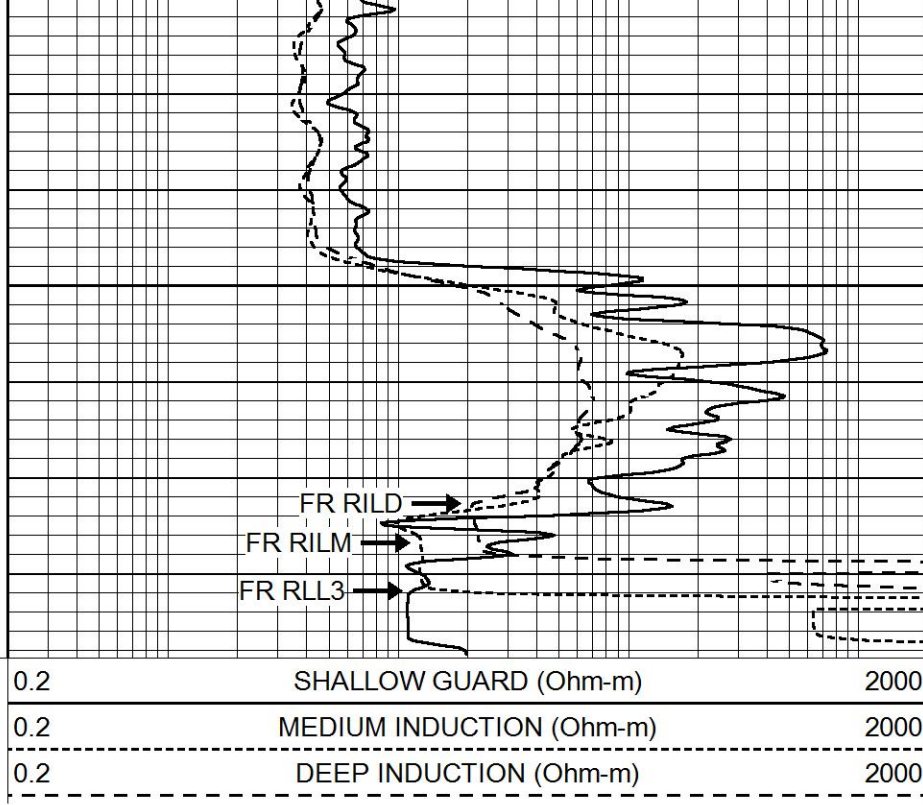


REPEAT SECTION


Database File 6054pe.db
 Dataset Pathname pass2.1
 Presentation Format _dil
 Dataset Creation Sat Nov 20 05:37:32 2021
 Charted by Depth in Feet scaled 1:240



4350

4400

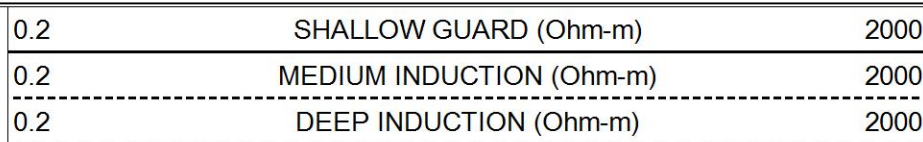

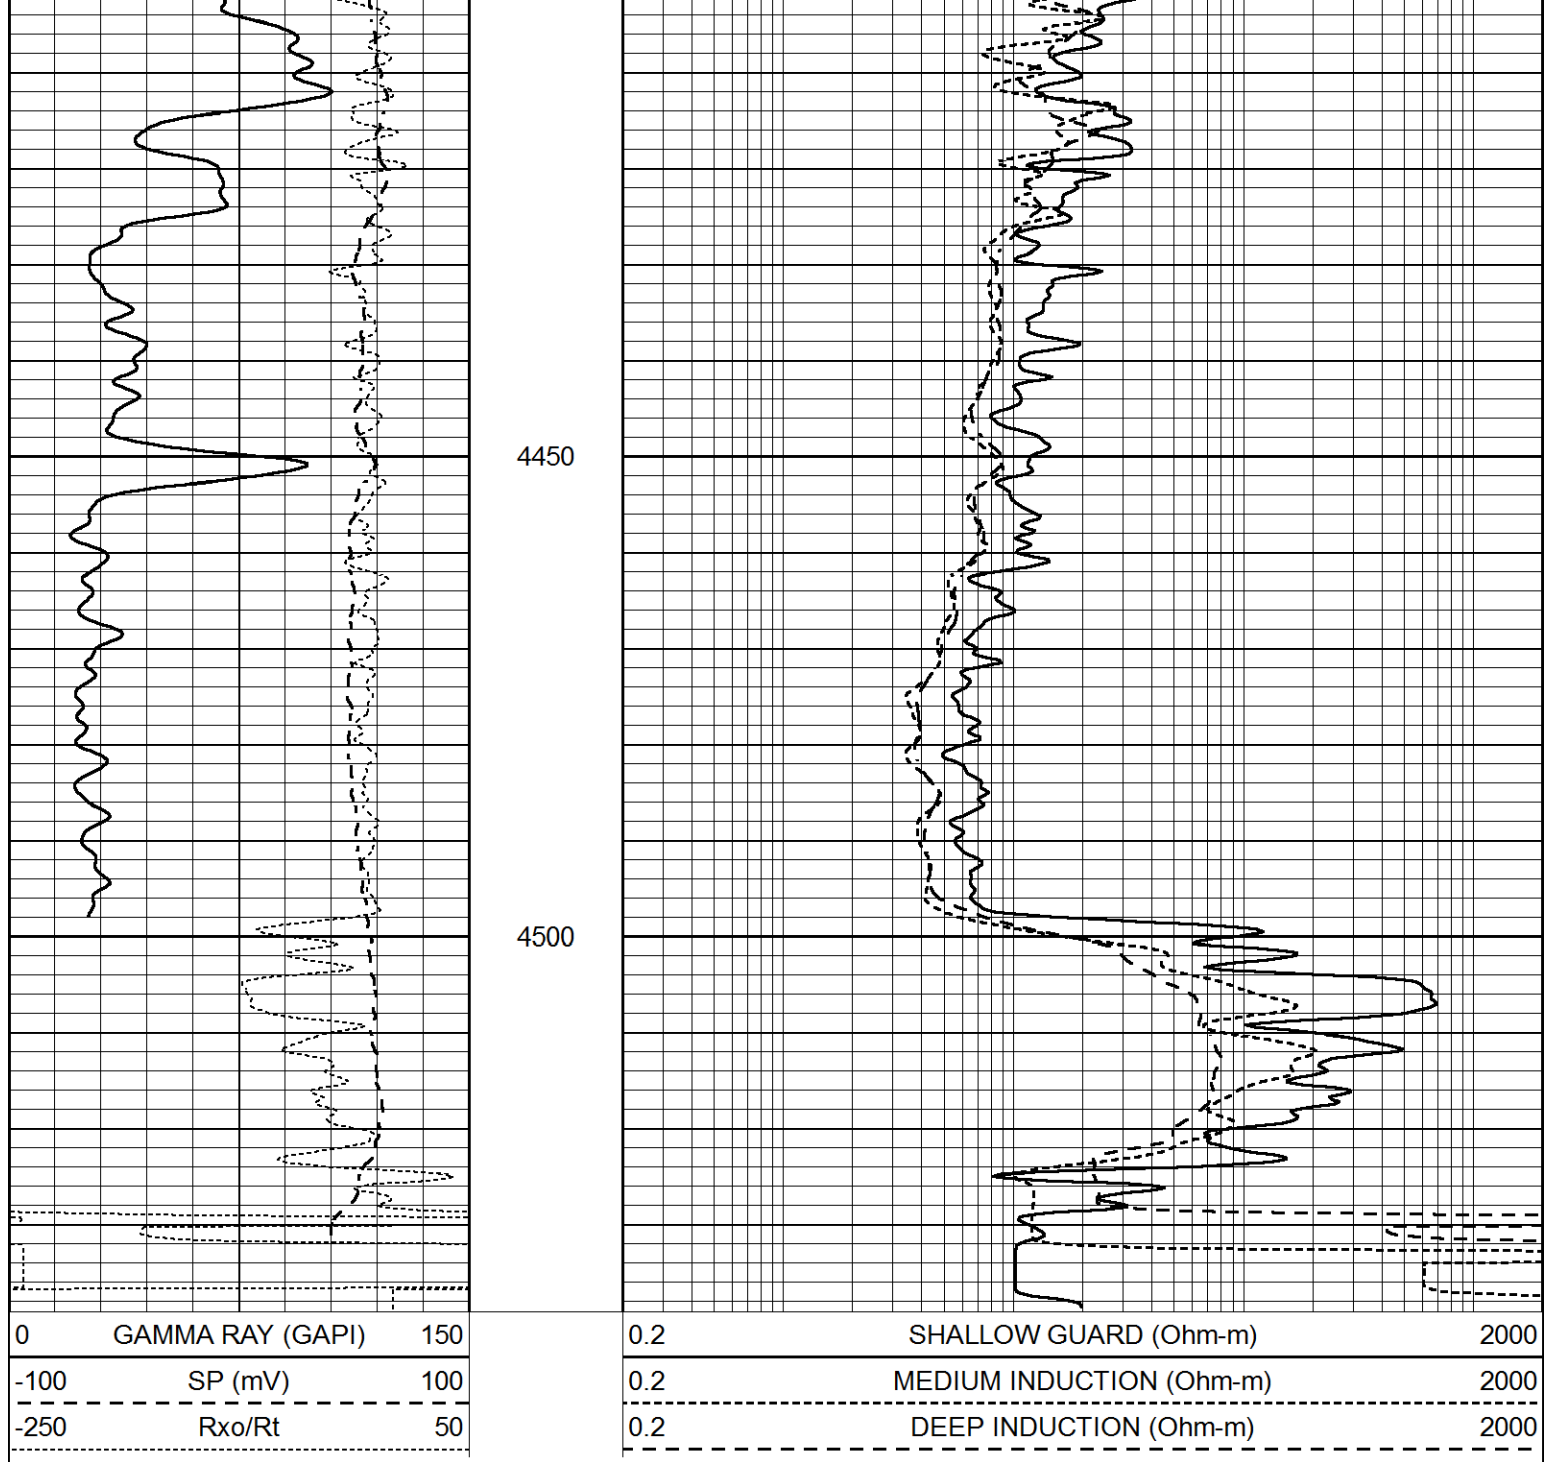

Calibration Report

Database File 6054pe.db
 Dataset Pathname pass2.1
 Dataset Creation Sat Nov 20 05:37:32 2021

Dual Induction Calibration Report

Serial-Model: FW1410-55-Probe
 Surface Cal Performed: Tue Feb 19 11:44:18 2019
 Downhole Cal Performed: Tue Feb 19 11:44:24 2019
 After Survey Verification Performed: Tue Feb 19 11:44:27 2019

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197

Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251
Downhole Calibration								
	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		
After Survey Verification								
	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		
Litho Density Calibration Report								
Serial: 140704								
Model: V4_10P								
Source Number: 74GBq-19								
Master Calibration				Performed: Mon Dec 07 12:12:14 2020				
	Background	Aluminum		Magnesium				
Window 1	557.73	5525.14		24361.20	cps			
Window 2	47.08	1245.09		5901.17	cps			
Window 4	239.06	1250.70		5456.76	cps			
Window 5	564.08	8300.56		16134.07	cps			
Window 6	44.21	1356.78		2705.40	cps			
Window 8	267.87	2686.97		5150.30	cps			
Bulk Density	-	2.6020		1.6830	g/cc			
Pe	-	3.0000		2.5070	b/e			
LS Alpha:	: -1.8719	SS Alpha:	: -0.8000	LS CPE:		: 1.1424		
LS Beta:	: 135562.6841	SS Beta:	: 20128.7209	SS CPE:		: 1.5489		
Before Survey Background Counts Verification				Performed: Wed Dec 31 18:00:00 1969				
Window 1	0.00	cps						
Window 2	0.00	cps						
Window 4	0.00	cps						
Window 5	0.00	cps						
Window 6	0.00	cps						
Window 8	0.00	cps						
After Survey Background Counts Verification				Performed: Wed Dec 31 18:00:00 1969				
Window 1	0.00	cps						
Window 2	0.00	cps						
Window 4	0.00	cps						

Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

Lithodensity Caliper Calibration

Performed: Mon Dec 07 12:12:14 2020

Results	Readings	References (in)			
Low	High	Low	High	Gain	Offset
5852.8	8972.7	8.0	14.0	0.0	-3.5

Before Survey Caliper Verification

Performed:

	Reference	Reading
Caliper (in)		

After Survey Caliper Verification

Performed:

	Reference	Reading
Caliper (in)		

Compensated Neutron Calibration Report

Serial Number:	080621PMC
Tool Model:	NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Tue Jan 19 17:50:08 2021	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5300	GAPI/cps