



P.O. BOX 438
Haysville, KS 67060

CEMENT BOND LOG

Company **DOUBLE D OIL COMPANY**
Well **BYERS #1 SWD**
Field **FROG HOLLOW**
County **COWLEY**
State **KANSAS**

Company **DOUBLE D OIL COMPANY**
Well **BYERS #1 SWD**
Field **FROG HOLLOW**
County **COWLEY** State **KANSAS**

Location
4272 NORTH, 3489 WEST OF SE CORNER
SEC. **21** TWP. **32S** RGE. **5E**

Other Services
Permanent Datum
Log Measured From
Drilling Measured From
GROUND LEVEL
GROUND LEVEL
GROUND LEVEL

Elevation
K.B.
D.F.
G.L.

Date **12-28-2021**

Run Number	ONE
Depth Driller	1963
Depth Logger	1915
Bottom Logged Interval	1914
Top Log Interval	0
Open Hole Size	
Type Fluid	WATER
Density / Viscosity	
Max. Recorded Temp.	
Estimated Cement Top	404
Time Well Ready	
Time Logger on Bottom	
Equipment Number	409
Location	GREAT BEND
Recorded By	LEE BRETZ
Witnessed By	MR. DON BUTLER

Borehole Record			Tubing Record		
Run Number	Bit	From	To	Size	Weight
					From
					To

Casing Record	Size	Wgt/Ft	Top	Bottom
Surface String	7"		0	350
Prot. String				
Production String	4.5		0	1963
Liner				


<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING GRESSEL OIL FEILD SERVICE!

9	Collar Locator	-1	0	AMP3 (mV)	100	250	WVF3FT	1250
0	Gamma Ray (GAPI)	150	0	X5 AMP (mV)	20			
0	LTEN (lb)	500						
320	TT3FT (usec)	120						

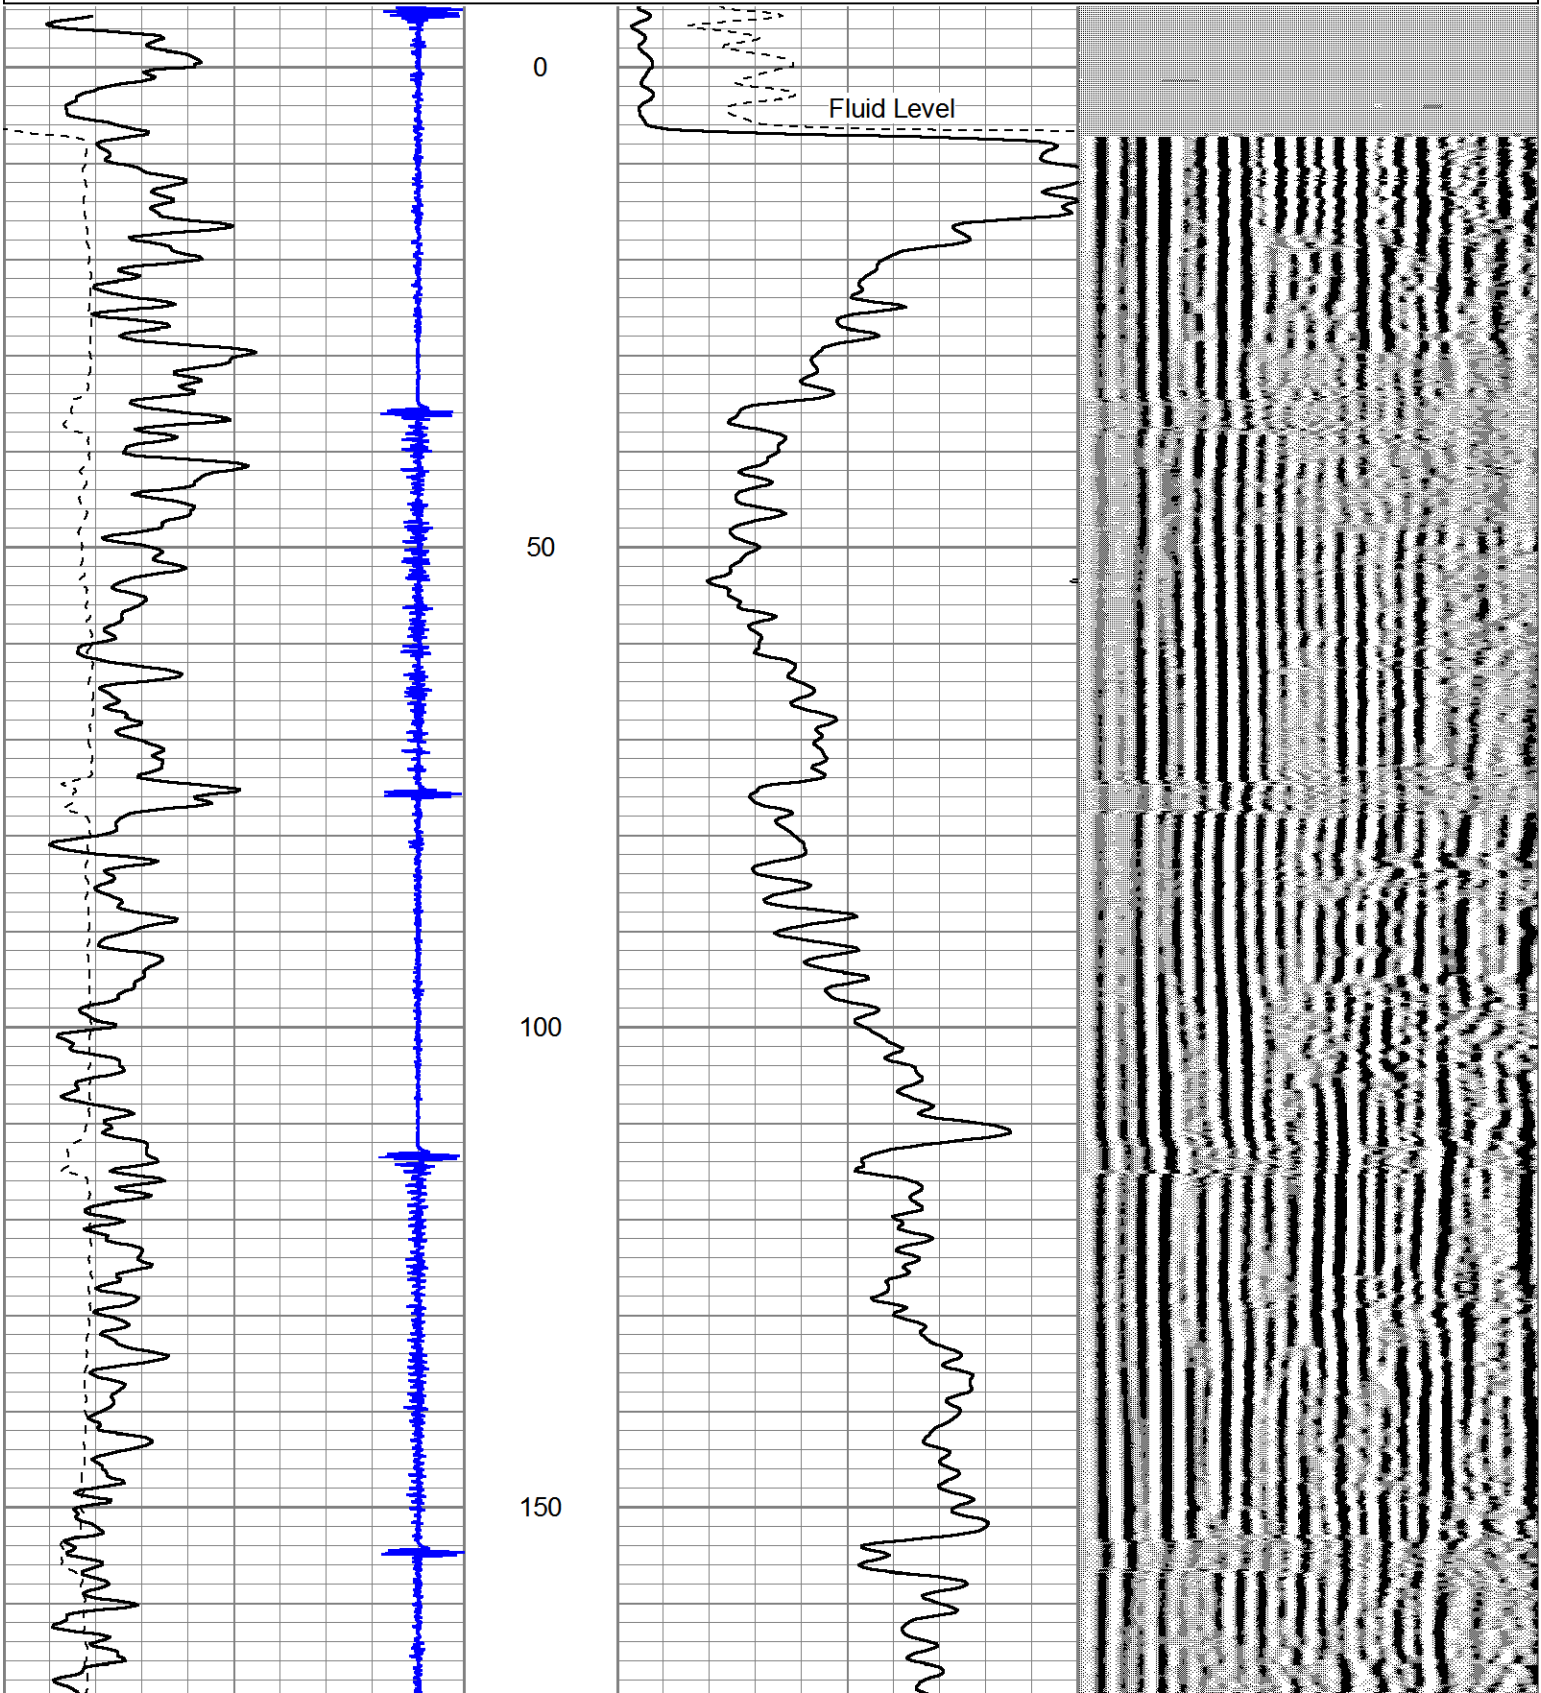


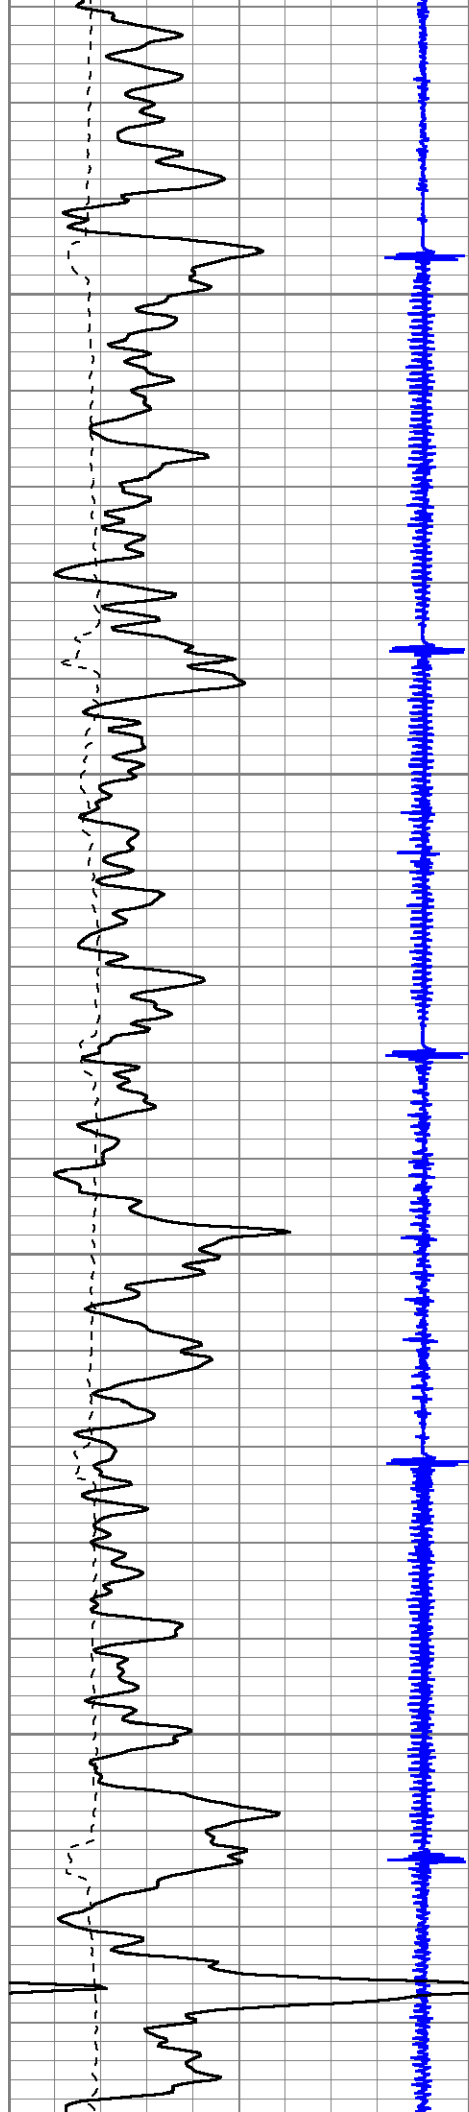



200

250

300

350

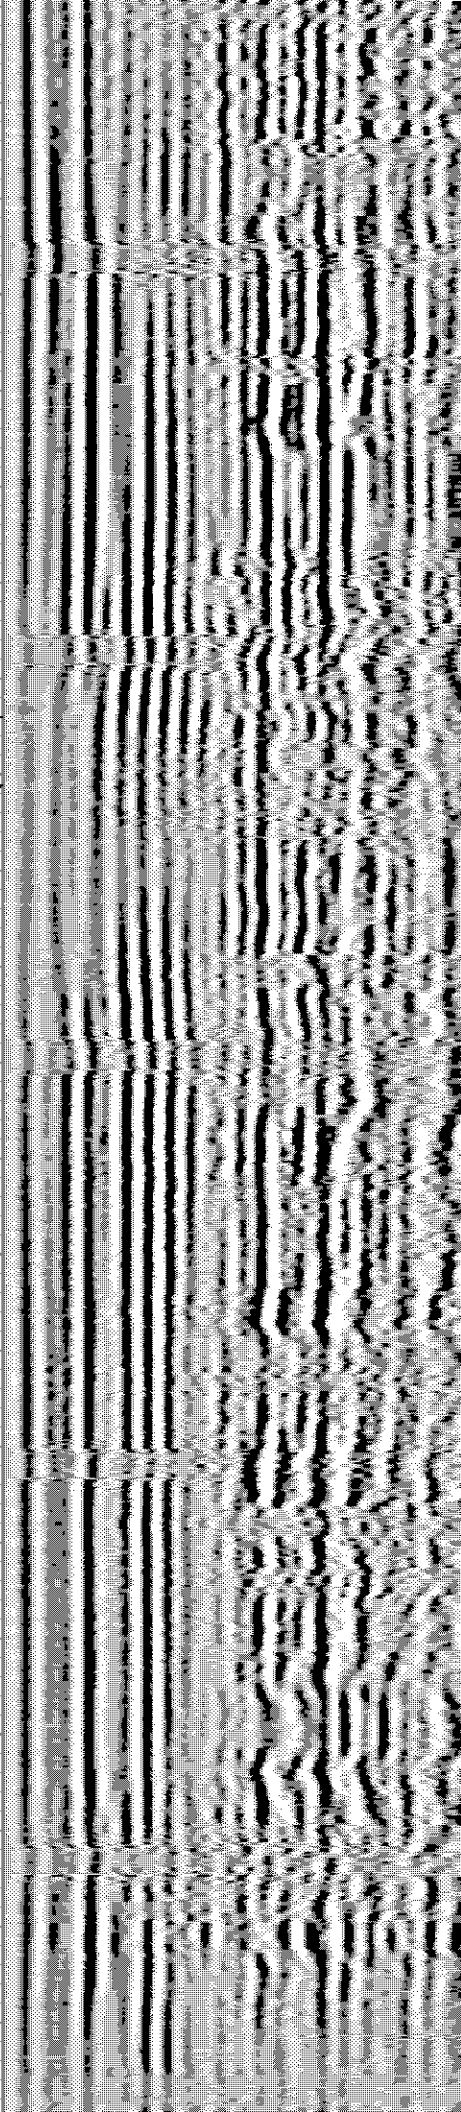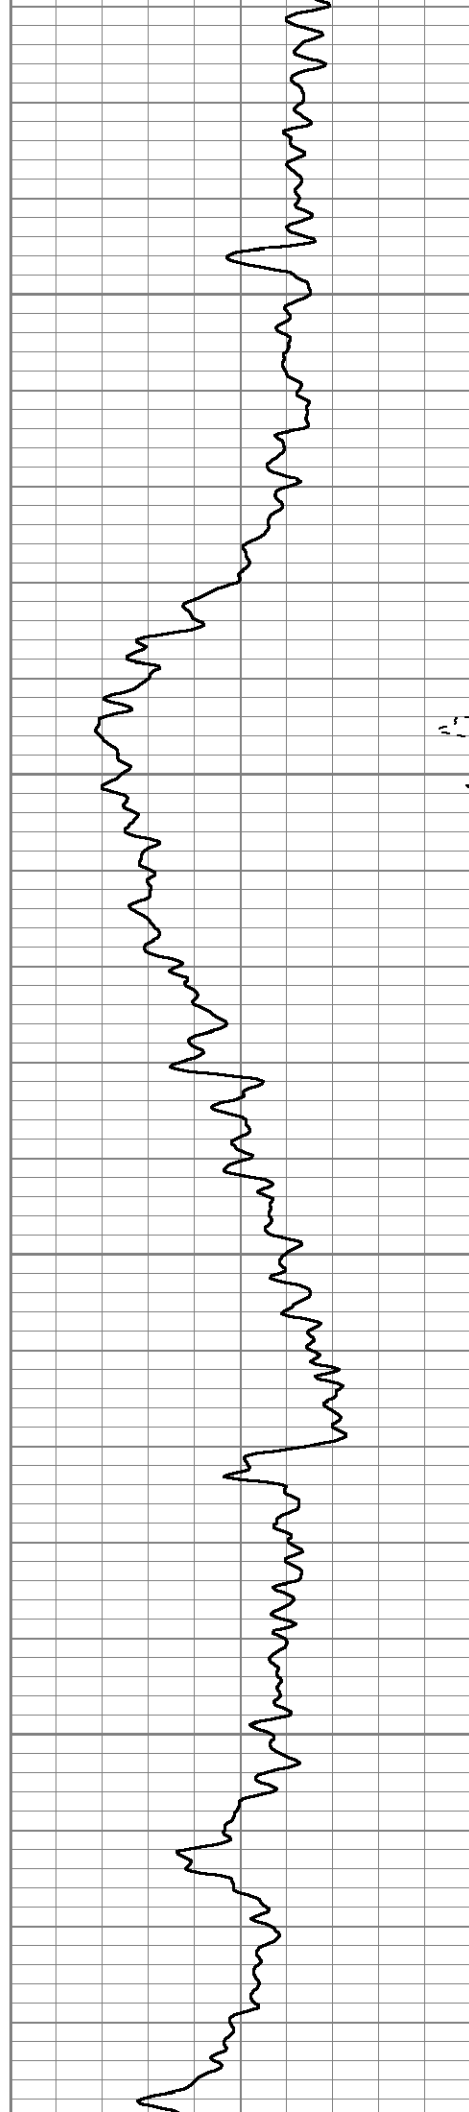

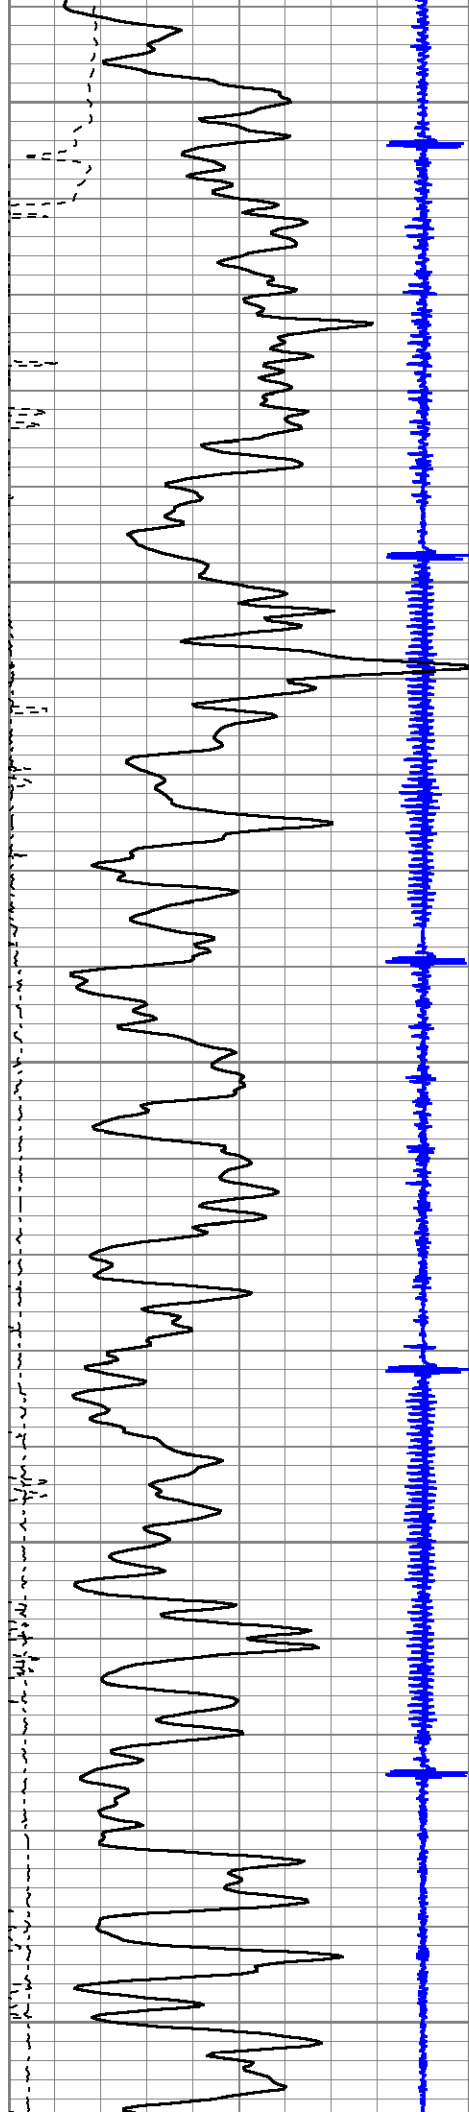



400


450

500

550

600

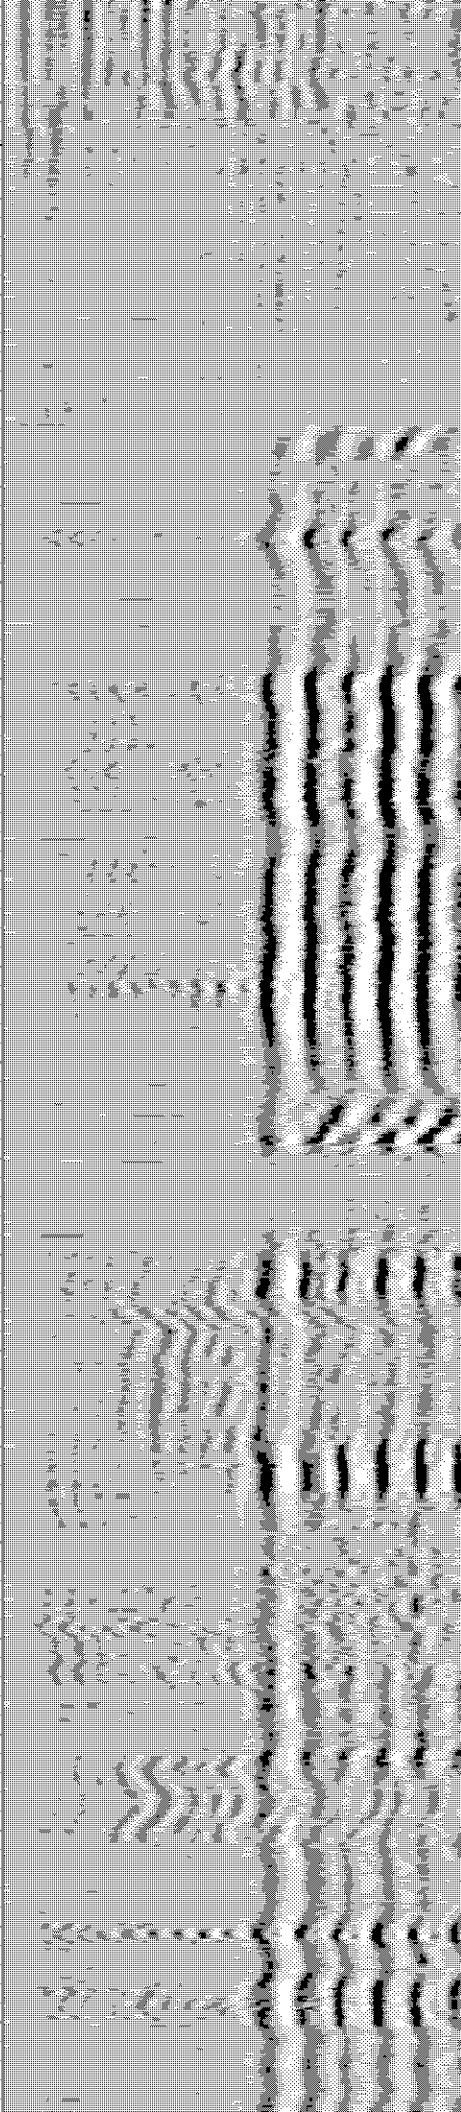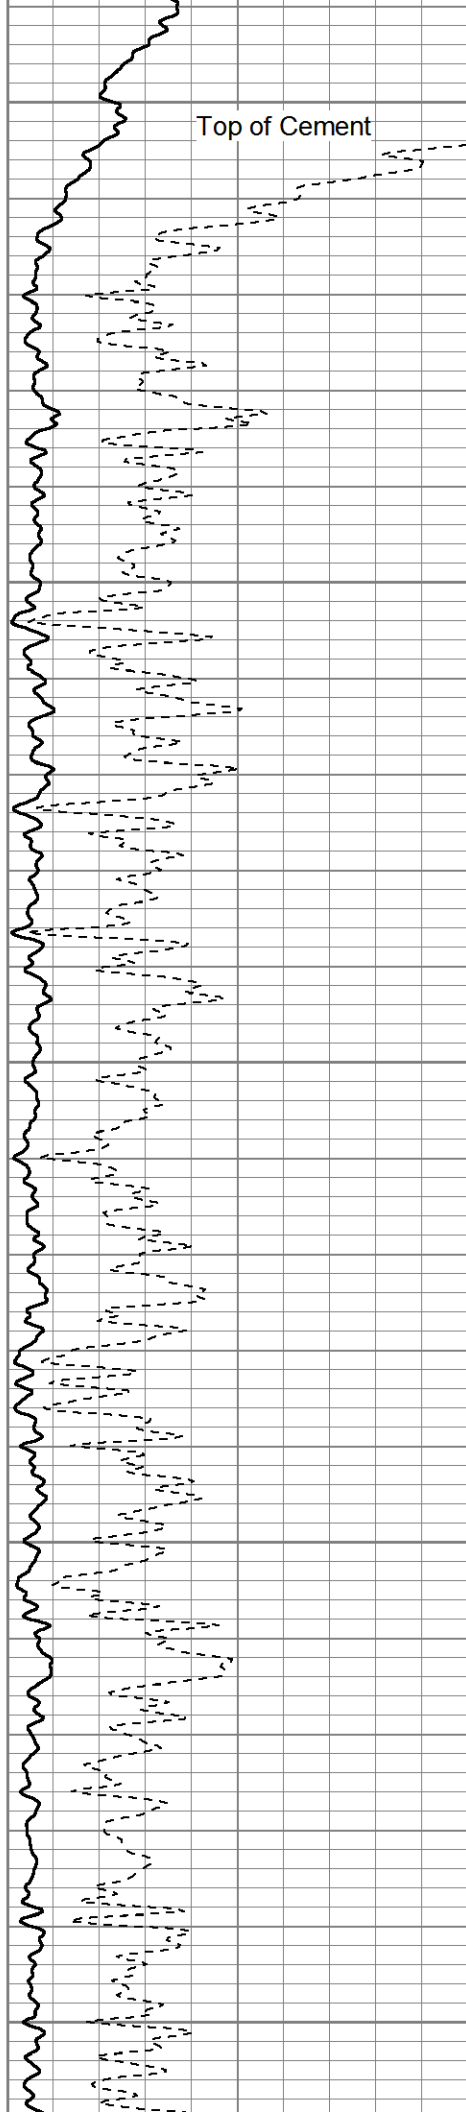


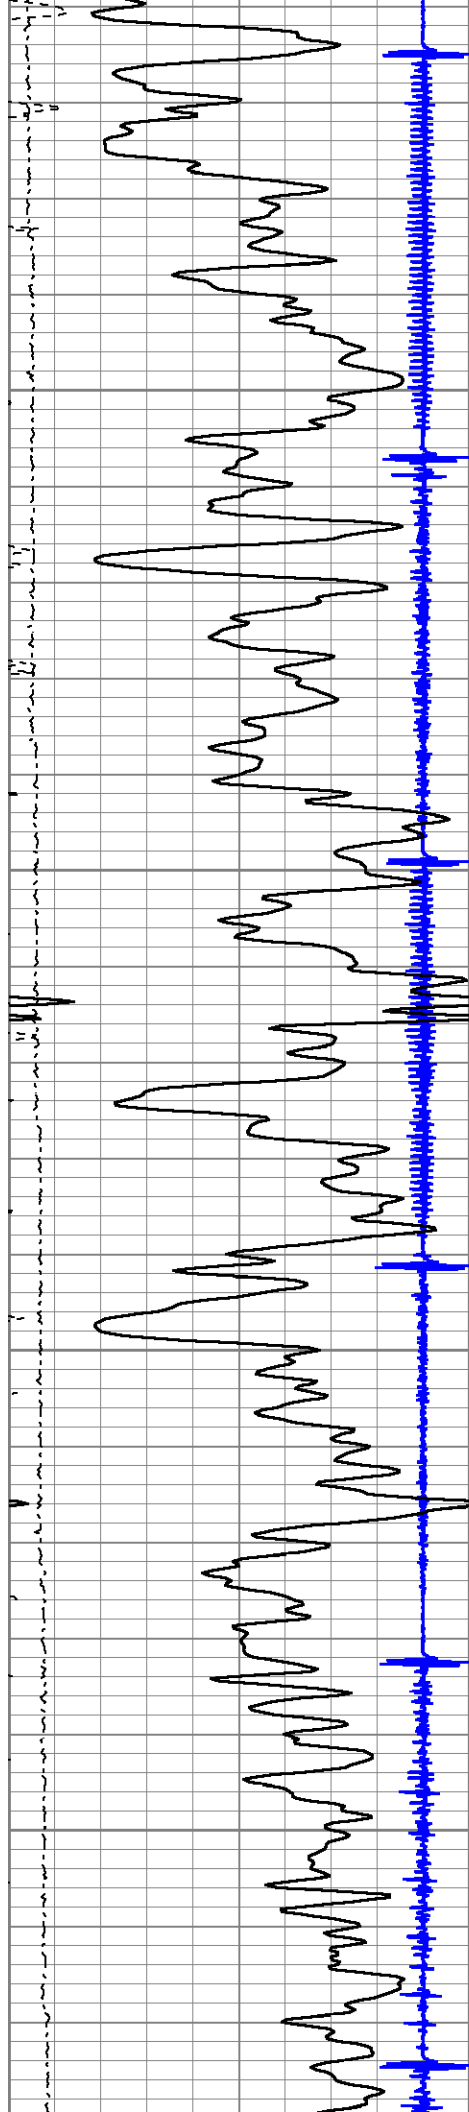



650

700

750

800

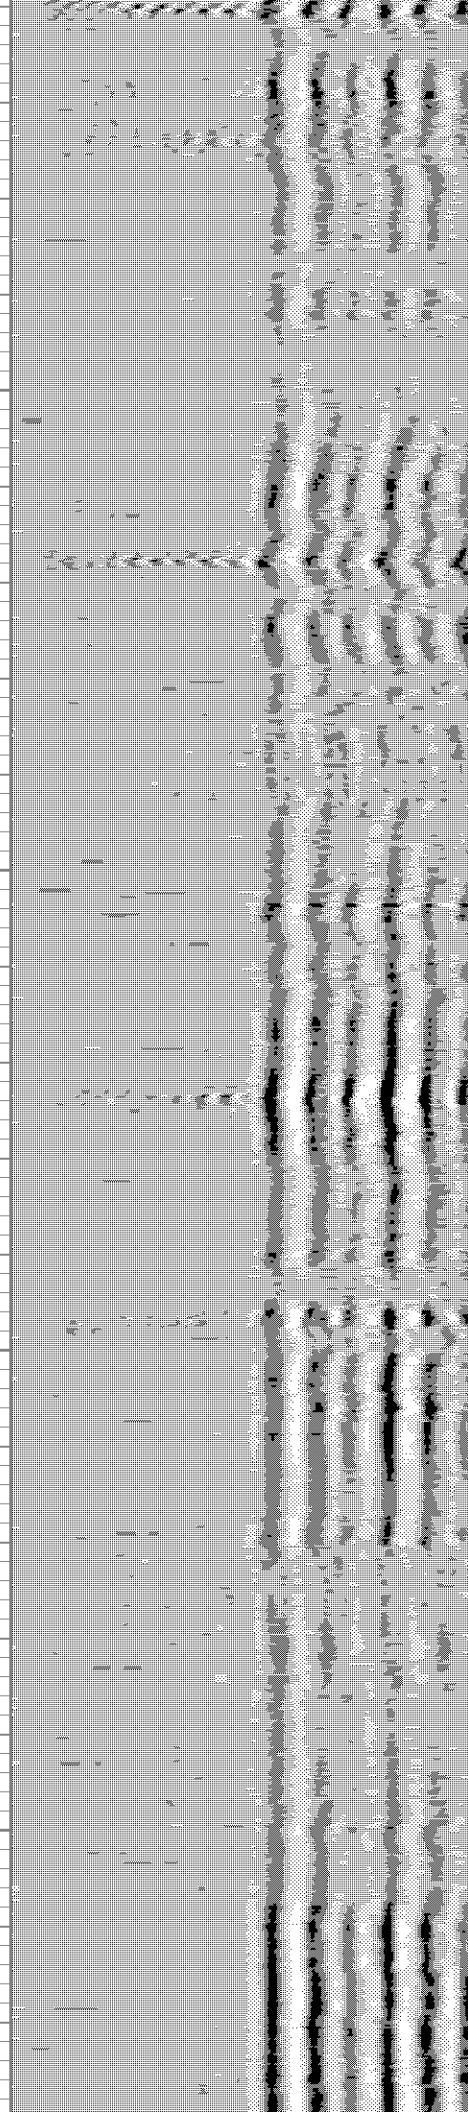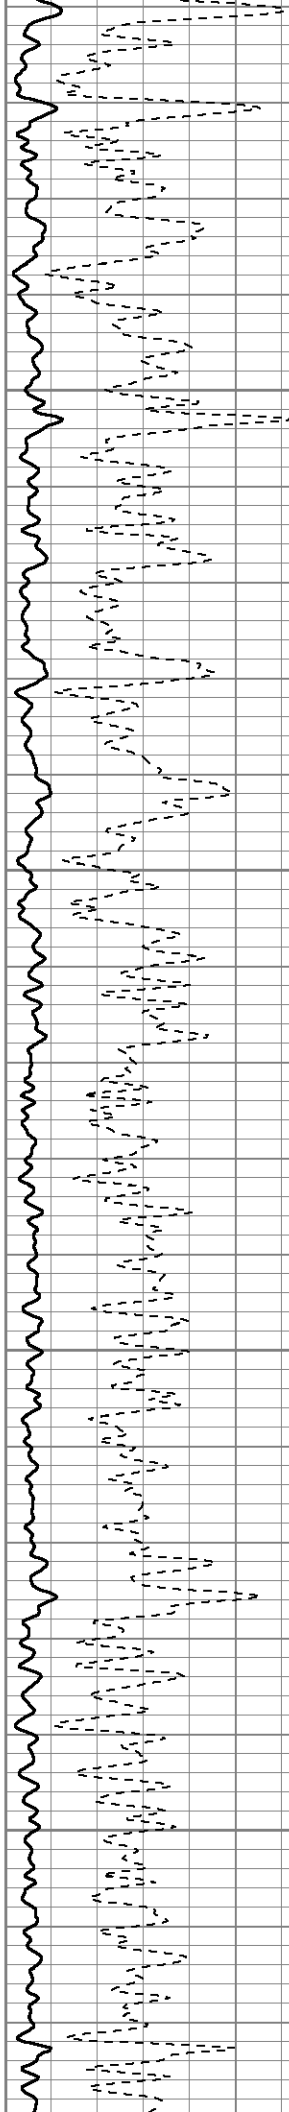

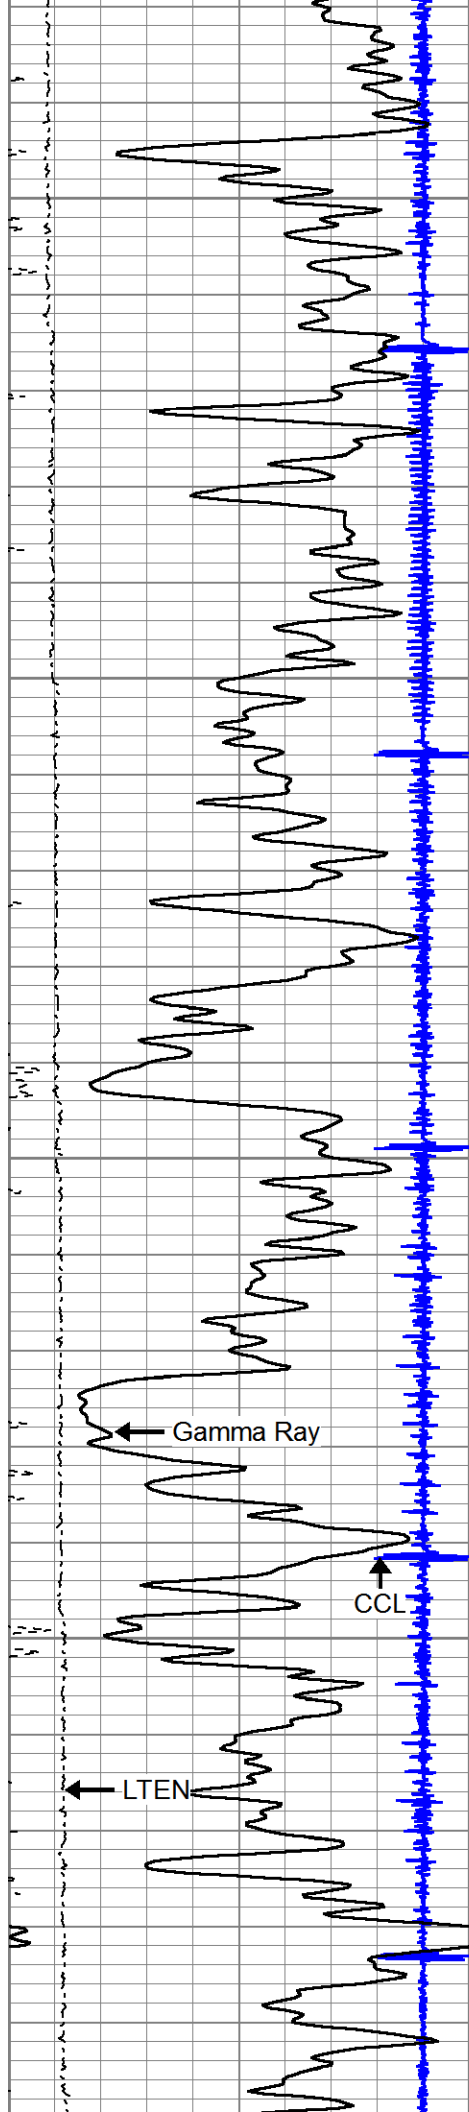


850

900

950

1000


1050

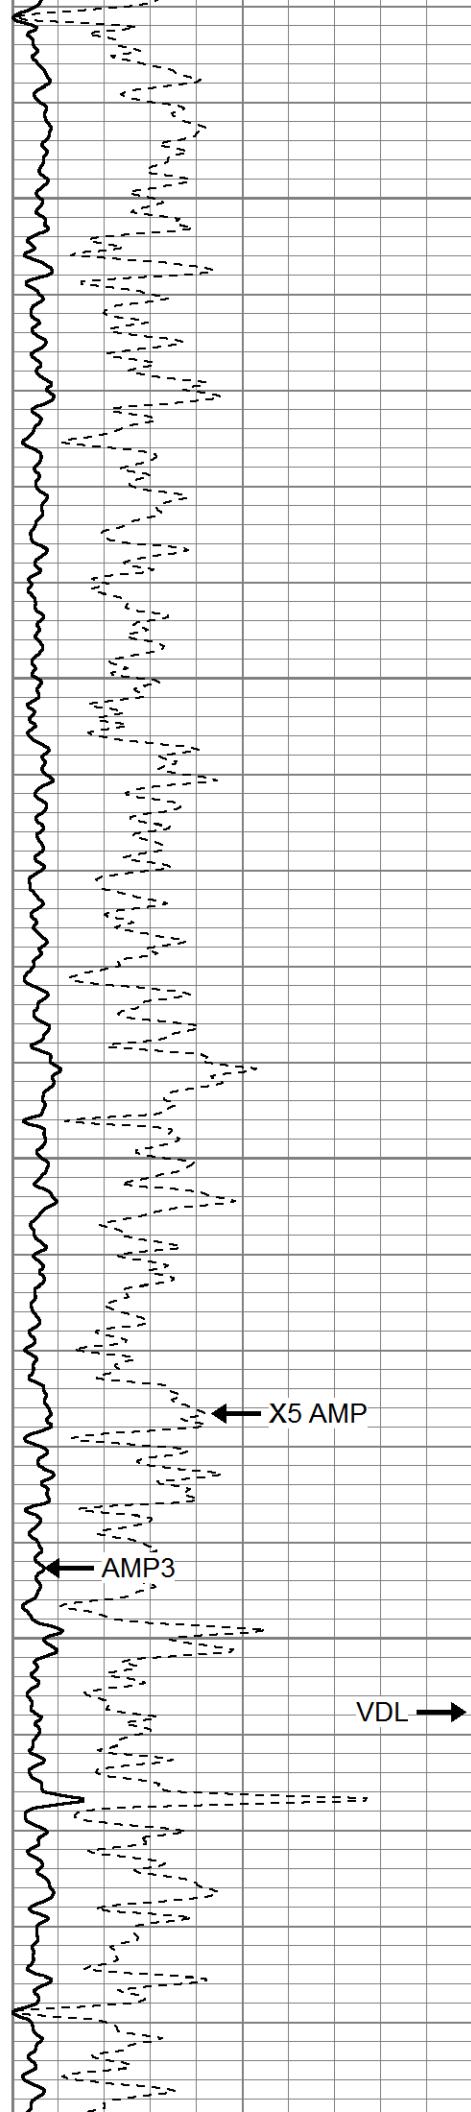



X5 AMP


AMP3

VDL

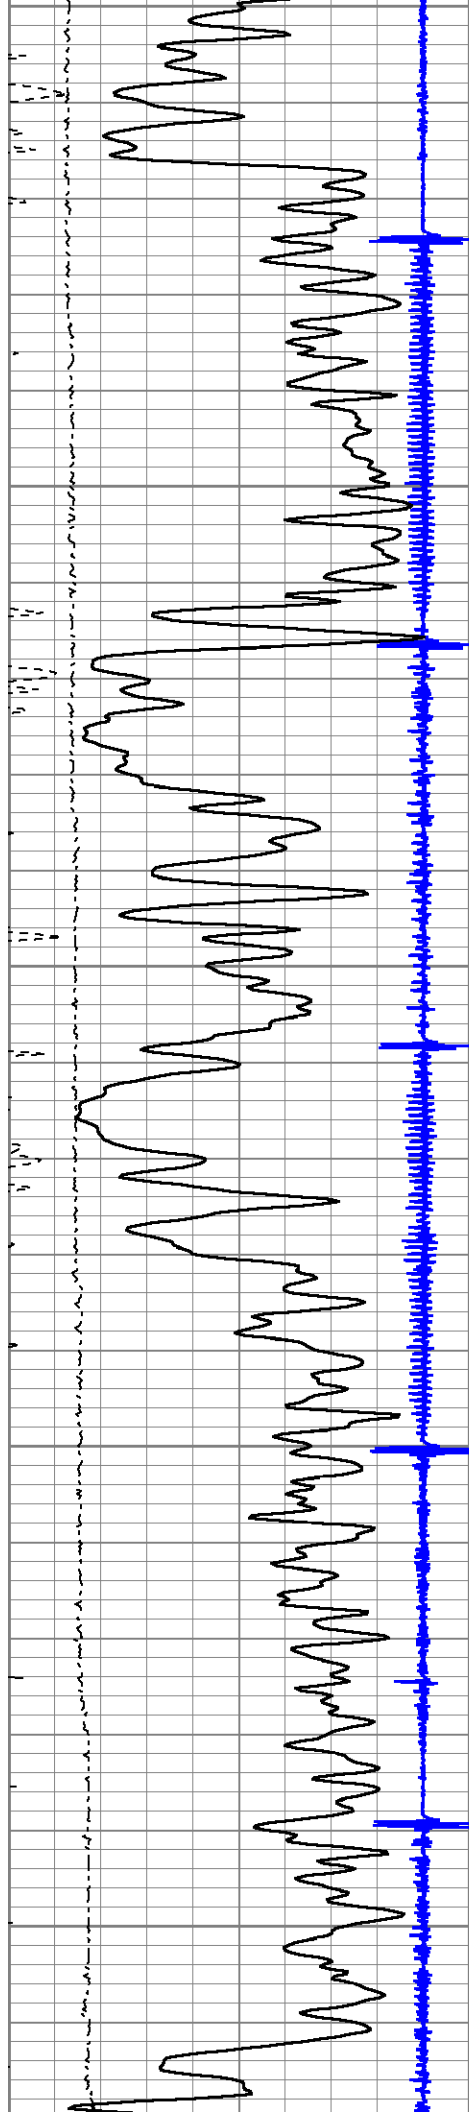

1050
1100
1150
1200
1250

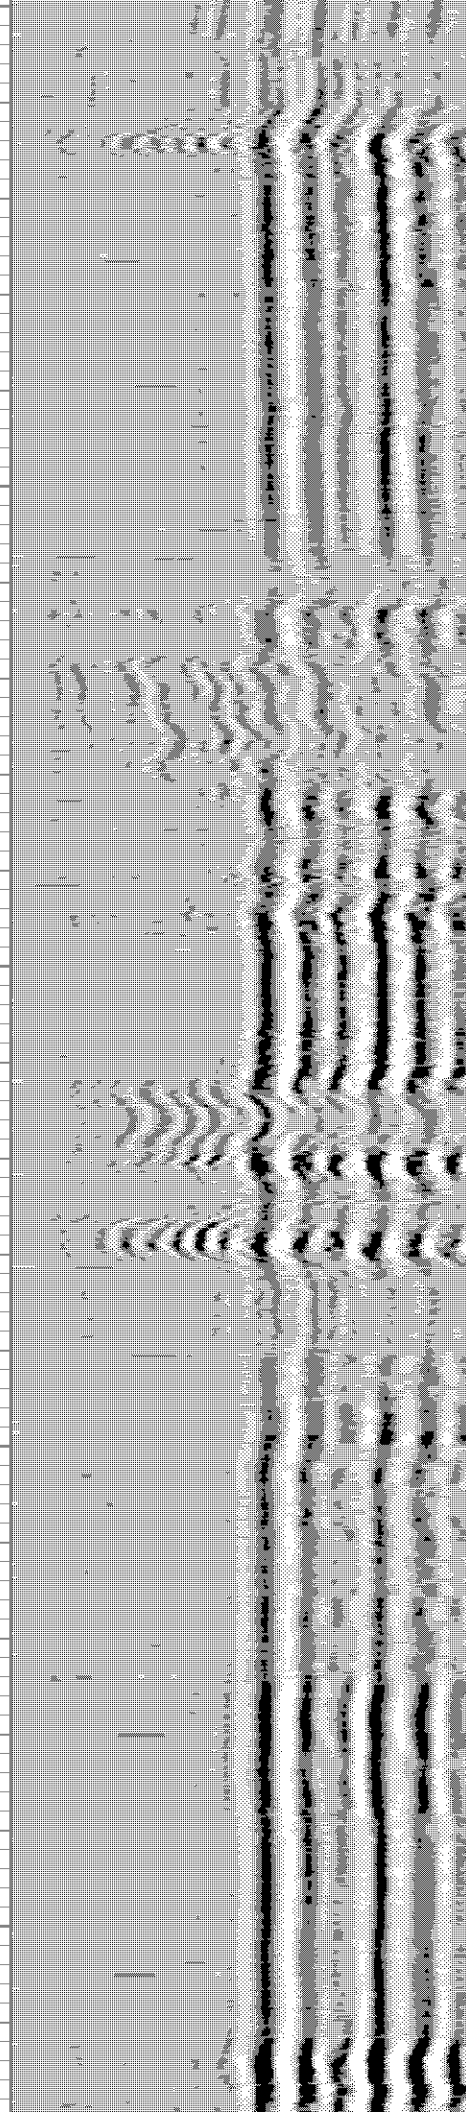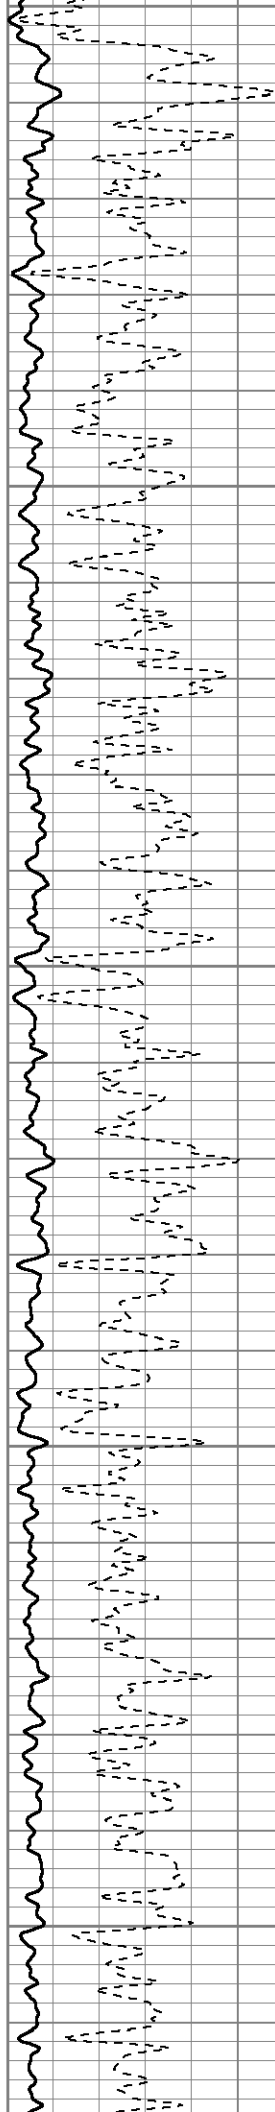


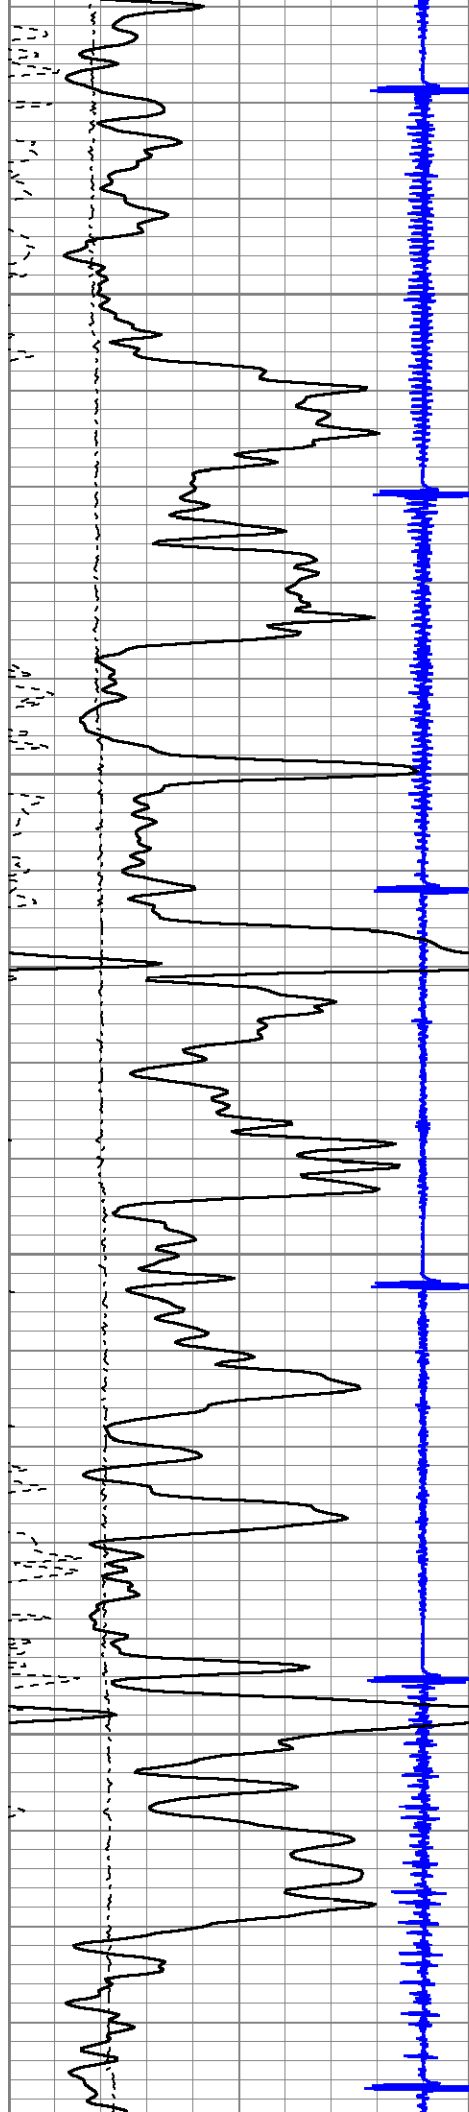



1300

1350

1400

1450

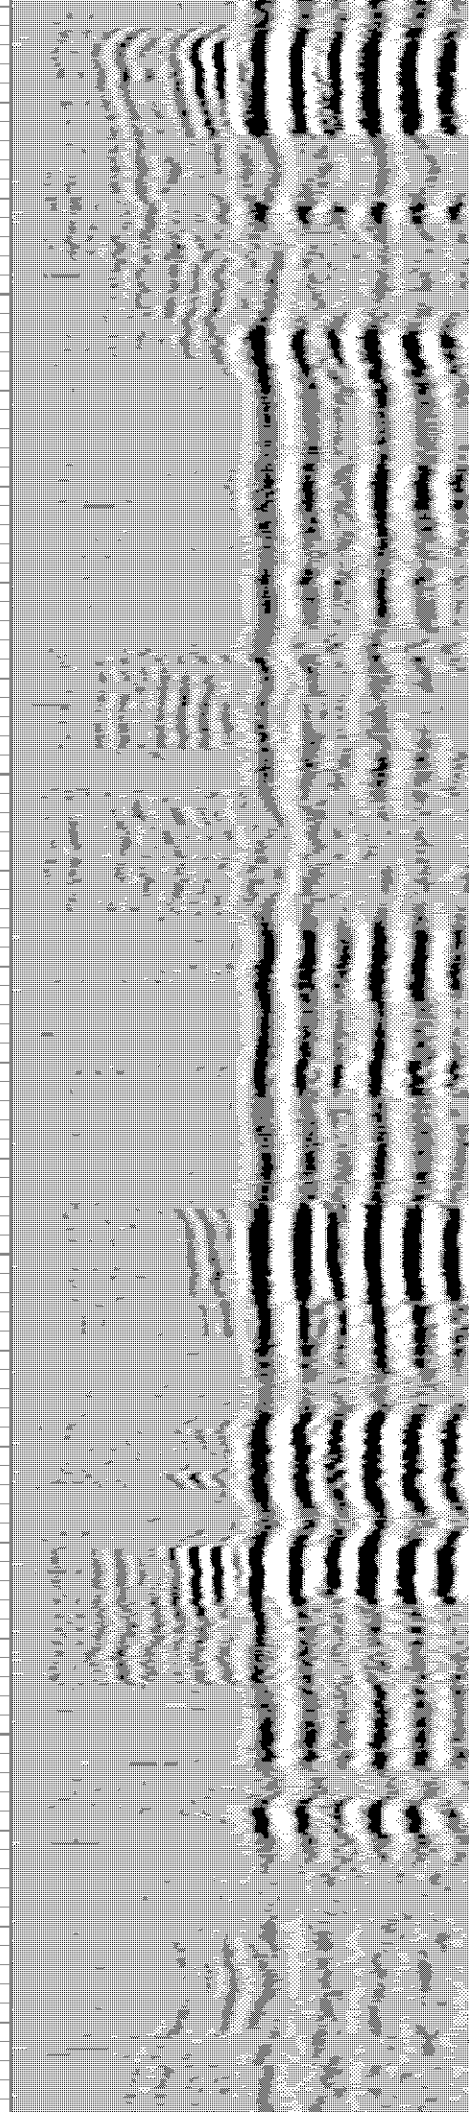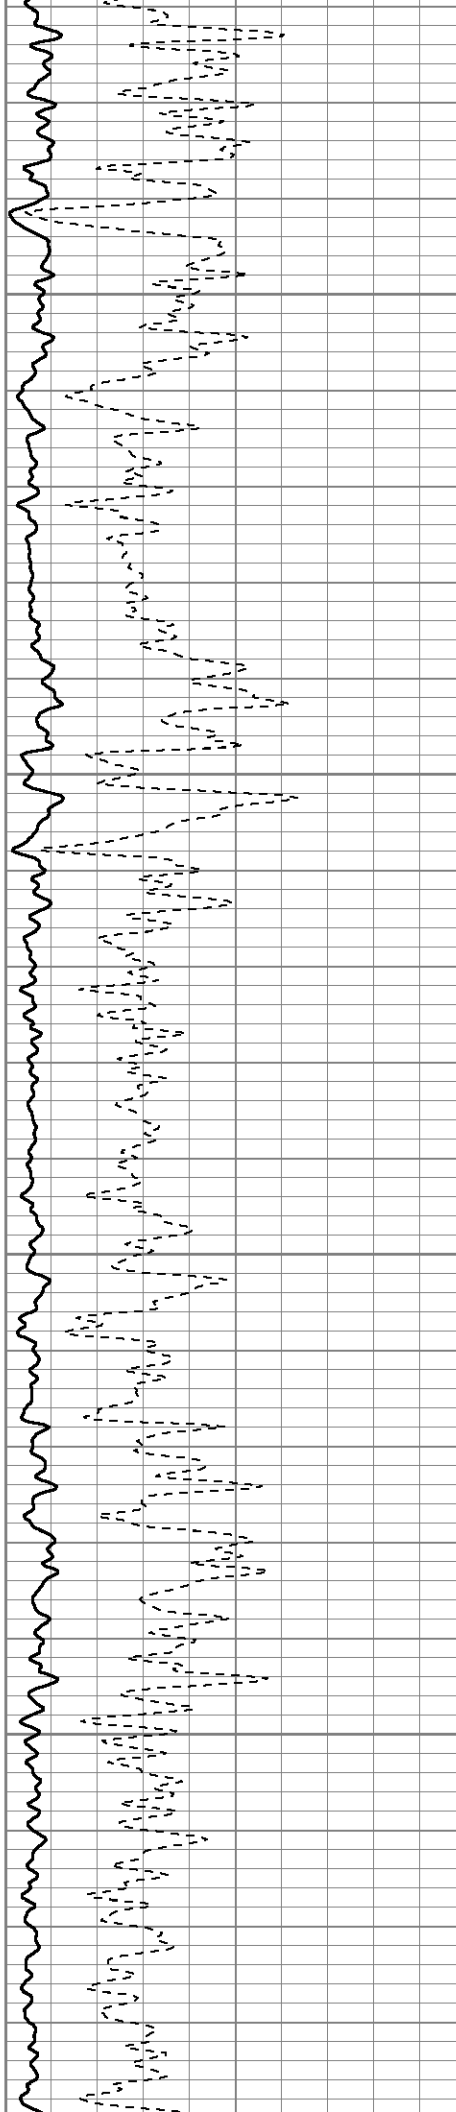

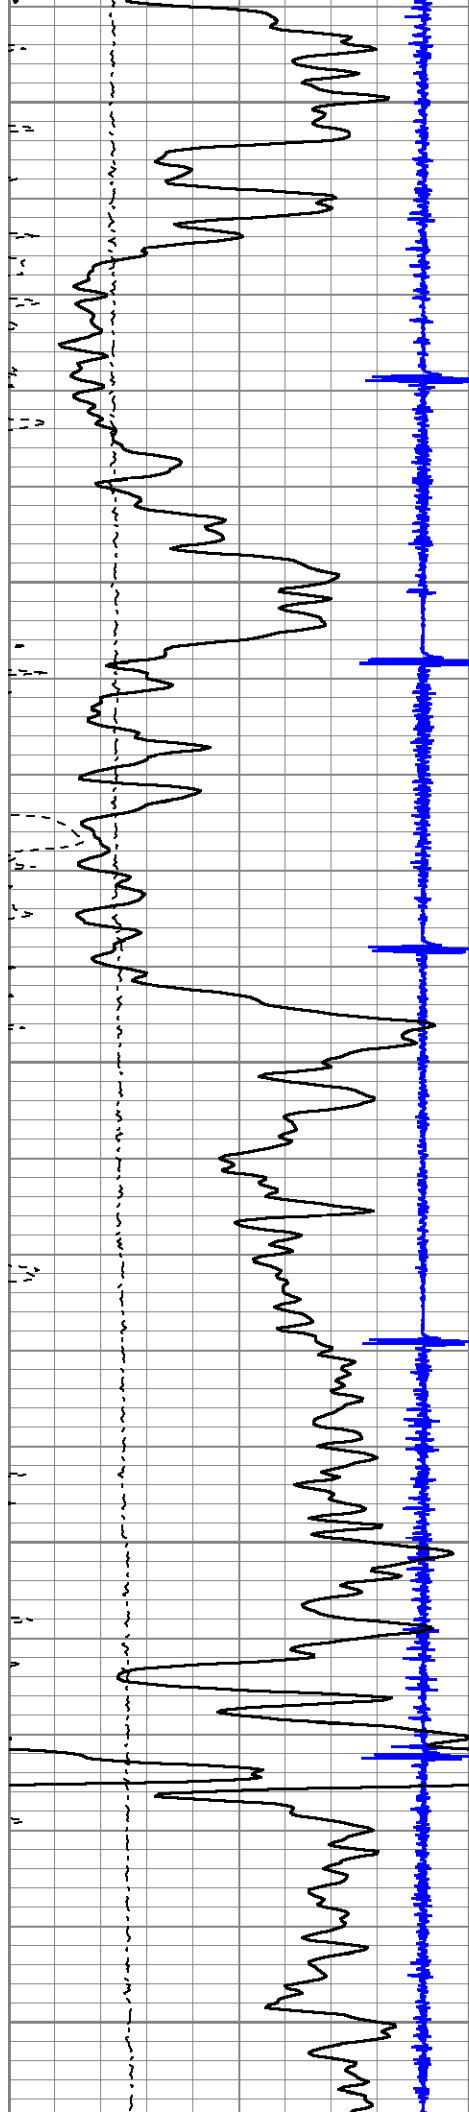



1500


1550

1600

1650

1700

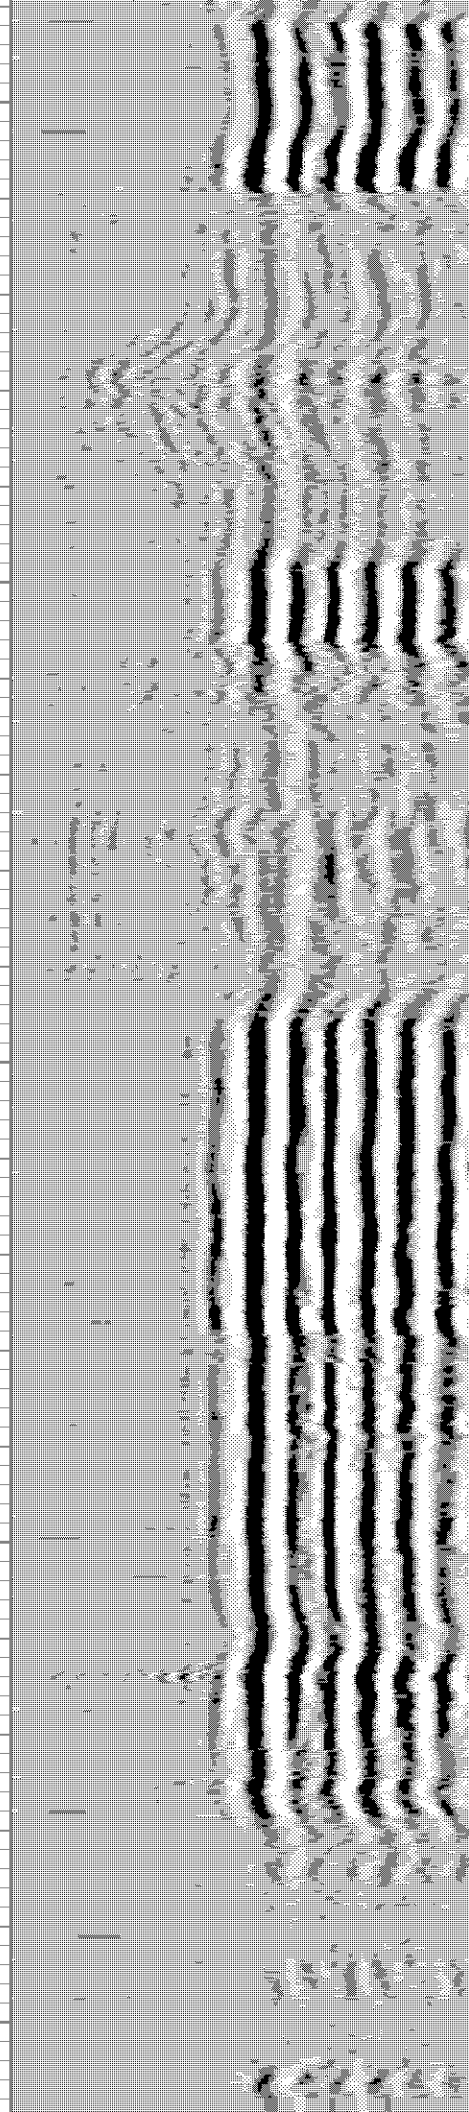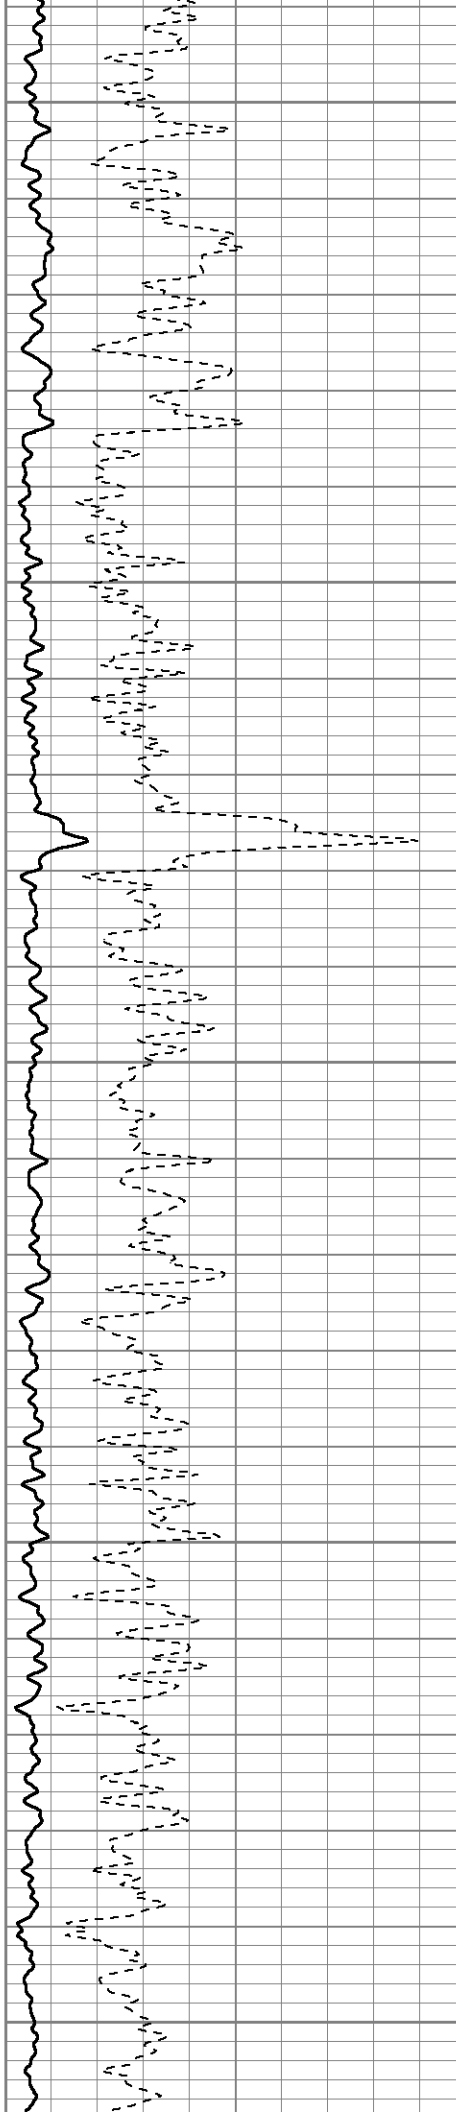

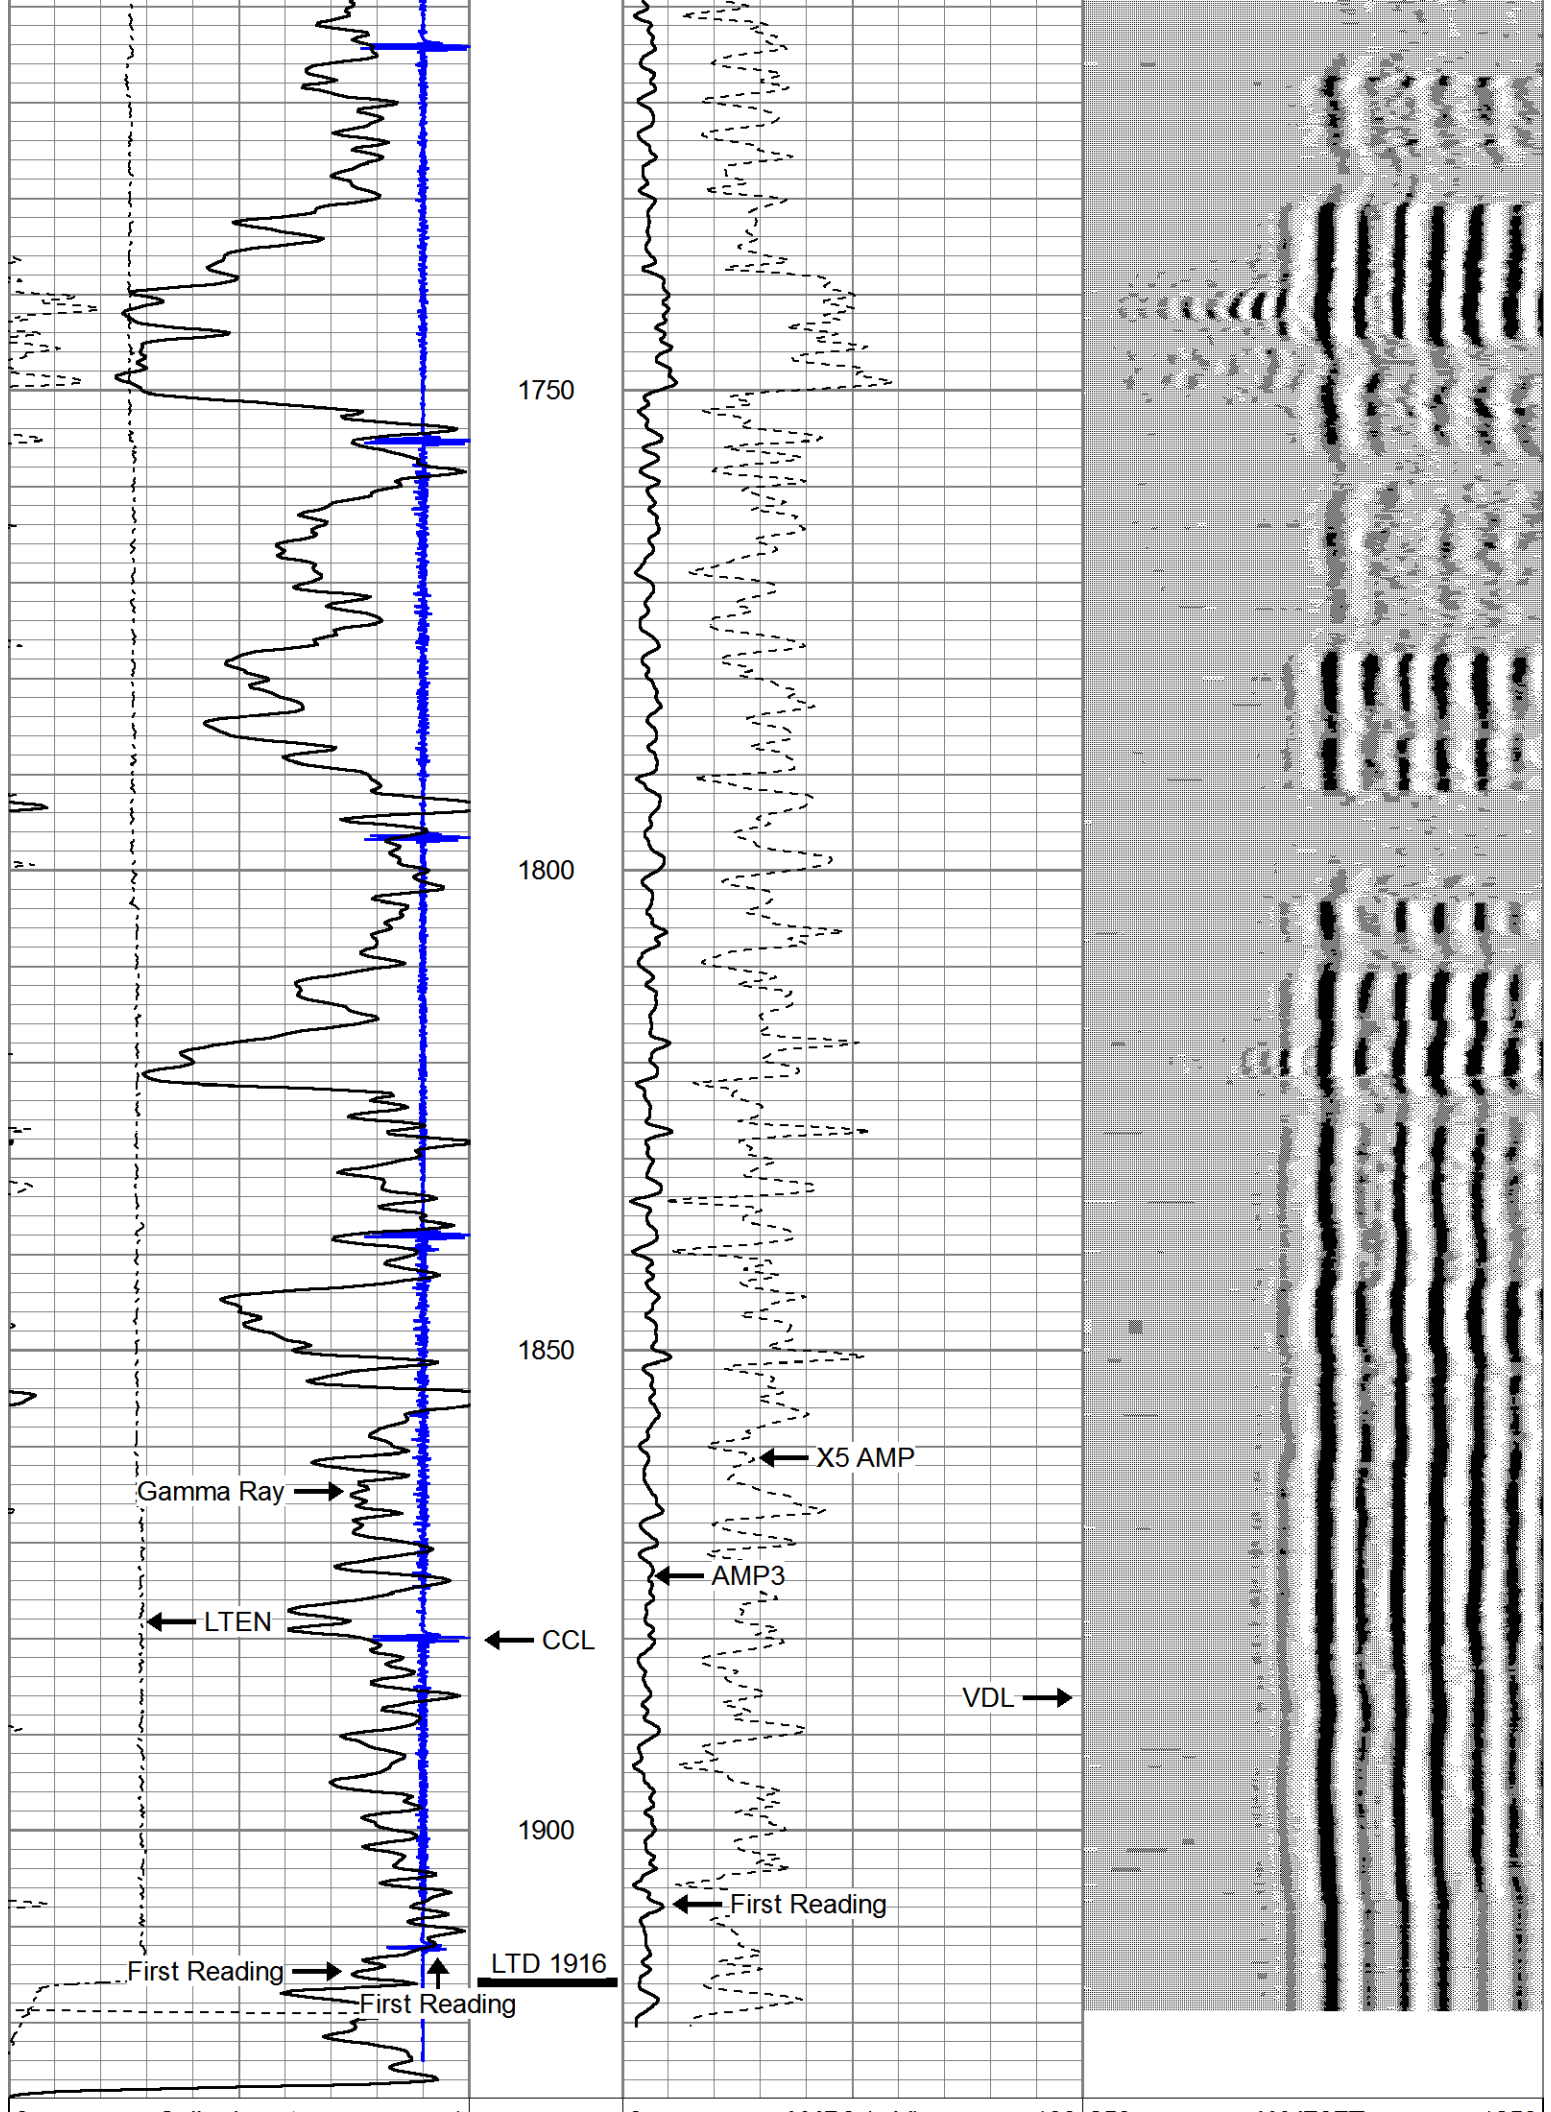

9	Collar Locator	-1
0	Gamma Ray (GAPI)	150
0	LTEN (lb)	500
320	TT3FT (usec)	120

0	AMP3 (mV)	100
0	X5 AMP (mV)	20

250 WWF3FT 1250



Field Service

P.O. BOX 438
Haysville, KS 67060


REPEAT SECTION

Database File: byers1swd.db
Dataset Pathname: pass2
Presentation Format: scbl_dr
Dataset Creation: Tue Dec 28 10:06:09 2021 by Log 7.0 B1
Charted by: Depth in Feet scaled 1:240

9	Collar Locator	-1
0	Gamma Ray (GAPI)	150
0	LTEN (lb)	1000
320	TT3FT (usec)	120



0	AMP3 (mV)	100
0	X5 AMP (mV)	20


250 WWF3FT 1250

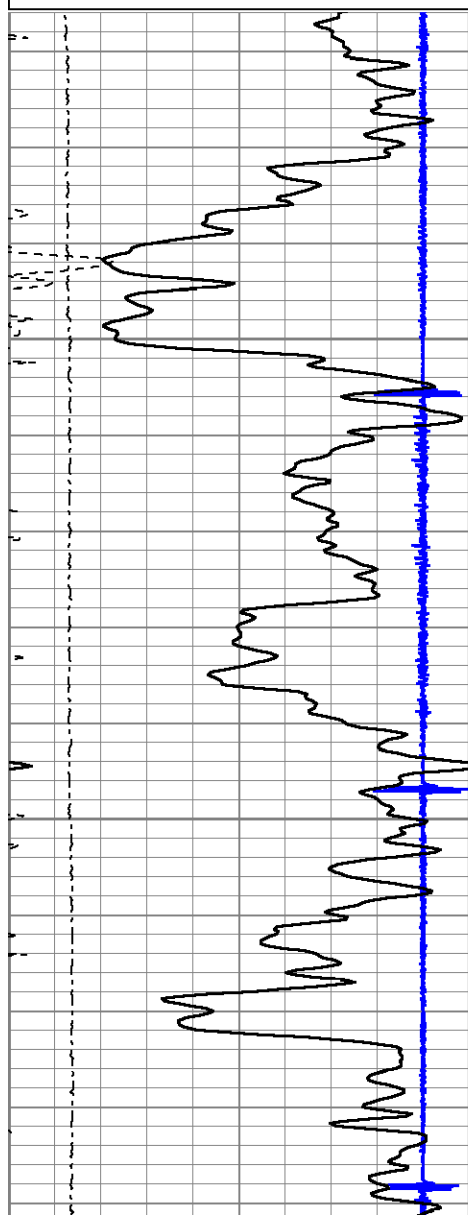

1750

1800

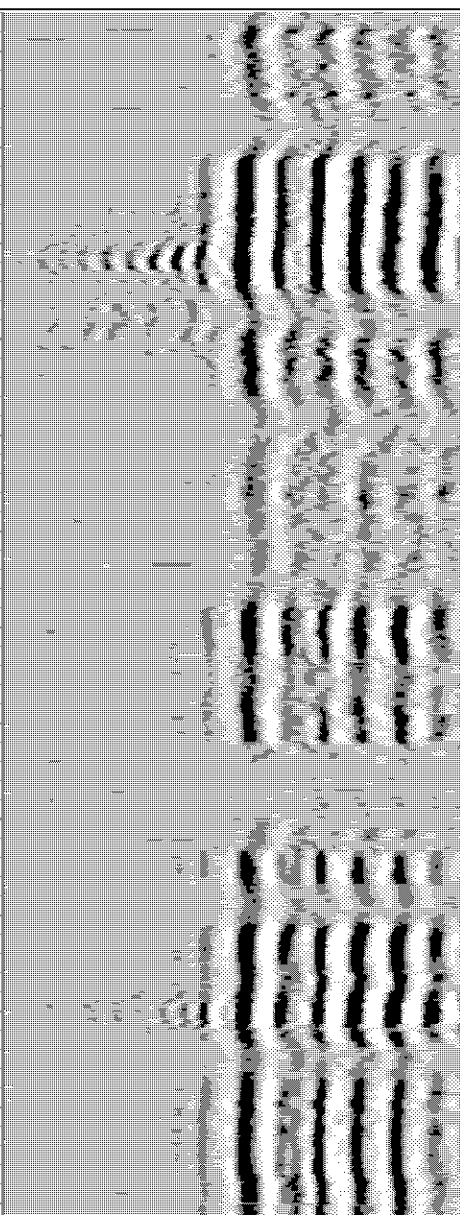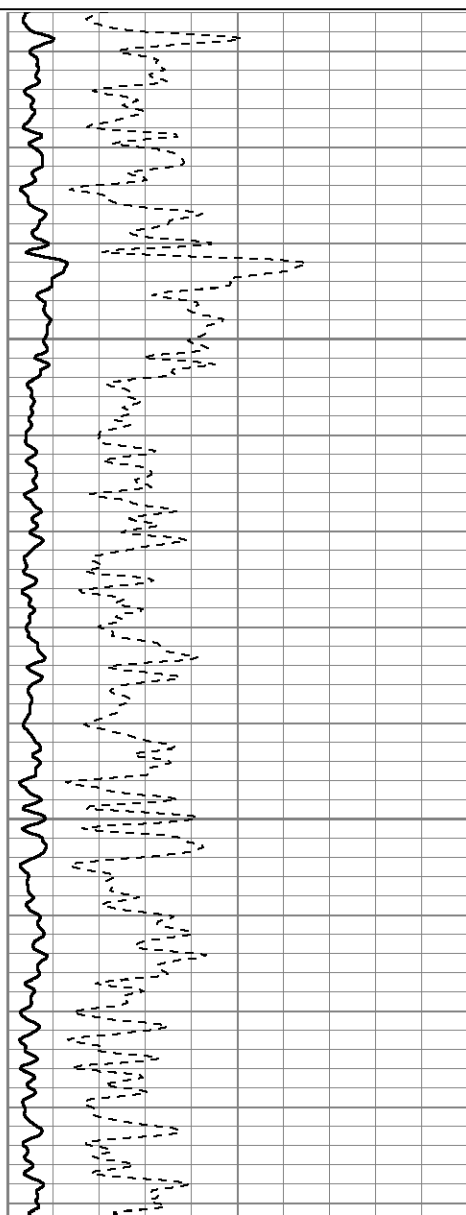

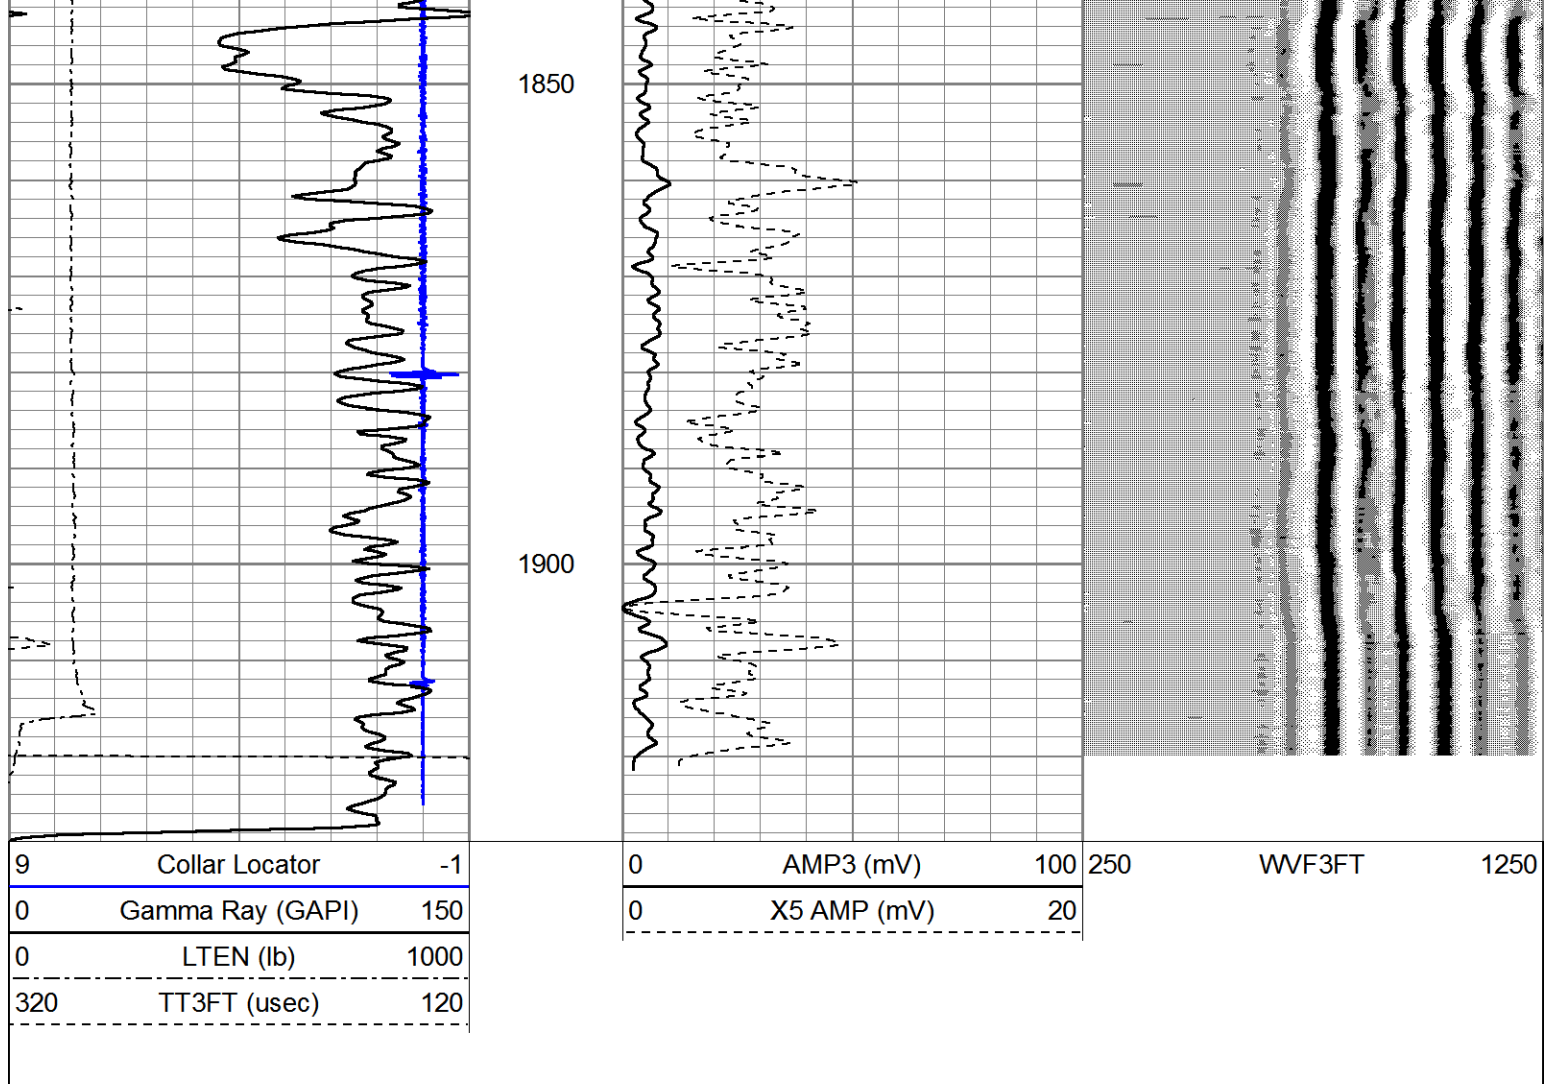

Sensor	Offset (ft)	Schematic	Description	Len (ft)	OD (in)	Wt (lb)
			STNDRD Standard Cable Head	1.00	1.69	10.00
WVF3FT	8.76		CBLGEARHART-Gearhart (SDSDEMO) Probecbl	8.75	2.75	92.00
WVF5FT	7.76					

CCL	3.69			CCL-probe (cclpr) probe ccl	1.55	2.75	30.00
GR	0.90			GR-probegr (progr1) probe gamma ray	3.02	2.75	20.00
Dataset: byers1swd.db: field/well/run1/pass3 Total Length: 14.32 ft Total Weight: 152.00 lb O.D. 2.75 in							