



DUAL INDUCTION LOG

Company	PHILLIPS EXPLORATION COMANY, L.C.		
Well	GEYER #4-3 YEP		
Field	SALINE VALLEY		
County	TREGO		
State	KANSAS		
Location:	API # : 15-195-23126-0000		Other Services CDL/CNL
	1100' FNL & 1150' FWL		
Permanent Datum	SEC 3	TWP 11S	RGE 24W
Log Measured From	GROUND LEVEL		Elevation 2335
Drilling Measured From	KELLY BUSHING 5' A.G.L		K.B. 2340 D.F. 2338 G.L. 2335
Date	10/6/21		
Run Number	ONE		
Depth Driller	3970		
Depth Logger	3972		
Bottom Logged Interval	3970		
Top Log Interval	00		
Casing Driller	8 5/8" @ 212'		
Casing Logger	212'		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD		CHLORIDES 4100 PPM
Density / Viscosity	9.4/50		
pH / Fluid Loss	10.0/7.2		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.95 @ 70F		
Rmf @ Meas. Temp	.71 @ 70F		
Rmc @ Meas. Temp	1.14 @ 70F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.57 @ 116F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	///		
Maximum Recorded Temperature	116F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	PAT DEENIHAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments



THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
WAKEENEY, KS. - NORTH TO RD. B - 5 WEST TO RD. 200 - 1 NORTH - 1/2 EAST
SOUTH INTO







MAIN SECTION


0	Gamma Ray (GAPI)	150	1000	CILD (mmho/m)	0
-100	SP (mV)	100	0	RLL3 (Ohm-m)	50
-----			0	Deep Induction (Ohm-m)	50
			50	RILD X10 (Ohm-m)	500
			50	RLL3 X10 (Ohm-m)	500

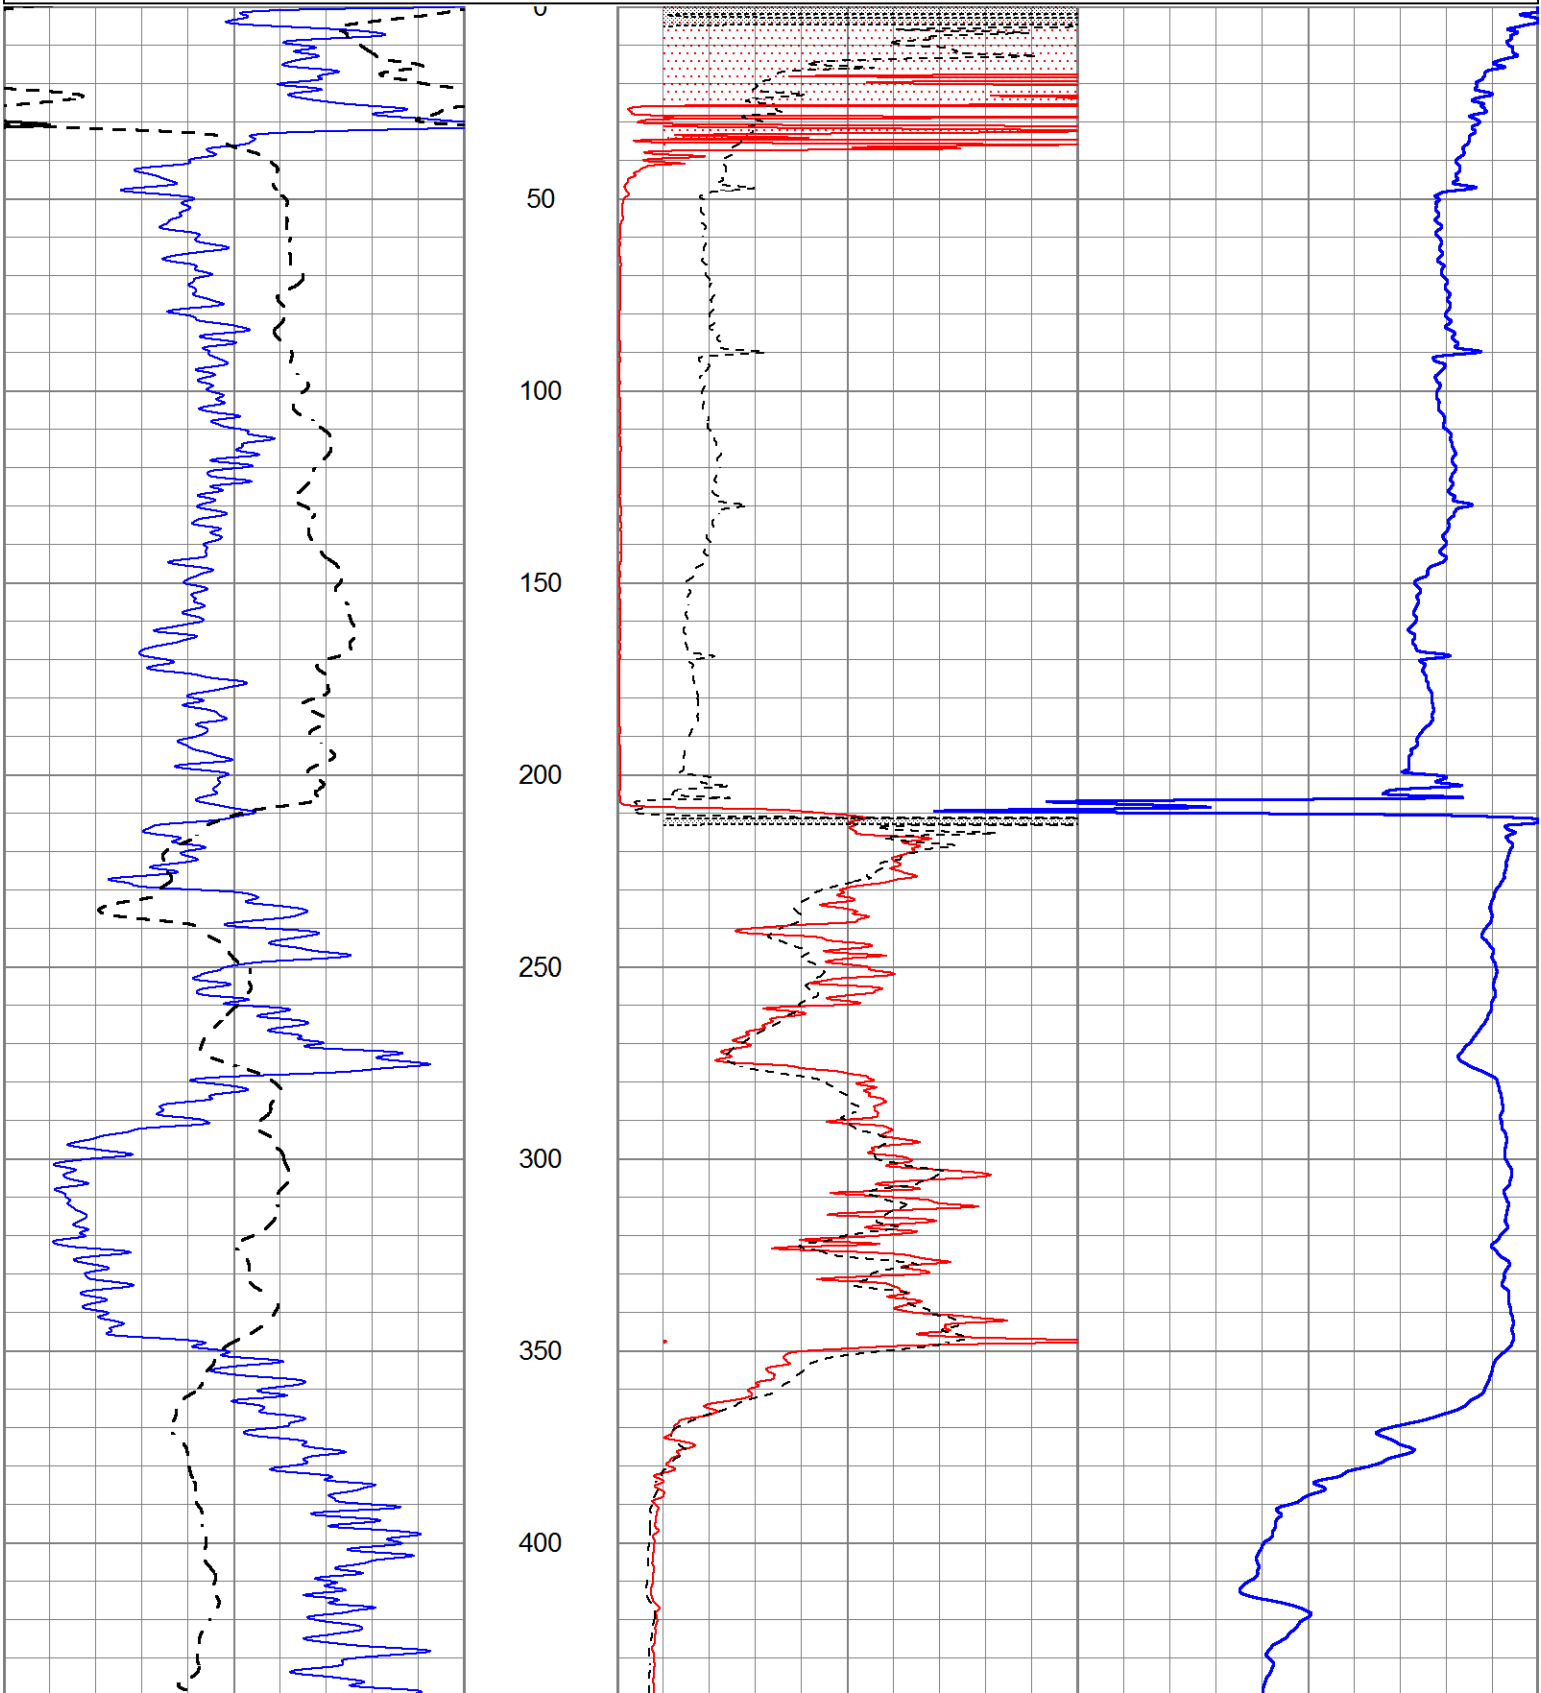

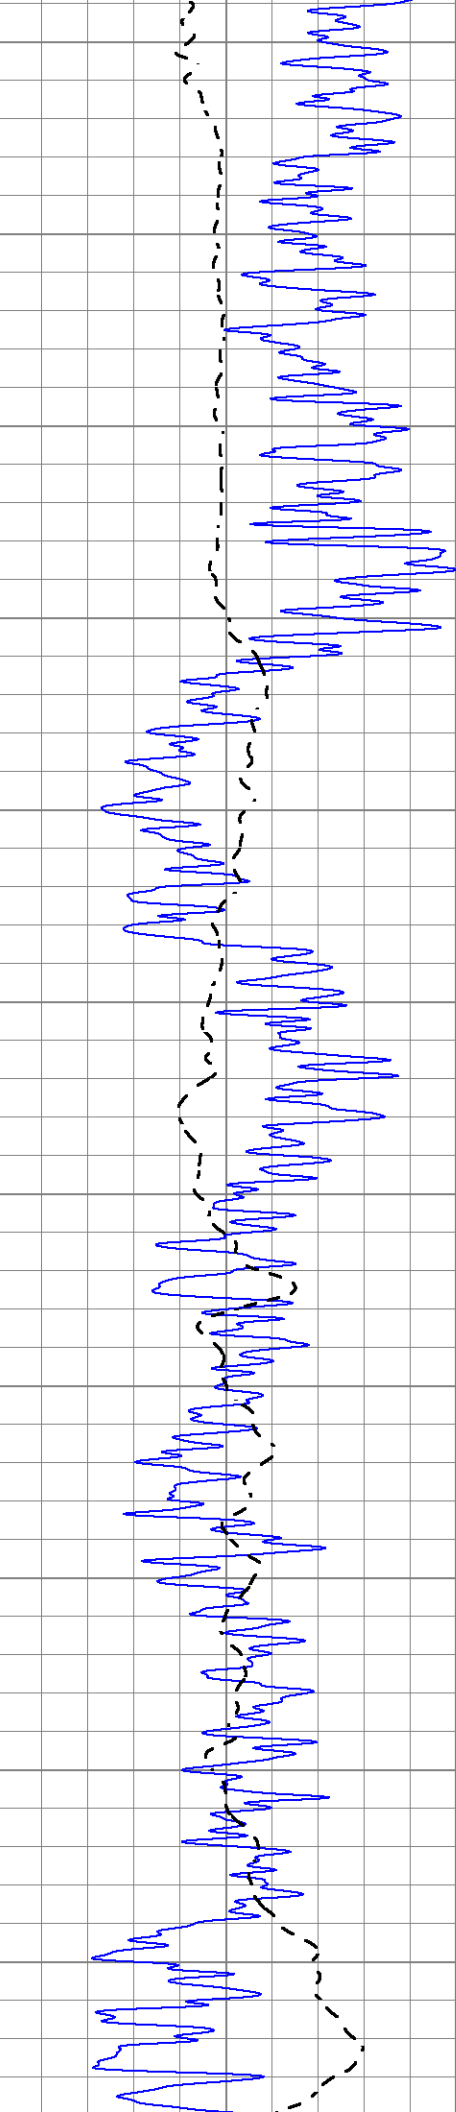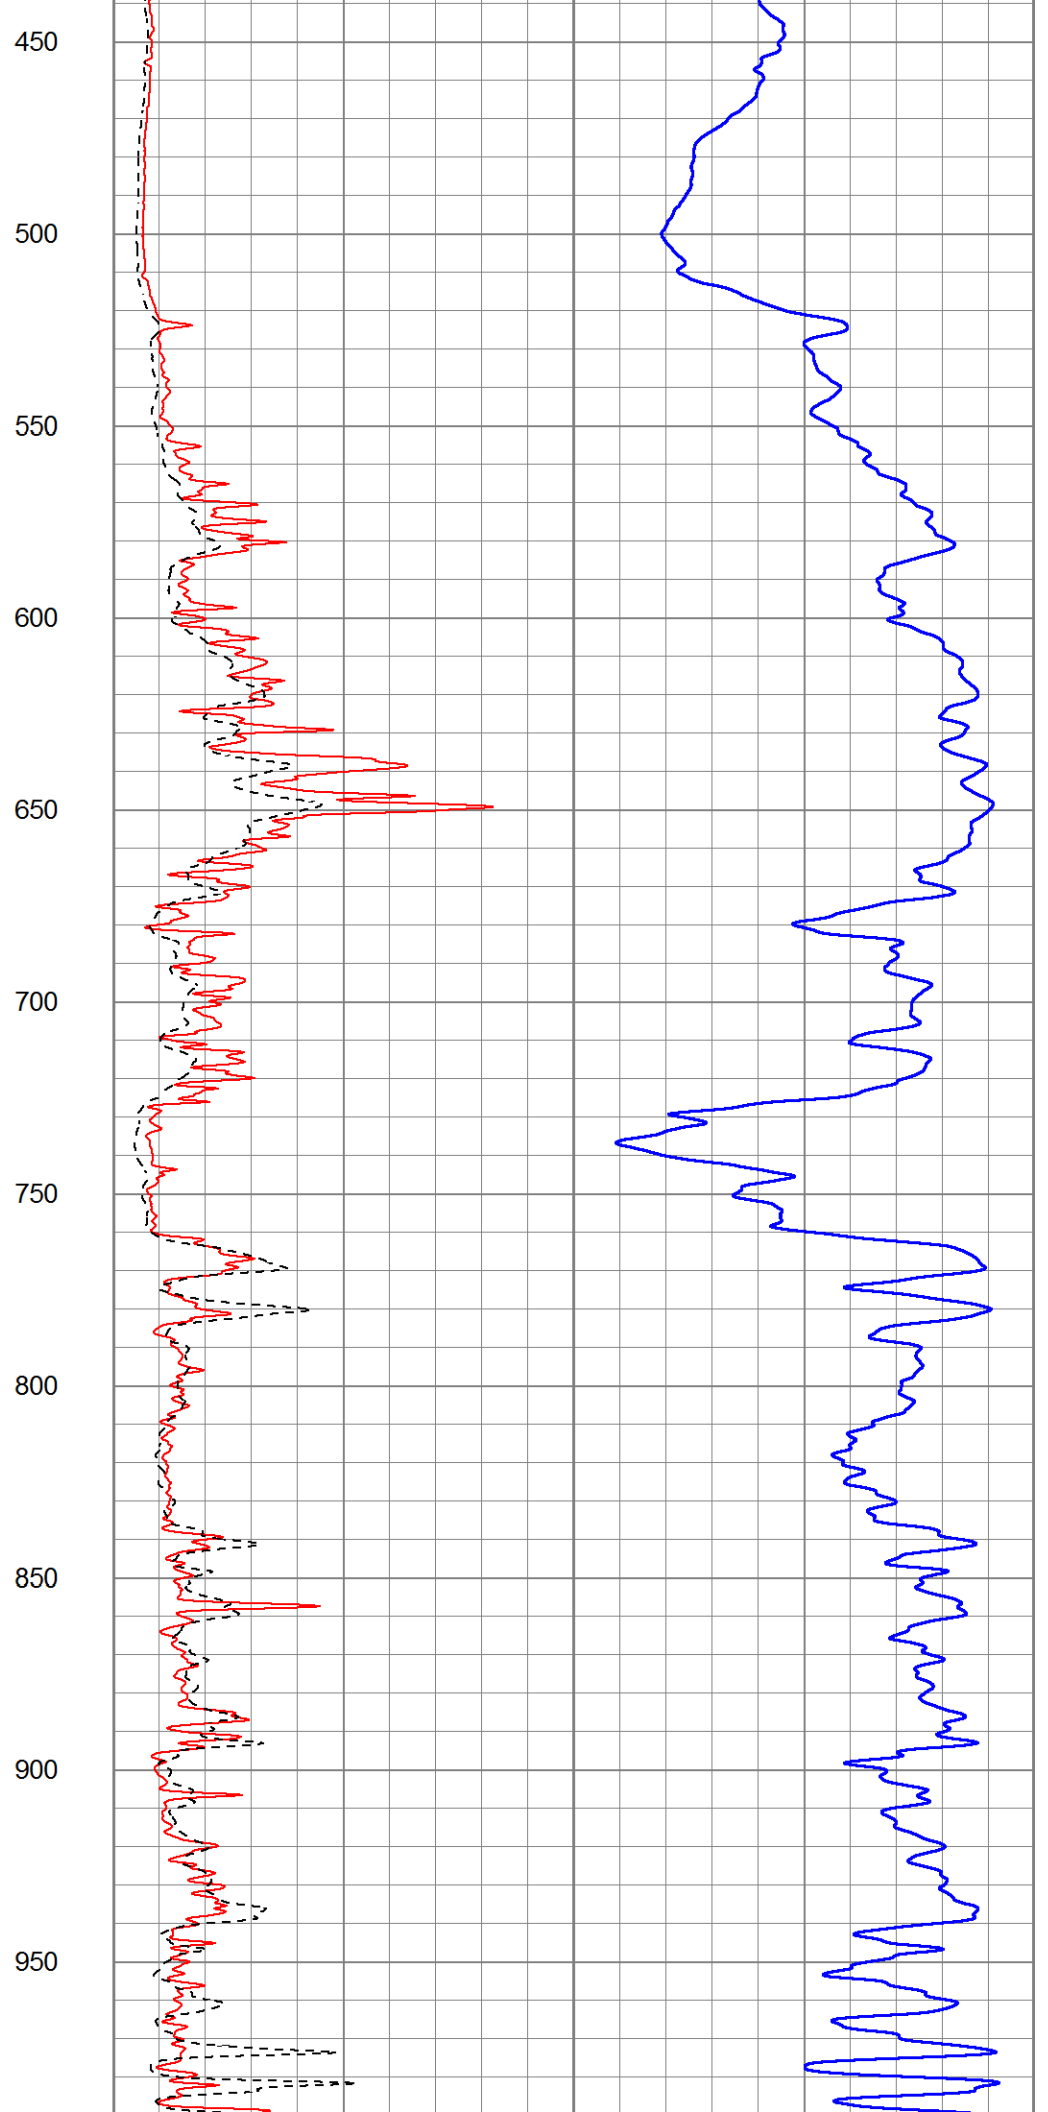


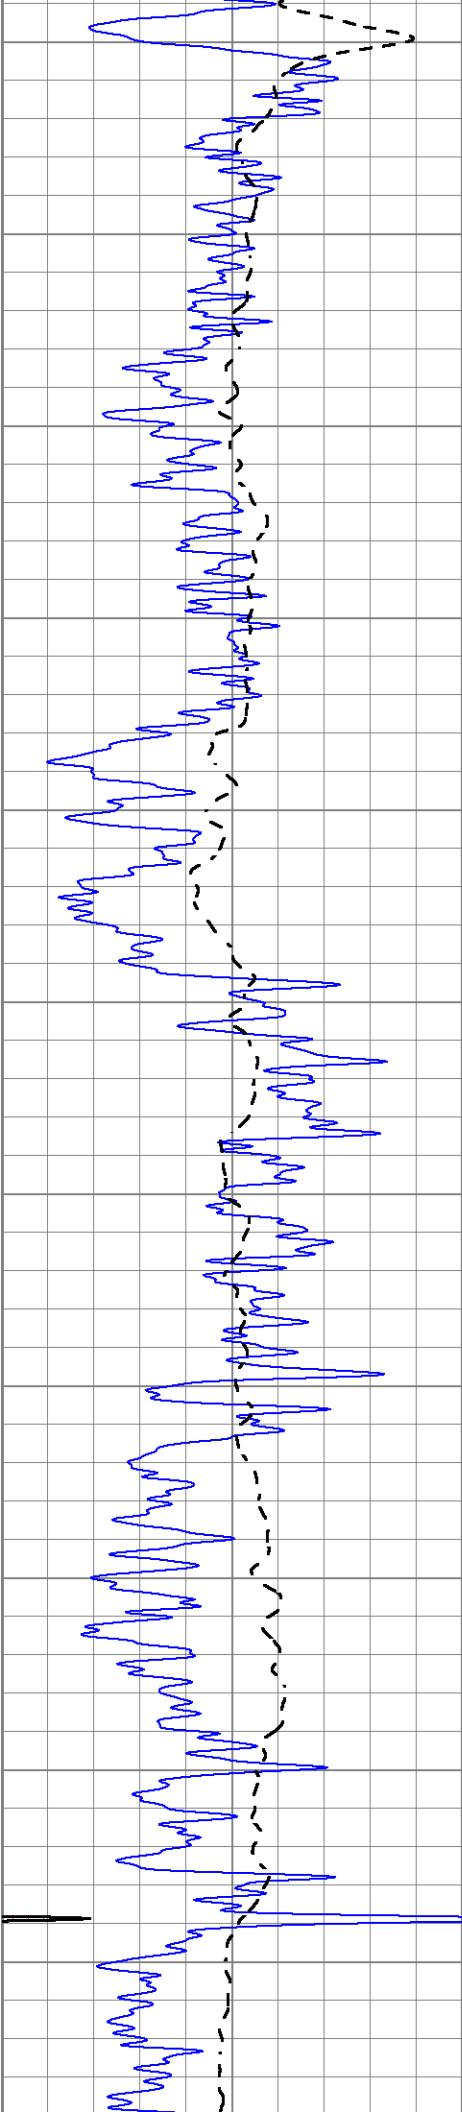
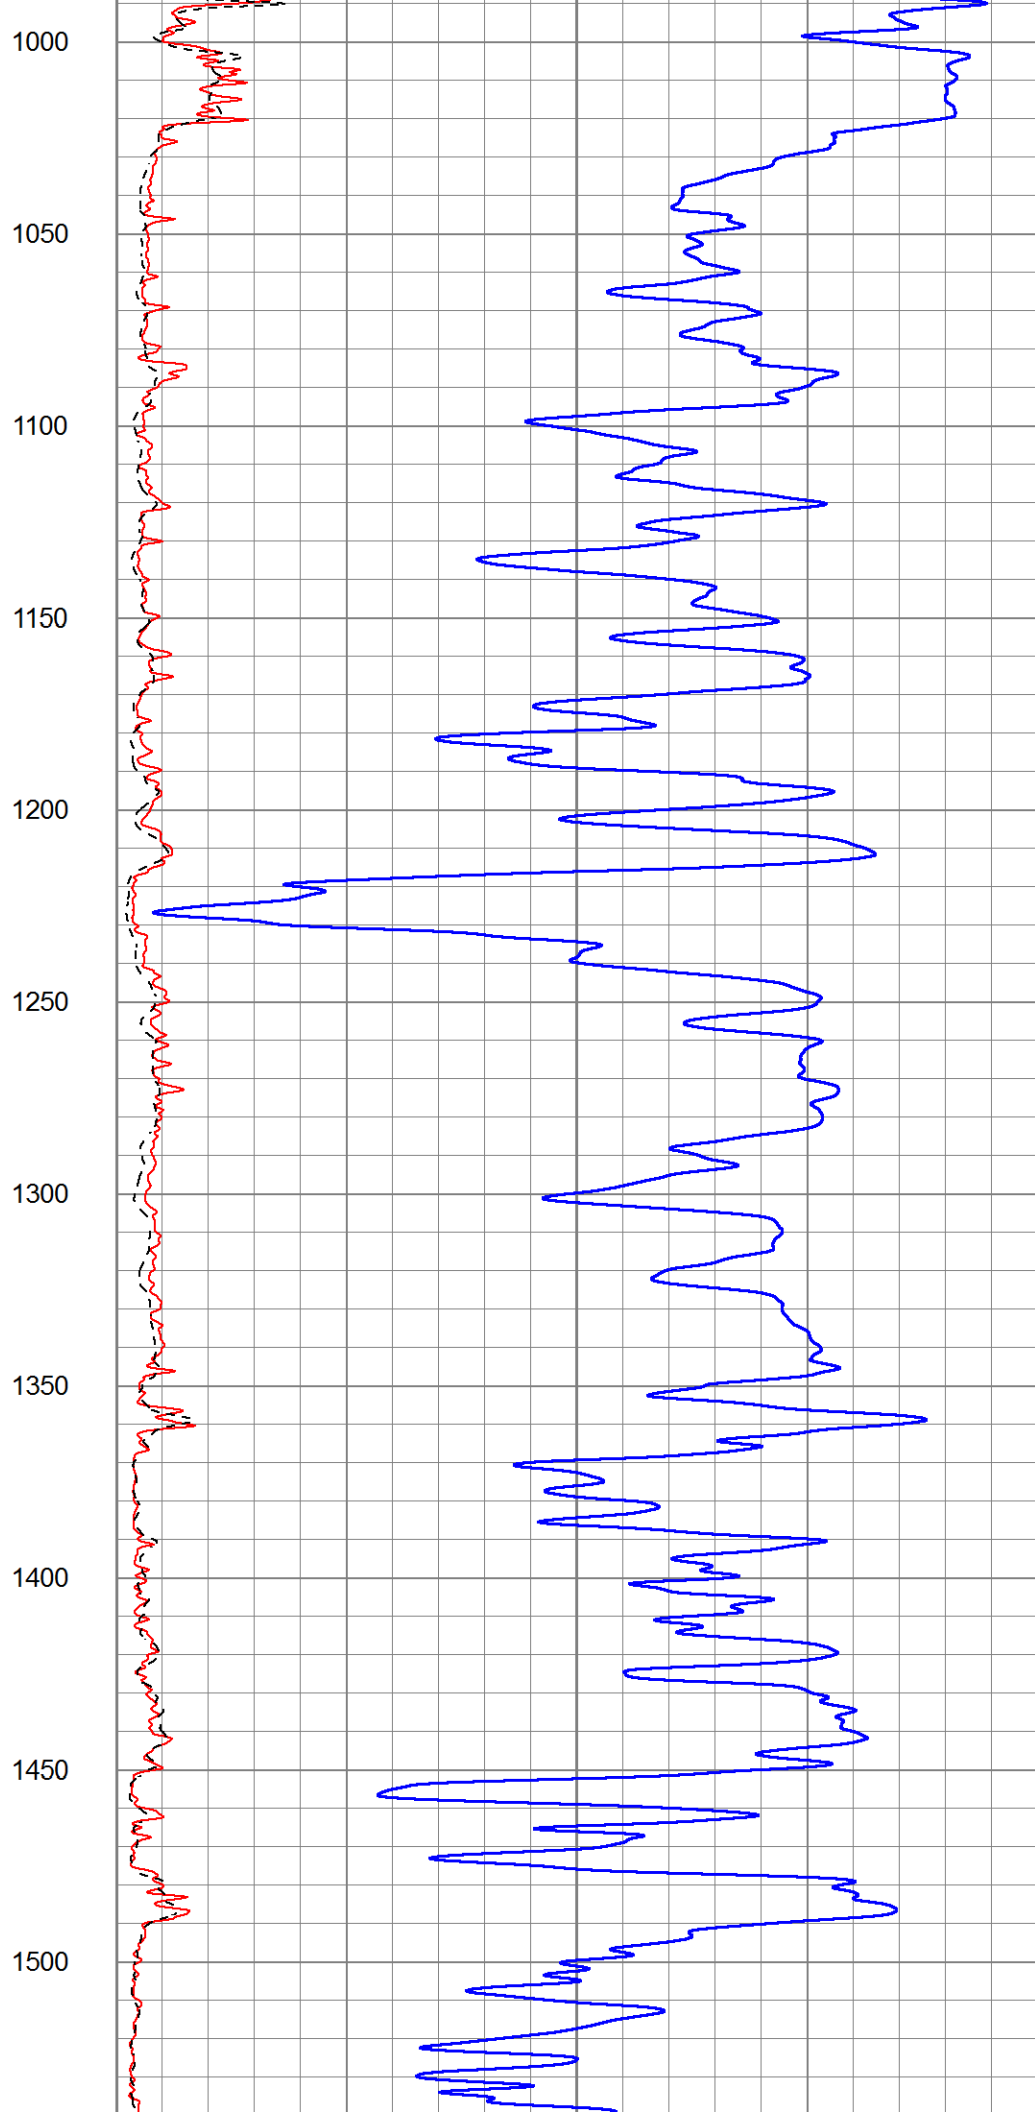


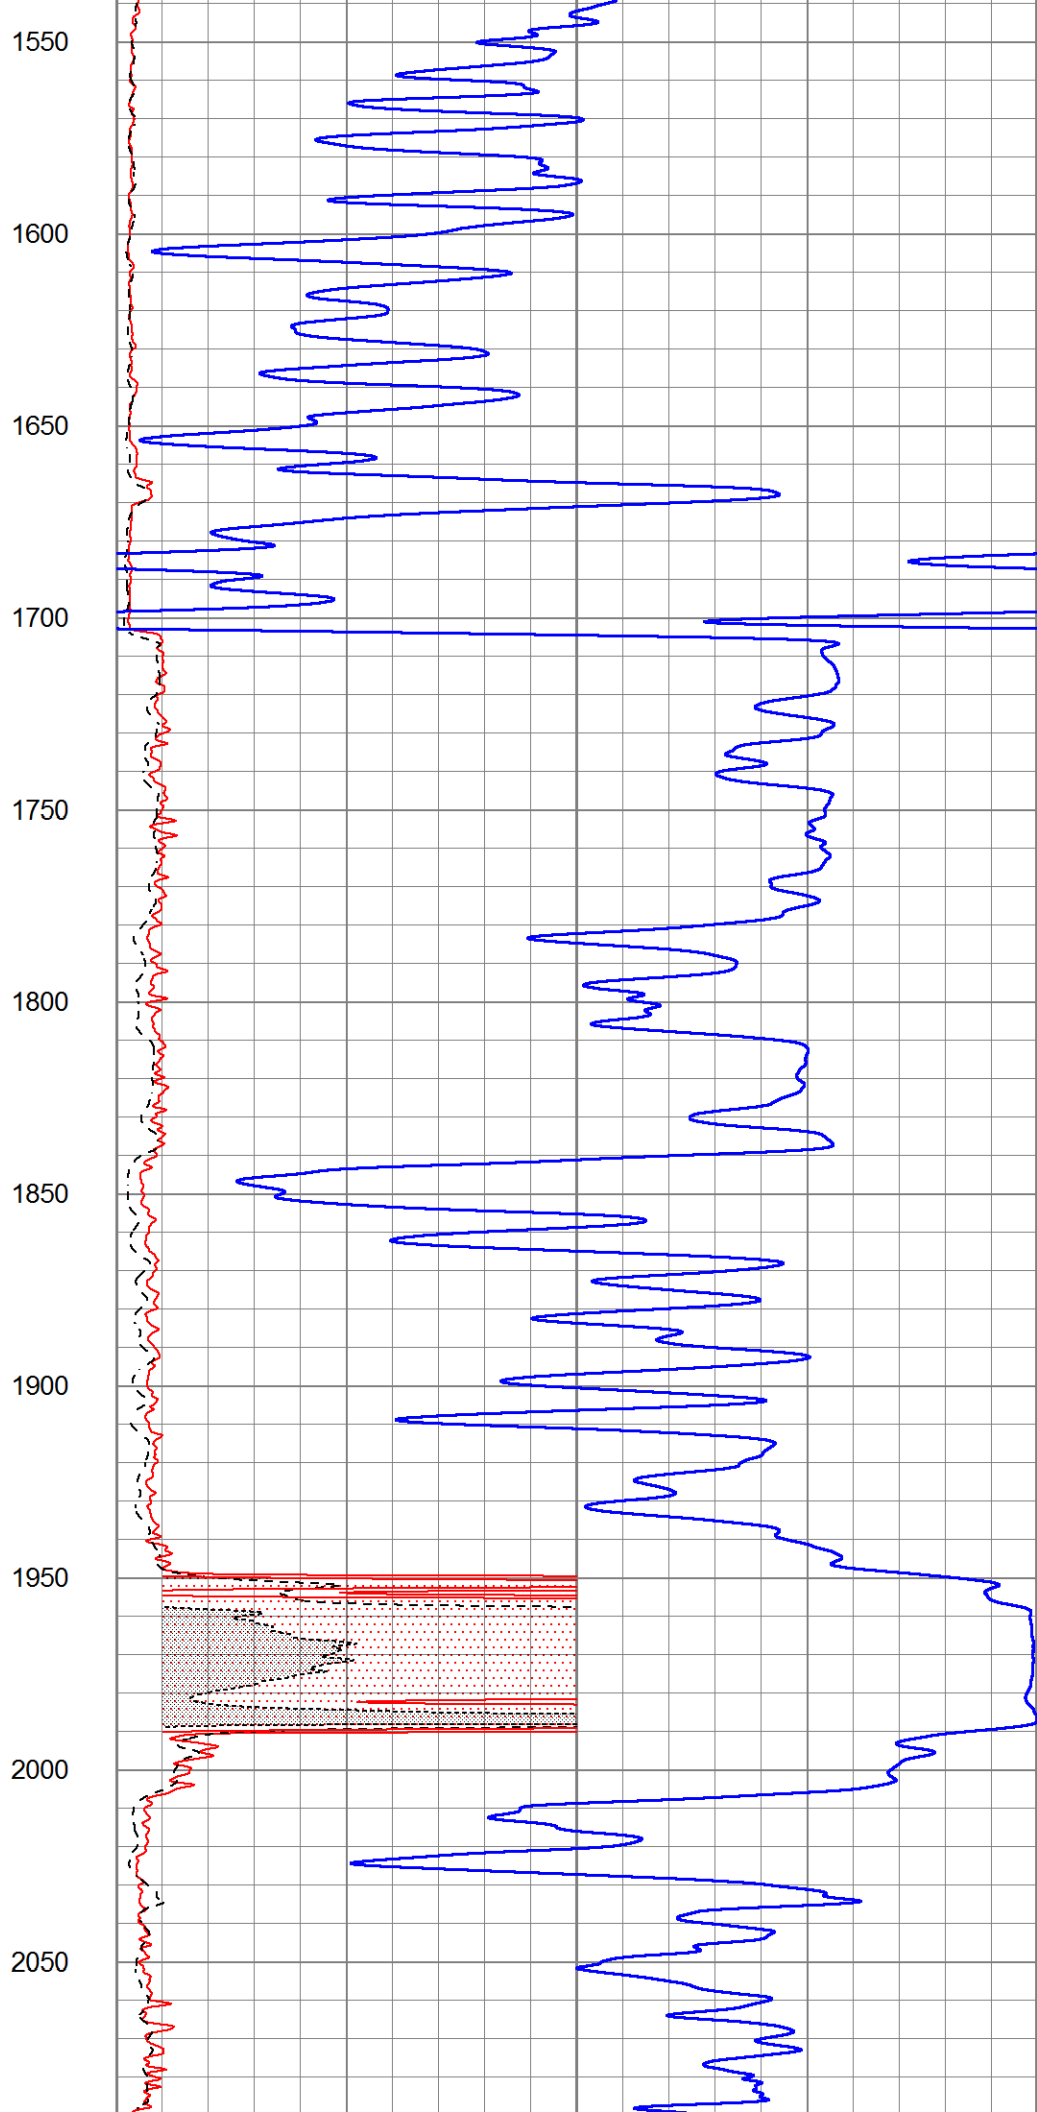
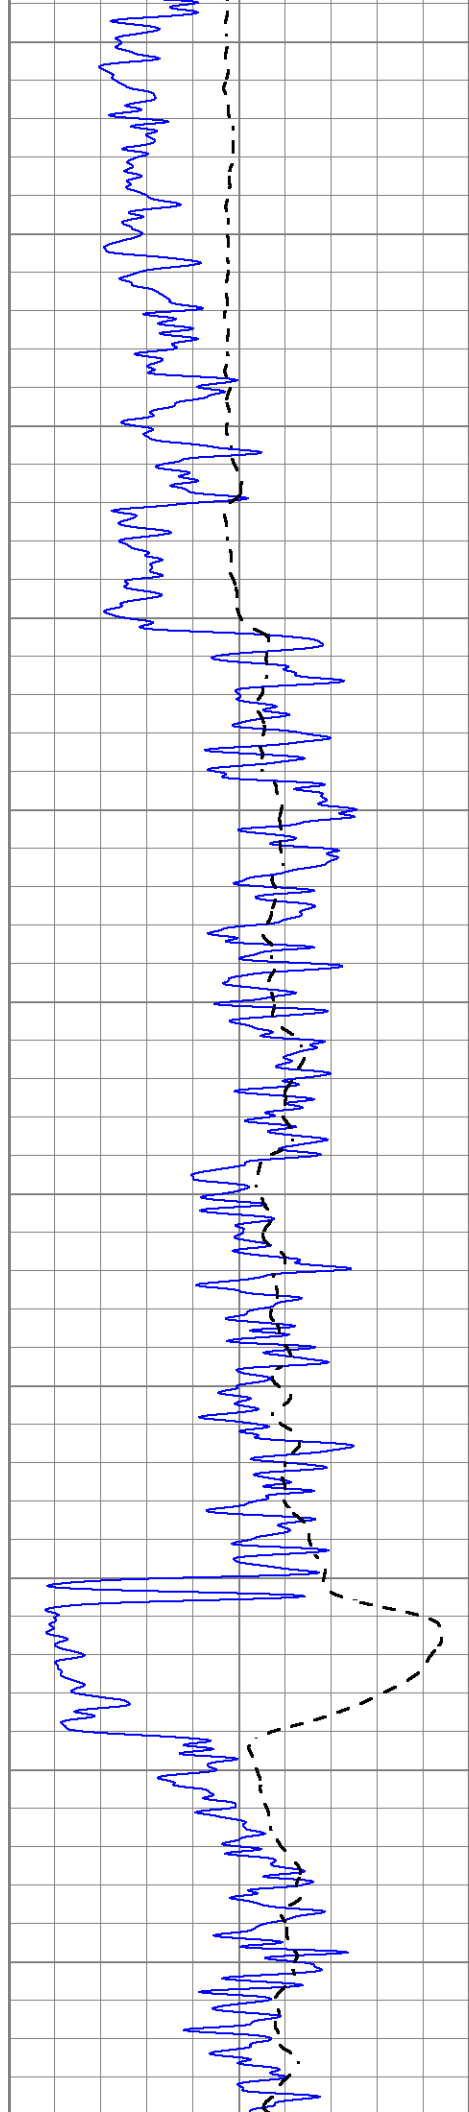


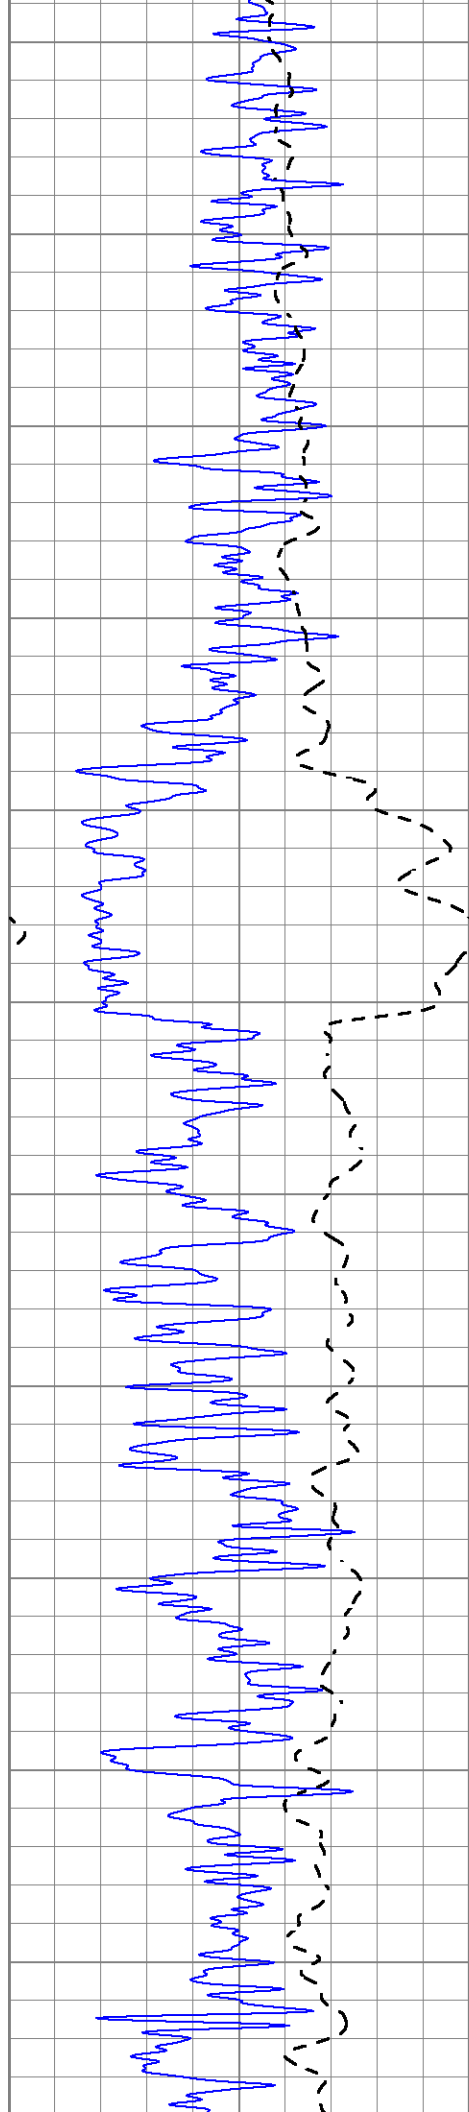


2100
2150
2200
2250
2300
2350
2400
2450
2500
2550
2600

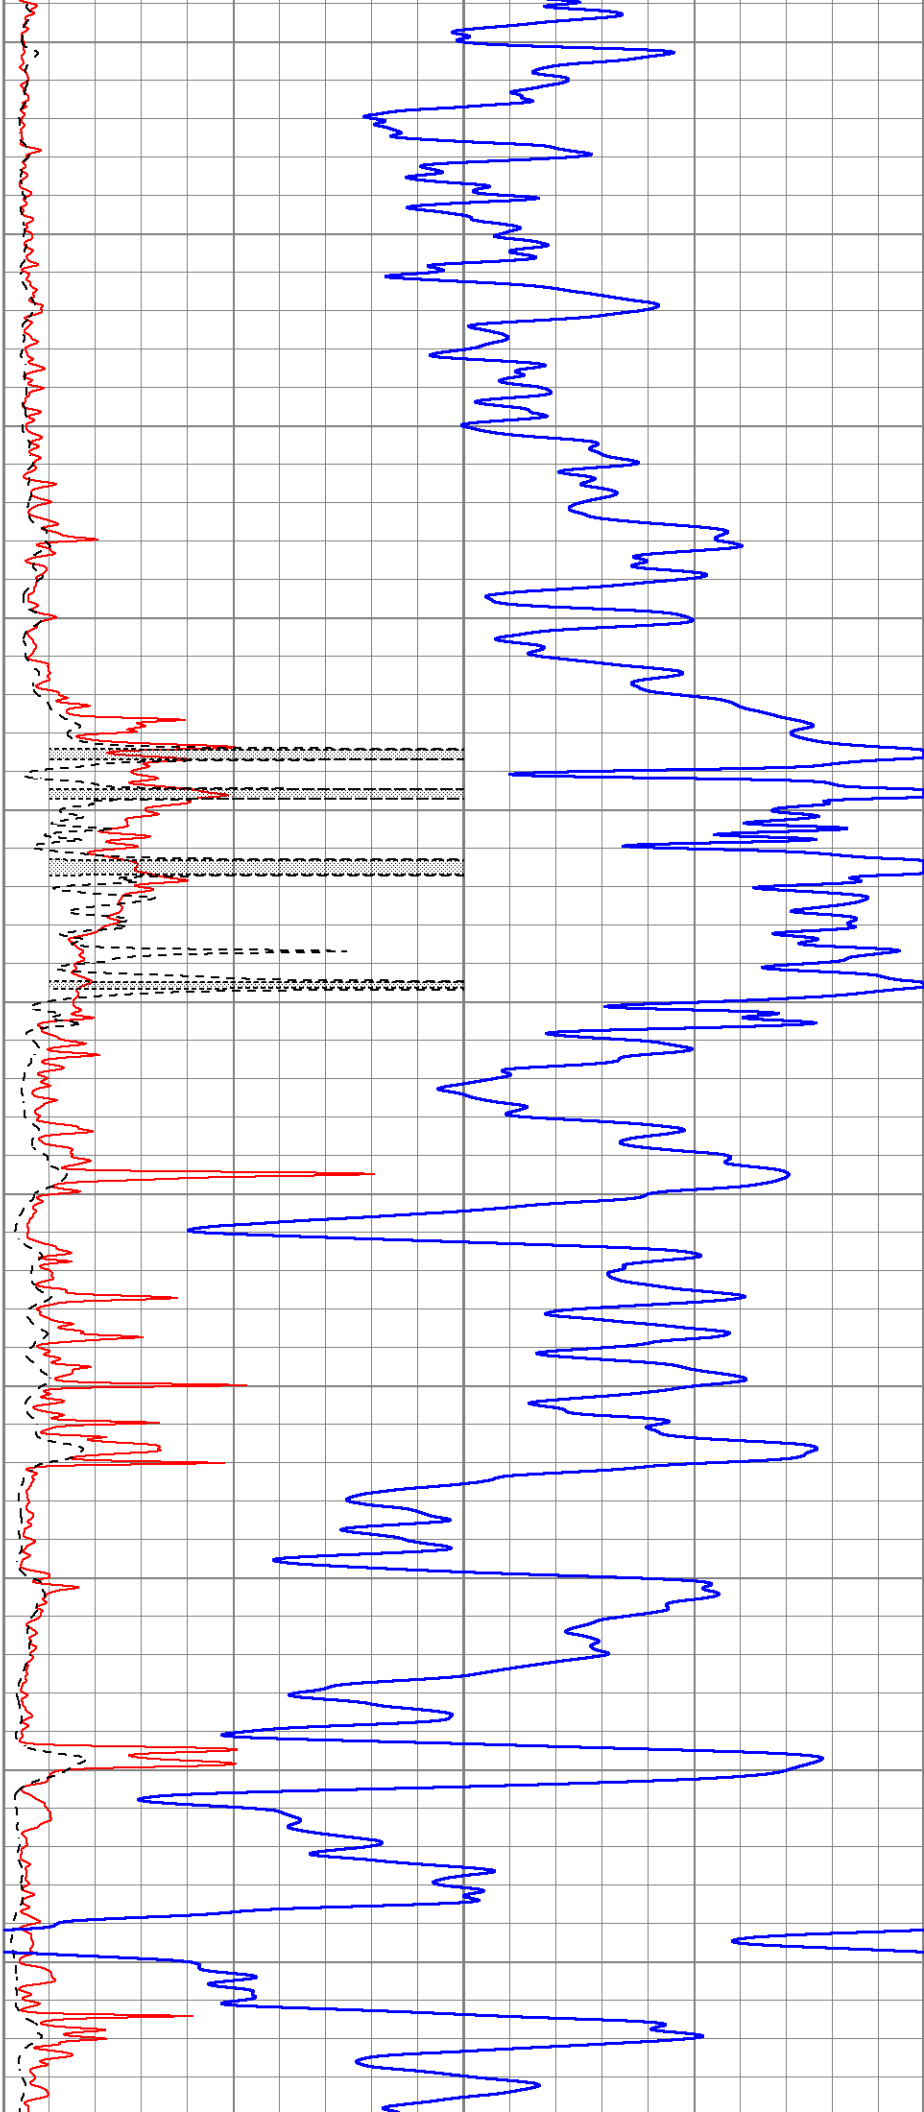

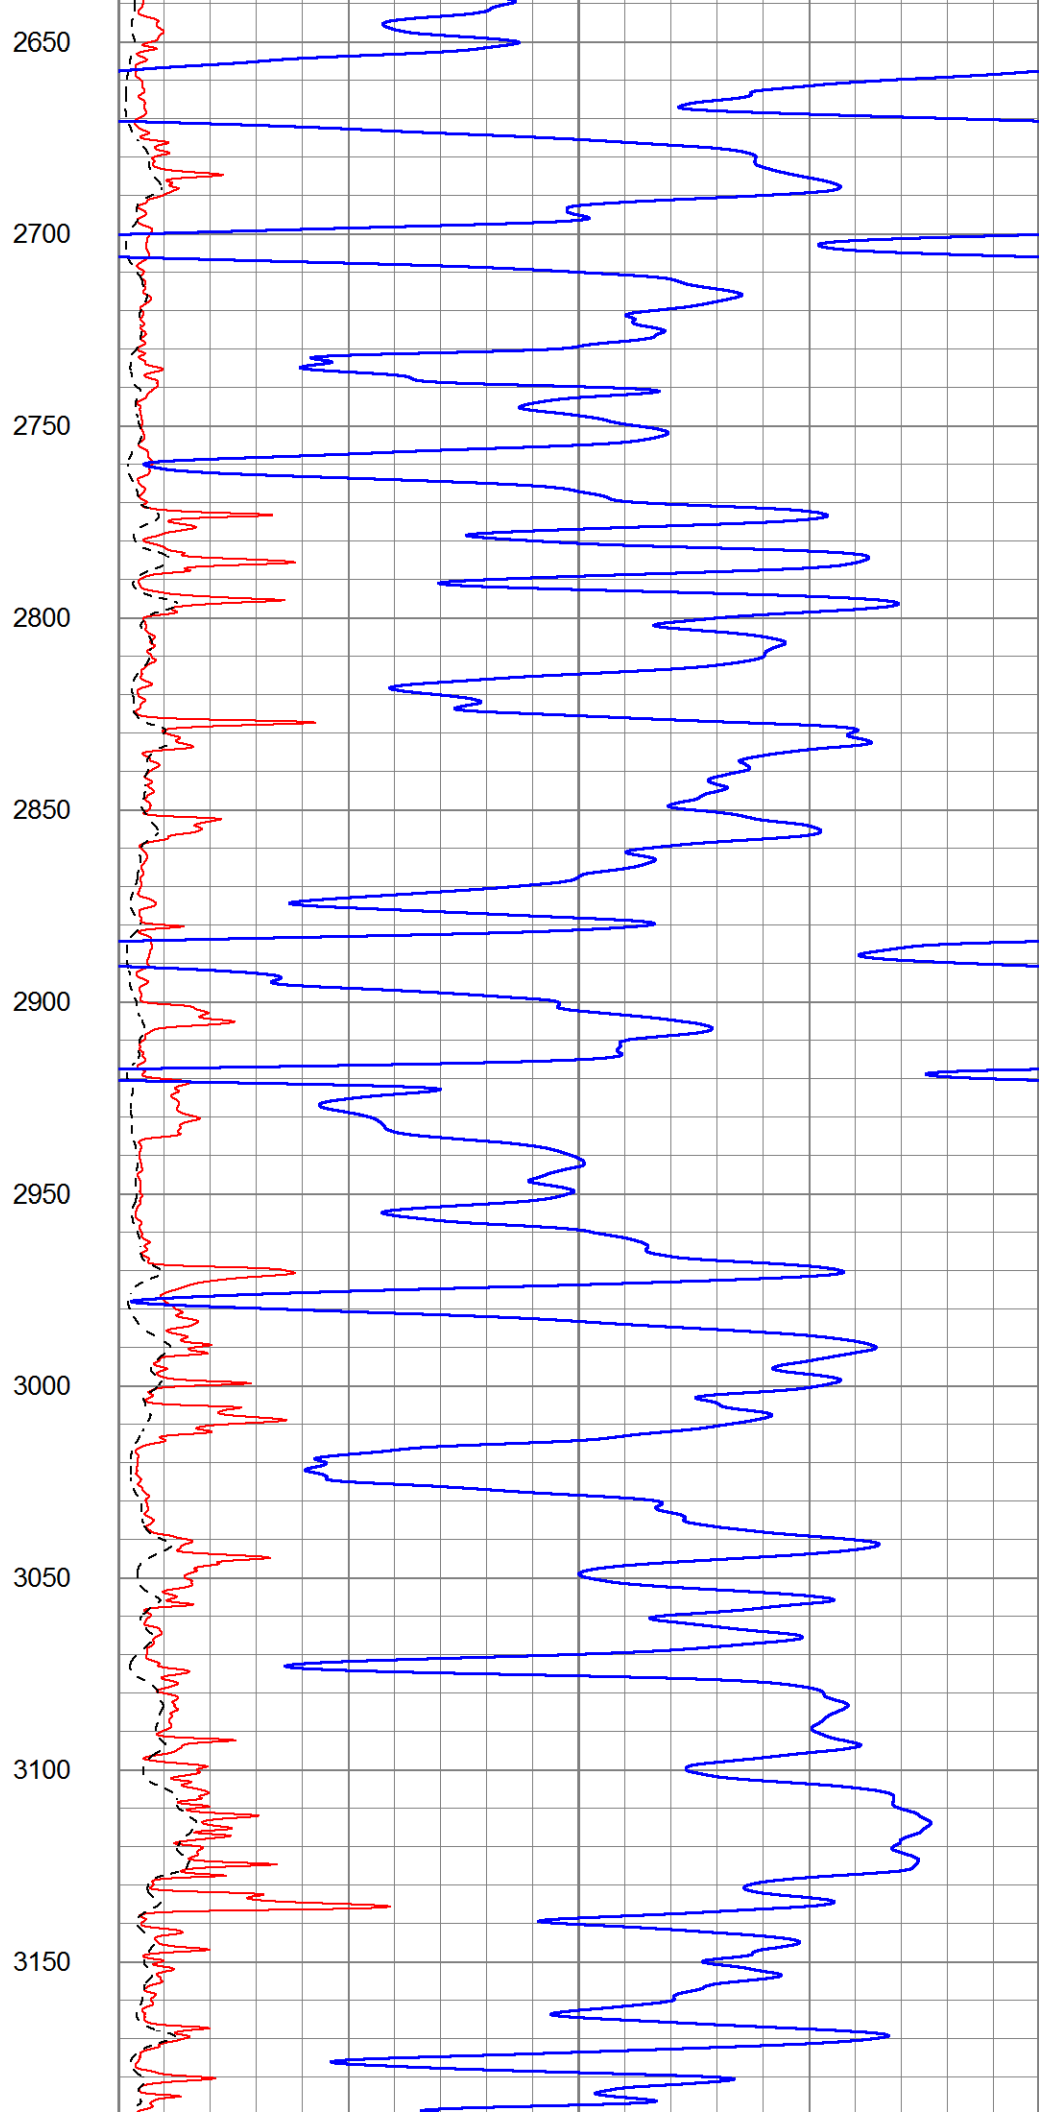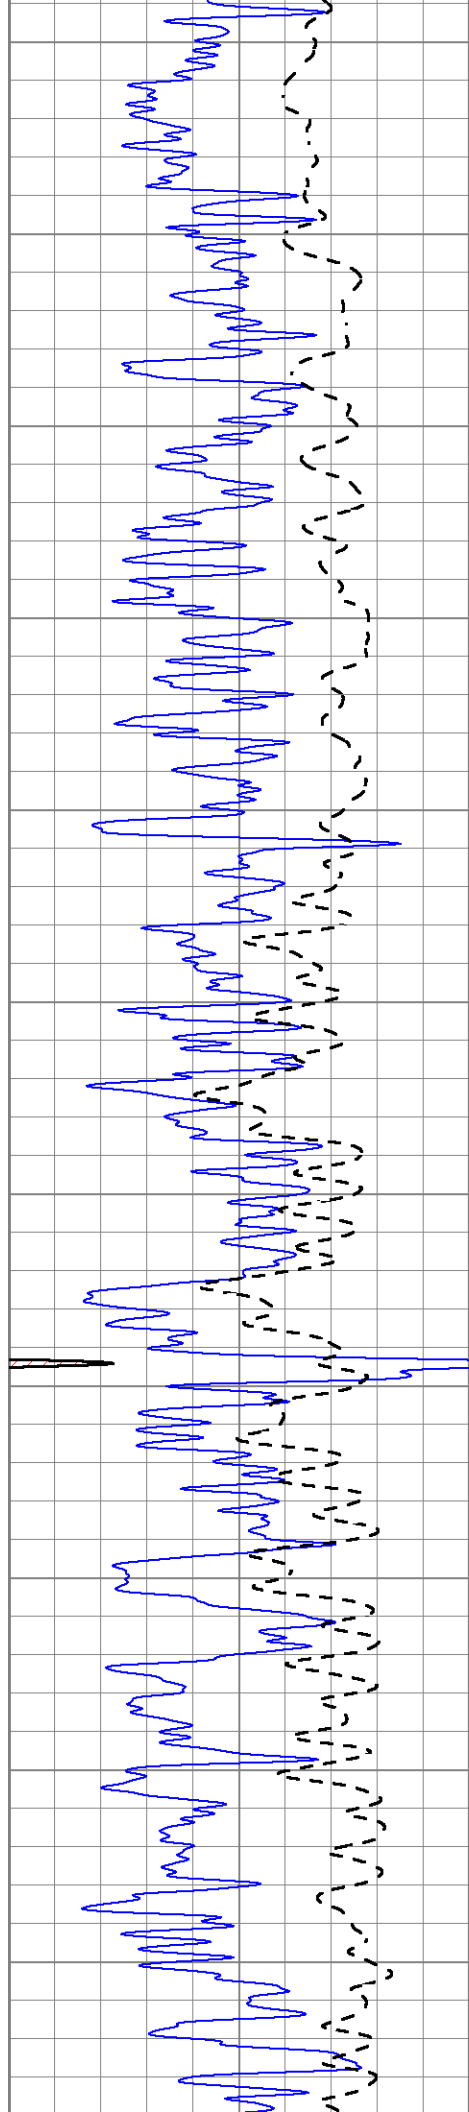

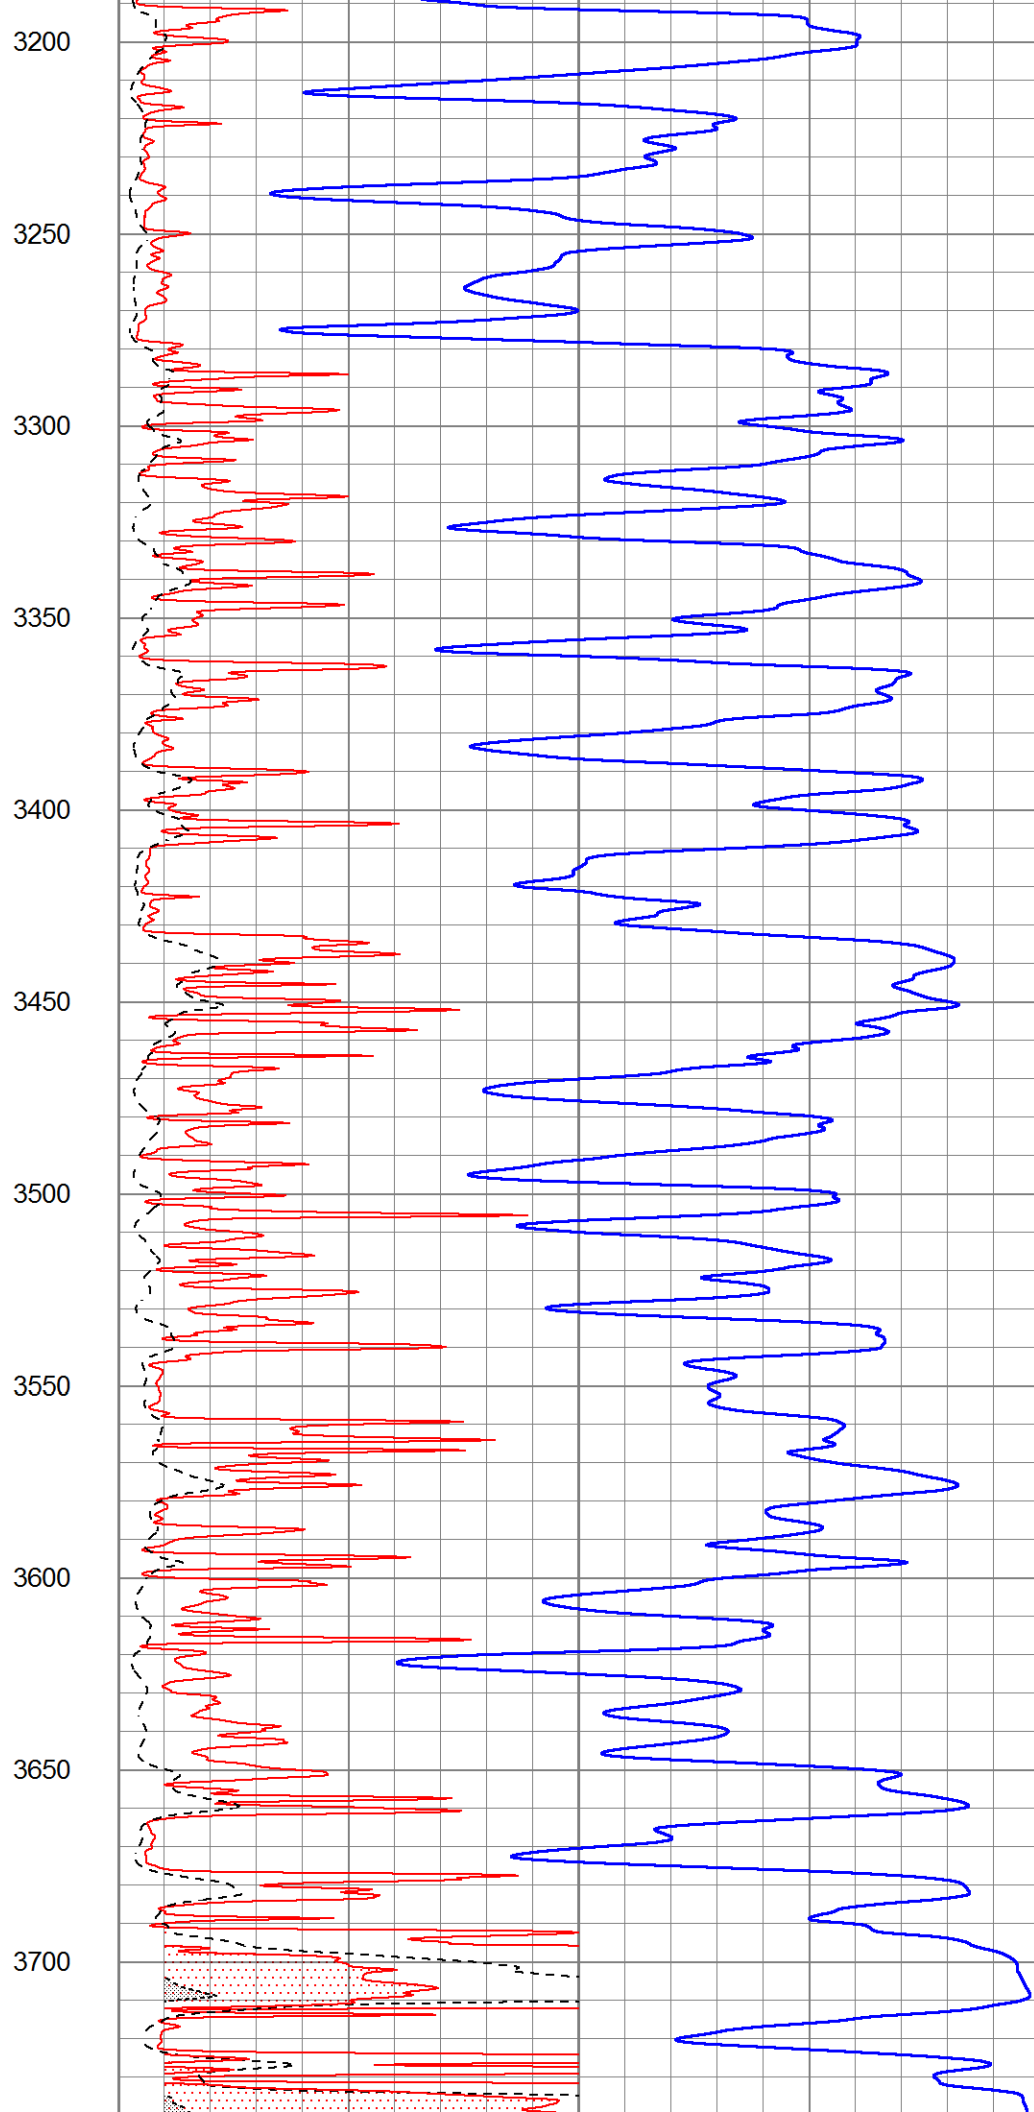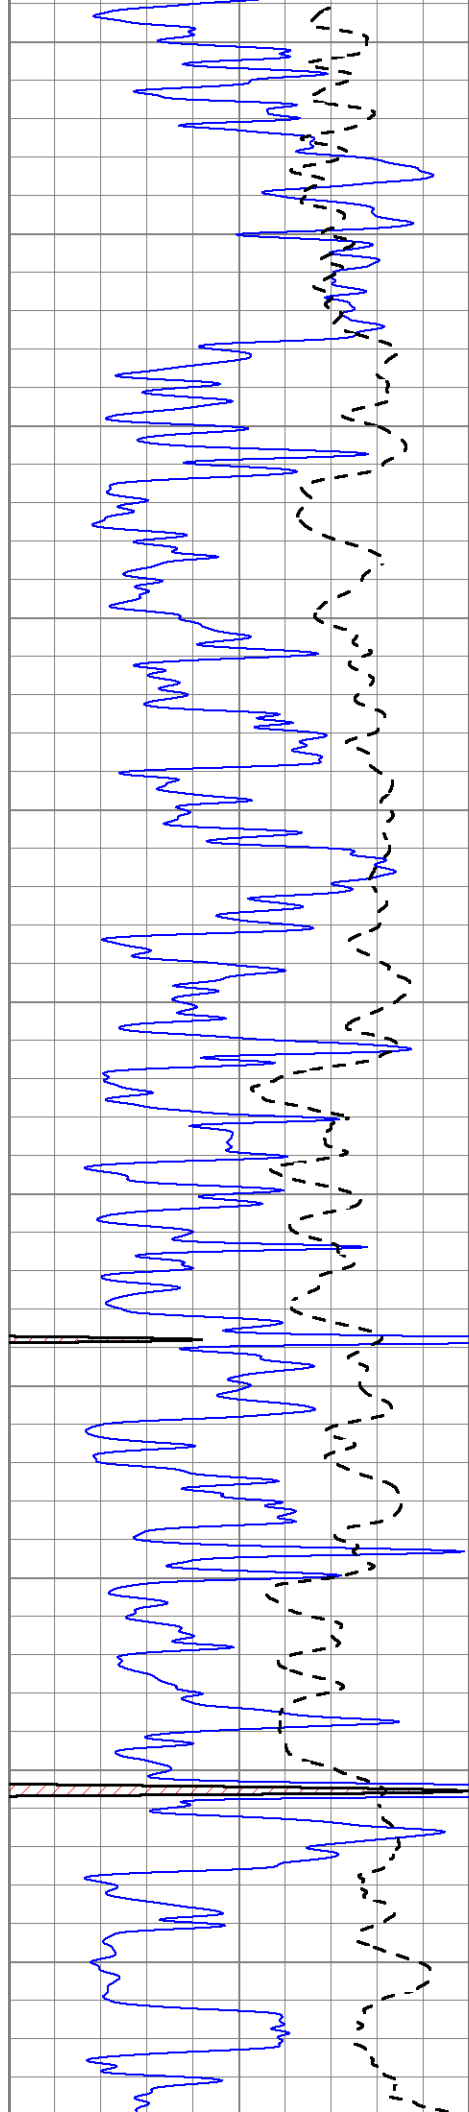


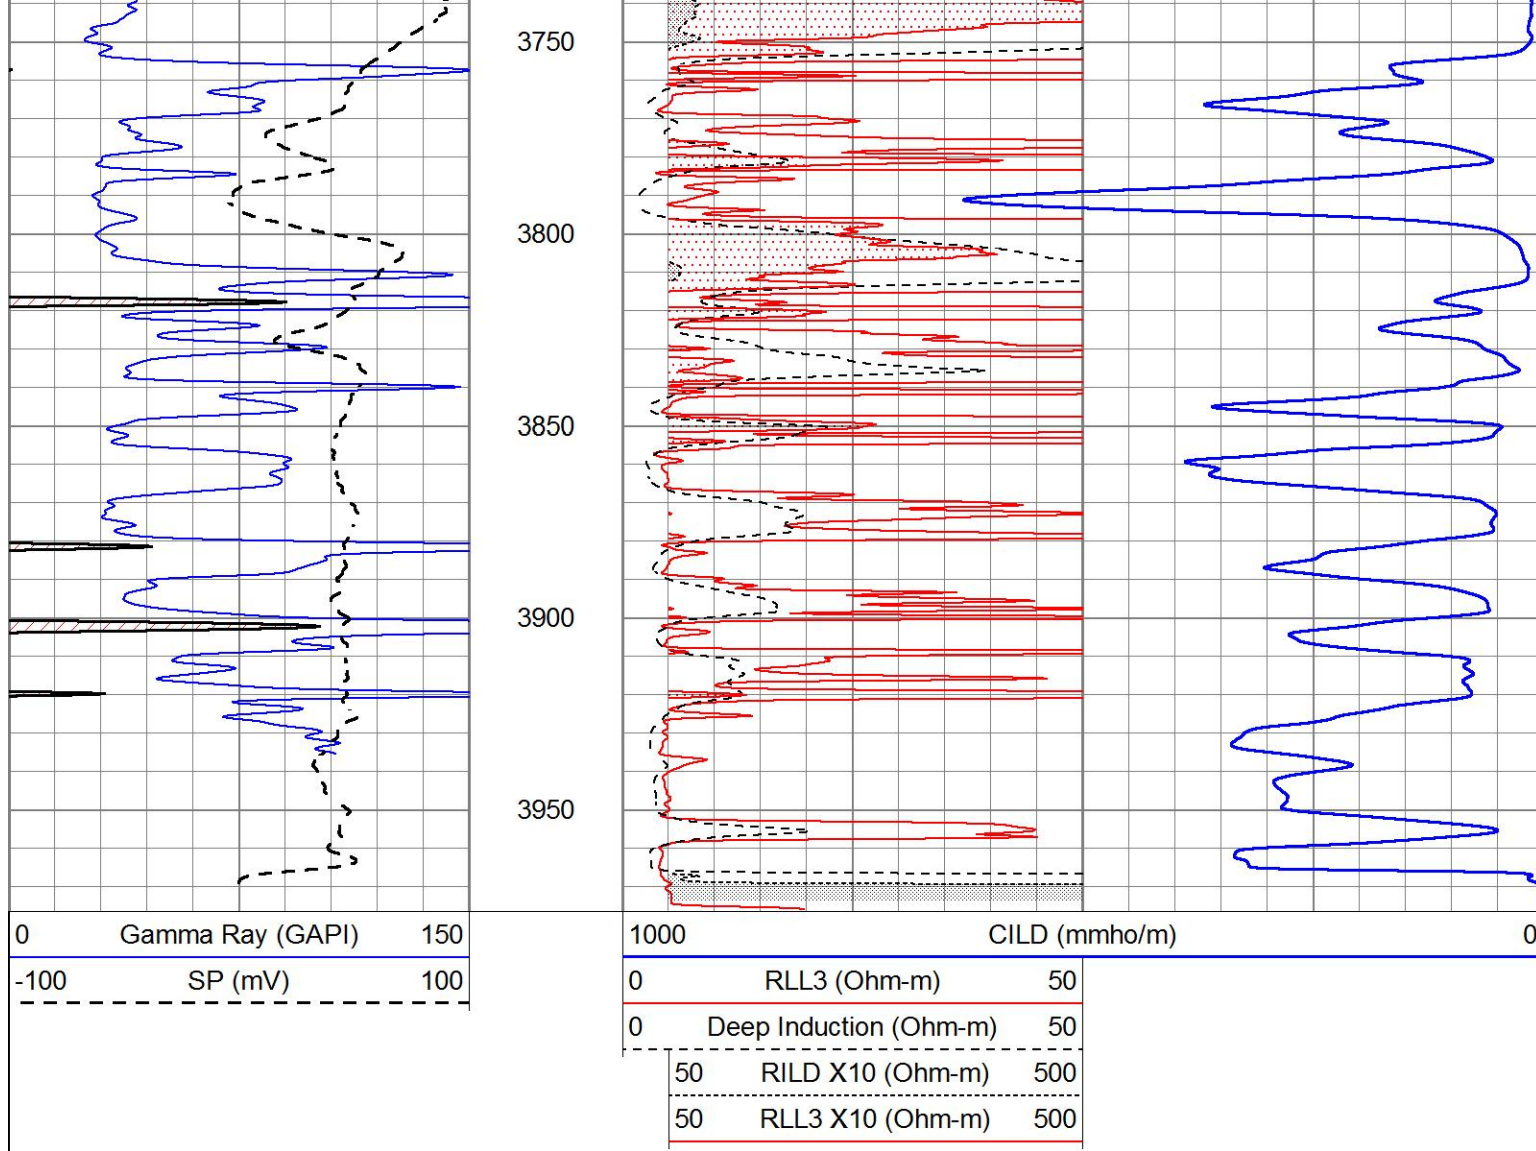


ANHYDRITE

Database File 5860ddn.db
 Dataset Pathname pass3.2
 Presentation Format _dil
 Dataset Creation Wed Oct 06 12:39:12 2021
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

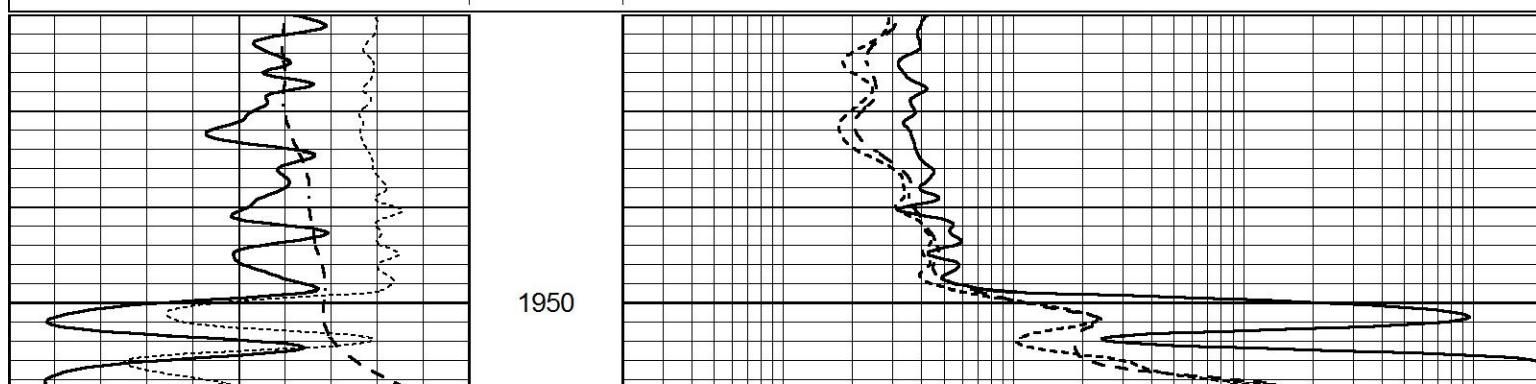

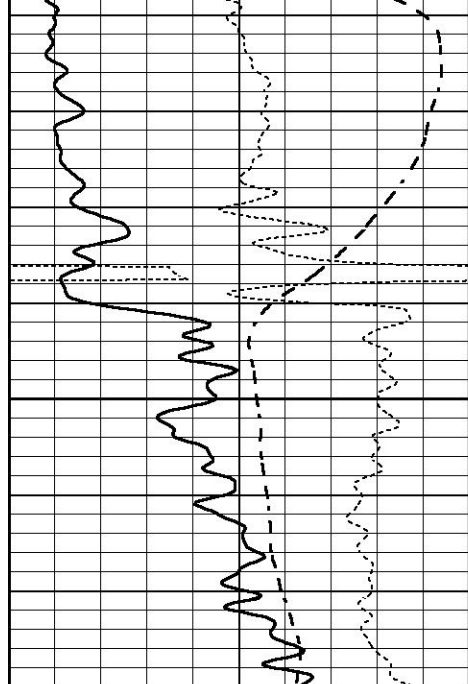

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

2000

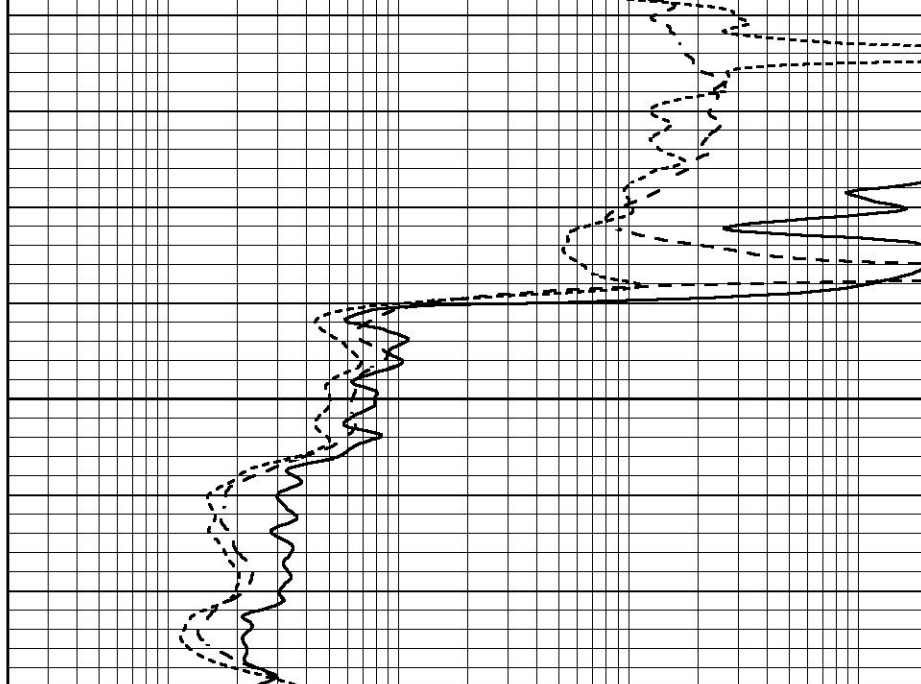


0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000



MAIN SECTION

Database File 5860ddn.db
 Dataset Pathname pass3.1
 Presentation Format _dil
 Dataset Creation Wed Oct 06 12:26:20 2021
 Charted by Depth in Feet scaled 1:240


0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

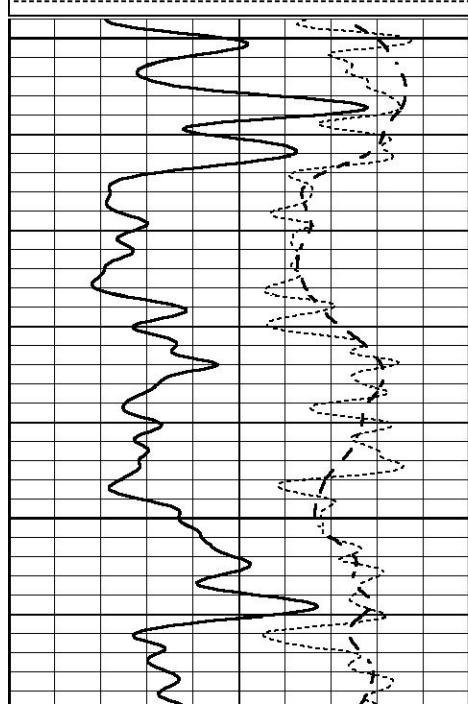


3300

3350

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

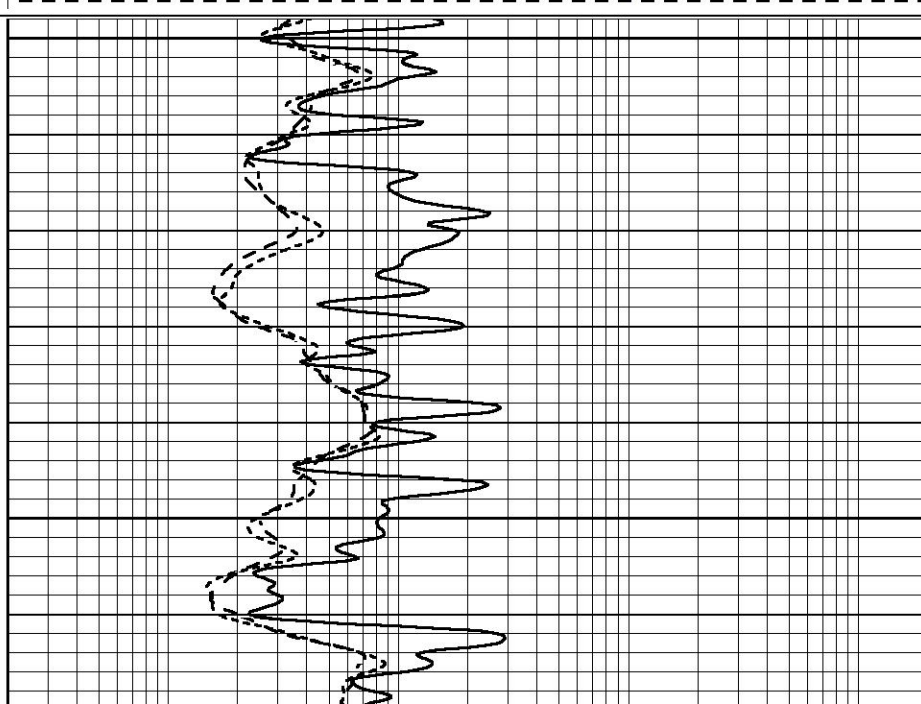

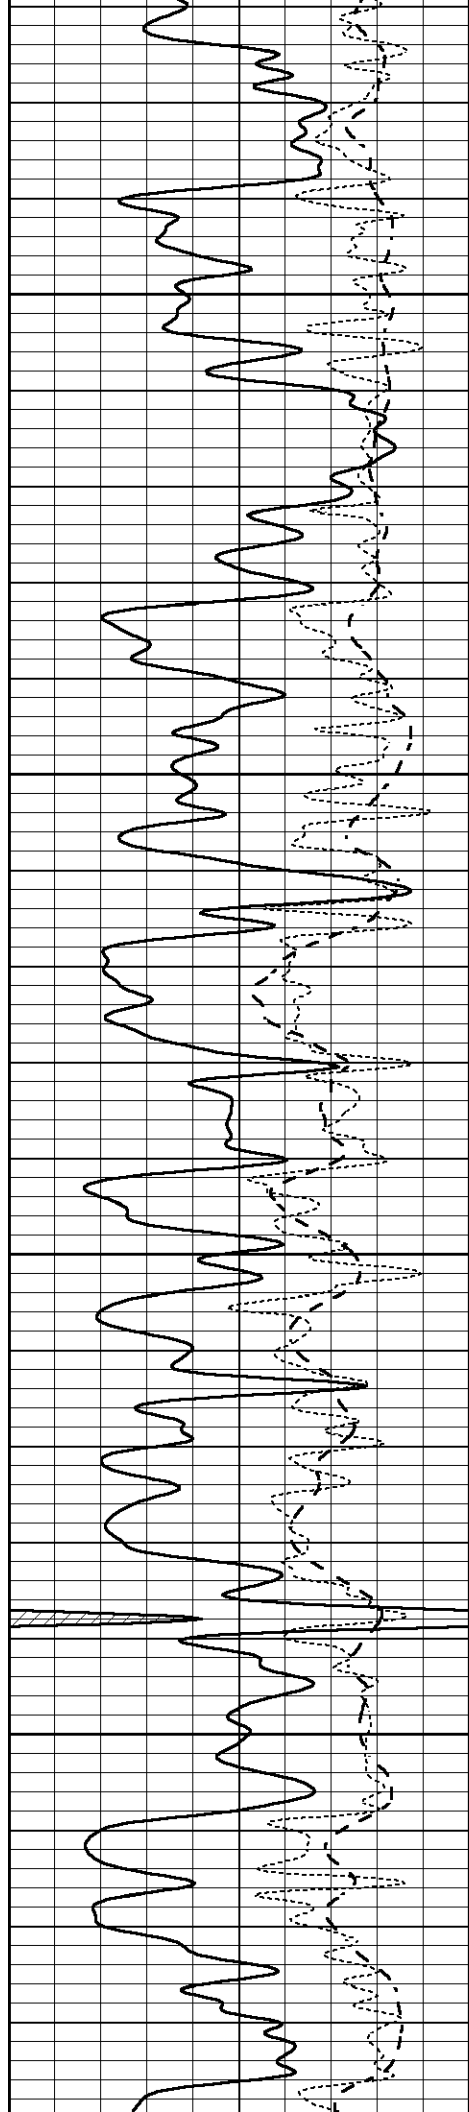


3400

3450

3500

3550

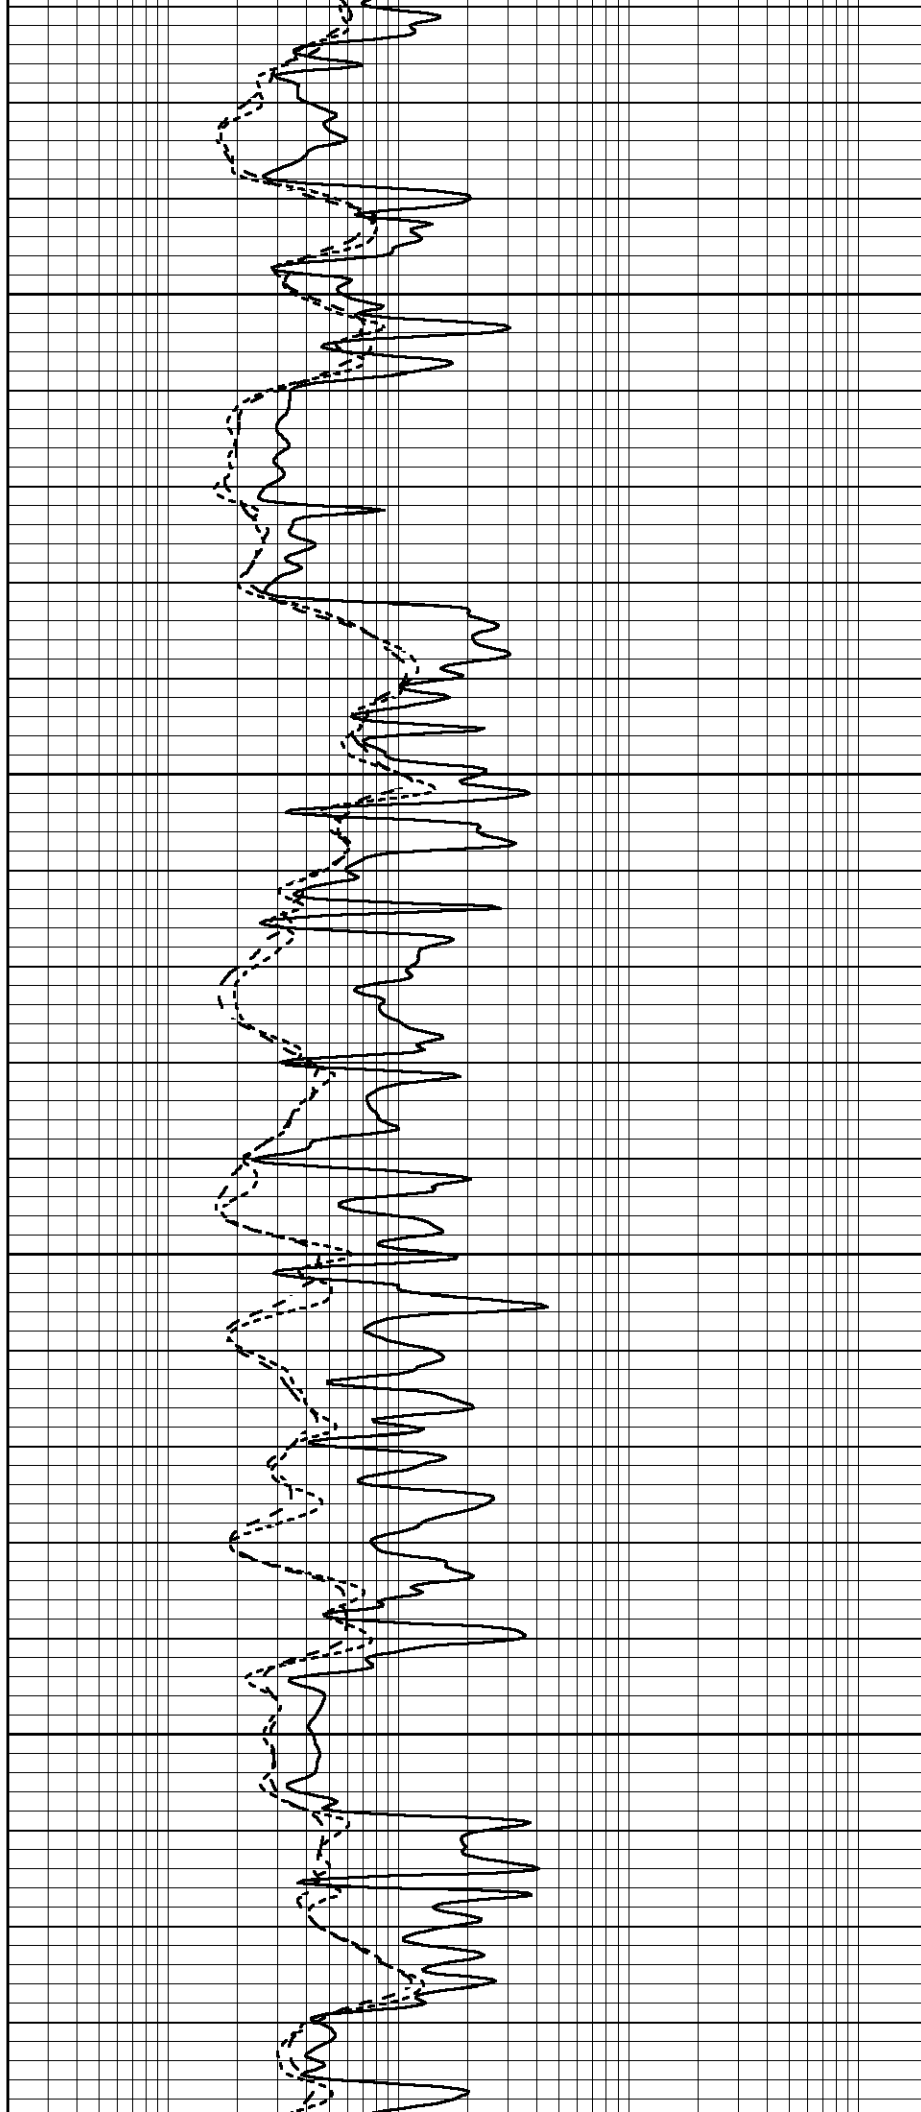




3600


3650

3700

3750

3800

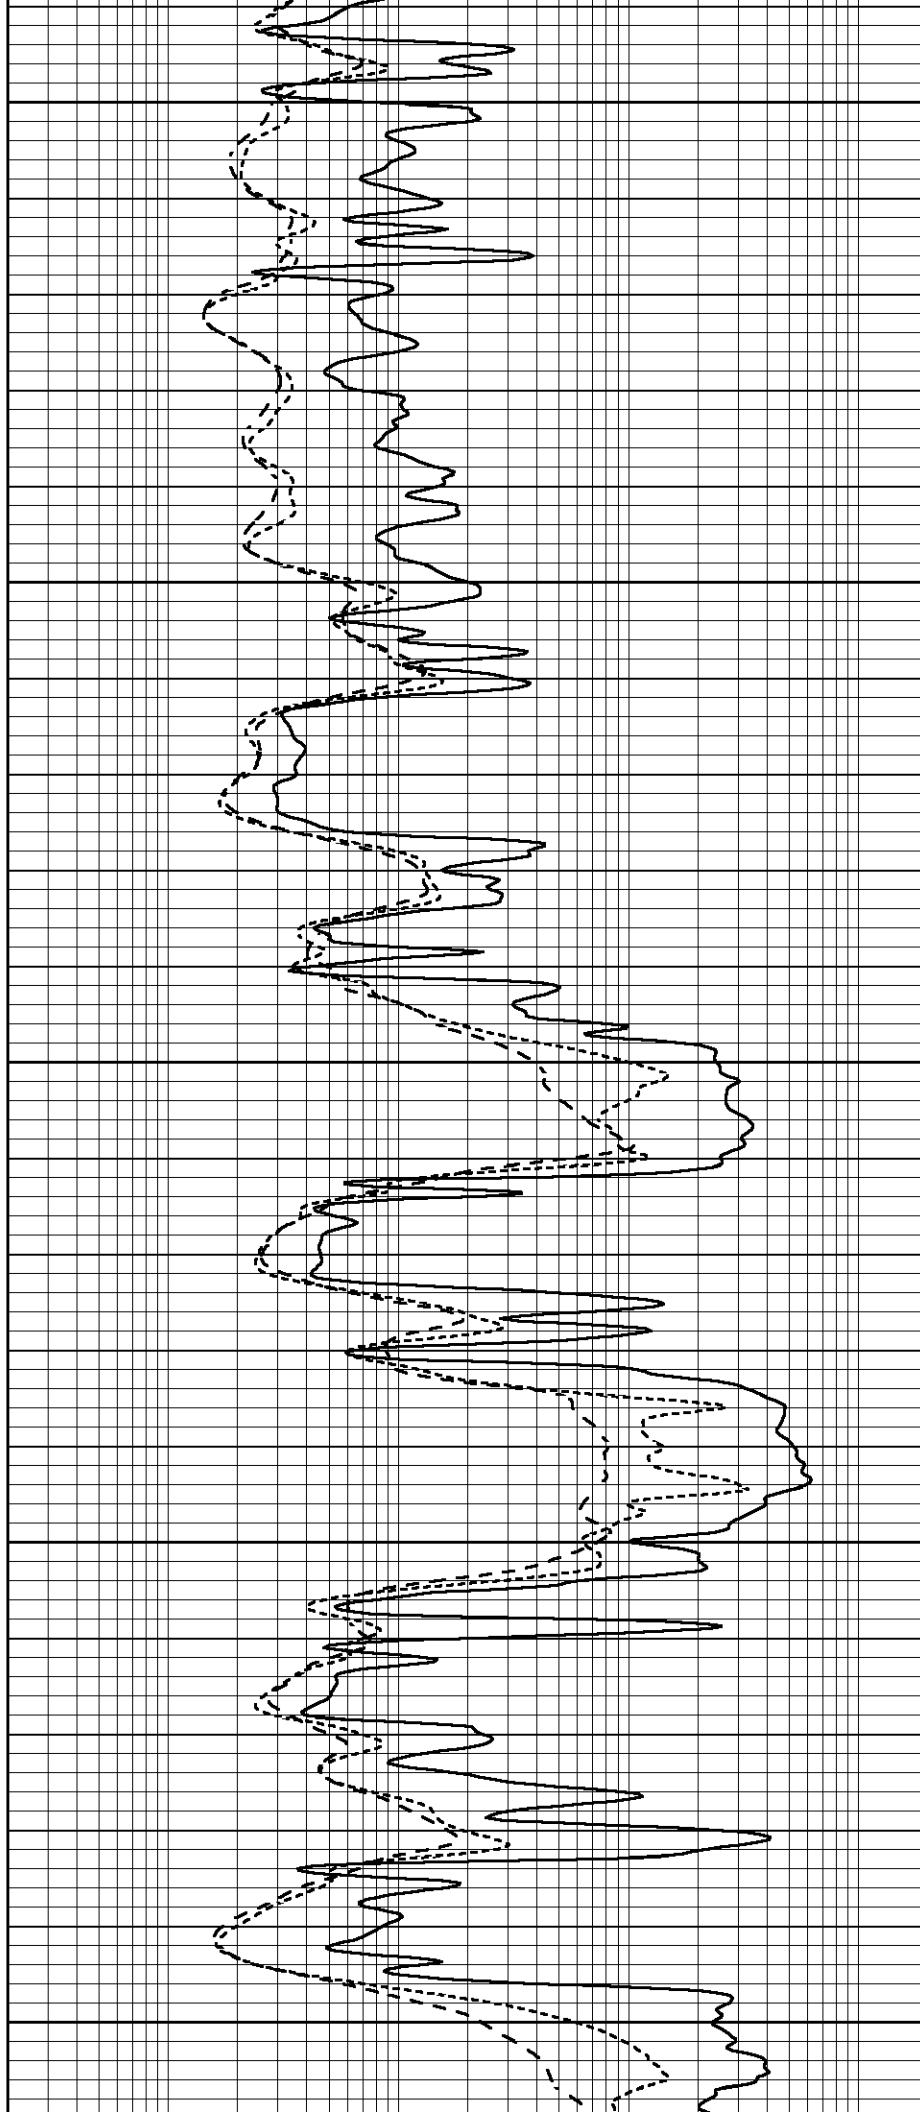

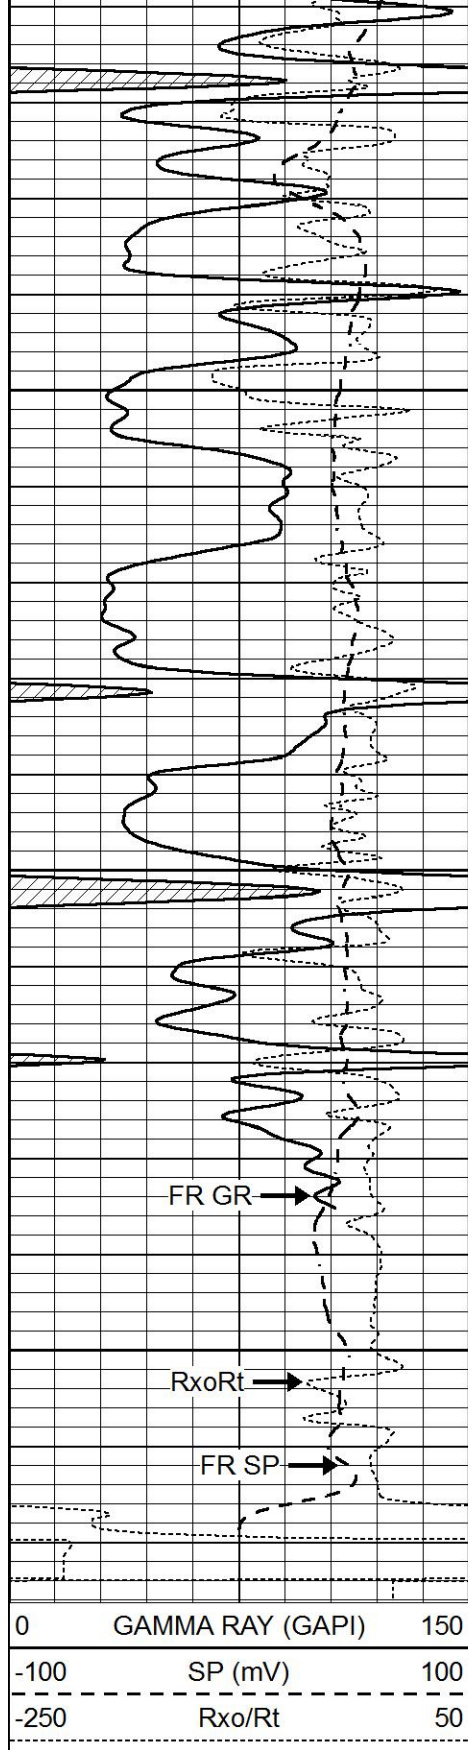


3850

3900


3950

LTD 3972

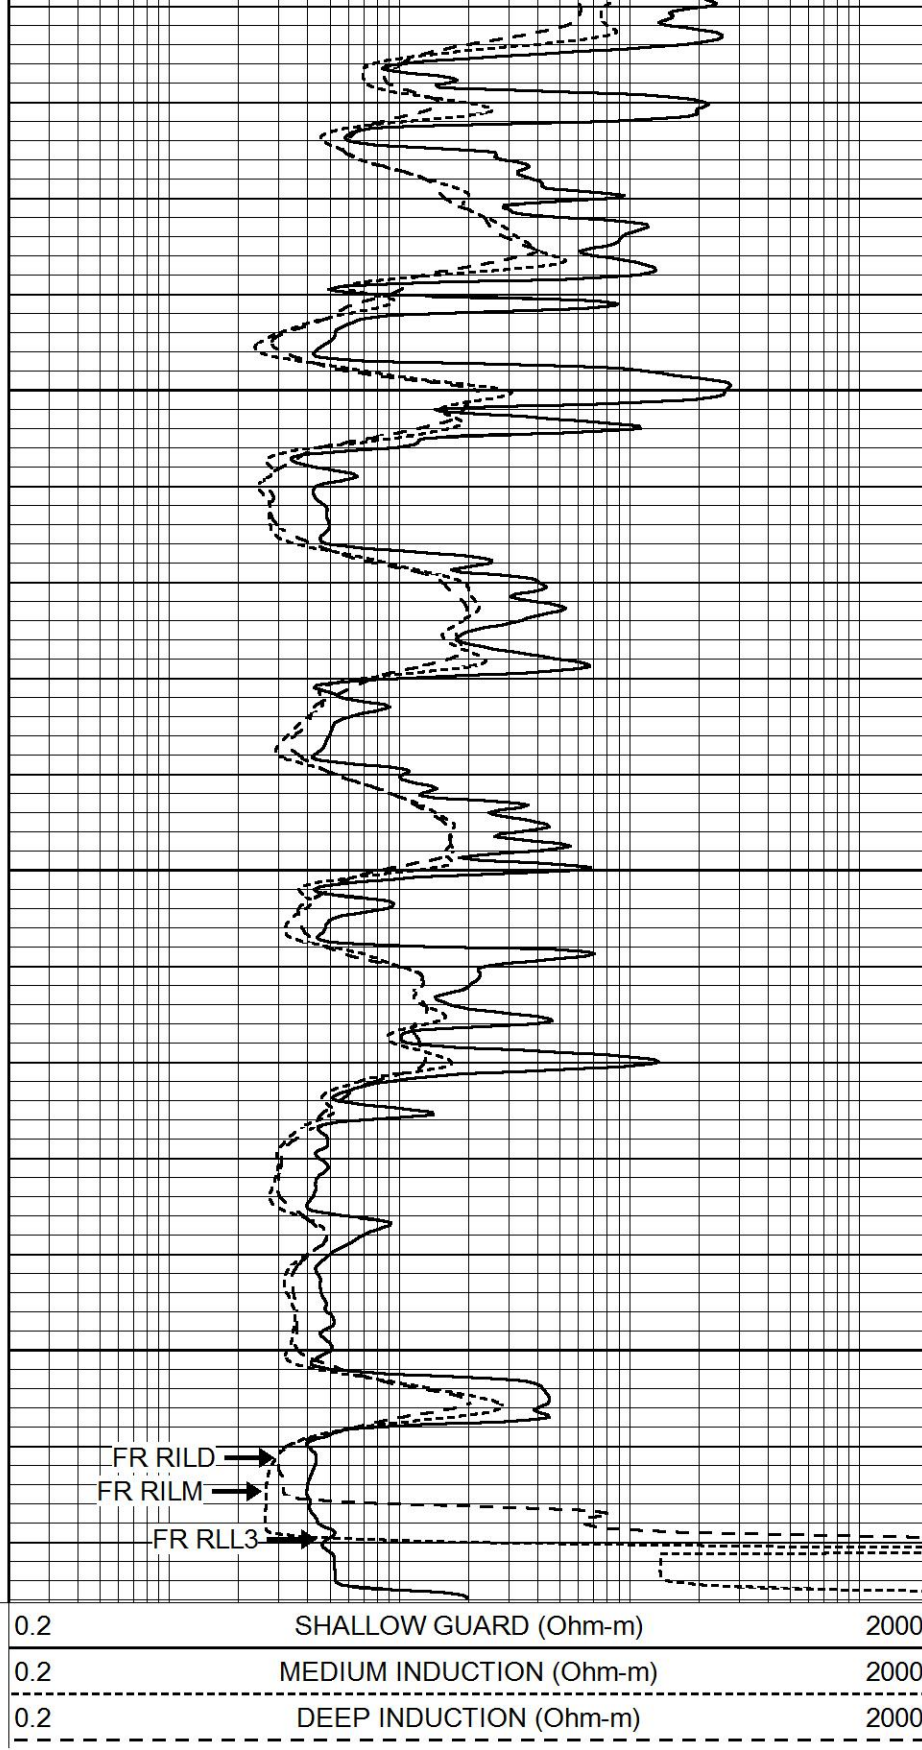

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

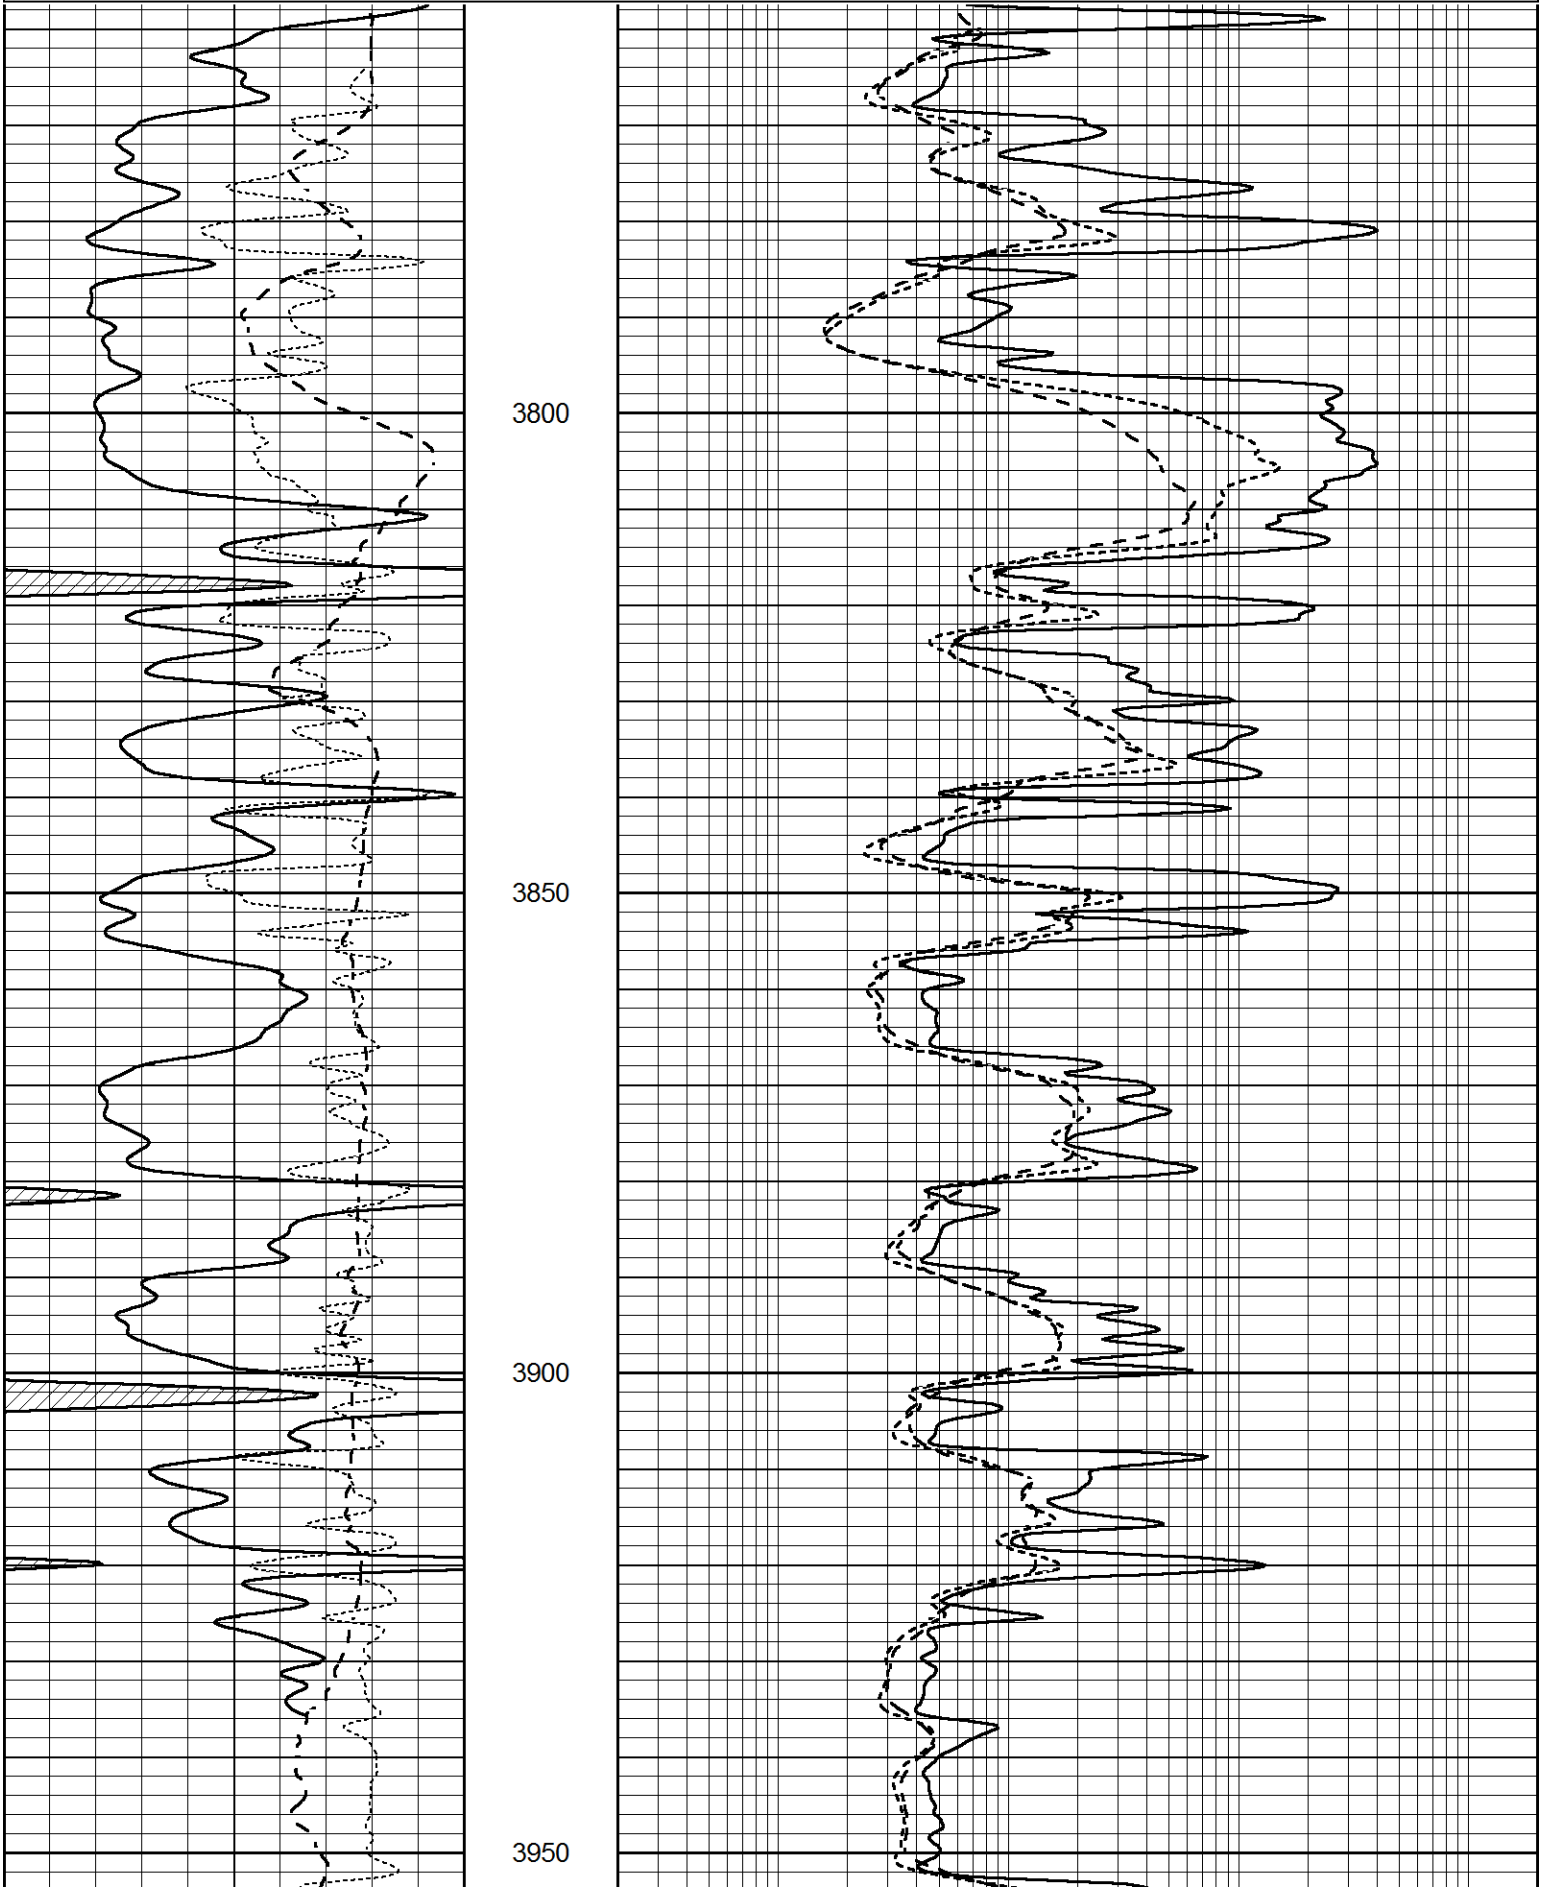



0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

```
Database File      5860ddn.db
Dataset Pathname  pass2.1
Dataset Creation   Wed Oct 06 12:24:39 2021
```

Serial-Model:	FW1410-55-Probe
Surface Cal Performed:	Tue Feb 19 11:44:18 2019
Downhole Cal Performed:	Tue Feb 19 11:44:24 2019
After Survey Verification Performed:	Tue Feb 19 11:44:27 2019

Readings			References			Results		
Loop:	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Serial: 140704
Model: V4_10P
Source Number: 74GBq-19

Performed: Mon Dec 07 12:12:14 2020

	Background	Aluminum	Magnesium		
Window 1	557.73	5525.14	24361.20	cps	
Window 2	47.08	1245.09	5901.17	cps	
Window 4	239.06	1250.70	5456.76	cps	
Window 5	564.08	8300.56	16134.07	cps	
Window 6	44.21	1356.78	2705.40	cps	
Window 8	267.87	2686.97	5150.30	cps	
Bulk Density	-	2.6020	1.6830	g/cc	
Pe	-	3.0000	2.5070	b/e	
LS Alpha:	: -1.8719	SS Alpha:	: -0.8000	LS CPE:	: 1.1424
LS Beta:	: 135562.6841	SS Beta:	: 20128.7209	SS CPE:	: 1.5489

Before Survey Background Counts Verification			Performed: Wed Dec 31 18:00:00 1969		
Window 1	0.00	cps			
Window 2	0.00	cps			
Window 4	0.00	cps			
Window 5	0.00	cps			
Window 6	0.00	cps			
Window 8	0.00	cps			

After Survey Background Counts Verification			Performed: Wed Dec 31 18:00:00 1969		
Window 1	0.00	cps			
Window 2	0.00	cps			
Window 4	0.00	cps			
Window 5	0.00	cps			
Window 6	0.00	cps			
Window 8	0.00	cps			

Lithodensity Caliper Calibration				Performed: Mon Dec 07 12:12:14 2020	
Results	Readings	References (in)			
Low	High	Low	High	Gain	Offset
5852.8	8972.7	8.0	14.0	0.0	-3.3

Before Survey Caliper Verification		Performed:	
	Reference	Reading	
	_____	_____	
Caliper (in)			

After Survey Caliper Verification		Performed:	
	Reference	Reading	
	_____	_____	
Caliper (in)			

Compensated Neutron Calibration Report	
--	--

Serial Number:	080621PMC
Tool Model:	NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
POST-SURVEY VERIFICATION			
Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu
Gamma Ray Calibration Report			
Serial Number:	7		
Tool Model:	Probe1		
Performed:	Tue Jan 19 17:50:08 2021		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5300	GAPI/cps	