

MICRO LOG

Company PLATEAU OPERATING CORPORATION
Well SIMON #1-18
Field NA
County HAMILTON State KANSAS

Location: API #: 15-075-20907-0000
1320' FNL & 1320' FWL
SEC 18 TWP 25S RGE 40W
Permanent Datum GROUND LEVEL Elevation 3477
Log Measured From KELLY BUSHING 7' A.G.L.
Drilling Measured From KELLY BUSHING
Other Services CDL/CNL/PE DIL/SON
Elevation K.B. 3484 D.F. 3482 G.L. 3477

Date	1/29/22	
Run Number	TWO	
Depth Driller	2670	
Depth Logger	2667	
Bottom Logged Interval	2649	
Top Log Interval	800	
Casing Driller	8 5/8" @ 820	
Casing Logger	820	
Bit Size	7 7/8	
Type Fluid in Hole	CHEMICAL MUD	
Density / Viscosity	9.2/36	
pH / Fluid Loss	8.5/10.0	
Source of Sample	FLOWLINE	
Rm @ Meas. Temp	.60 @ 50F	
Rmf @ Meas. Temp	.45 @ 50F	
Rmc @ Meas. Temp	.72 @ 50F	
Source of Rmf / Rmc	MEASUREMENT	
Rm @ BHT	.29 @ 103F	
Time Circulation Stopped	2 HOURS	
Time Logger on Bottom	////	
Maximum Recorded Temperature	103F	
Equipment Number	3802	
Location	HAYS, KANSAS	
Recorded By	JASON CAPELLUCCI	TJ DREILING
Witnessed By	BILL KERRIGAN	


<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS


SYRACUSE, KS. - 5 SOUTH TO RD. 27 - 1/4 EAST - SOUTH INTO

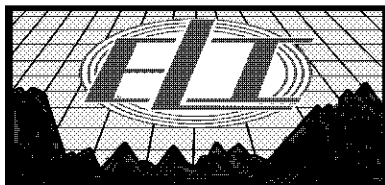



MAIN SECTION

Database File	6233pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Sat Jan 29 15:34:35 2022
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

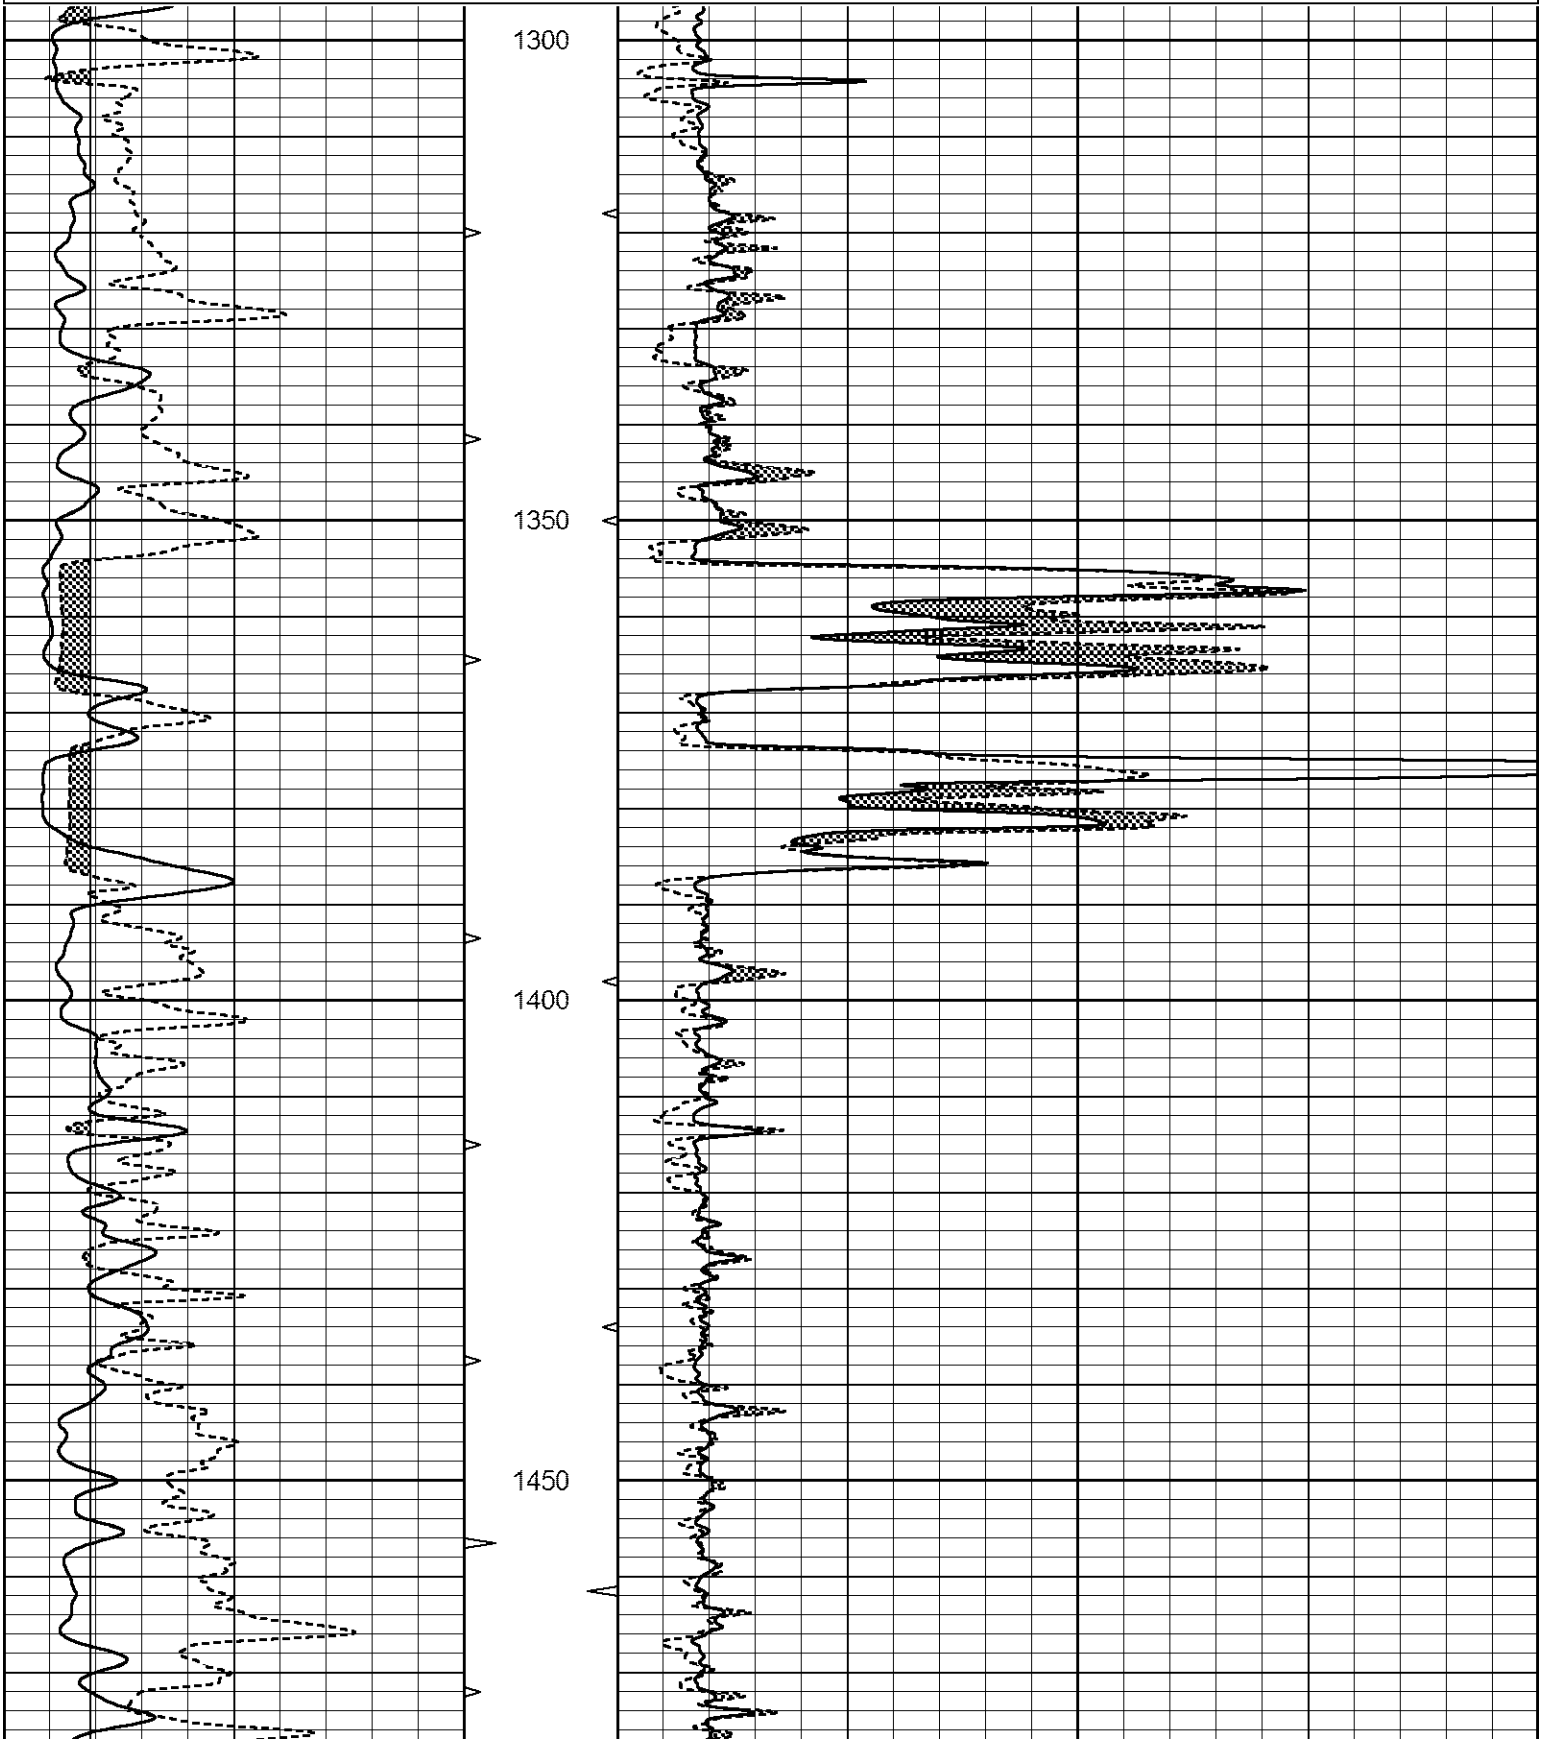

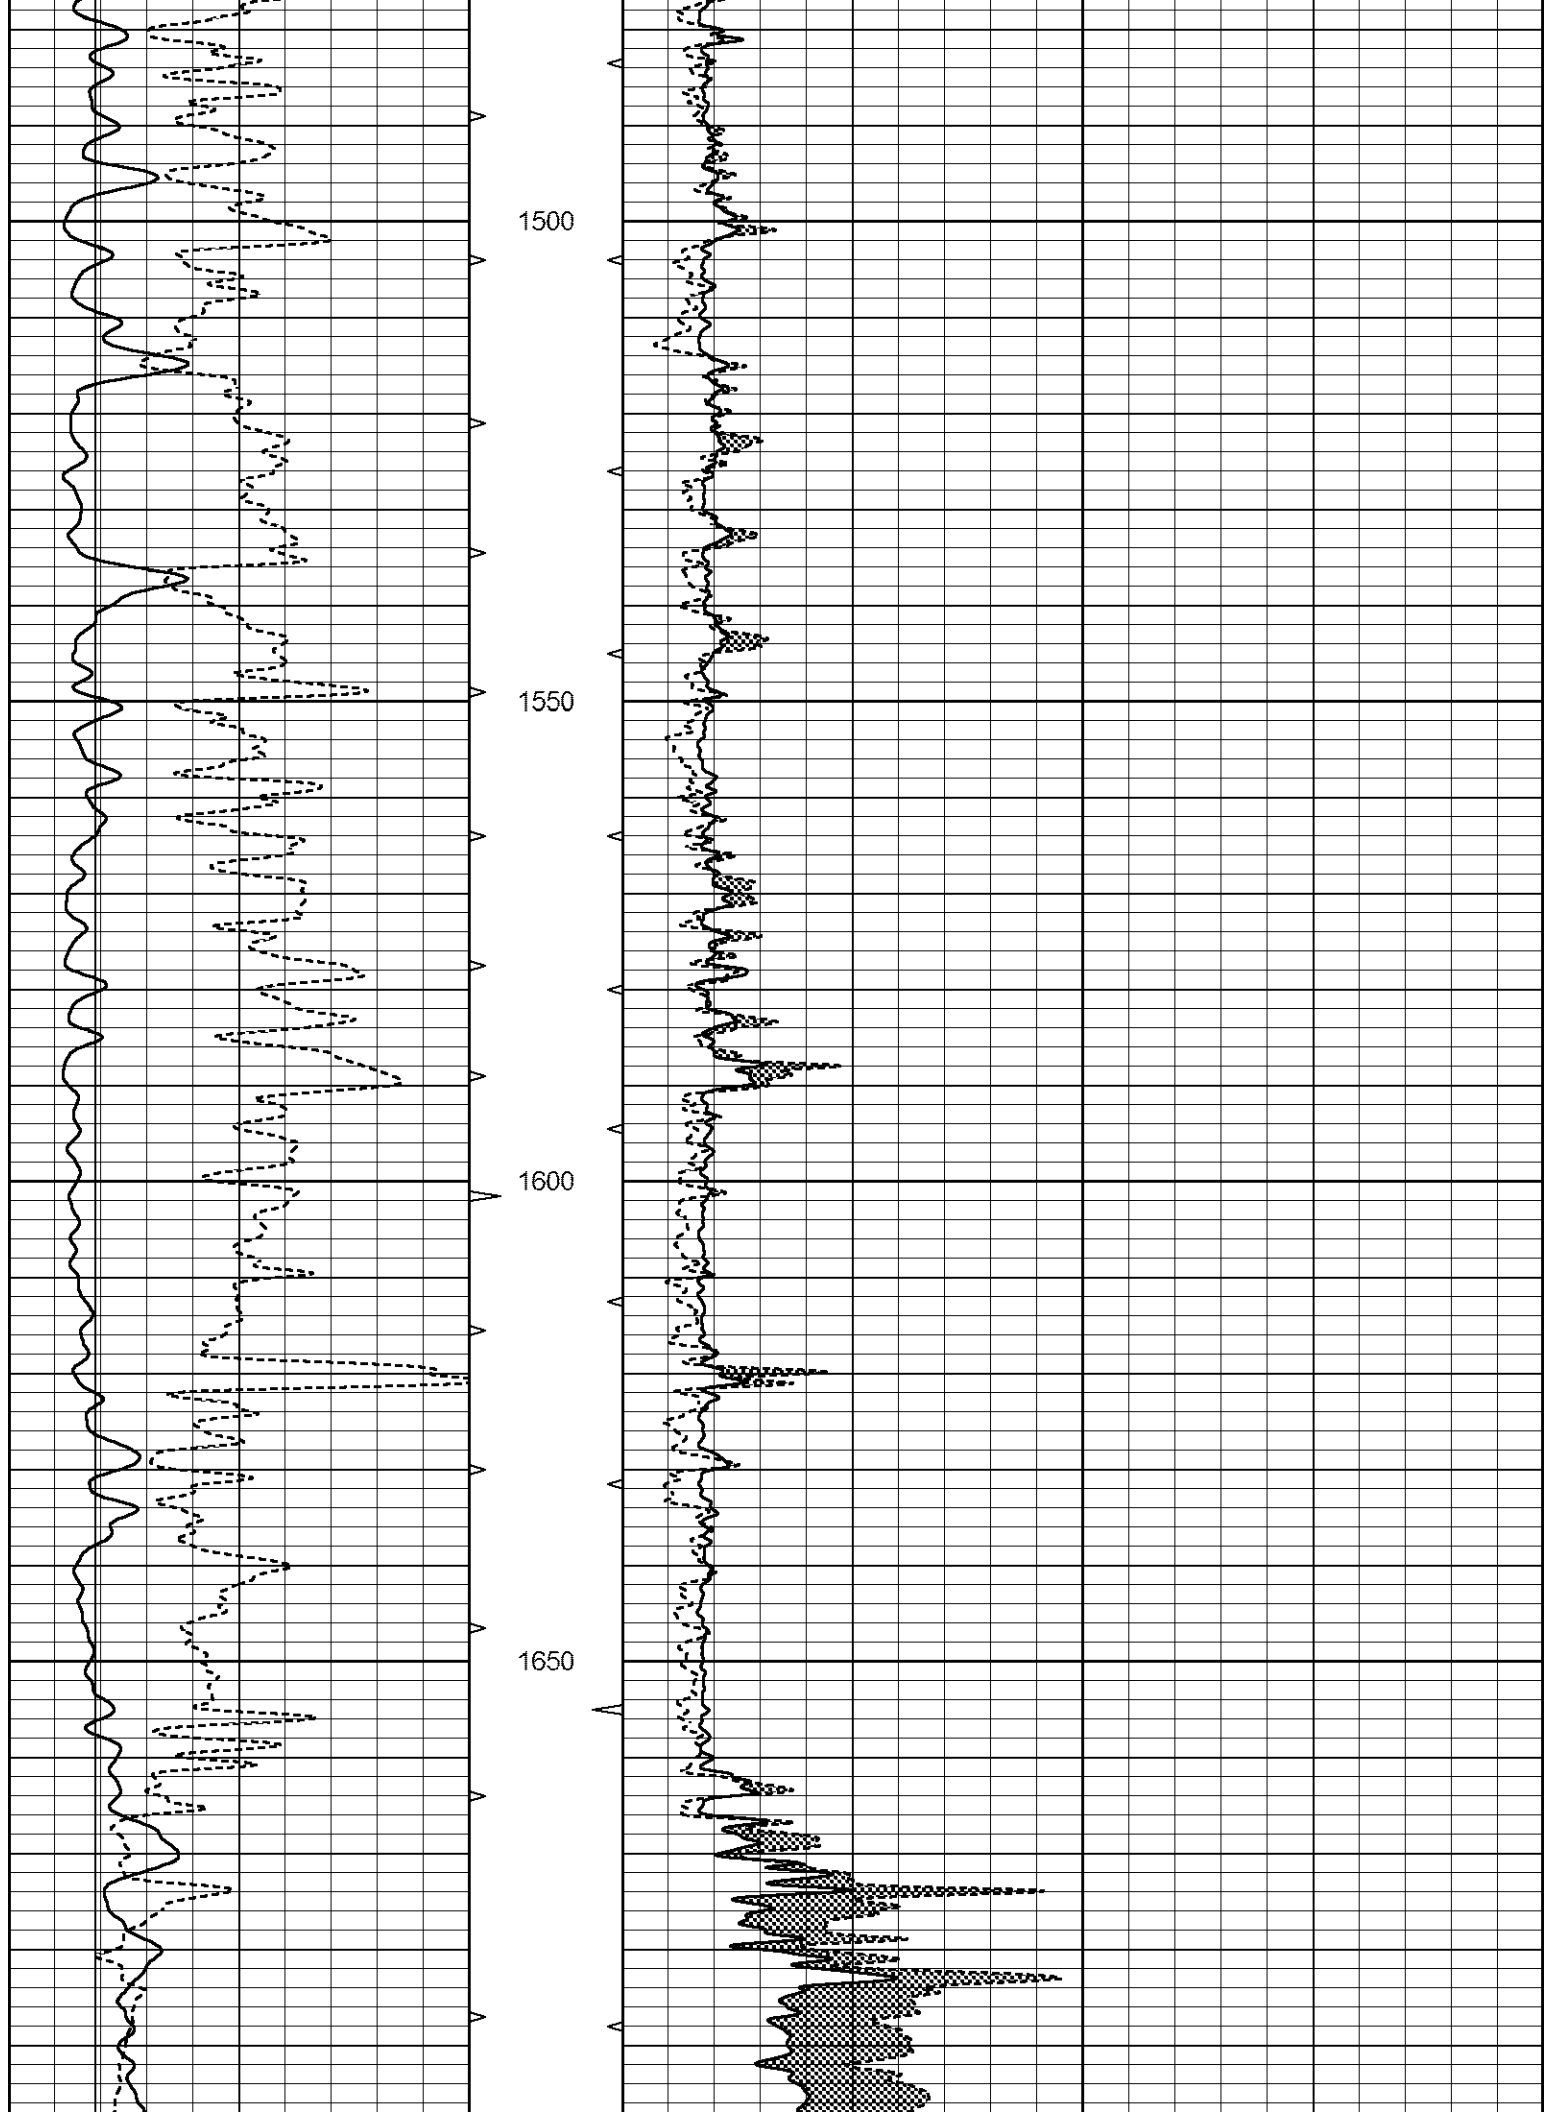

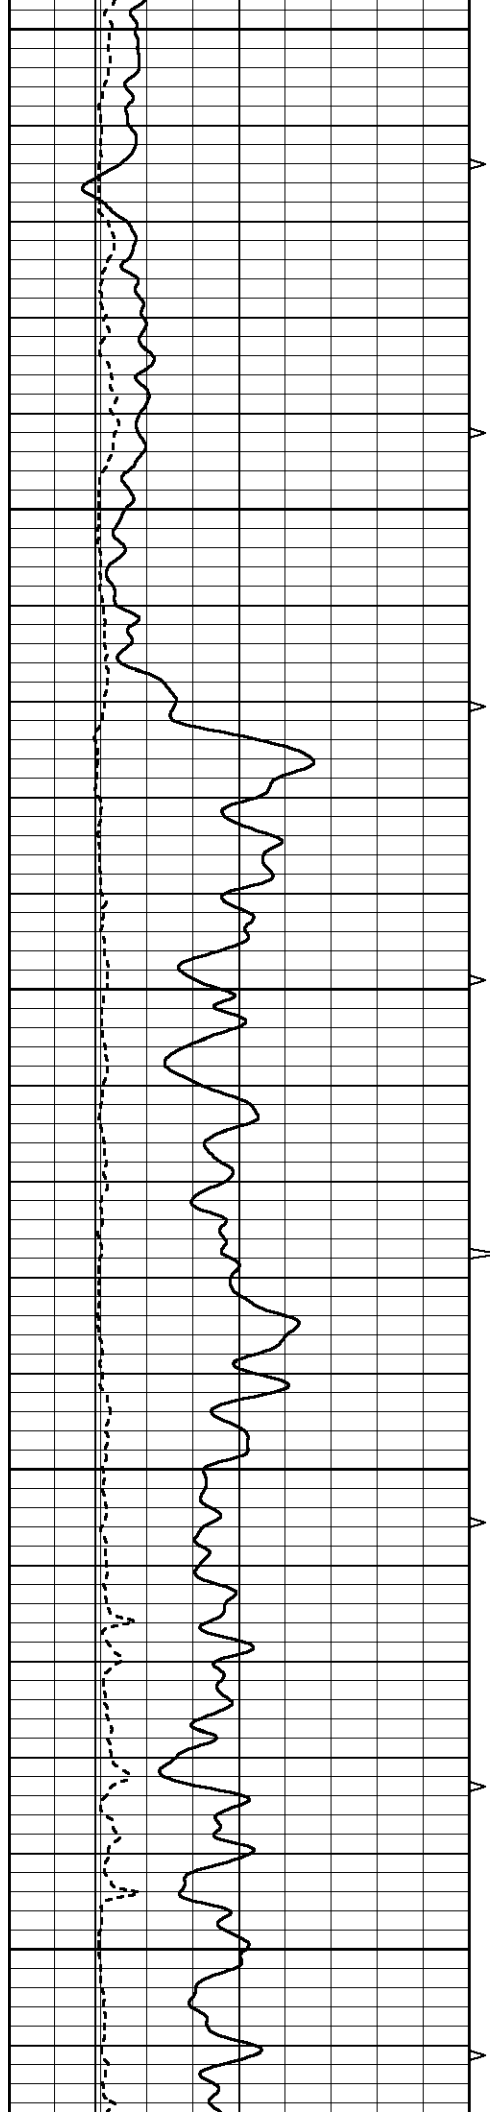


1700


1750

1800

1850

1900

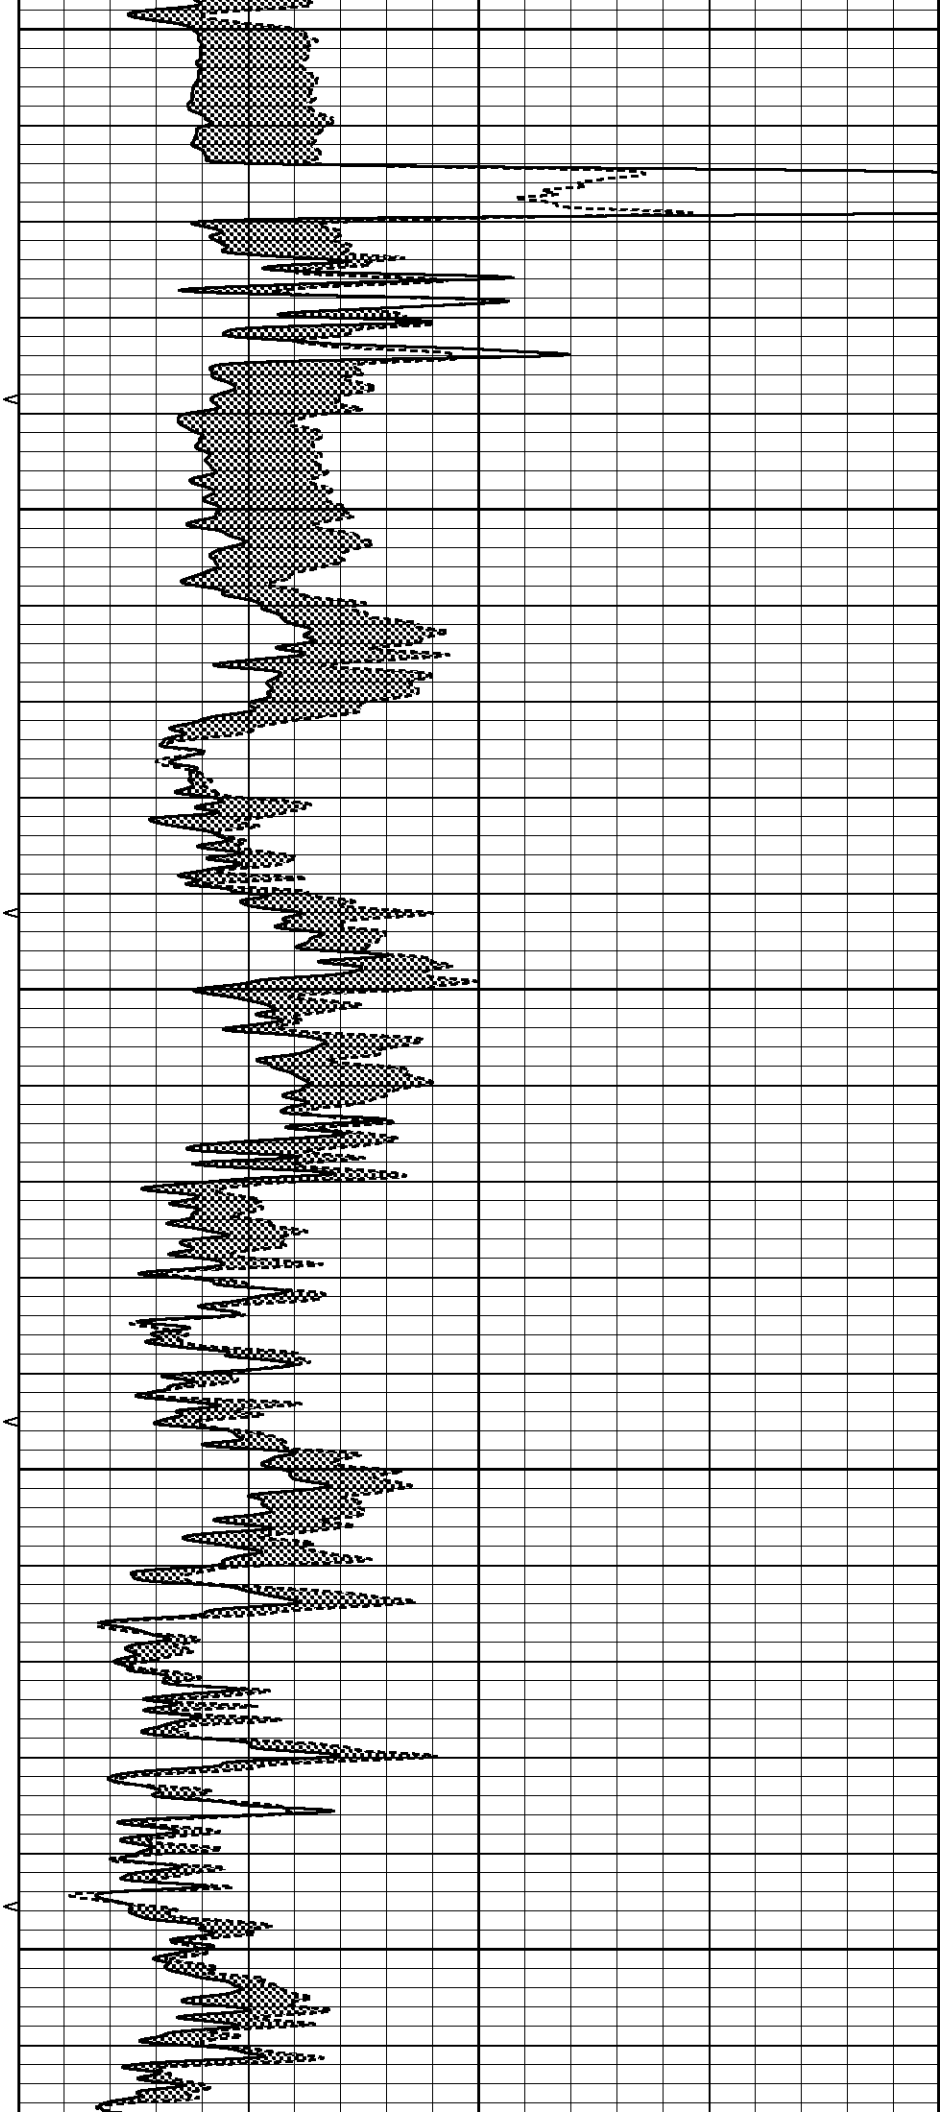

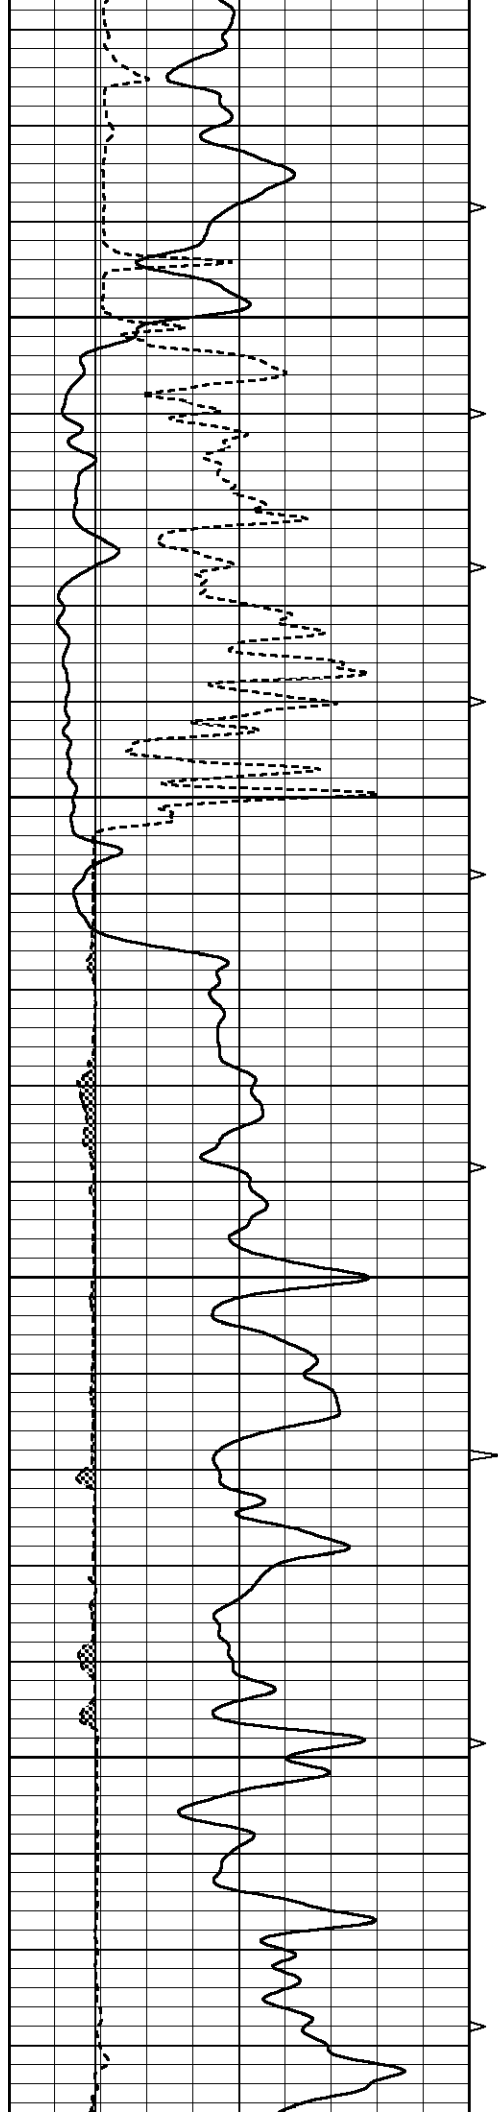



1950

2000

2050

2100

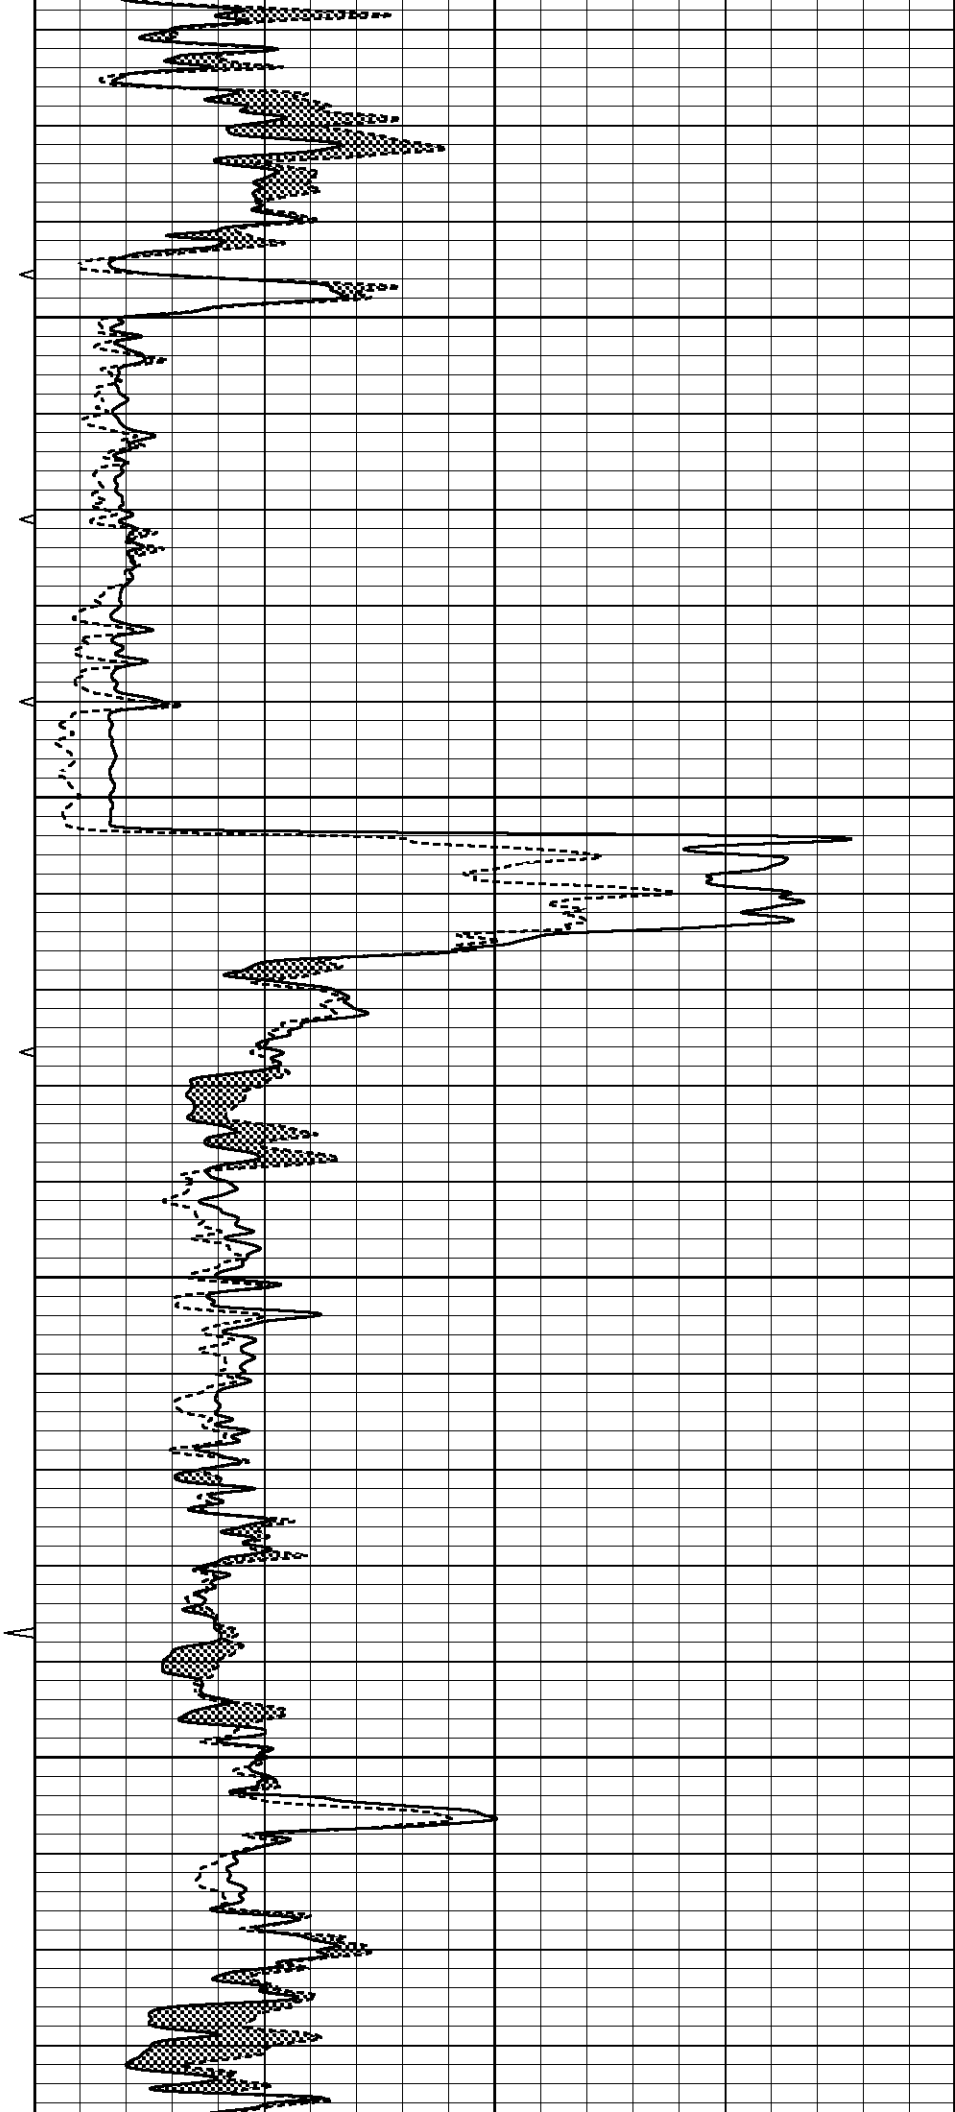

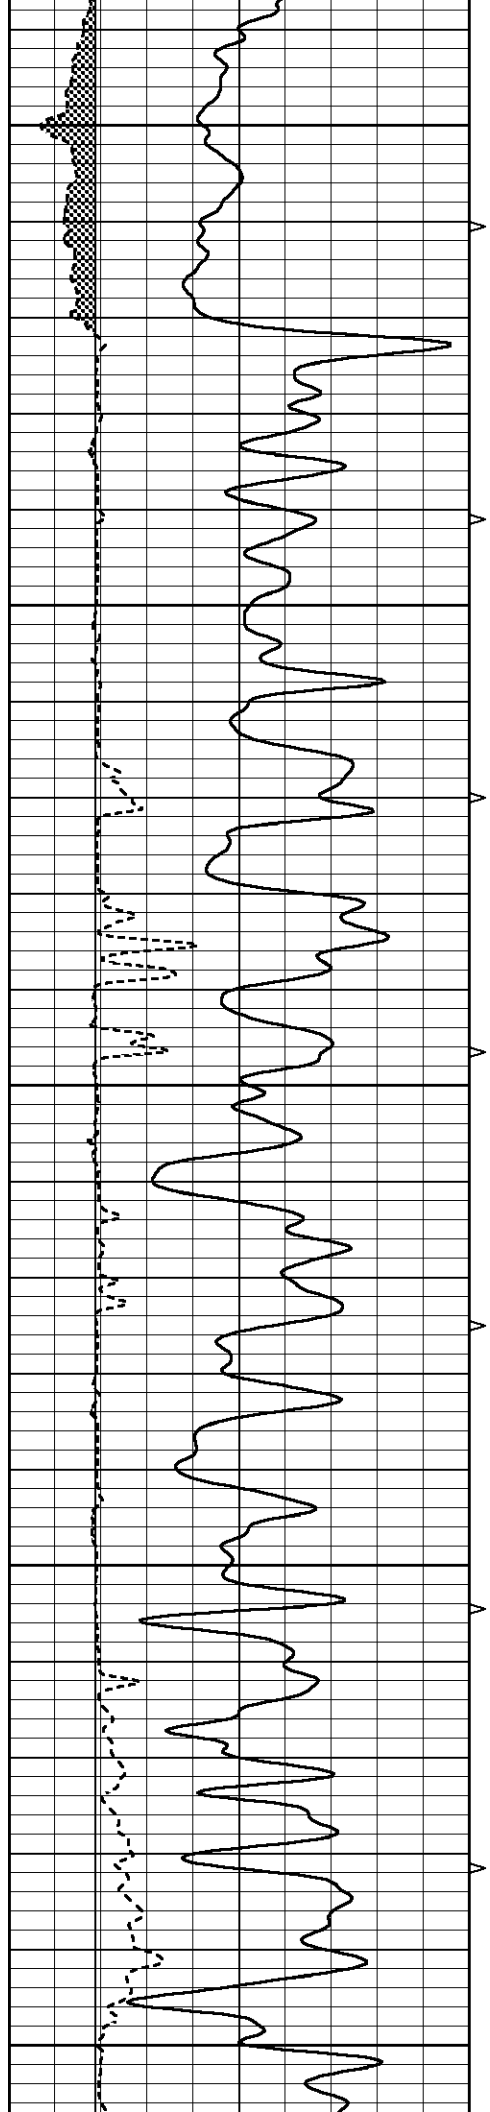


2150


2200

2250

2300

2350

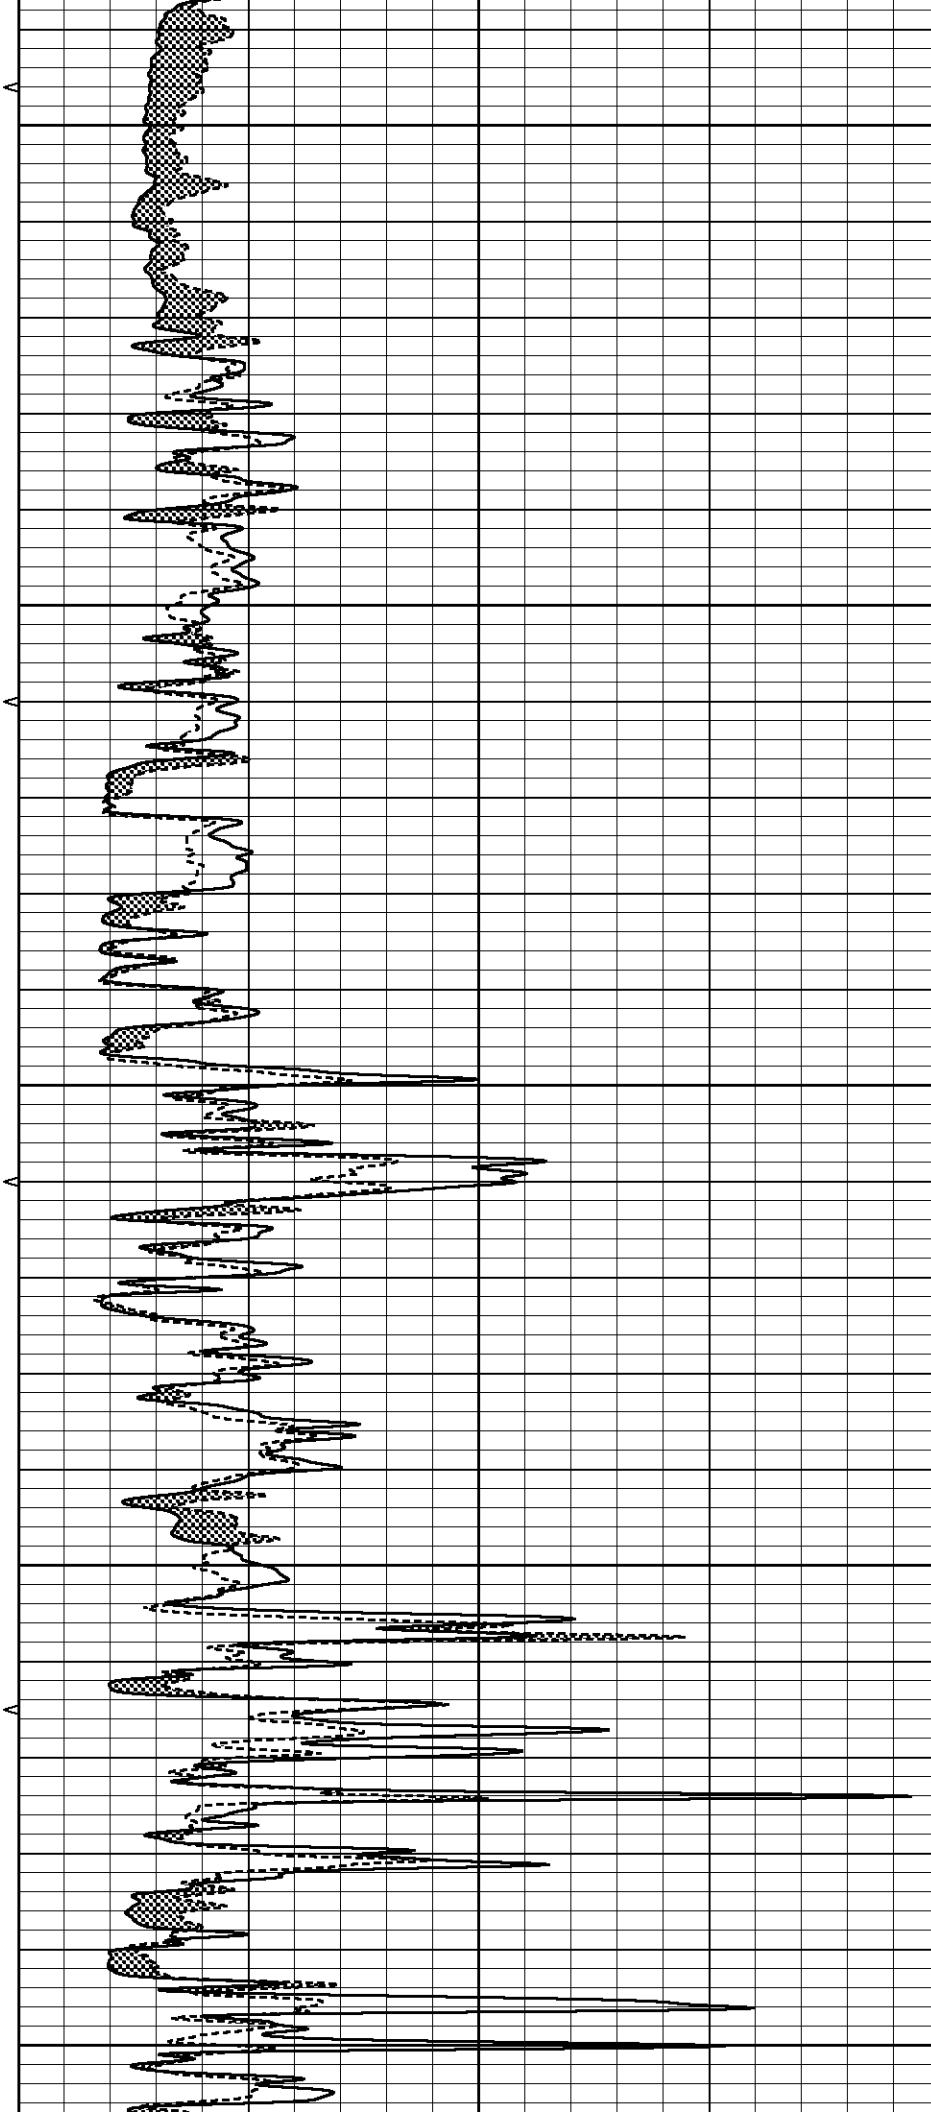

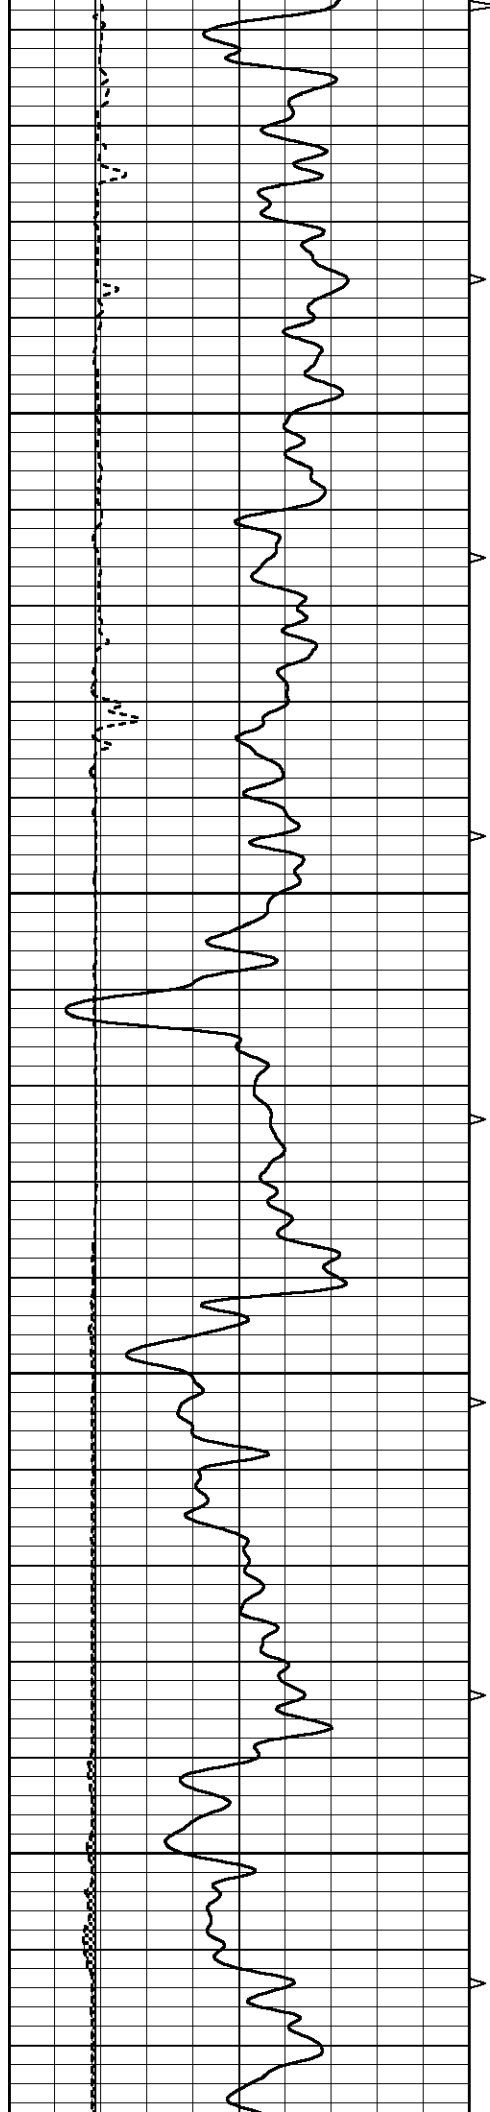



2400

2450

2500

2550

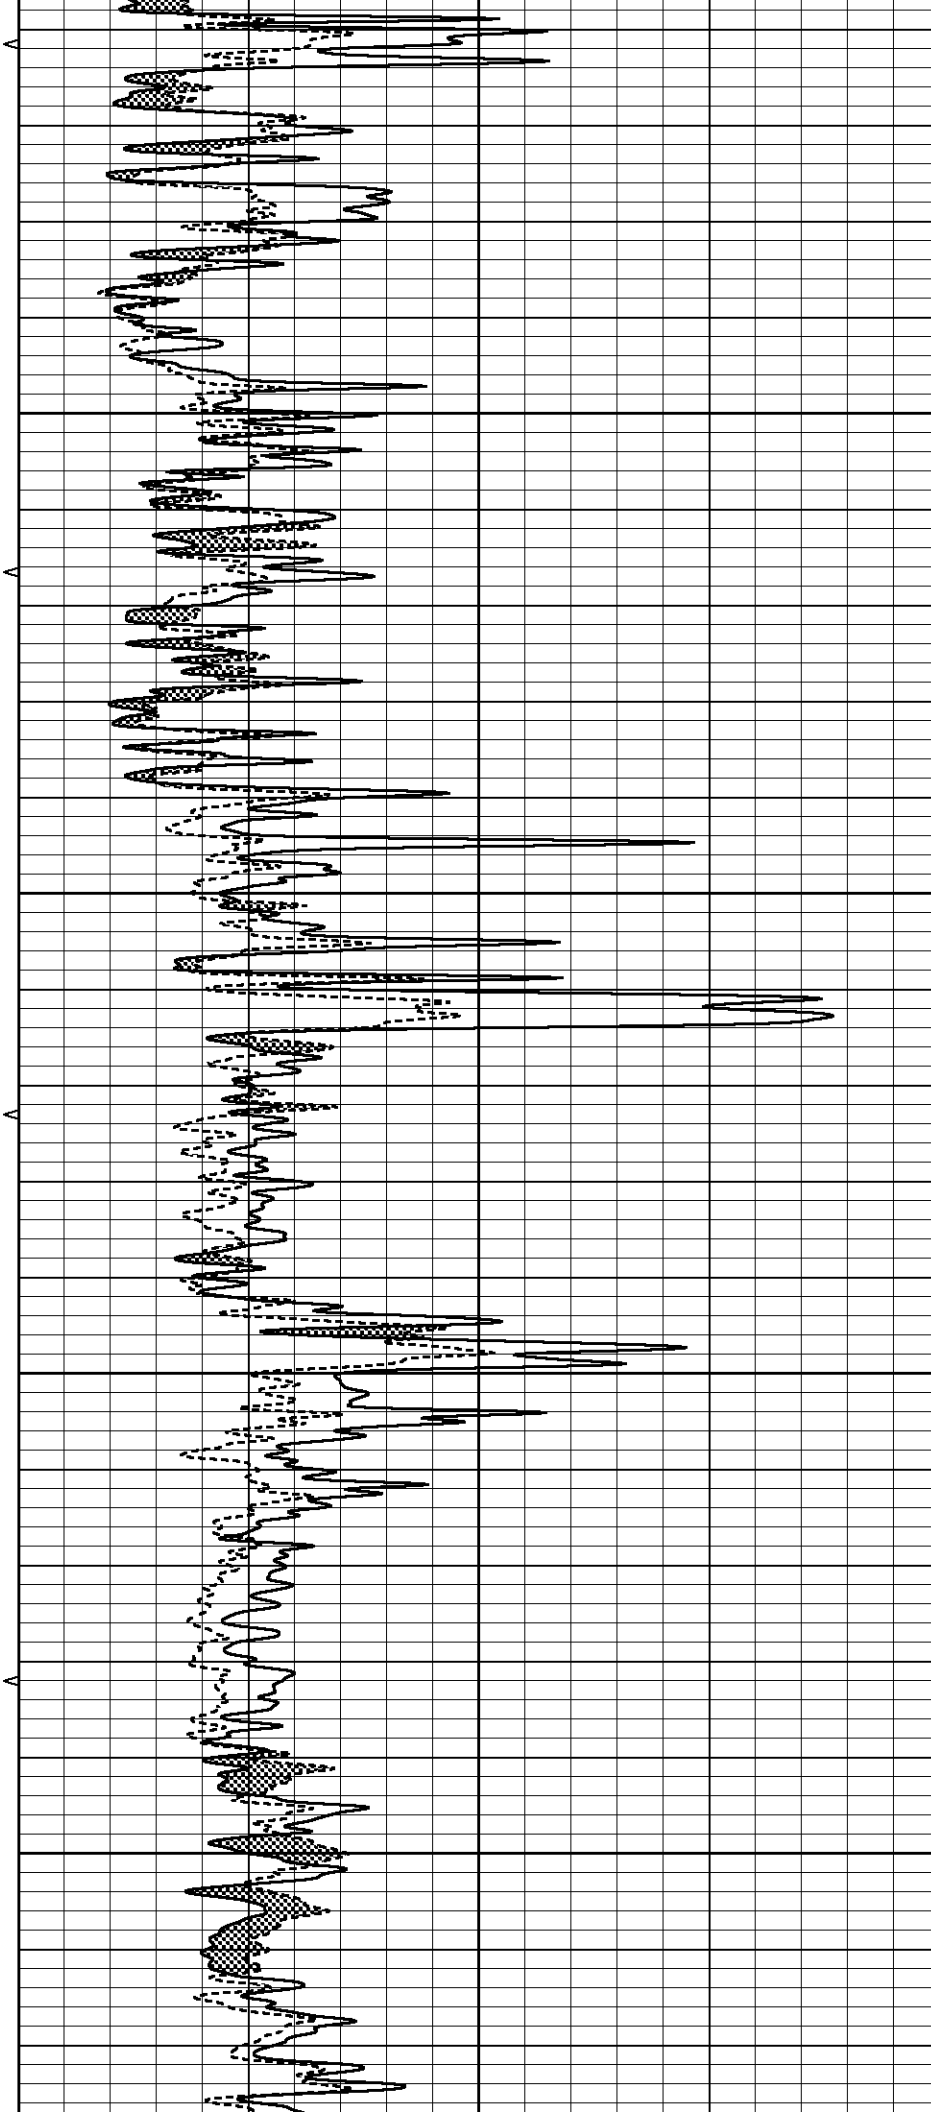


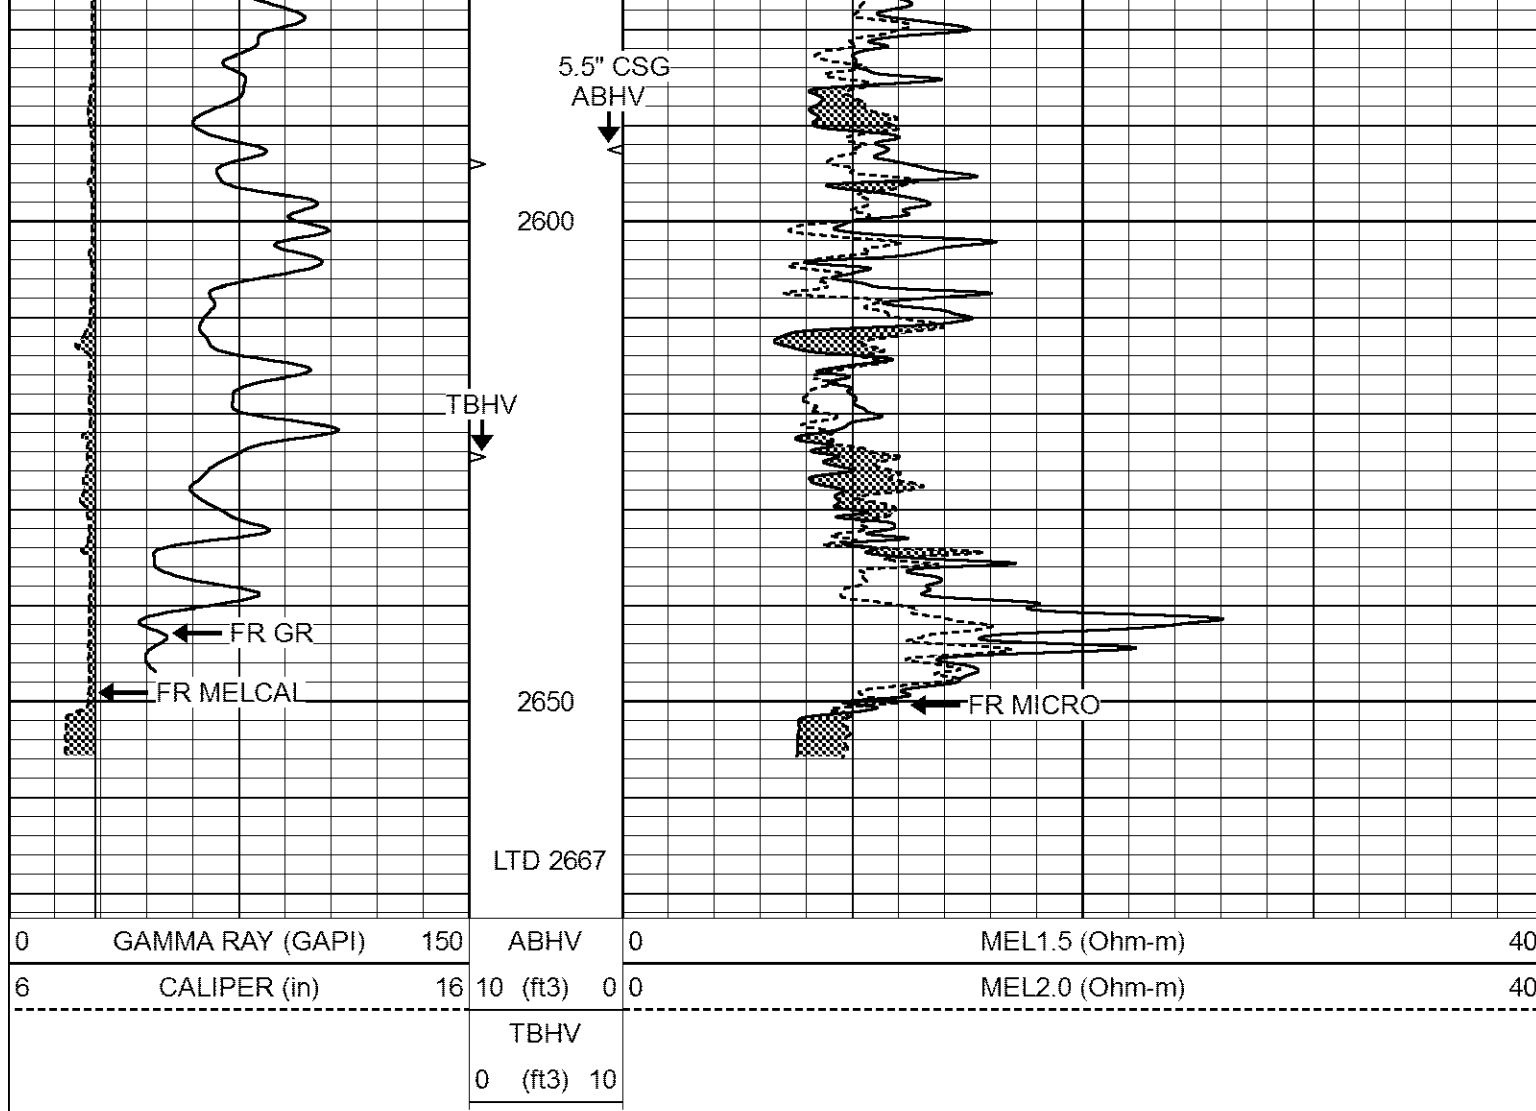


REPEAT SECTION

Database File 6233pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Sat Jan 29 15:22:44 2022
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

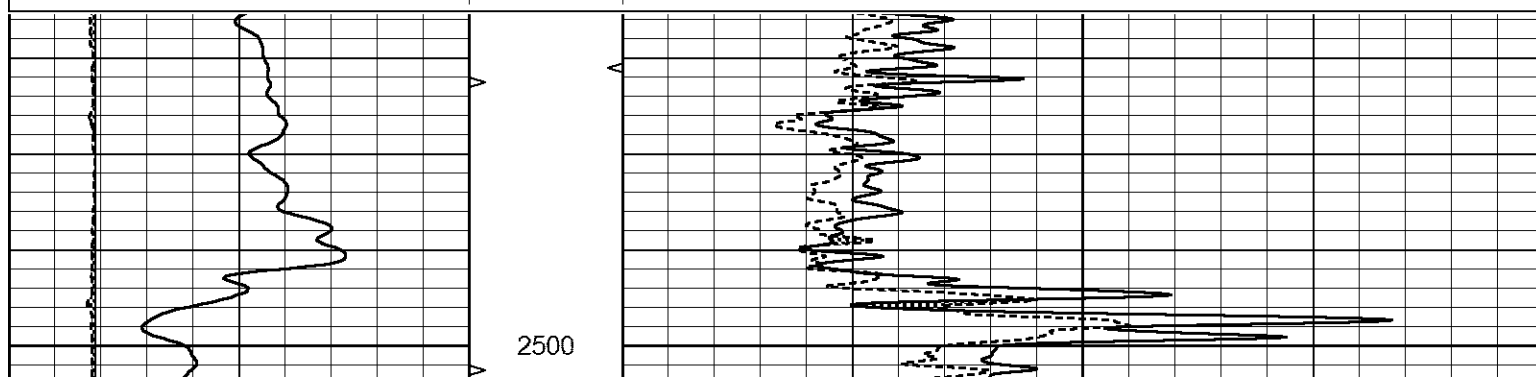

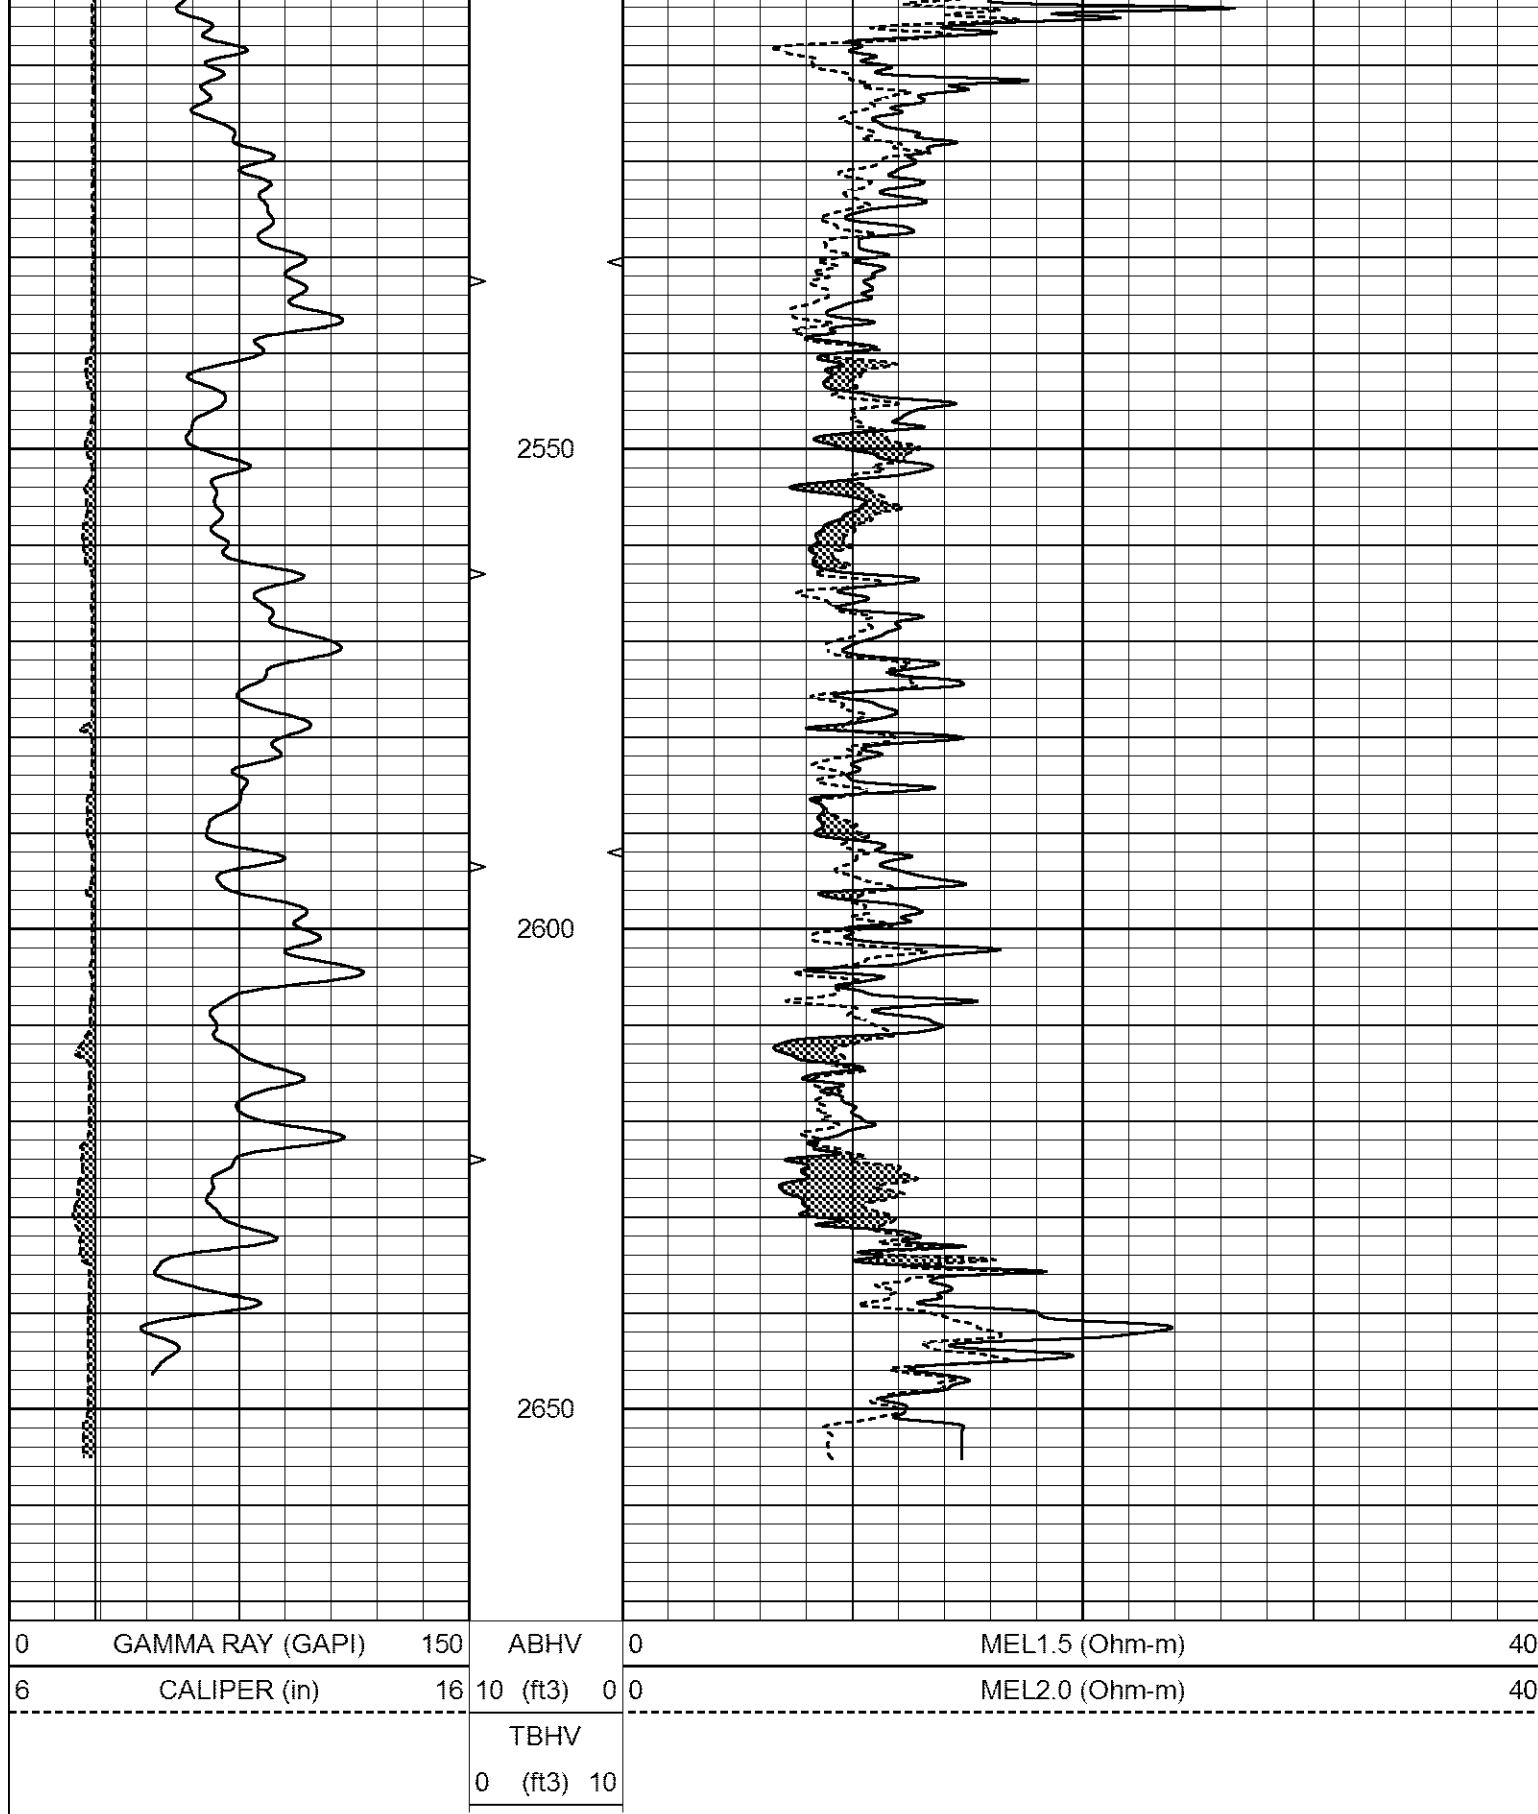

Calibration Report

Database File 6233pe.db
Dataset Pathname pass6.1
Dataset Creation Sat Jan 29 15:22:44 2022

MICRO_USR Calibration Report

Serial Number: Tool Model: Performed:		070910 ProbeL Sun Jan 23 09:07:22 2022						
Caliper Calibration:		Gain=7.192	Offset=3.002					
References		Low Cal 8.000	High Cal 14.000					
Readings		0.723	1.557					
1.5" Calibration:		Gain=65.000	Offset=2.567					
References		Low Cal 0.000	High Cal 20.000					
Readings		0.004	1.335					
2" Calibration:		Gain=305.000	Offset=-2.000					
References		Low Cal 0.000	High Cal 20.000					
Readings		0.004	1.029					
Microlog Calibration Report								
Serial-Model: Performed:		070910-ProbeL (Not Performed)						
Readings		References		Results				
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Gamma Ray Calibration Report								
Serial Number:		070558						
Tool Model:		Probe1						
Performed:		Fri Oct 30 21:32:56 2020						
Calibrator Value:		1.0	GAPI					
Background Reading:		0.0	cps					
Calibrator Reading:		1.0	cps					
Sensitivity:		0.2700	GAPI/cps					