



MIDWEST SURVEYS
LOGGING - PERFORATING - CONSULTING SERVICES
P.O. Box 68, Osawatomie, KS 66064
913 / 755 - 2128

GAMMA RAY / NEUTRON / CCL

File No.

Company **M.J.T. Enterprises**

Well **Hunt No.- 27**

Field **Paola / Rantoul**

County **Miami** State **Kansas**

Location

2465' FSL & 2567' FEL

NW/4NW/4NW/SE

Sec. **7** Twp. **18S** Rge. **22E**

Permanent Datum

Log Measured From

Drilling Measured From

Elevation

K.B. NA

D.F. NA

GL 926'

API# 15-121-31,638

Date

09-08-2021

Run Number

One

Depth Driller

565.0

Depth Logger

439.0

Bottom Logged Interval

438.0

Top Log Interval

20.0

Fluid Level

Full

Type Fluid

Water

Density / Viscosity

NA

Salinity - PPM Cl

NA

Max Recorded Temp

NA

Estimated Cement Top

0.0

Equipment No.

107

Recorded By

Steve Windisch

Witnessed By

Mike Taylor

RUN

BORE-HOLE RECORD

No.

BIT

FROM

TO

SIZE

WG.T.

FROM

TO

One

9.875"

0.0

21.6

7.00"

21.0#

0.0

Two

5.625"

21.6

565.0

2.795"

6.5#

0.0

440.5

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

Drilling Contractor :
Evans Energy & Development, Inc.

Database File: hunt 27.db
Dataset Pathname: pass1
Presentation Format: gr-n-ccl
Dataset Creation: Wed Sep 08 08:55:32 2021 by Log SCH 111116
Charted by: Depth in Feet scaled 1:240

0 Gamma Ray (cps) 150


150 Gamma Ray (cps) 300

-1 CCL 1

10

Neutron (cps)

2100

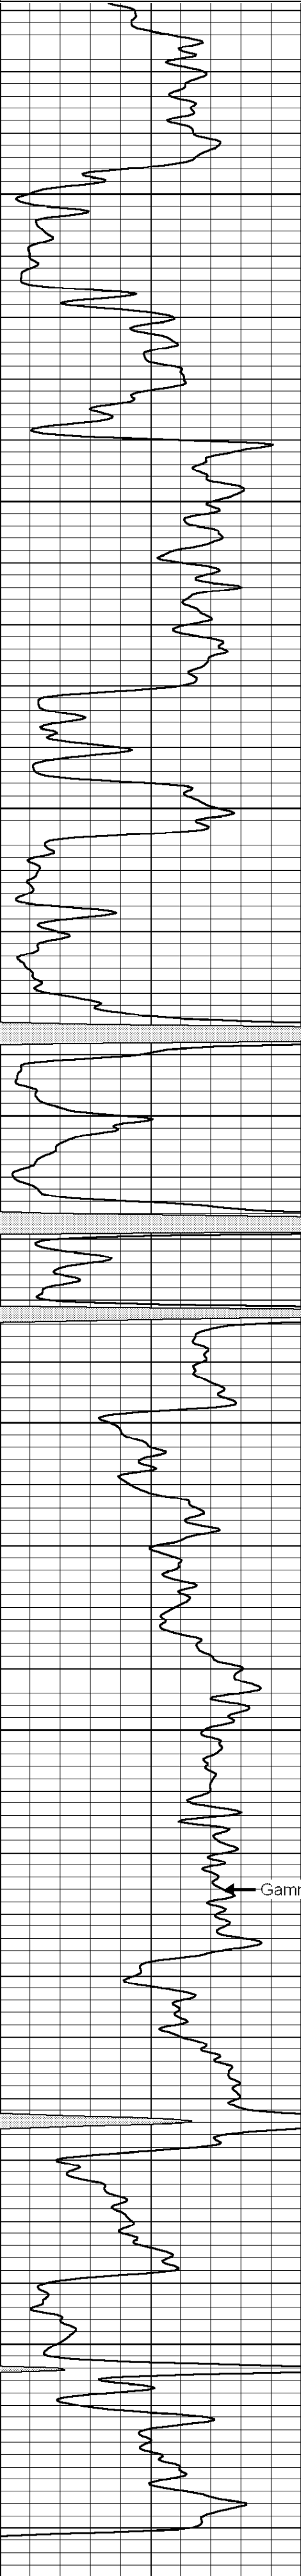

Gamma Ray

0 Gamma Ray (cps) 150


150 Gamma Ray (cps) 300

-1 CCL 1

10

Neutron (cps)

2100

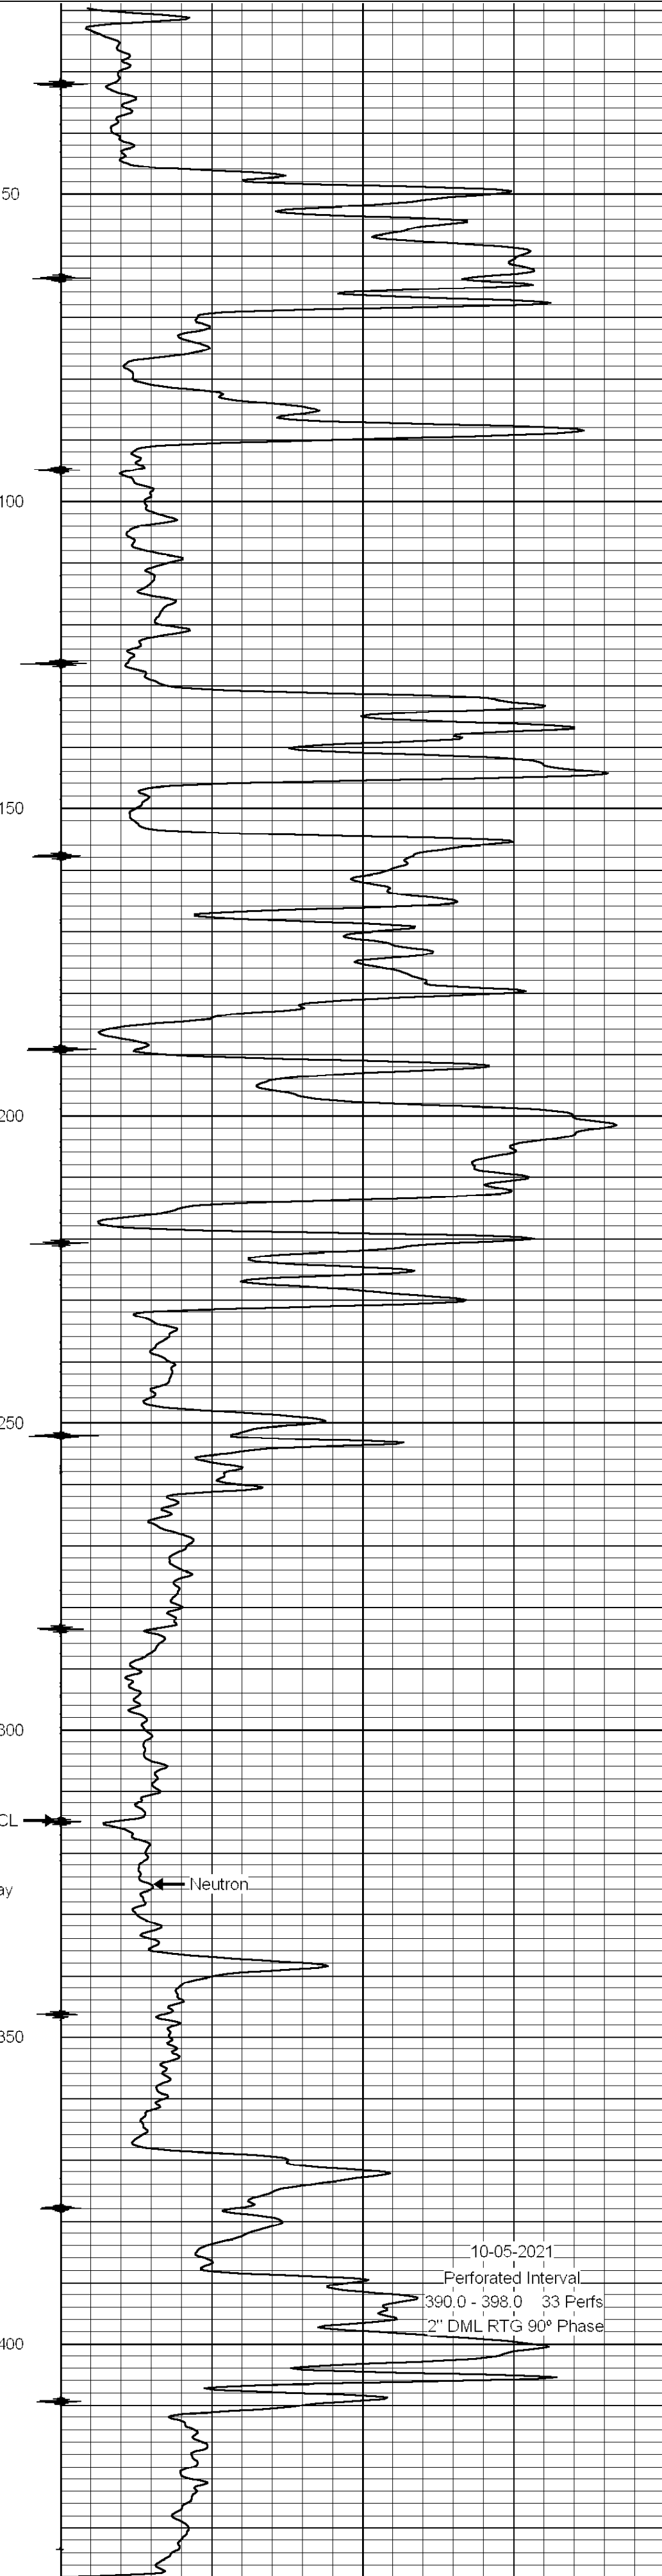

Neutron

10-05-2021
Perforated Interval
390.0 - 398.0 33 Perfs
2" DML RTG 90° Phase