


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

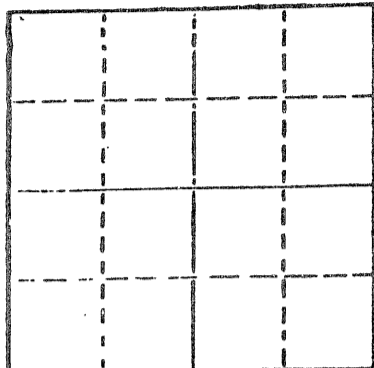

Locate well correctly on above
Section Plot

Rooks _____ County. Sec. 15 Twp. 9 Rge. 17 NE/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
175' West of NW SE NE

Lease Owner Dreiling Oil, Inc.
Lease Name Westhusin Well No. 1
Office Address Rt. #1, Victoria, KS 67671
Character of Well (Completed as Oil, Gas or Dry Hole) _____

Dry Hole
Date Well completed 2-2 1978
Application for plugging filed 2-2 1978
Application for plugging approved 2-2 1978
Plugging commenced 2-2 1978
Plugging completed 2-2 1978

Reason for abandonment of well or producing formation _____
Dry Hole
If a producing well is abandoned, date of last production _____
19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3454
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Pipe				8 5/8"	166'	0'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

1st plug was set @ 600' w/70 sacks cement
2nd plug was set @ 150' w/20 sacks cement
3rd plug was set @ 40' w/10 sacks cement

RECEIVED
STATE CORPORATION COMMISSION
2/21/78
FEB 21 1978

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Dreiling Oil, Inc.

STATE OF KANSAS COUNTY OF ELLIS, ss.
I, Joseph A. Hess, Sec. Treas. of Drlg. Contrc. (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Joseph A. Hess
JOSEPH A. HESS, HAYS, KS 67601
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of February, 1978

Cecilia Basgall
Cecilia Basgall Notary Public.

My commission expires November 17, 1980.

CECILIA BASGALL
NOTARY PUBLIC
Ellis County, Kansas

DREILING OIL, INC.

Victoria, Kansas 67671

Dreiling Oil, Inc. Rt. #1 Victoria, KS 67671	WELL LOG	Sec. 15	Twp. 9	Rng. 17
Farm Westhusin No. 1		Location 175' West of NW SE NE		
Total Depth 3,454'		County	Rooks	
Comm. 1-27-78	Comp. 2-2-78	Elevation:	2038	K. B.
Contractor Dreiling Oil, Inc. Rt. #1 Victoria, KS 67671			2035	D. F.
			2033	G. R.


Casing Record	Cement Record	Production:
166' - 8 5/8"	125 sacks cement	D & A

Figures Indicate Bottom of Formations

0'	170'	Post Rock & Shale
170'	410'	Shale
410'	1302'	Shale & Sand
1302'	1341'	Anhydrite
1341'	1827'	Shale
1826'	1985'	Shale & Lime Streaks
1985'	2308'	Lime & Shale
2308'	2425'	Lime
2475'	3044'	Shale & Lime
3044'	3454'	Lime
3454'	T.D.	

STATE OF KANSAS)
)ss
COUNTY OF ELLIS)

I, Joseph A. Hess, Secretary Treasurer of Dreiling Oil, Inc., upon oath states that the above and foregoing is a true and correct copy from the Daily Drilling Report from the Westhusin #1.


JOSEPH A. HESS

Subscribed and sworn to before me this 17th day of February, 1978.


Cecilia Basgall Notary Public

CECILIA BASGALL
NOTARY PUBLIC
Ellis County, Kansas

My appointment expires: November 17, 1980.

RECEIVED
STATE CORPORATION COMMISSION
2/21/78
FEB 21 1978

CONSERVATION DIVISION
Wichita, Kansas