



MICRO LOG

Company	BLUERIDGE PETROLEUM CORPORATION	Company	BLUERIDGE PETROLEUM CORPORATION
Well	NAOMI #1-35	Well	NAOMI #1-35
Field	WILDCAT	Field	WILDCAT
County	NESS	County	NESS
State	KANSAS	State	KANSAS
Location:	API # : 15-135-26101-0000	Other Services CDL/CNL/PE DIL/SONIC	
Permanent Datum	GROUND LEVEL	Elevation	2162
Log Measured From	KELLY BUSHING	Elevation	2170
Drilling Measured From	KELLY BUSHING	Elevation	2168
	SEC 35 TWP 20S RGE 22W	Elevation	G.L. 2162
Date	5/13/21		
Run Number	TWO		
Depth Driller	4385		
Depth Logger	4388		
Bottom Logged Interval	4372		
Top Log Interval	3500		
Casing Driller	8 5/8"@1354'		
Casing Logger	1354		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7.200 PPM	
Density / Viscosity	9.4/48		
pH / Fluid Loss	9.0/10.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.450@85F		
Rmf @ Meas. Temp	.338@85F		
Rmc @ Meas. Temp	.540@85F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.319@120F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	6:30 P.M.		
Maximum Recorded Temperature	120F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	JIM MUSGROVE		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-135-26101-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
BAZINE, KS., (HWY 96 & W. EDGE) 11S. TO "RD. 20", 1W. TO "RD. CC", 1 3/4 S., W. INTO JUST PAST
RIVER BRIDGE




MAIN SECTION

Database File	5271pe.db
Dataset Pathname	pass6.3
Presentation Format	micro
Dataset Creation	Thu May 13 18:38:03 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

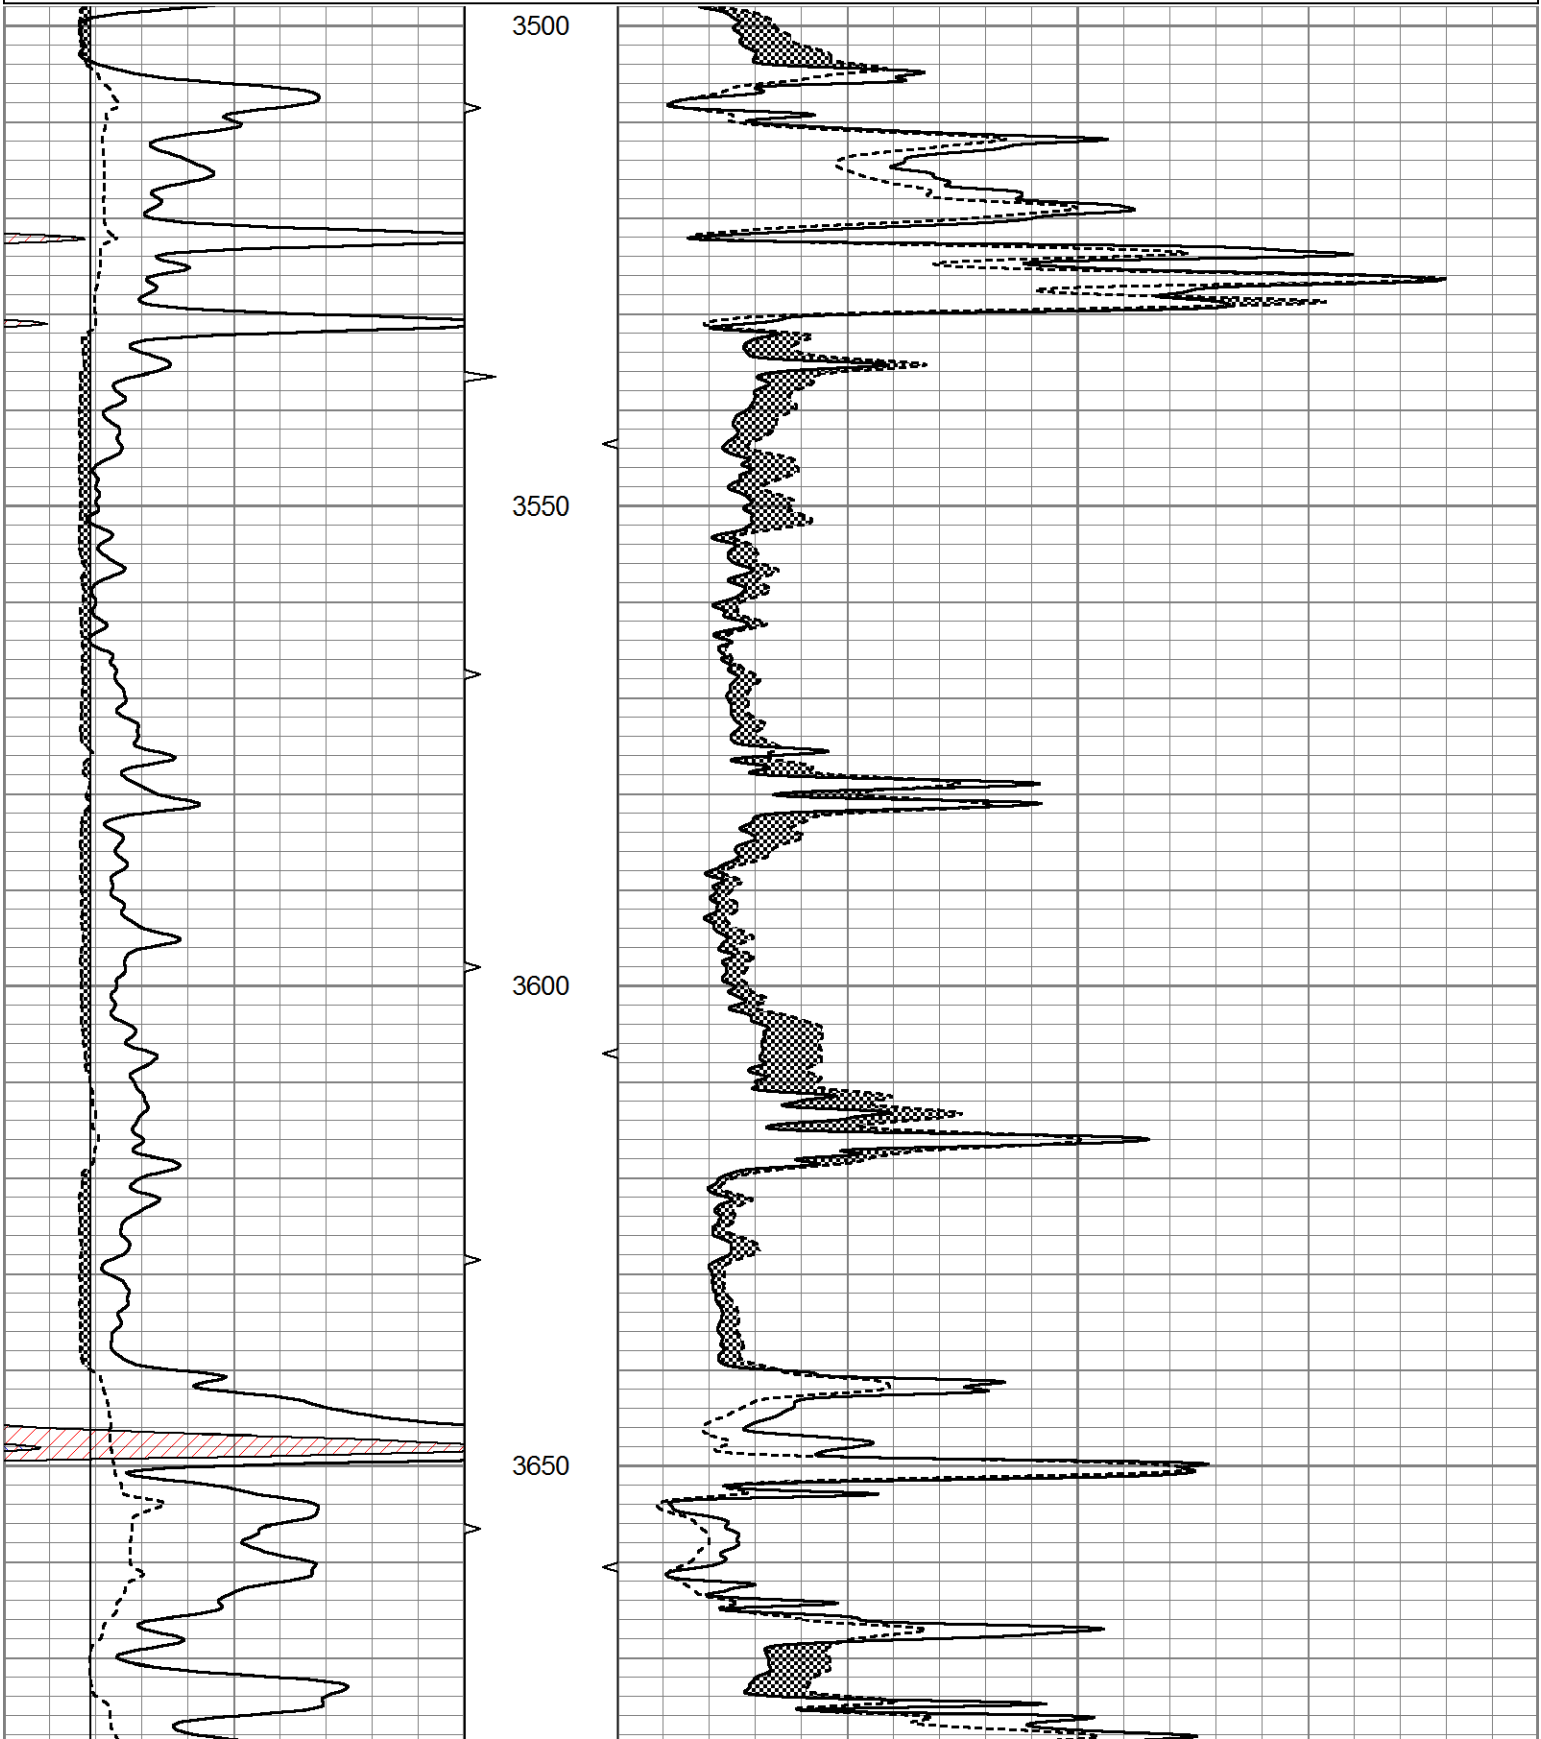

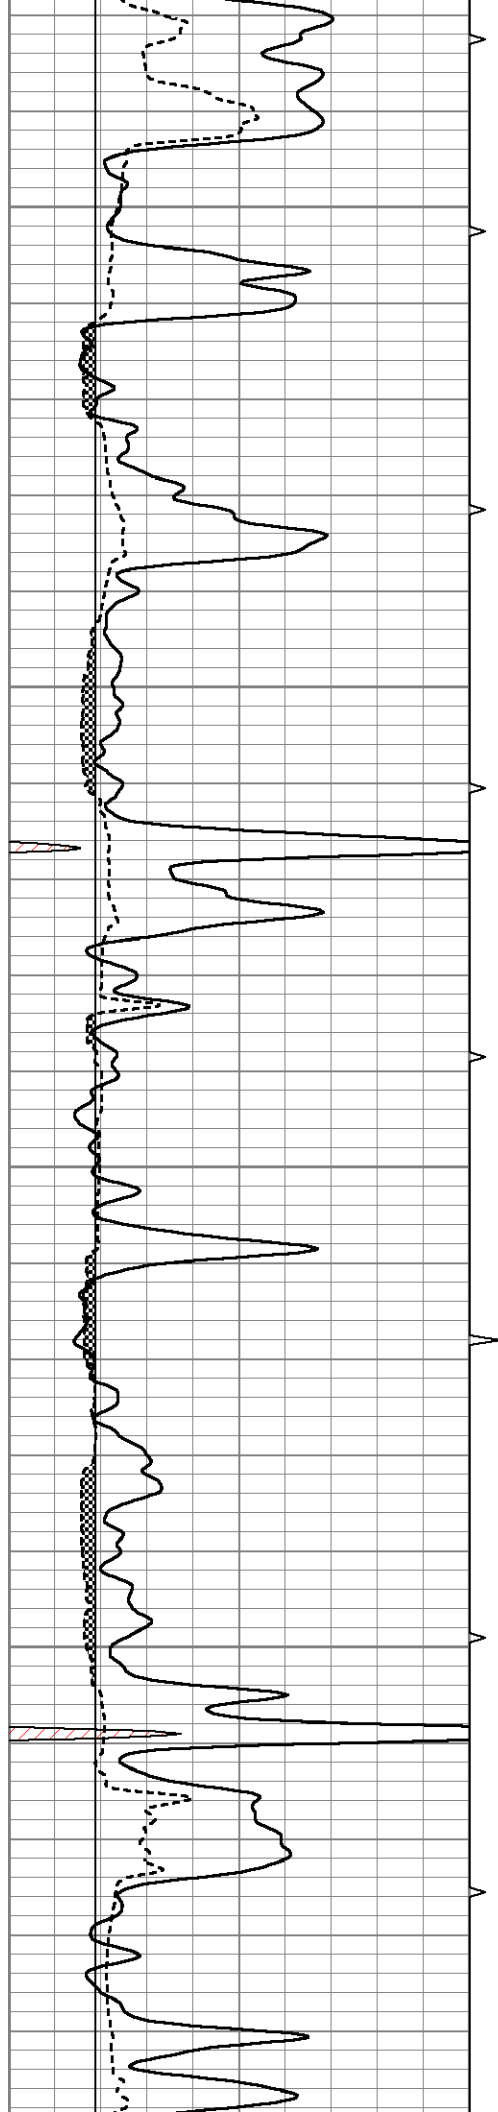



3700

3750

3800

3850

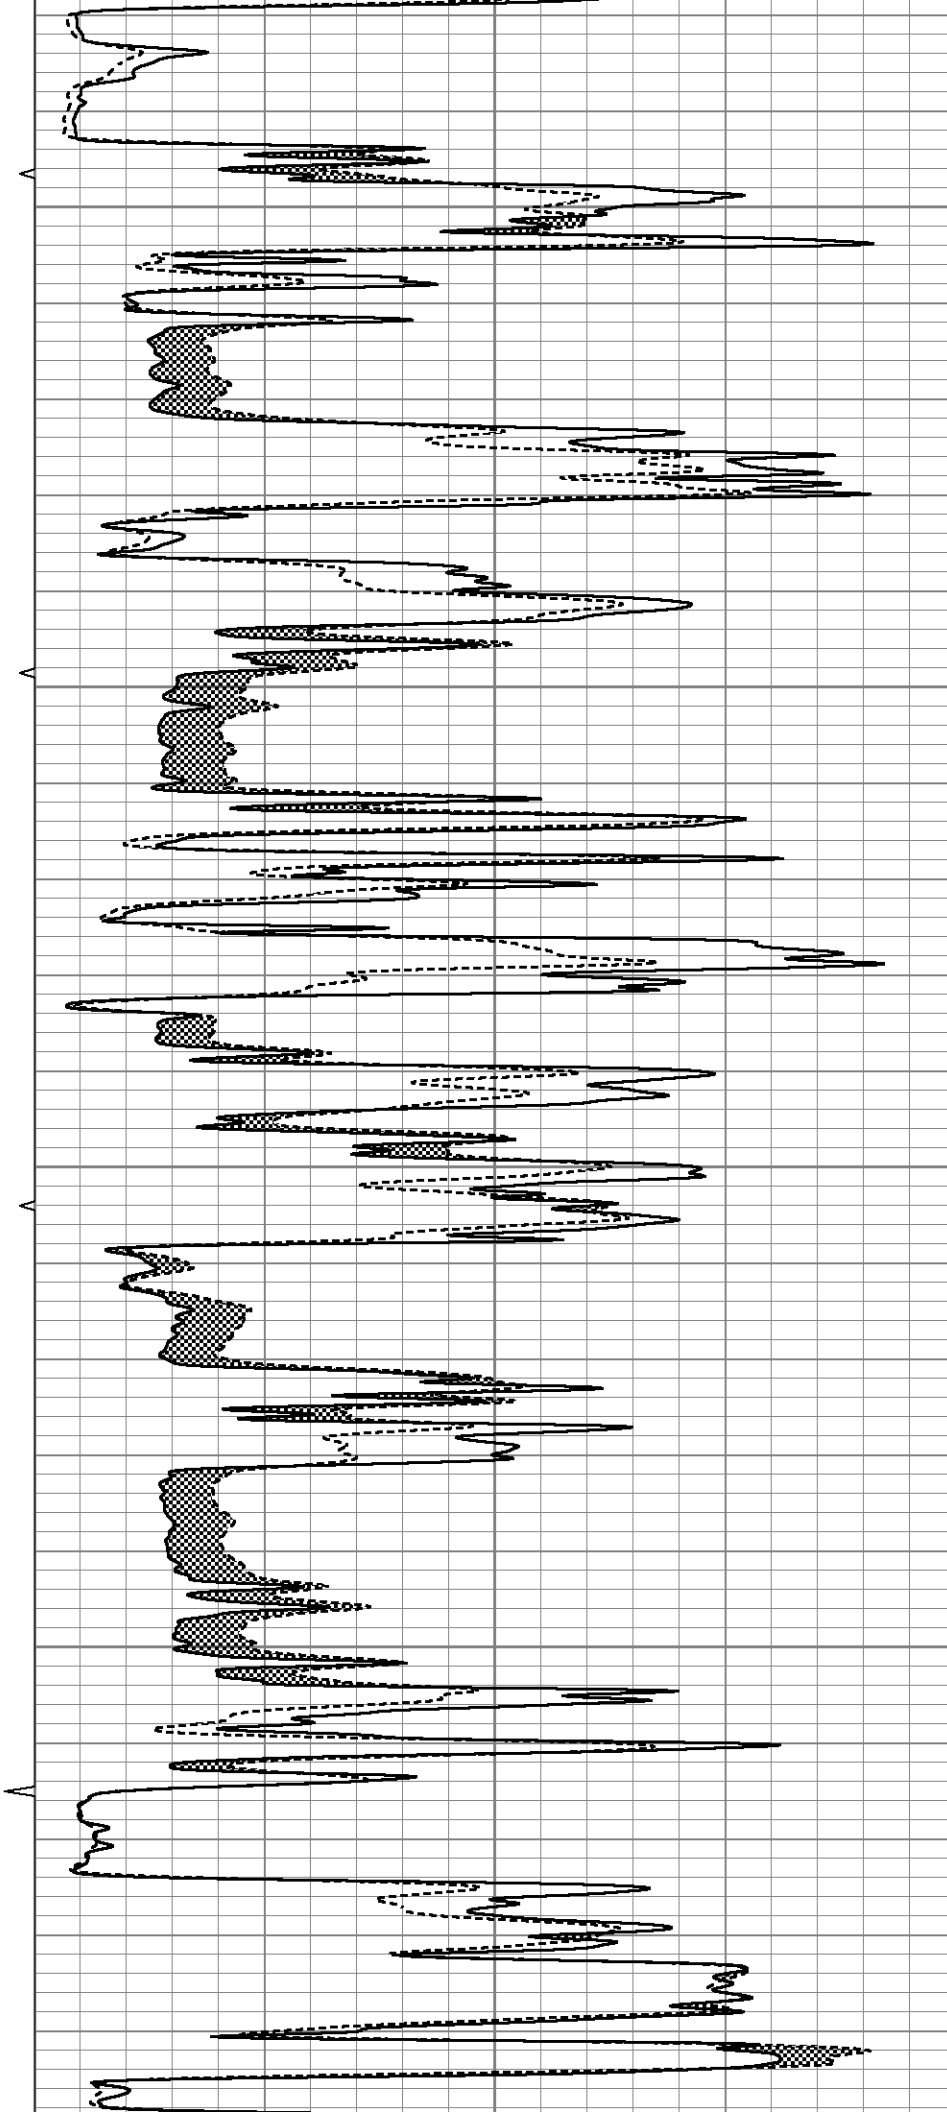

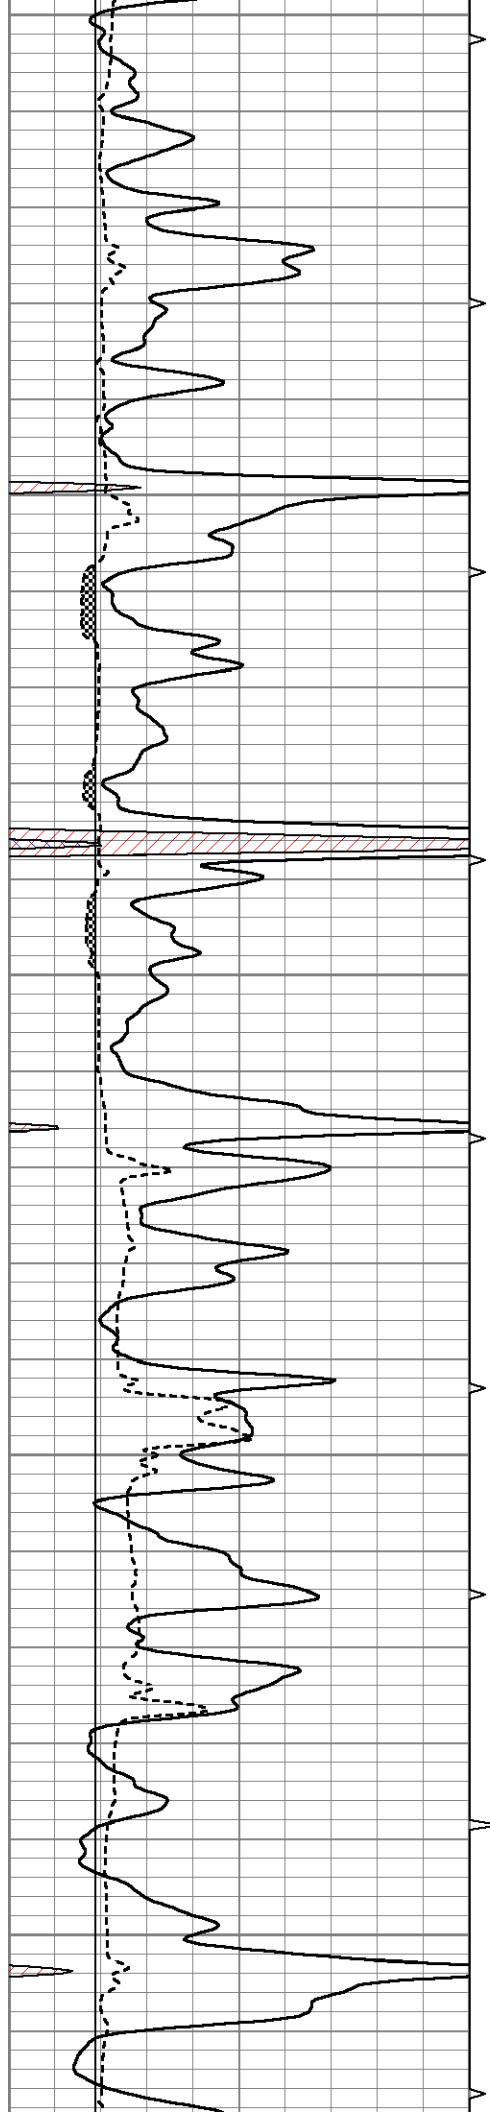


3900


3950

4000

4050

4100

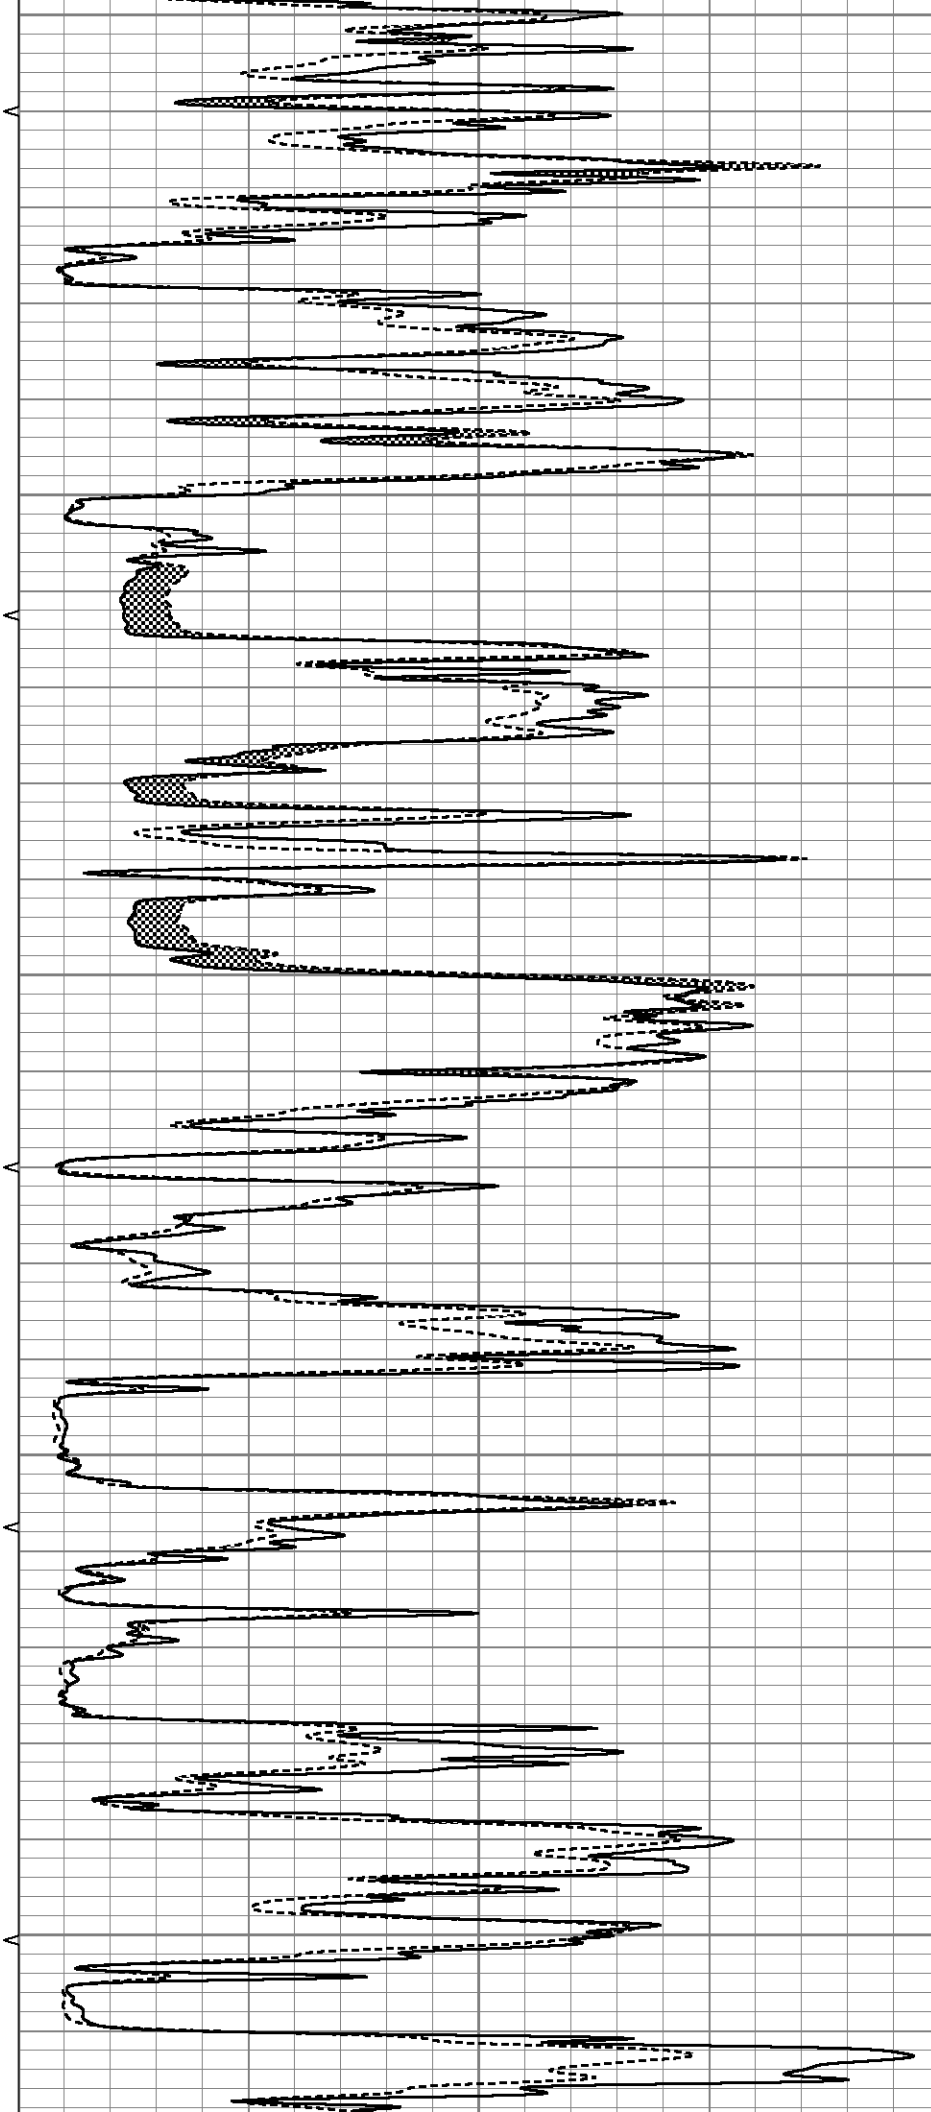

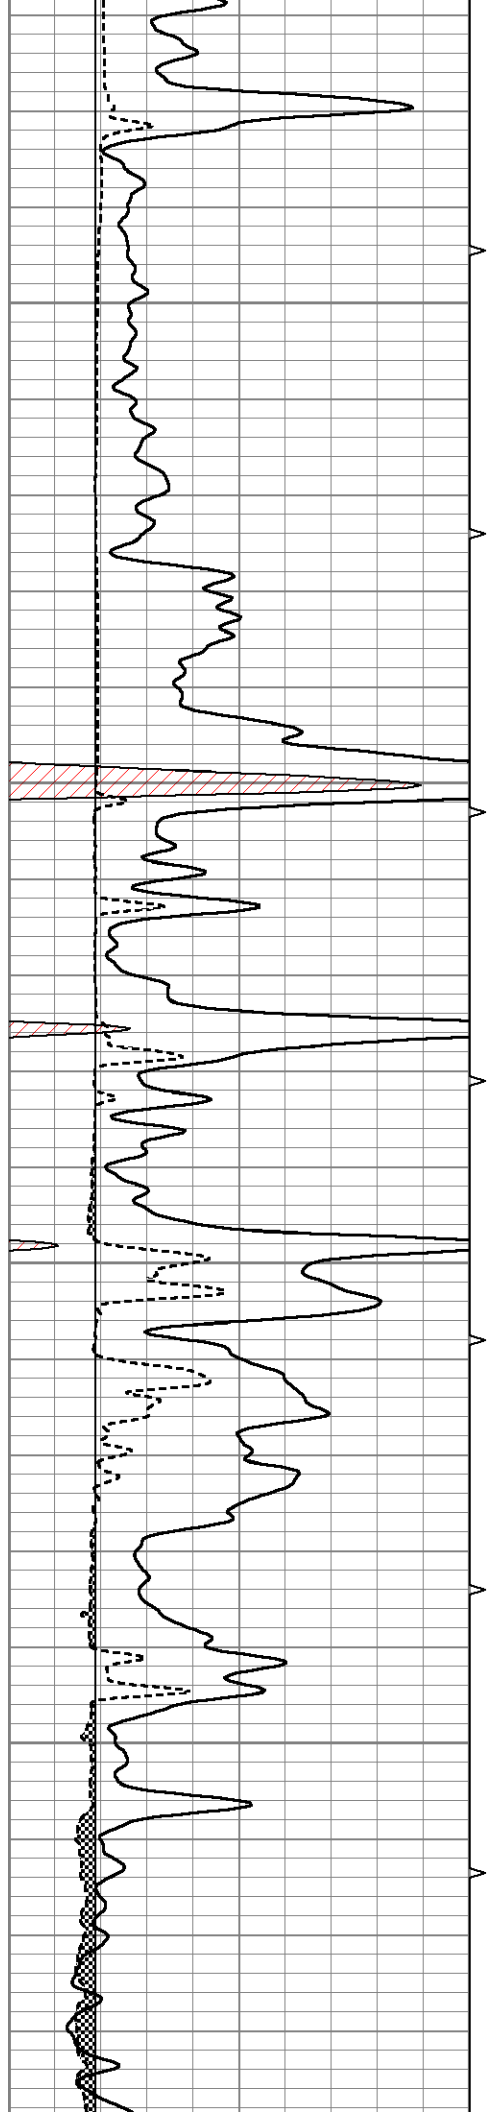



4150

4200

4250



4300

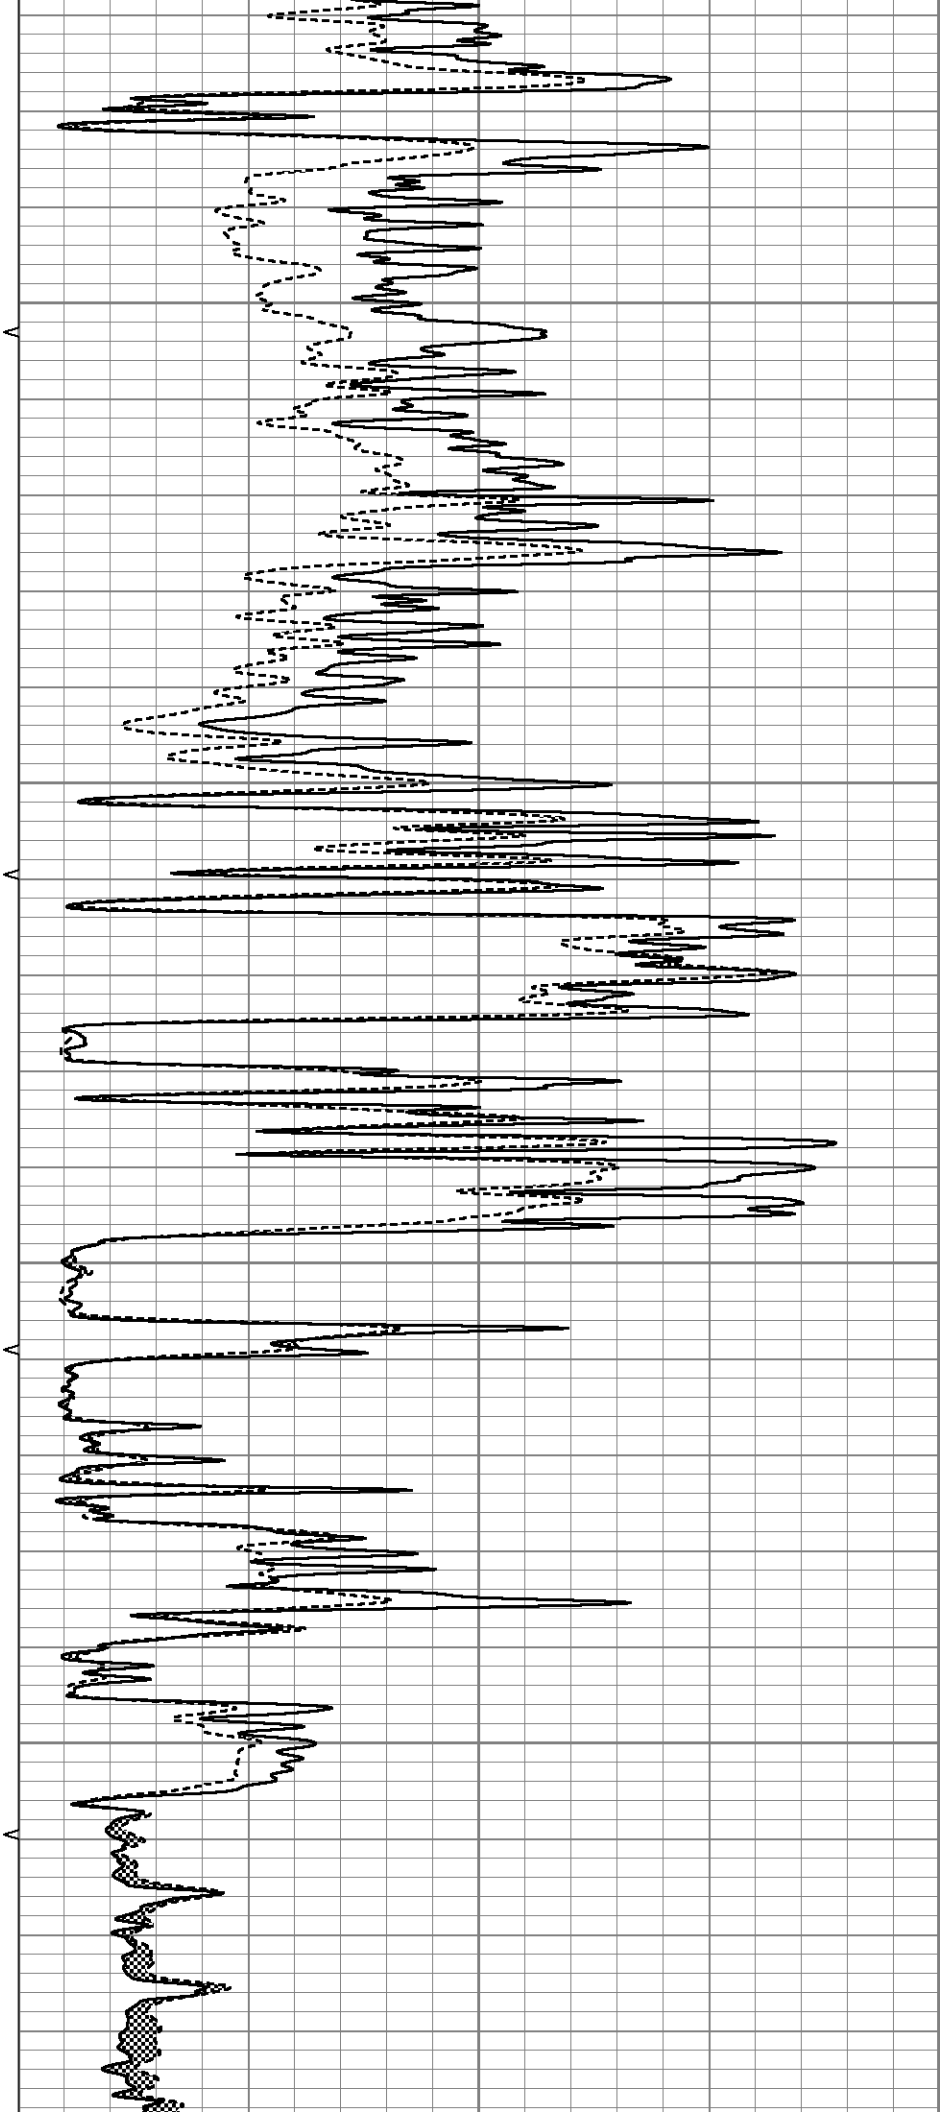


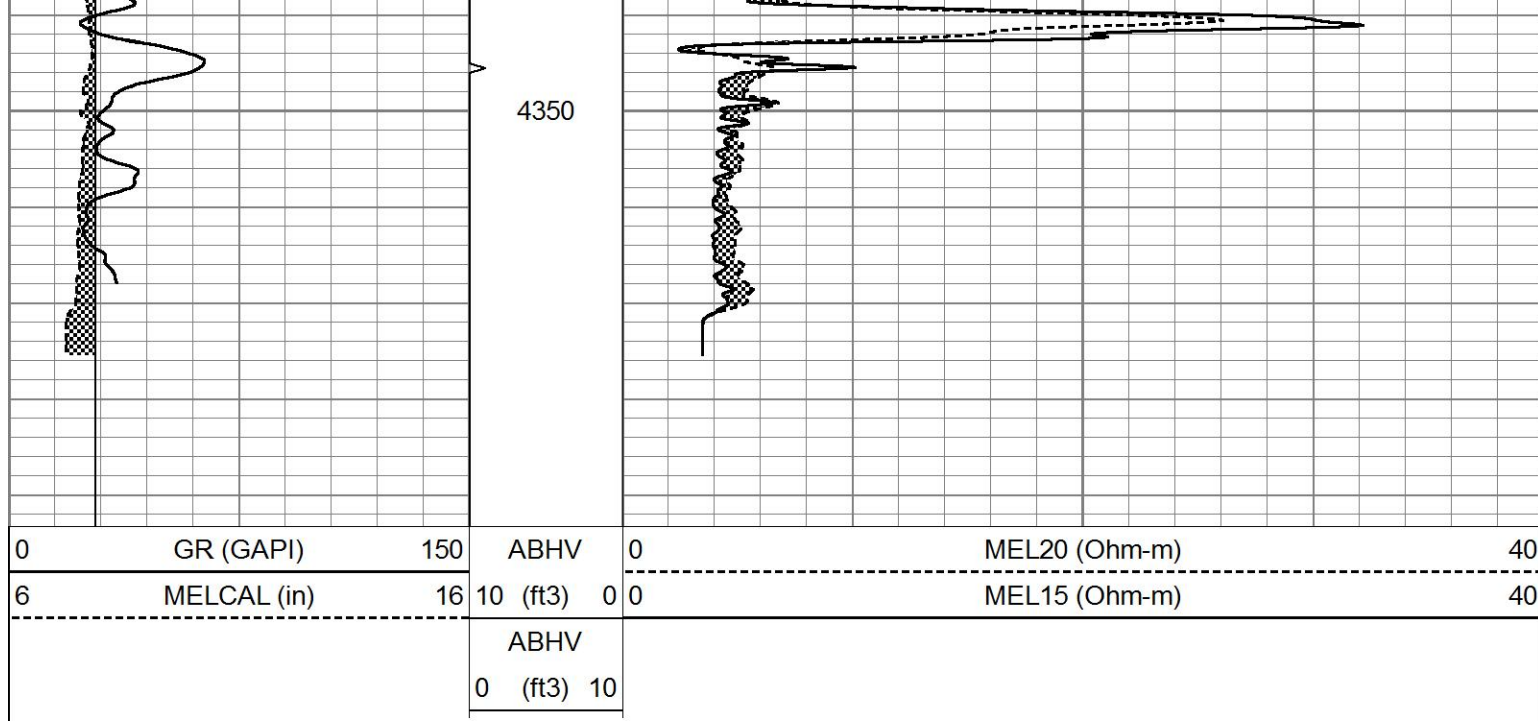

REPEAT SECTION

Database File 5271pe.db
Dataset Pathname pass5.1
Presentation Format micro
Dataset Creation Thu May 13 18:06:43 2021
Charted by Depth in Feet scaled 1:240

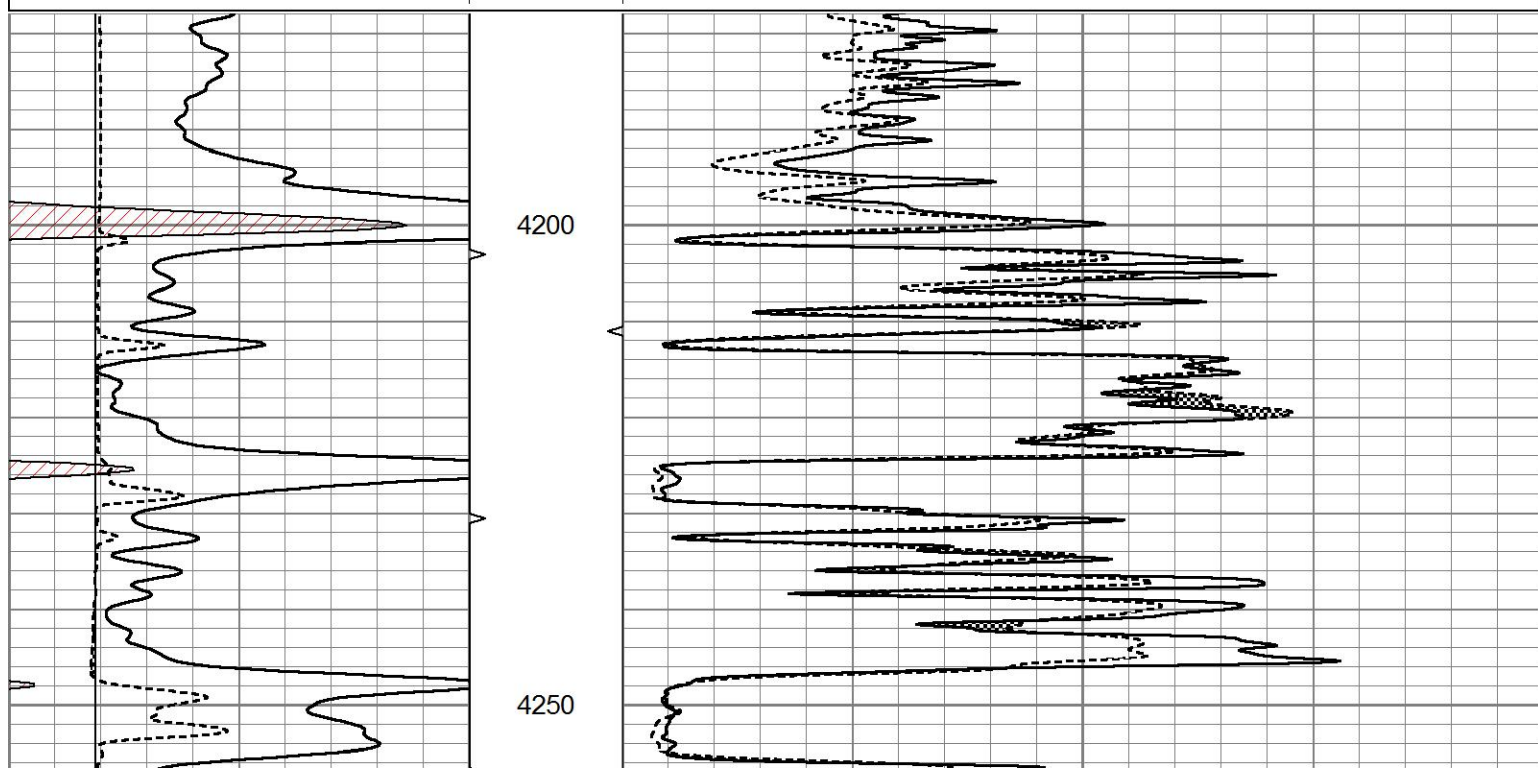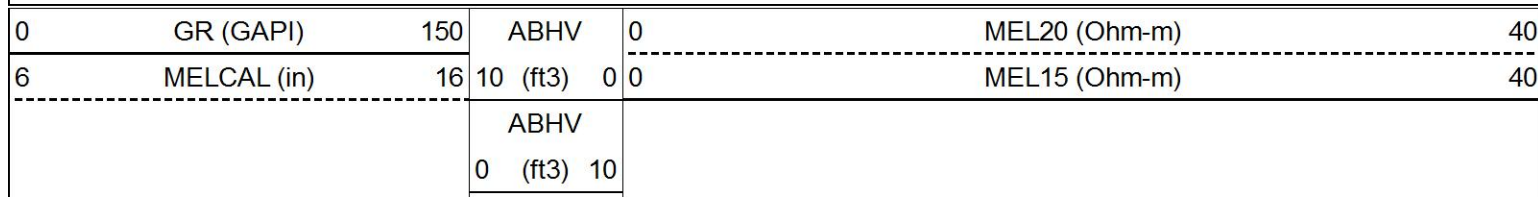

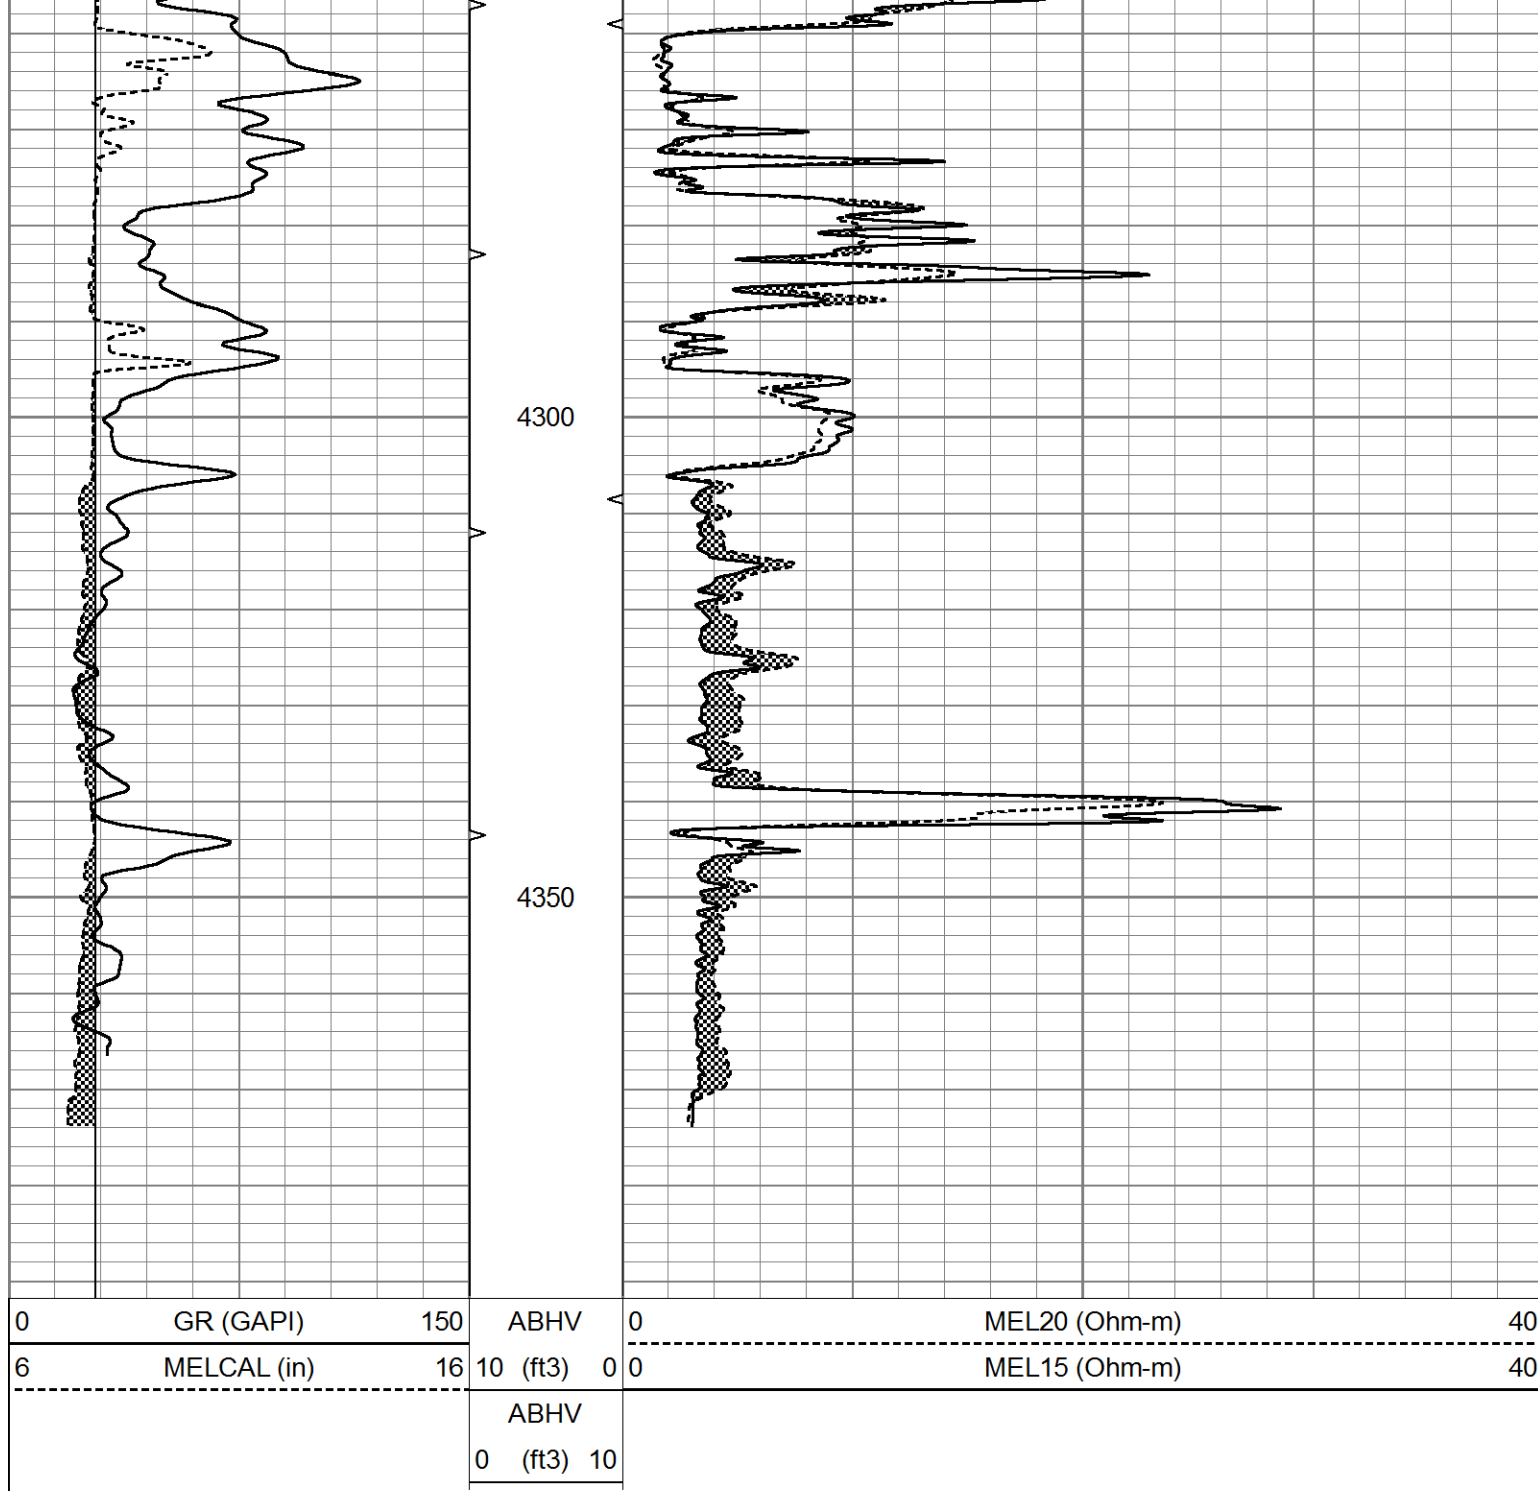

Database File		5271pe.db		Calibration Report	
Dataset Pathname		pass6.3			
Dataset Creation		Thu May 13 18:38:03 2021			
MICRO Calibration Report					
Serial Number:		070912			
Tool Model:		ProbeN			
Performed:		Wed May 12 15:49:10 2021			
Caliper Calibration:		Gain=3.448		Offset=0.828	
References		Low Cal		High Cal	
Readings		8.000		16.000	
		2.080		4.400	
1.5" Calibration:		Gain=24.000		Offset=0.500	

No Calibration:		Low Cal 0.000	High Cal 20.000
References		0.002	1.239
Readings			
2" Calibration:		Gain=38.000	Offset=0.000
		Low Cal 0.000	High Cal 20.000
References		0.003	1.075
Readings			
Gamma Ray Calibration Report			
Serial Number:		070559	
Tool Model:		OPEN_GR	
Performed:		Wed Apr 21 02:21:11 2021	
Calibrator Value:		1.0	GAPI
Background Reading:		0.0	cps
Calibrator Reading:		1.0	cps
Sensitivity:		0.3600	GAPI/cps