



MICRO LOG

Company VINCENT OIL CORPORATION

Well KEOUGH #14-34

Field MULBERRY CREEK

County FORD State KANSAS

Location: API #: 15-057-21049-0000

460' FSL & 1440' FWL

SEC 34 TWP 28S RGE 23W

Permanent Datum GROUND LEVEL Elevation 2542
Log Measured From KELLY BUSHING 12' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation

K.B. 2554
D.F. 2552
G.L. 2542

Date 3/10/21

Run Number TWO

Depth Driller 5340

Depth Logger 5343

Bottom Logged Interval 5325

Top Log Interval 4300

Casing Driller 8 5/8" @ 700

Casing Logger 700

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.1/58

pH / Fluid Loss 11.0/7.2

Source of Sample FLOWLINE

Rm @ Meas. Temp .56 @ 65F

Rmf @ Meas. Temp .42 @ 65F

Rmc @ Meas. Temp .67 @ 65F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .28 @ 128F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 1111

Maximum Recorded Temperature 128F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By TOM DUDGEON

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. - 2 NORTH TO WILBURN RD. - 3 1/2 WEST - NORTH INTO




MAIN SECTION

Database File	5210pe.db
Dataset Pathname	pass6.1
Presentation Format	_micro
Dataset Creation	Wed Mar 10 08:01:59 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

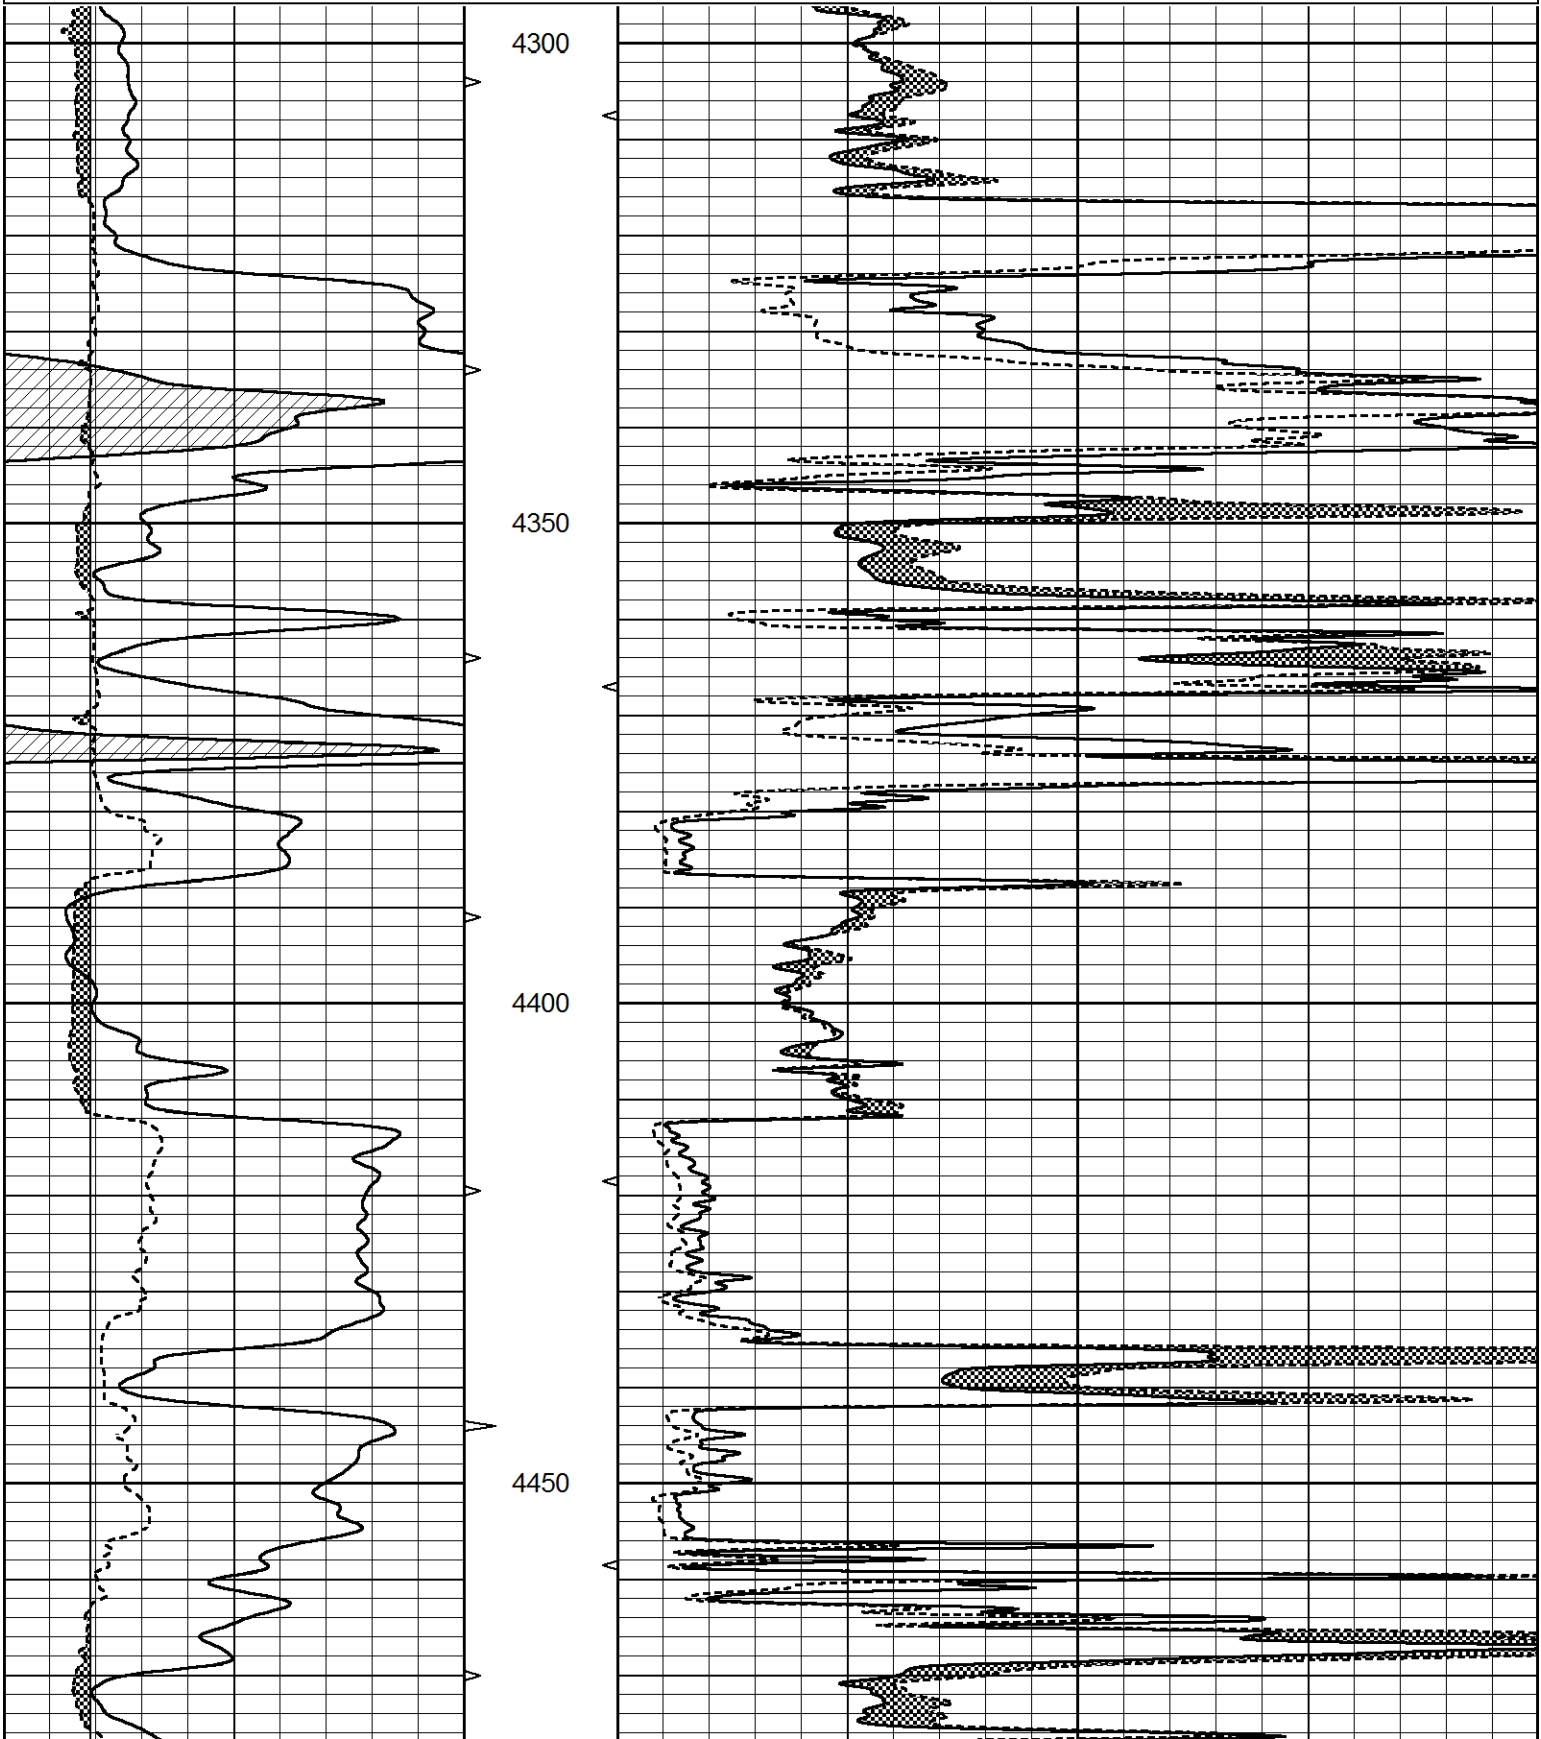

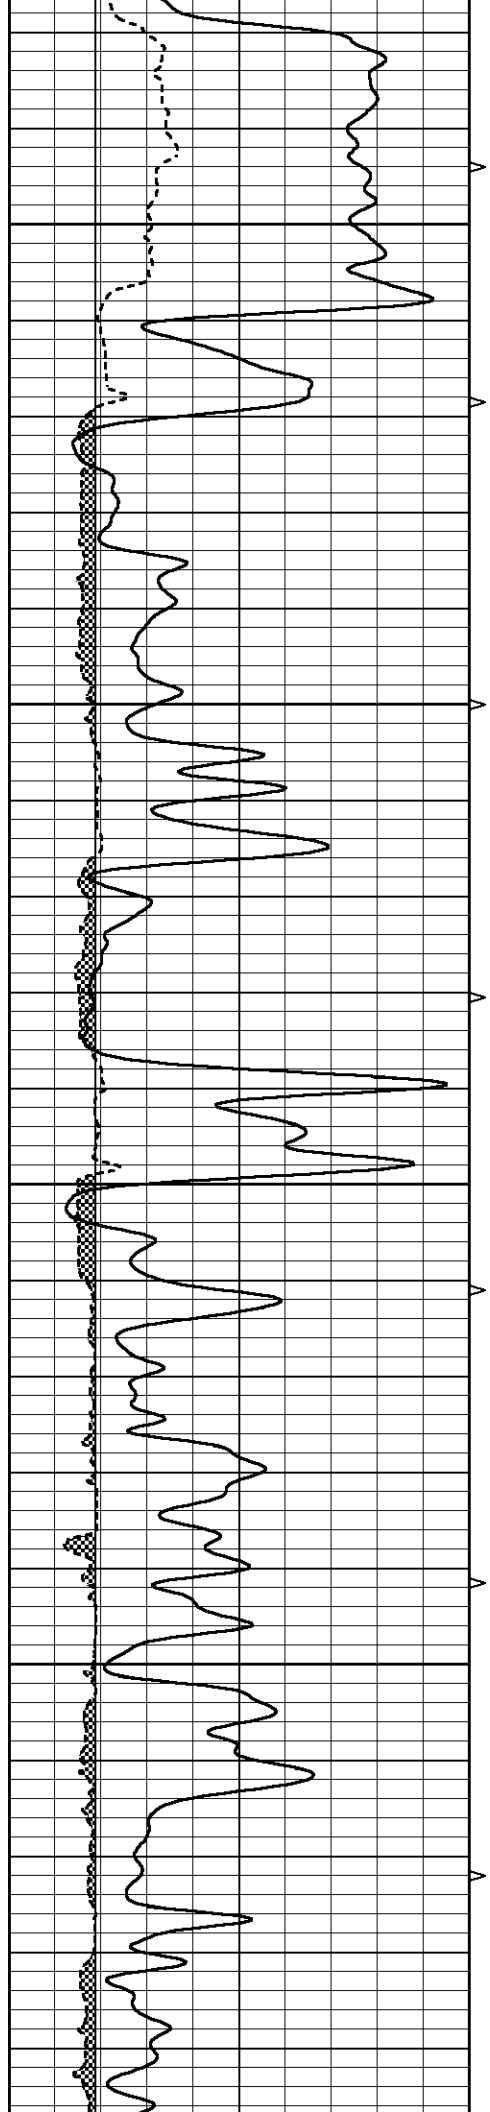



4500

4550

4600

4650

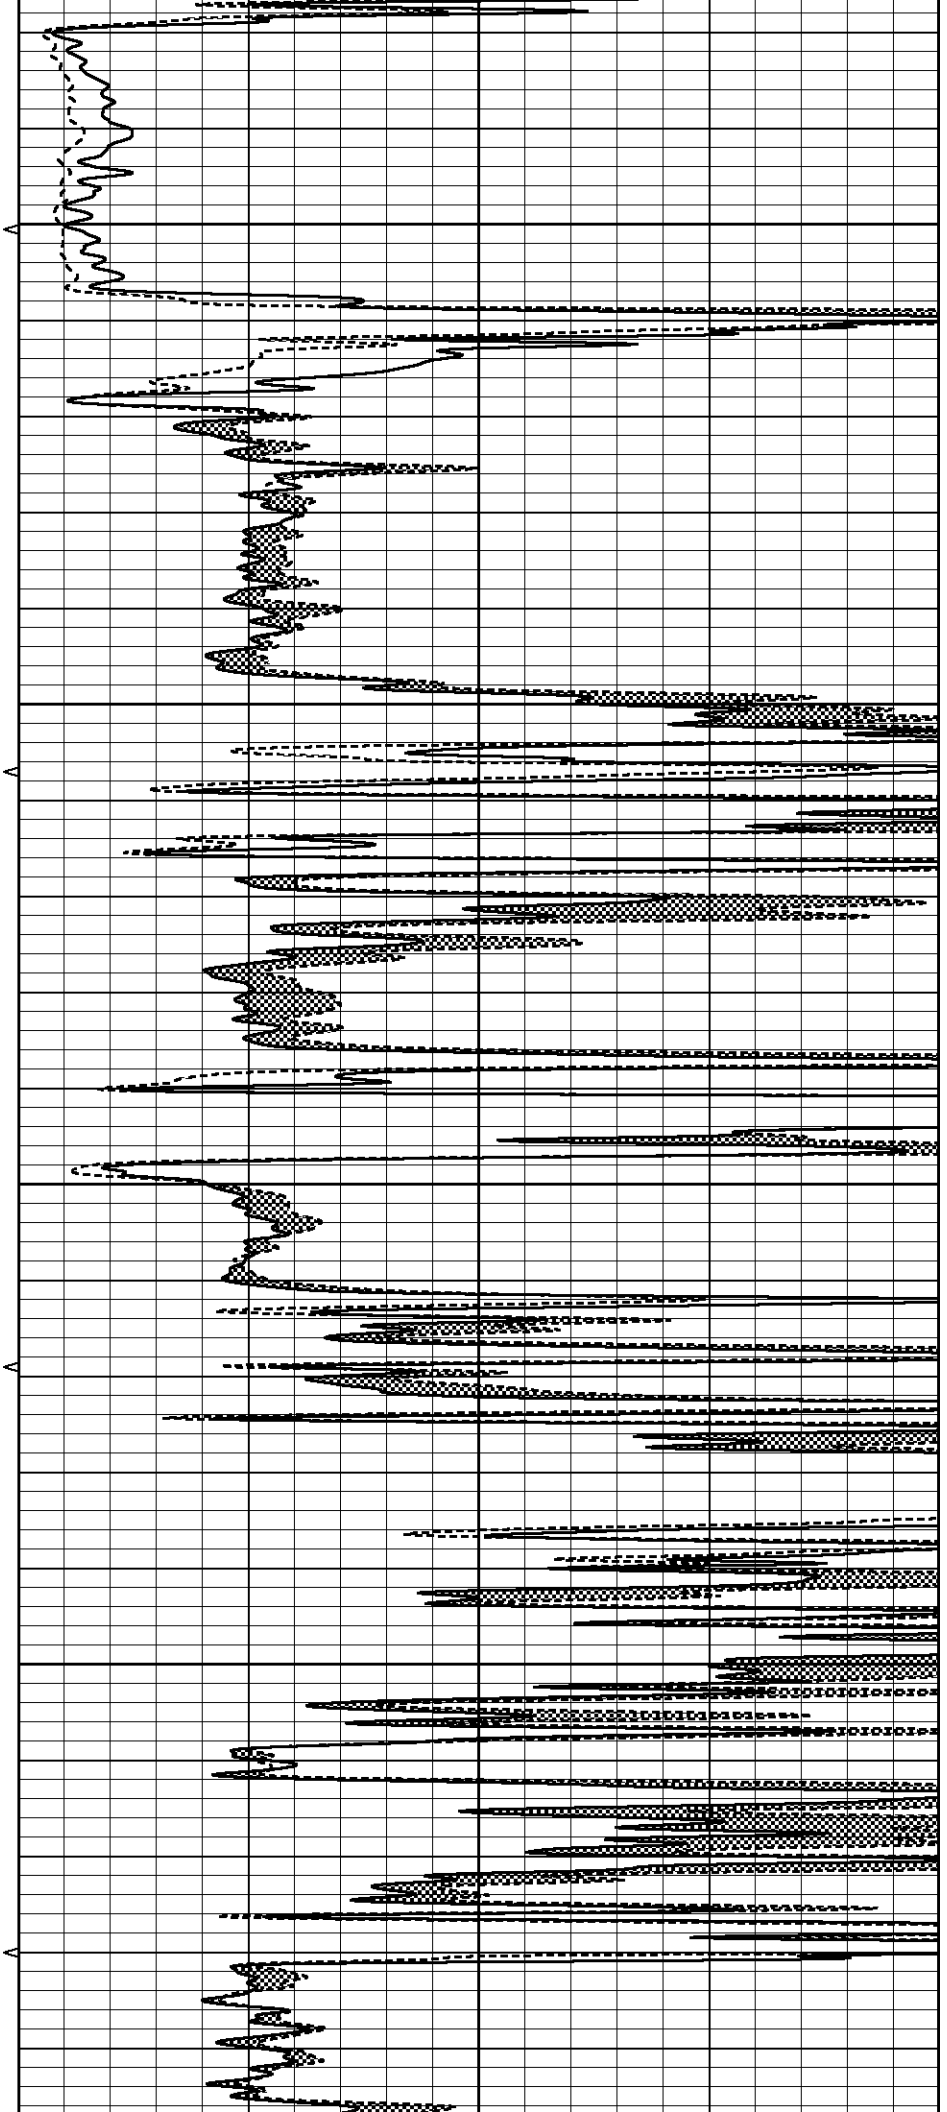

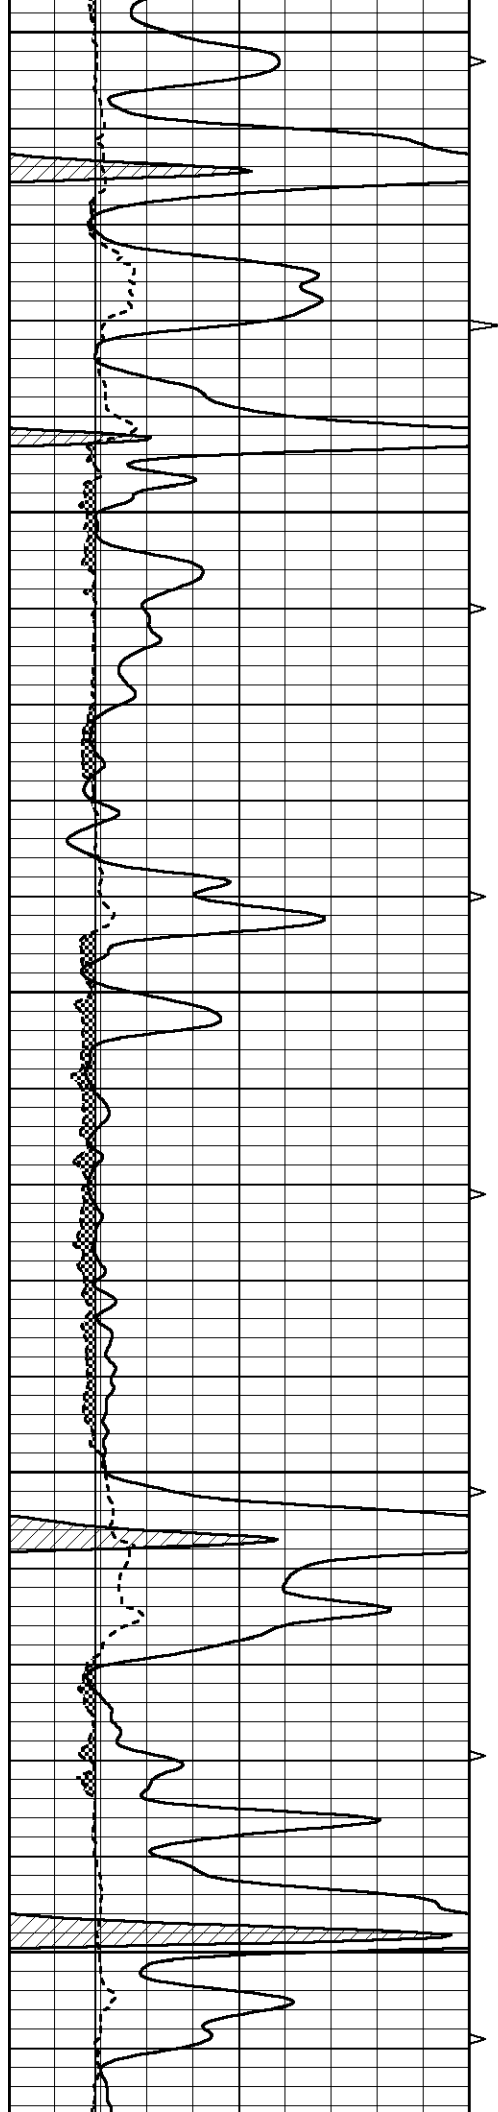


4700


4750

4800

4850

4900

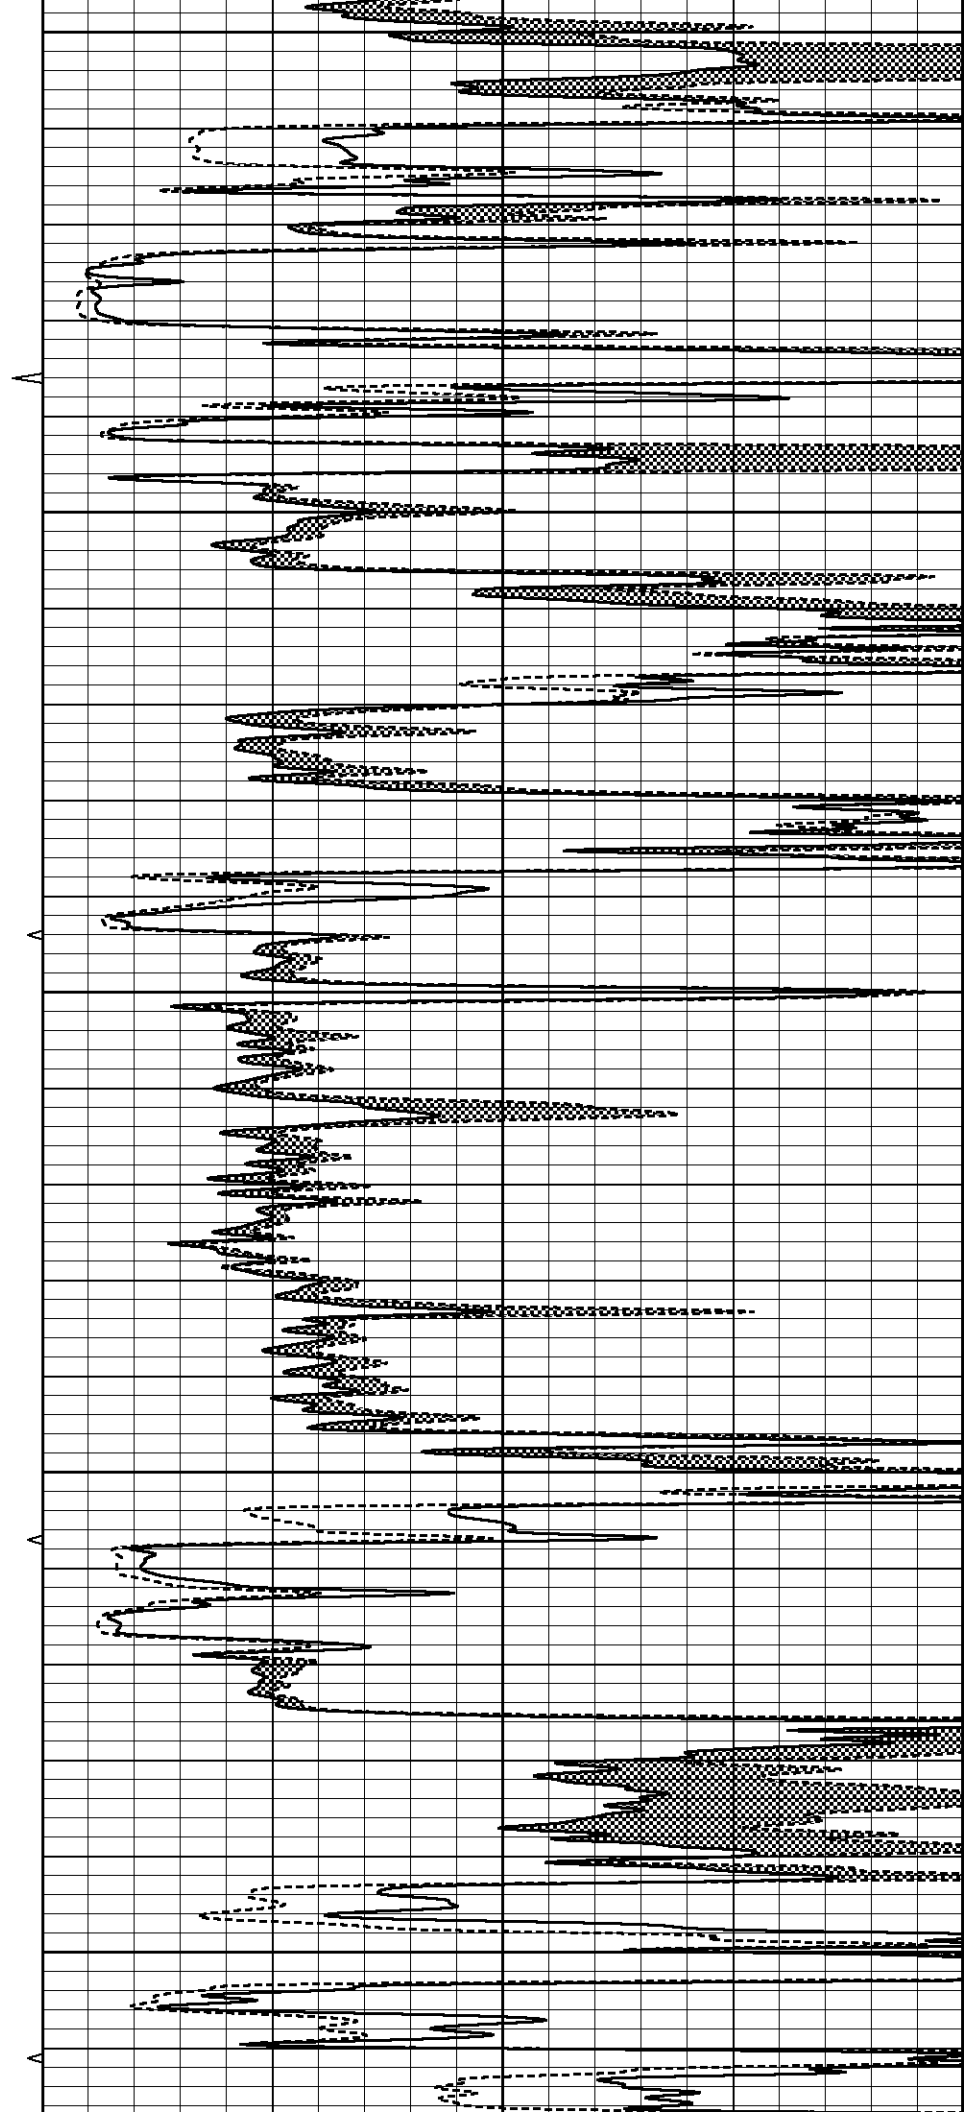

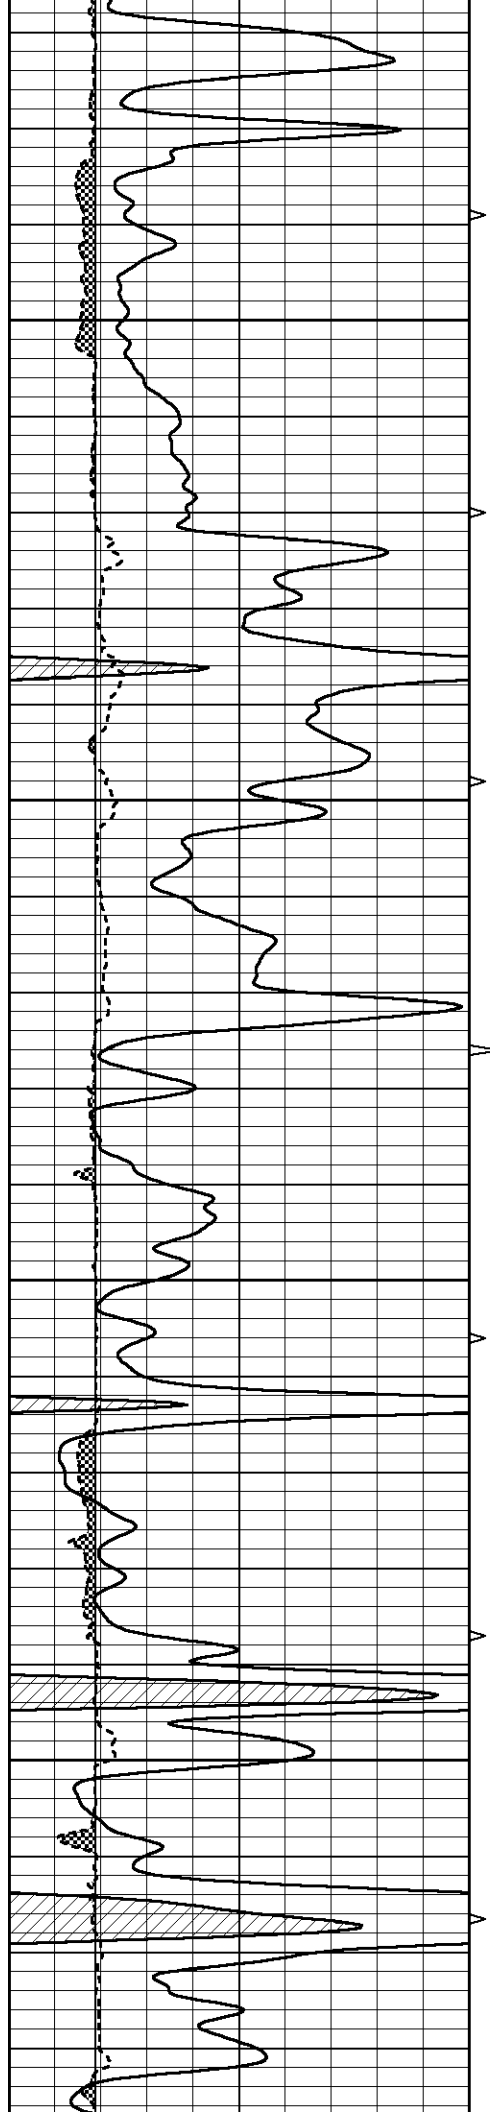



4950

5000

5050

5100

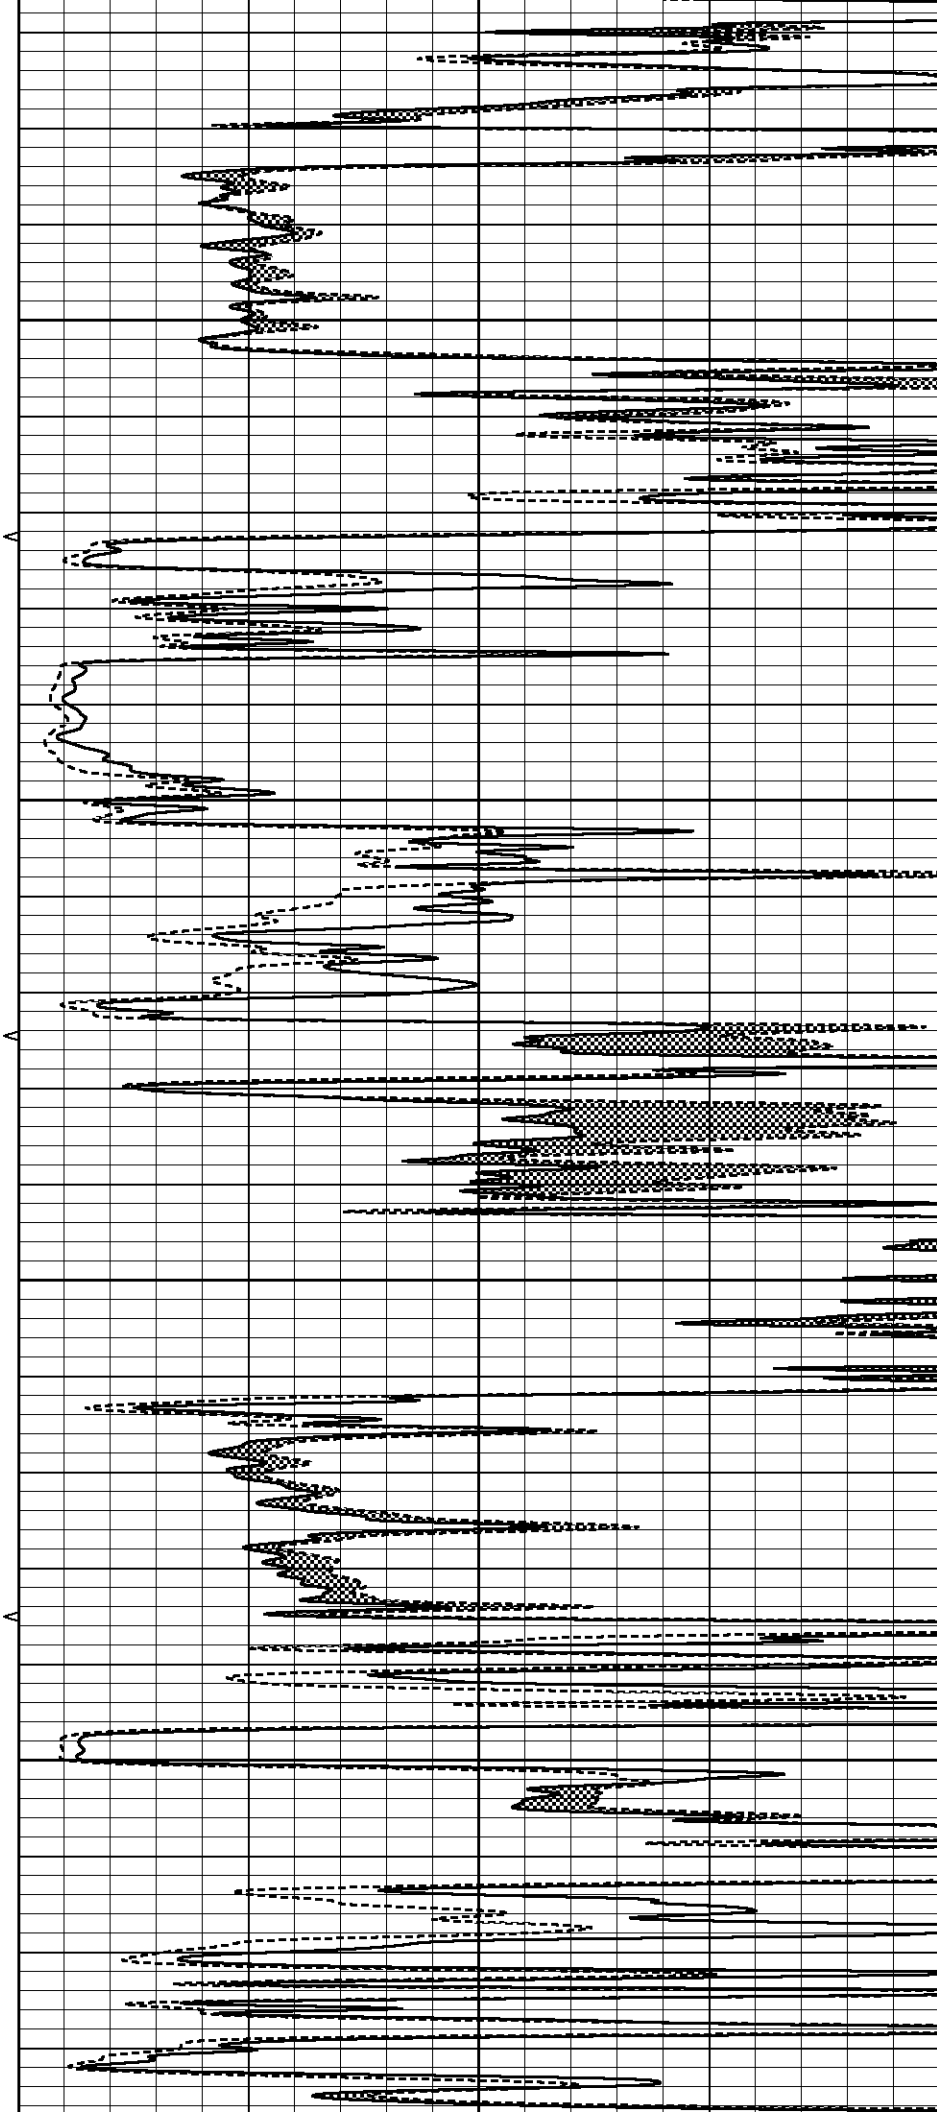

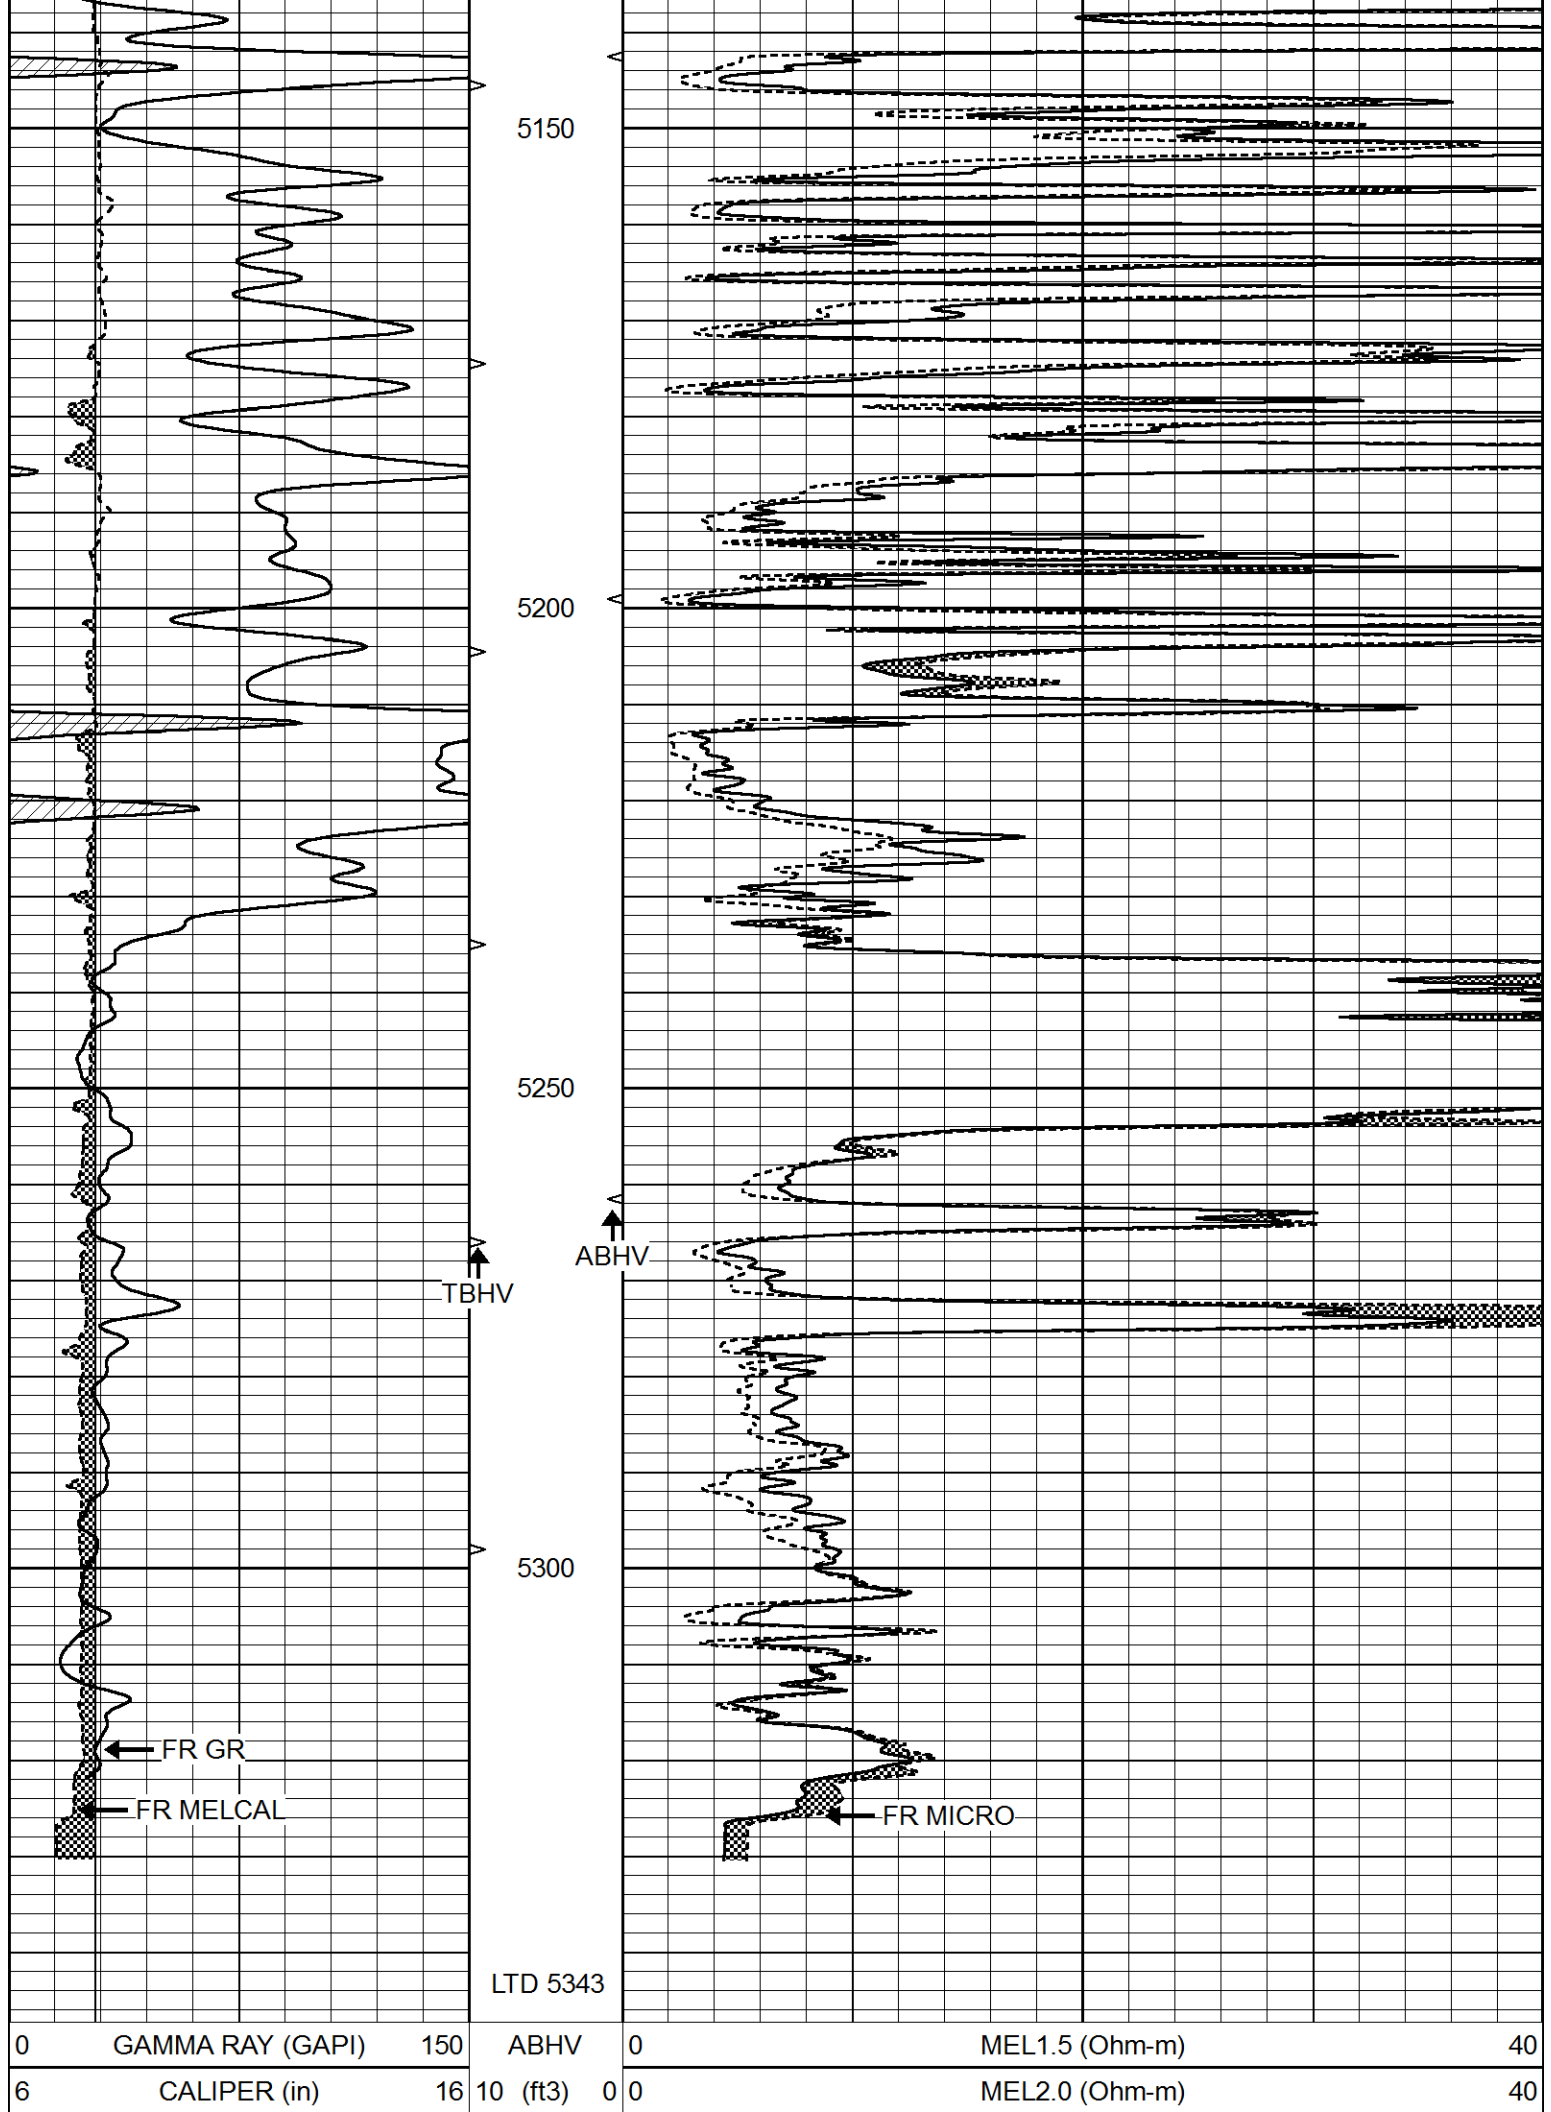


TBHV
0 (ft3) 10




REPEAT SECTION

Database File 5210pe.db
Dataset Pathname pass5.1
Presentation Format _micro
Dataset Creation Wed Mar 10 07:56:51 2021
Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

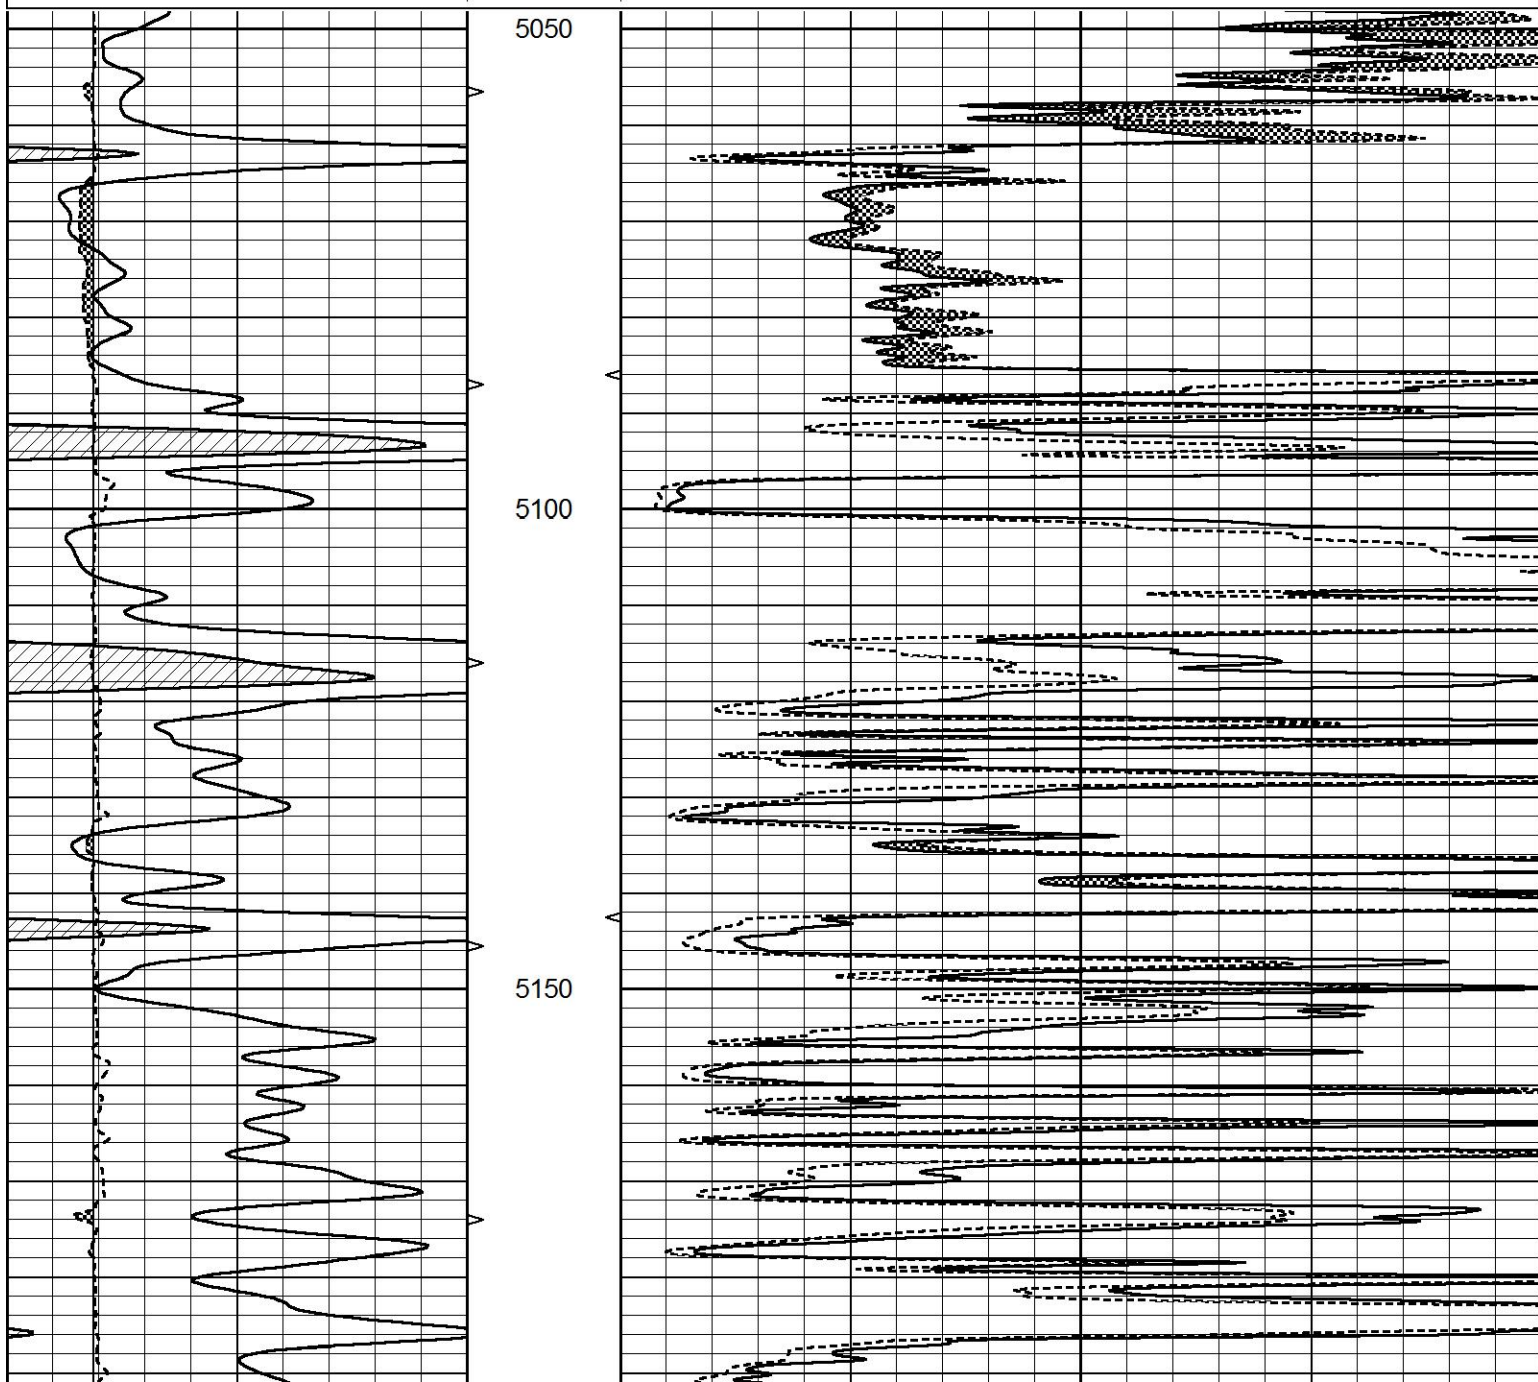

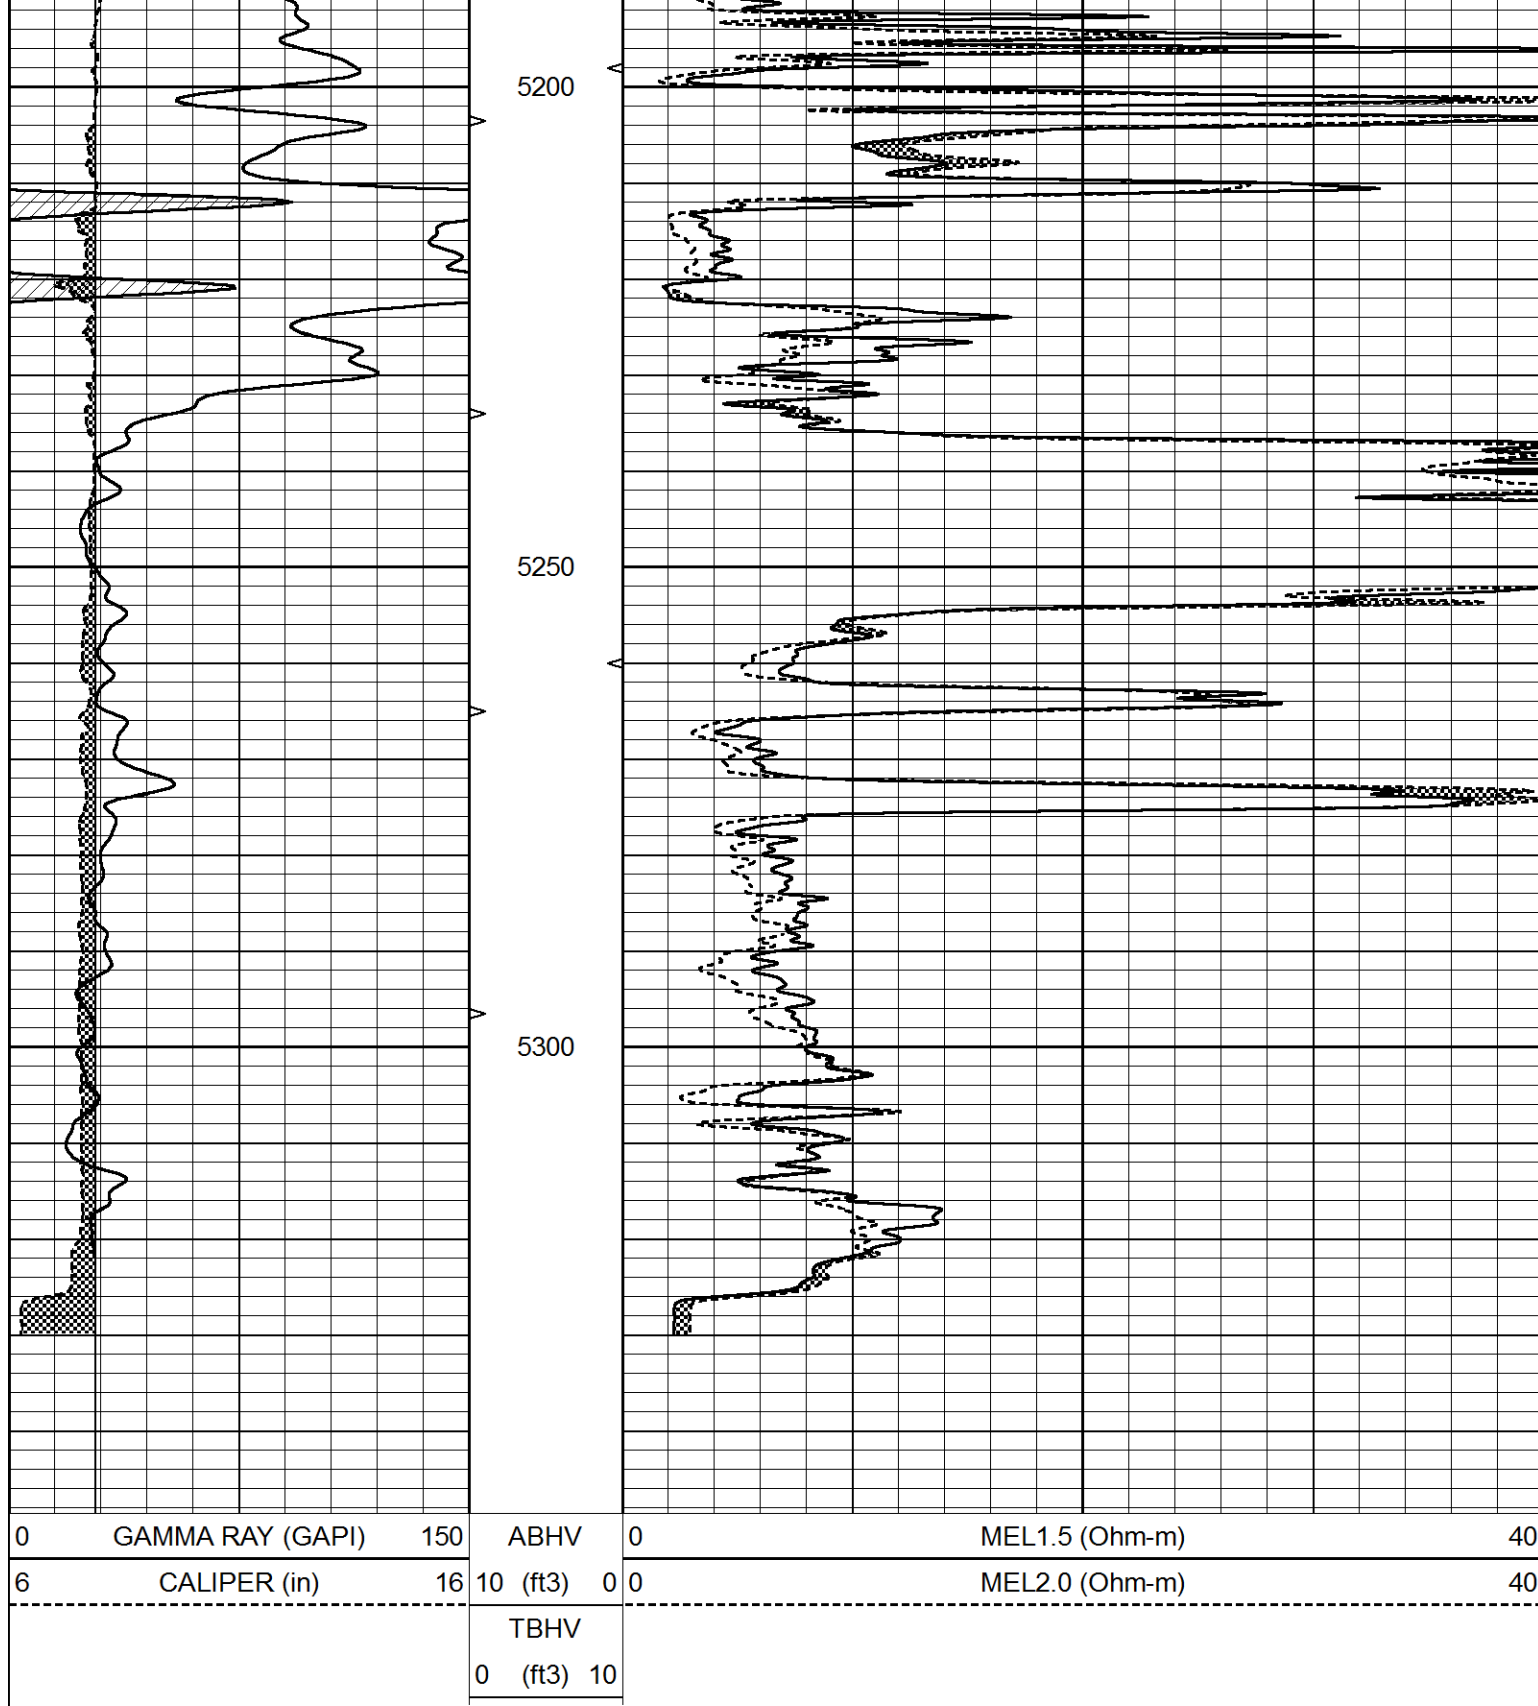

Calibration Report

Database File 5210pe.db
 Dataset Pathname pass5.1
 Dataset Creation Wed Mar 10 07:56:51 2021

MICRO_USR Calibration Report

Serial Number: 070911
 Tool Model: Probel
 Performed: Sun Dec 13 14:24:22 2020

Caliper Calibration:			Gain=3.755		Offset=1.950																																																
References			Low Cal		High Cal																																																
Readings			8.000		14.000																																																
			1.451		3.049																																																
1.5" Calibration:			Gain=60.000		Offset=-0.700																																																
References			Low Cal		High Cal																																																
Readings			0.000		20.000																																																
			0.004		0.843																																																
2" Calibration:			Gain=50.000		Offset=-0.650																																																
References			Low Cal		High Cal																																																
Readings			0.000		20.000																																																
			0.021		0.810																																																
Microlog Calibration Report																																																					
Serial-Model:			070911-ProbeL																																																		
Performed:			Sat Apr 11 01:13:01 2015																																																		
<table><tr><td colspan="3">Readings</td><td colspan="3">References</td><td colspan="3">Results</td></tr><tr><td></td><td>Zero</td><td>Cal</td><td></td><td>Zero</td><td>Cal</td><td></td><td>m</td><td>b</td></tr><tr><td>Normal</td><td>0.0002</td><td>0.4836</td><td>V</td><td>0.0000</td><td>10.0000</td><td>Ohm-m</td><td>20.6908</td><td>-0.0051</td></tr><tr><td>Inverse</td><td>0.0018</td><td>0.6297</td><td>V</td><td>0.0000</td><td>10.0000</td><td>Ohm-m</td><td>15.9263</td><td>-0.0282</td></tr><tr><td>Caliper</td><td>0.0000</td><td>1.0000</td><td>V</td><td>0.0000</td><td>1.0000</td><td>in</td><td>1.0000</td><td>0.0000</td></tr></table>									Readings			References			Results				Zero	Cal		Zero	Cal		m	b	Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051	Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282	Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
Readings			References			Results																																															
	Zero	Cal		Zero	Cal		m	b																																													
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051																																													
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282																																													
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000																																													
Gamma Ray Calibration Report																																																					
Serial Number:			070558																																																		
Tool Model:			Probe1																																																		
Performed:			Fri Oct 30 21:32:56 2020																																																		
Calibrator Value:			1.0		GAPI																																																
Background Reading:			0.0		cps																																																
Calibrator Reading:			1.0		cps																																																
Sensitivity:			0.2700		GAPI/cps																																																