

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-007-22673-00-00
Spot: NENENW Sec/Twnshp/Rge: 10-30S-14W
330 feet from N Section Line, 2310 feet from W Section Line
Lease Name: HICKS-JOHNSON Well #: 1-10
County: BARBER Total Vertical Depth: 4740 feet

Operator License No.: 5056
Op Name: HOLL, F.G., COMPANY L.L.C.
Address: 9431 E CENTRAL, SUITE 100
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	3507	2230	WITH 175 SX CMT
SURF	13.38	231		WITH 275 SX CMT

\$ 154.05

Well Type: OG UIC Docket No: _____ Date/Time to Plug: 11/29/2006 8:45 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3050' & 4 SX CMT. PLUG AT 800' WITH 12 SX GEL & 50 SX CMT. PLUG AT 260' WITH 100 SX CMT. PLUG AT 40' WITH 30 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 11/29/2006 10:45 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:

SANDED BACK TO 3050' & PUT 4 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 4 1/2" CASING. 1ST PLUG AT 800' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 260' WITH 100 SX CMT. 3RD PLUG AT 40' WITH 30 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3318	3322		
3300	3304		
3114	3421		

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED.


Plugged through: CSG

INVOICED

DATE 12-15-06

INV. NO. 2007060988

District: 01

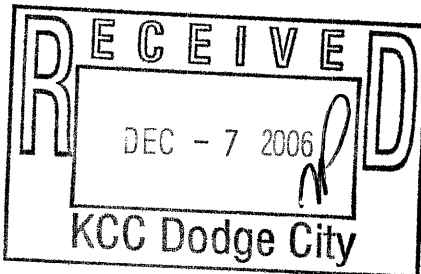

Signed

Stephen J. Pfeifer
(TECHNICIAN)

RECEIVED

DEC 14 2006

KCC WICHITA

Form CP-2/3

[Handwritten initials]