

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-20737-00-00
Spot: SESESW Sec/Twnshp/Rge: 21-25S-36W
330 feet from S Section Line, 2970 feet from E Section Line
Lease Name: LEE Well #: 2-21
County: KEARNY Total Vertical Depth: 5140 feet

Operator License No.: 101
Op Name: KCC FEE FUND PLUG
Address: 130 S. MARKET
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		791		
CIBP		1995		
PROD	4.5	5140	0	WITH 150 SX CMT
SURF	8.625	545		

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/28/2006 2:00 PM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: STEVE DURRANT Company: KCC Phone: (620) 225-8888

Proposed Plugging Method: SET CIBP @ 4800' & 2 SX CMT. SET CIBP @ 700'. TEST CASING. PERFORATE AT 690'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: STEVE DURRANT Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 12/01/2006 2:00 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 1995'. (TAGGED FILL & SET DOWN @ 2036'). CIBP @ 791'. PERFORATE AT 690'. PUMPED 250 SX CMT THROUGH CASING. FULL CIRCULATION. 7 BBLs CMT CIRCULATED TO THE PIT.


Perfs:

Top	Bot	Thru	Comments
4981	4988		

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND CEMENTING.

Plugged through: CSG

District: 01

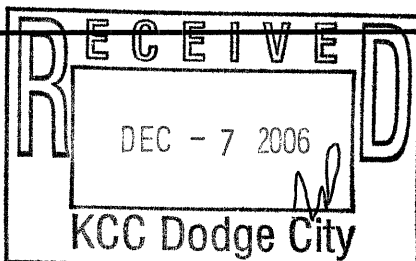

Signed

(TECHNICIAN)

RECEIVED
DEC 15 2006
KCC WICHITA

Form C-275