



MICRO LOG

Company JEL RESOURCES, LLC.

Well WFY OIL & GAS #1-6

Field N/A

County PAWNEE State KANSAS

Location: API #: 15-145-21883-0000

750' FSL & 2310' FWL
S/2 - NE - SE - SW

SEC 6 TWP 22S RGE 15W

Permanent Datum GROUND LEVEL Elevation 1982
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Other Services
CDL/CNL/PE
DIL/SONIC

Elevation
K.B. 1990
D.F. 1988
G.L. 1982

Date 4/6/23

Run Number TWO

Depth Driller 3996

Depth Logger 3996

Bottom Logged Interval 3980

Top Log Interval 2800

Casing Driller 8 5/8"@1036'

Casing Logger 1036

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/51

pH / Fluid Loss 9.5/9.6

Source of Sample FLOWLINE

Rm @ Meas. Temp .500@87F

Rmf @ Meas. Temp .375@87F

Rmc @ Meas. Temp .600@87F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .375@116F

Time Circulation Stopped 4 HOURS

Time Logger on Bottom 5.30 P.M.

Maximum Recorded Temperature 116F

Equipment Number 922339

Location HAYS, KANSAS

Recorded By JEFF LUEBBERS

Witnessed By JEREMY SCHWATRZ

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-145-21883-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
LARNED, KS., & K-19, 4 1/2E. ON K-19, N. INTO





MAIN SECTION

Database File	7266pe.db
Dataset Pathname	pass6.5
Presentation Format	micro
Dataset Creation	Thu Apr 06 18:23:12 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

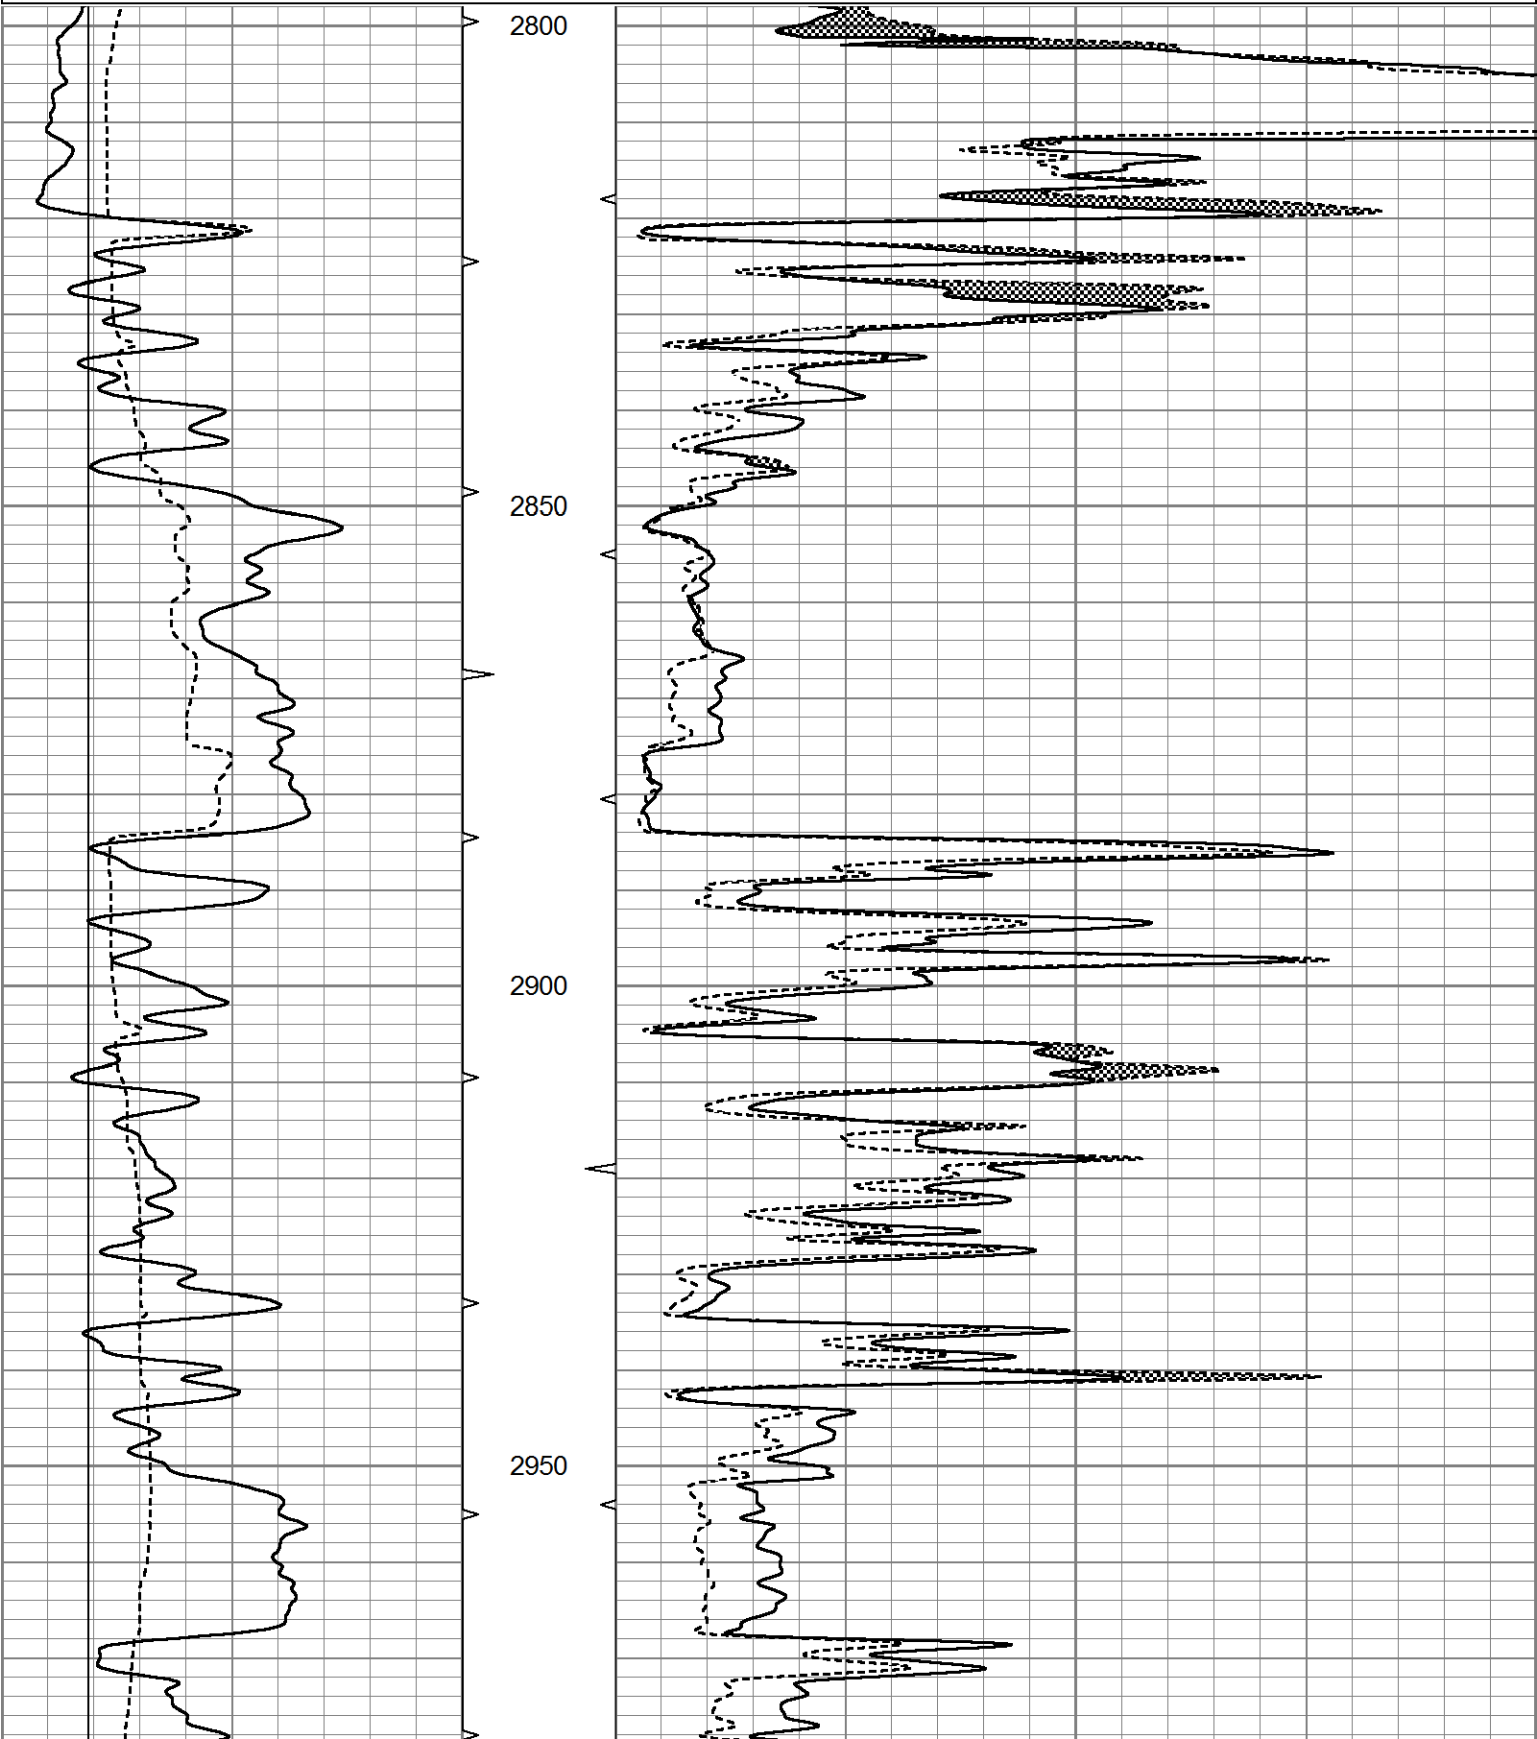

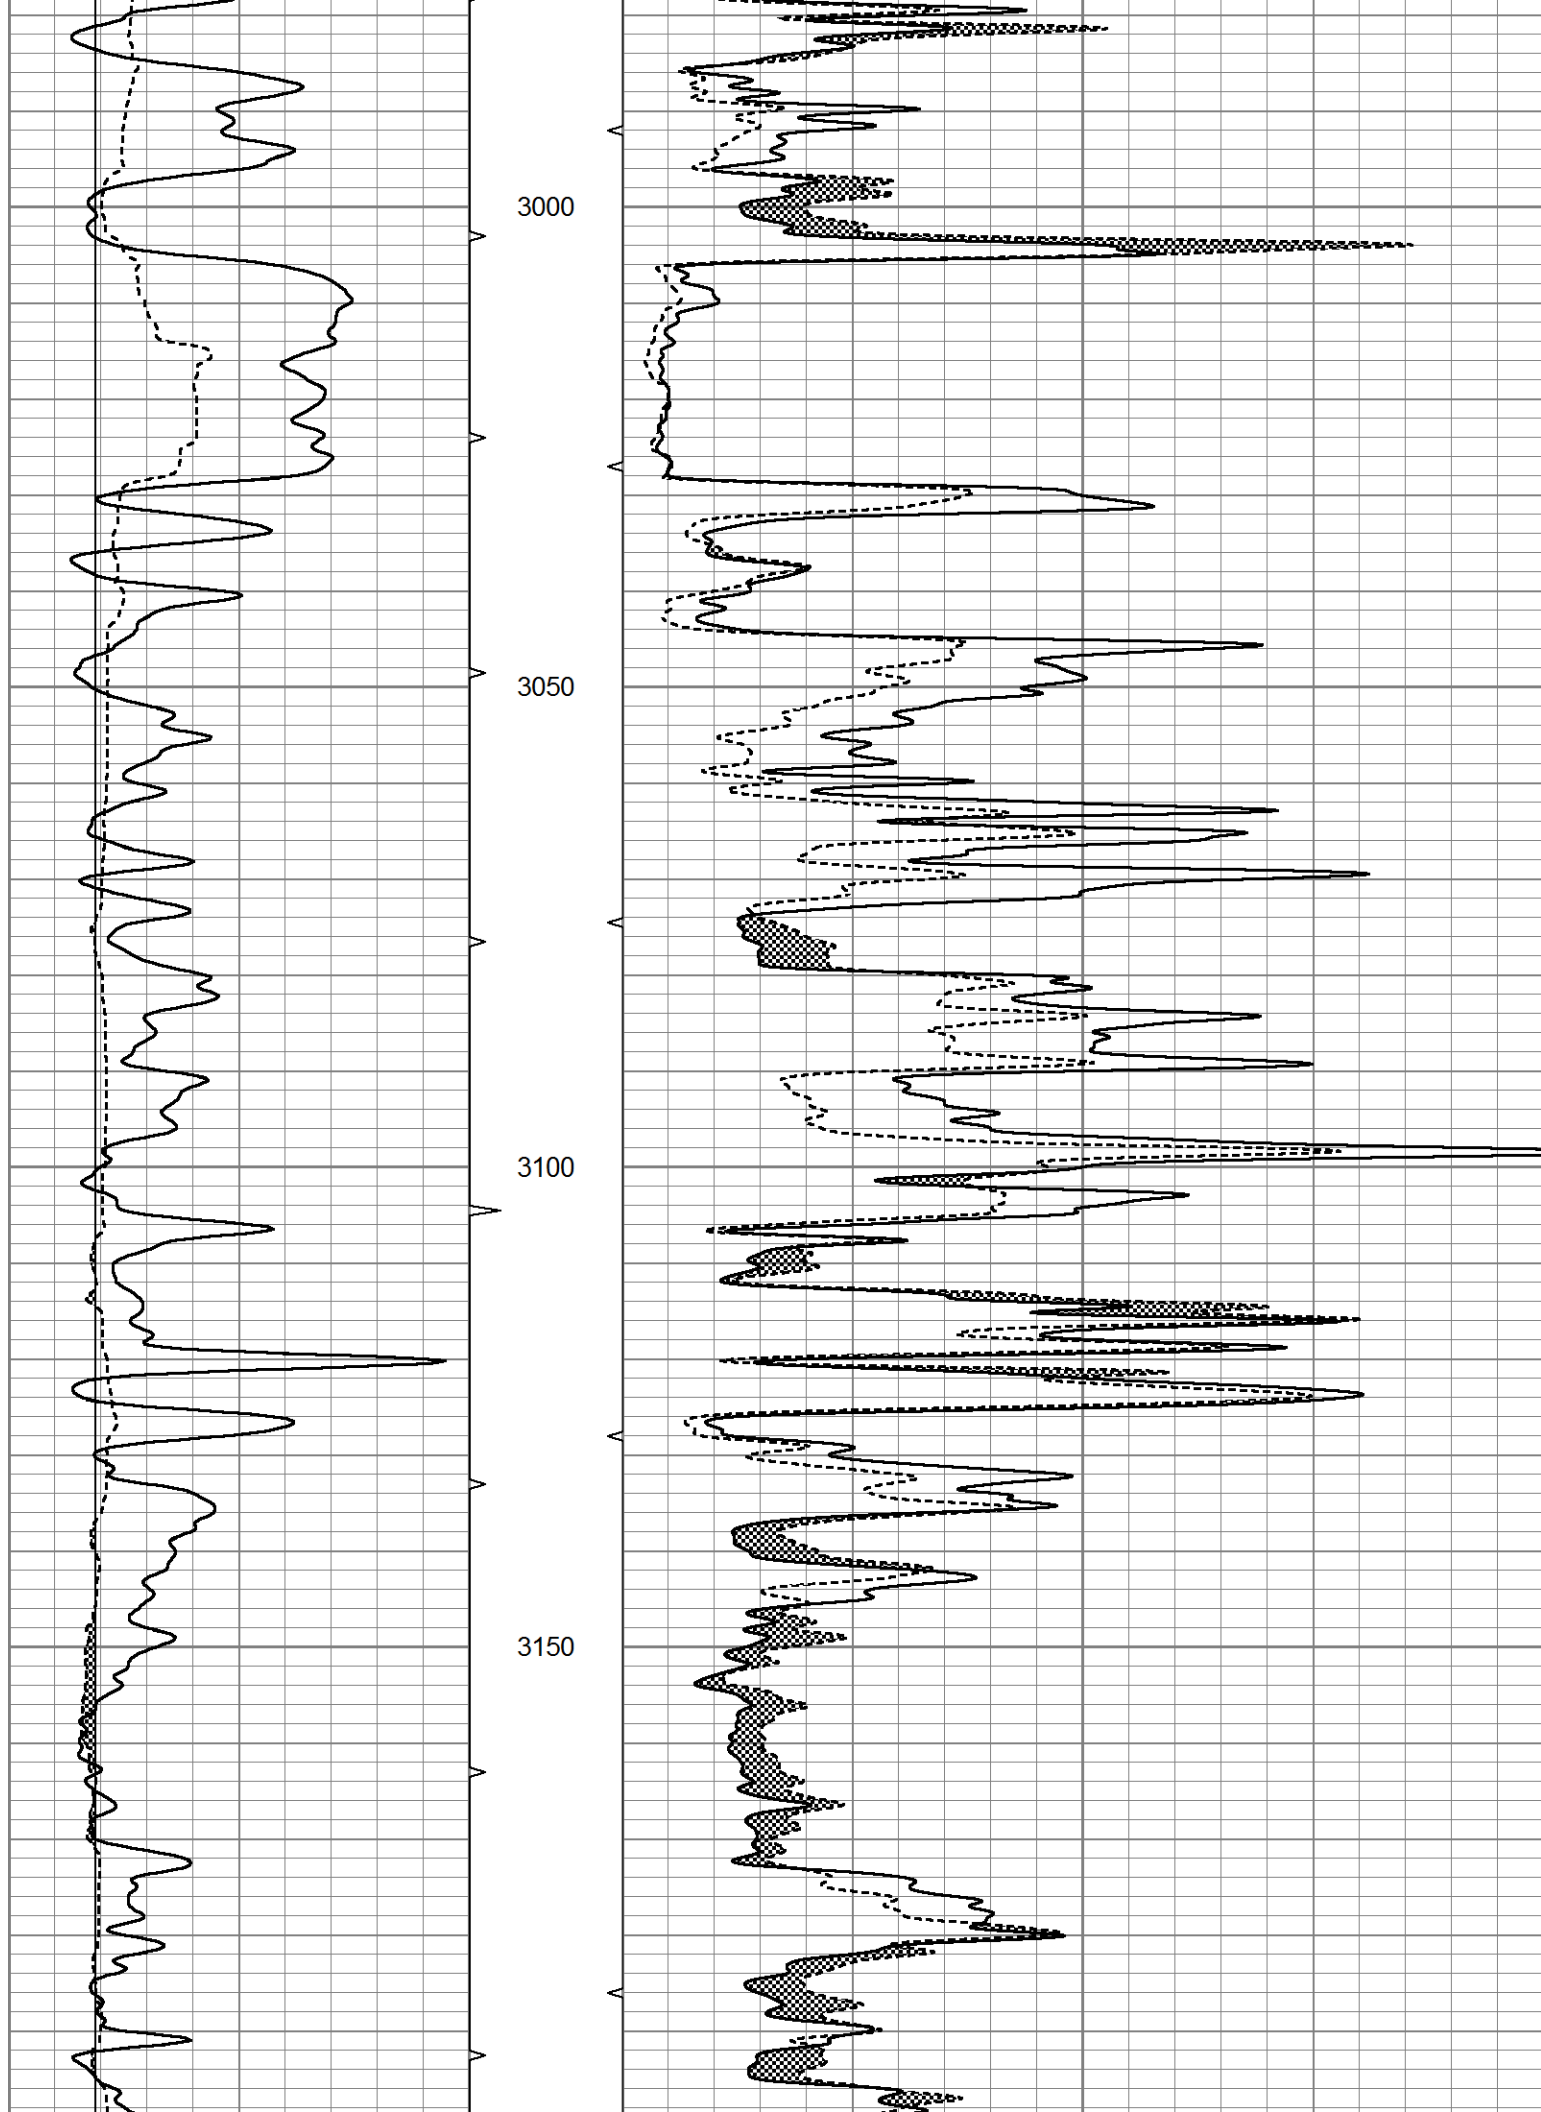

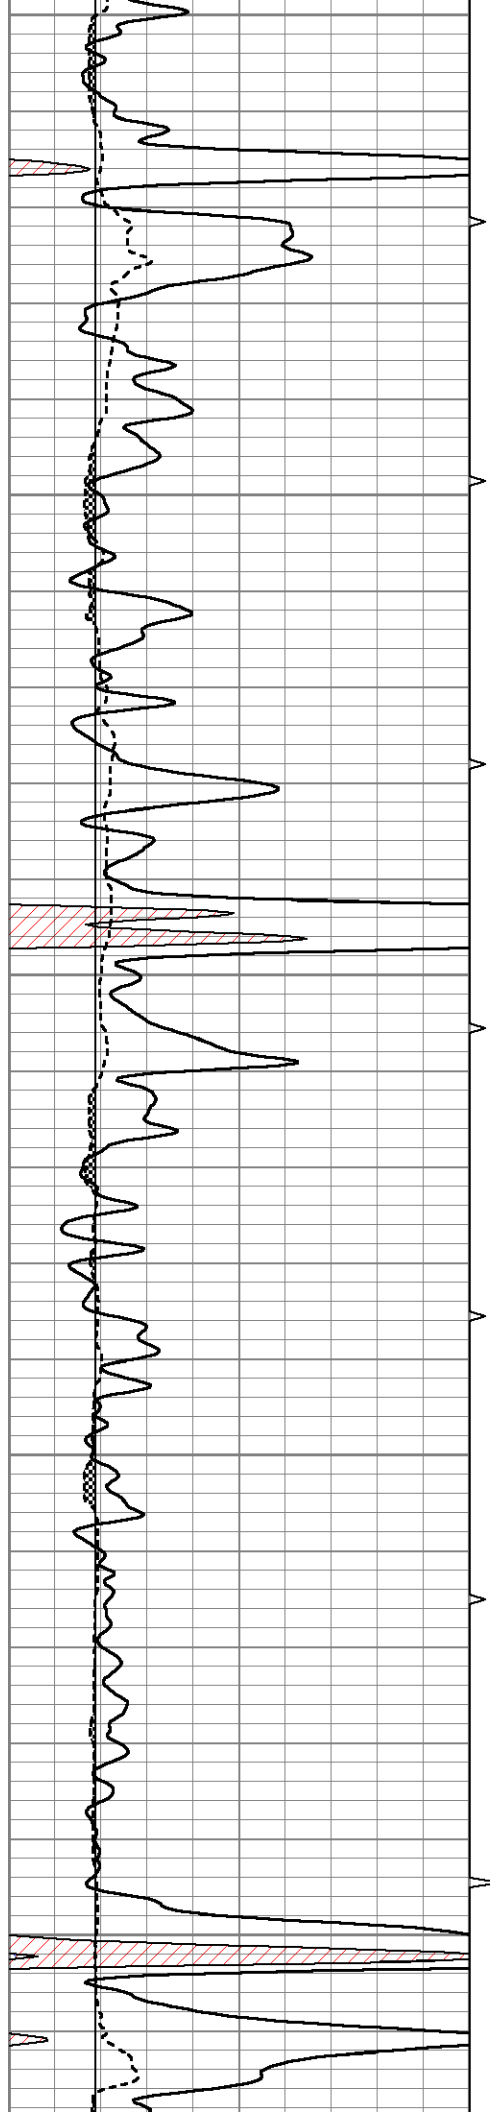


3200


3250

3300

3350

3400

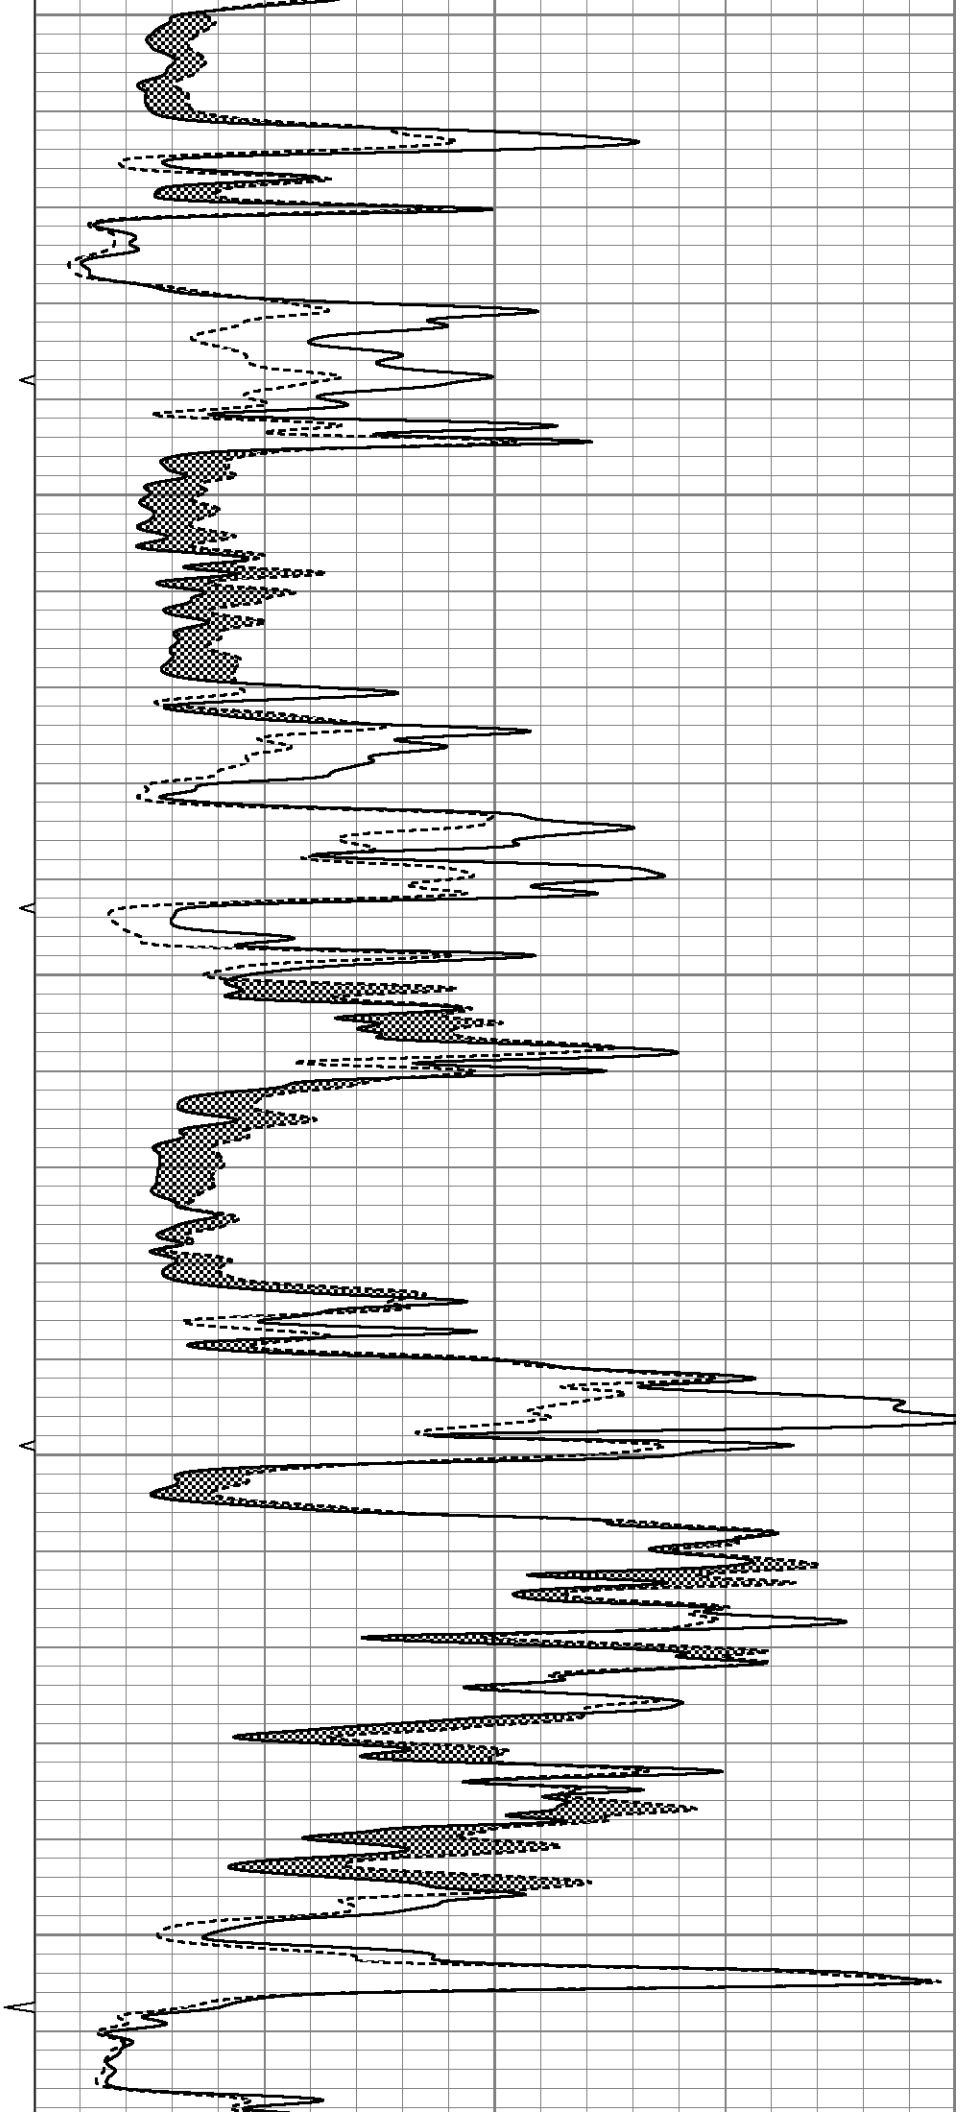

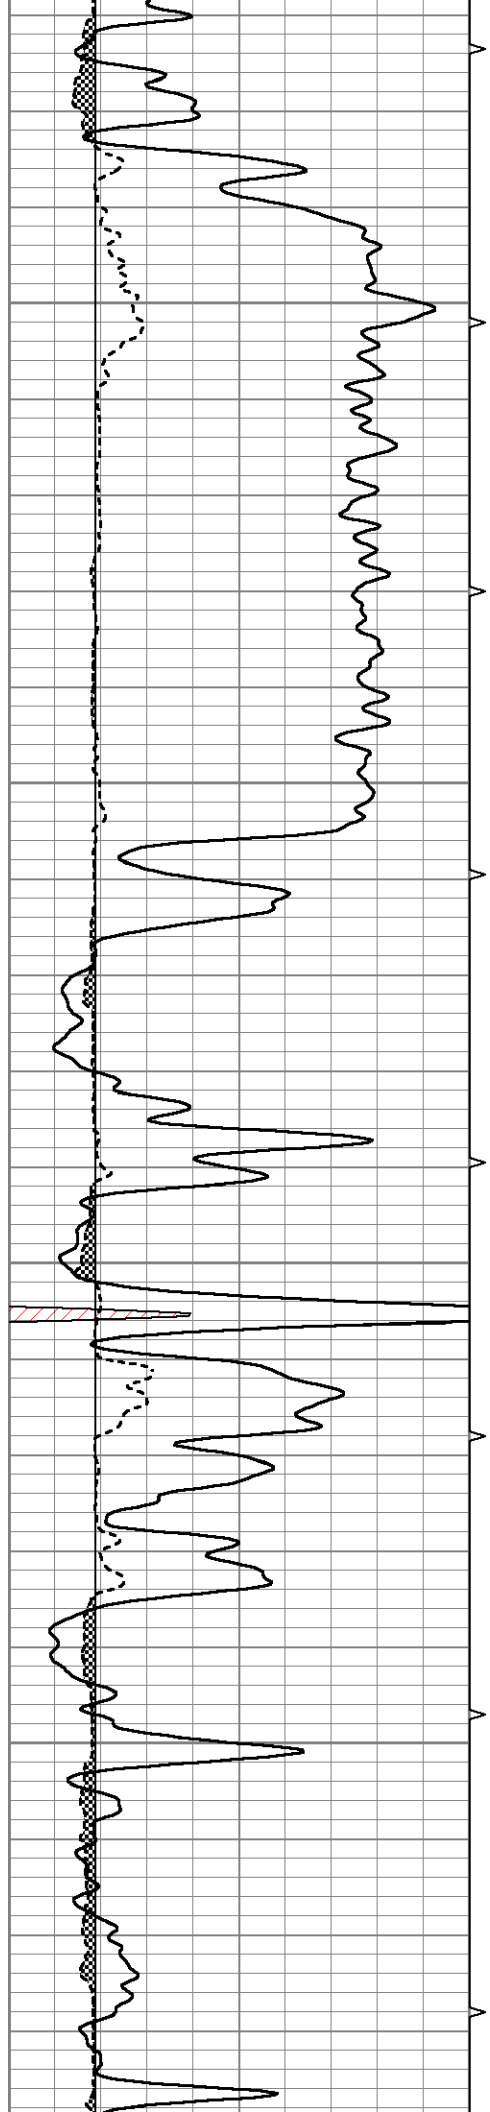



3450


3500

3550

3600

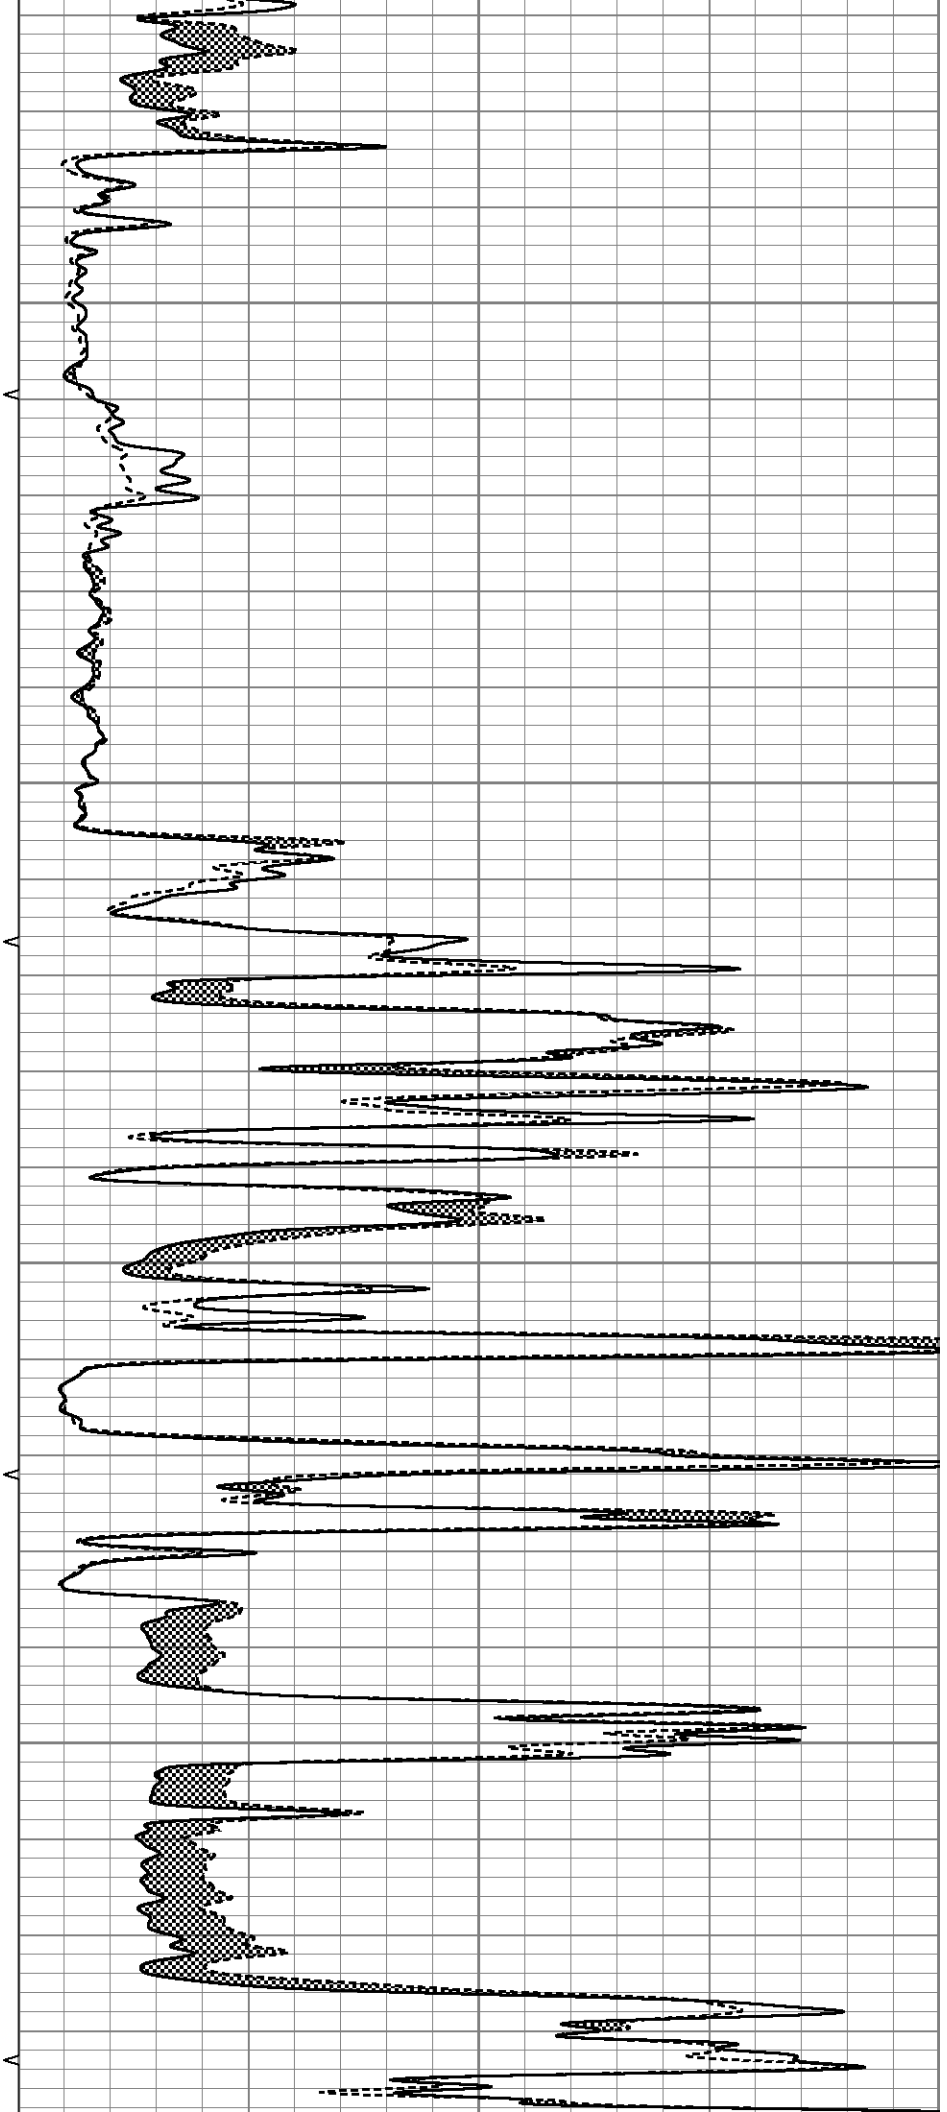

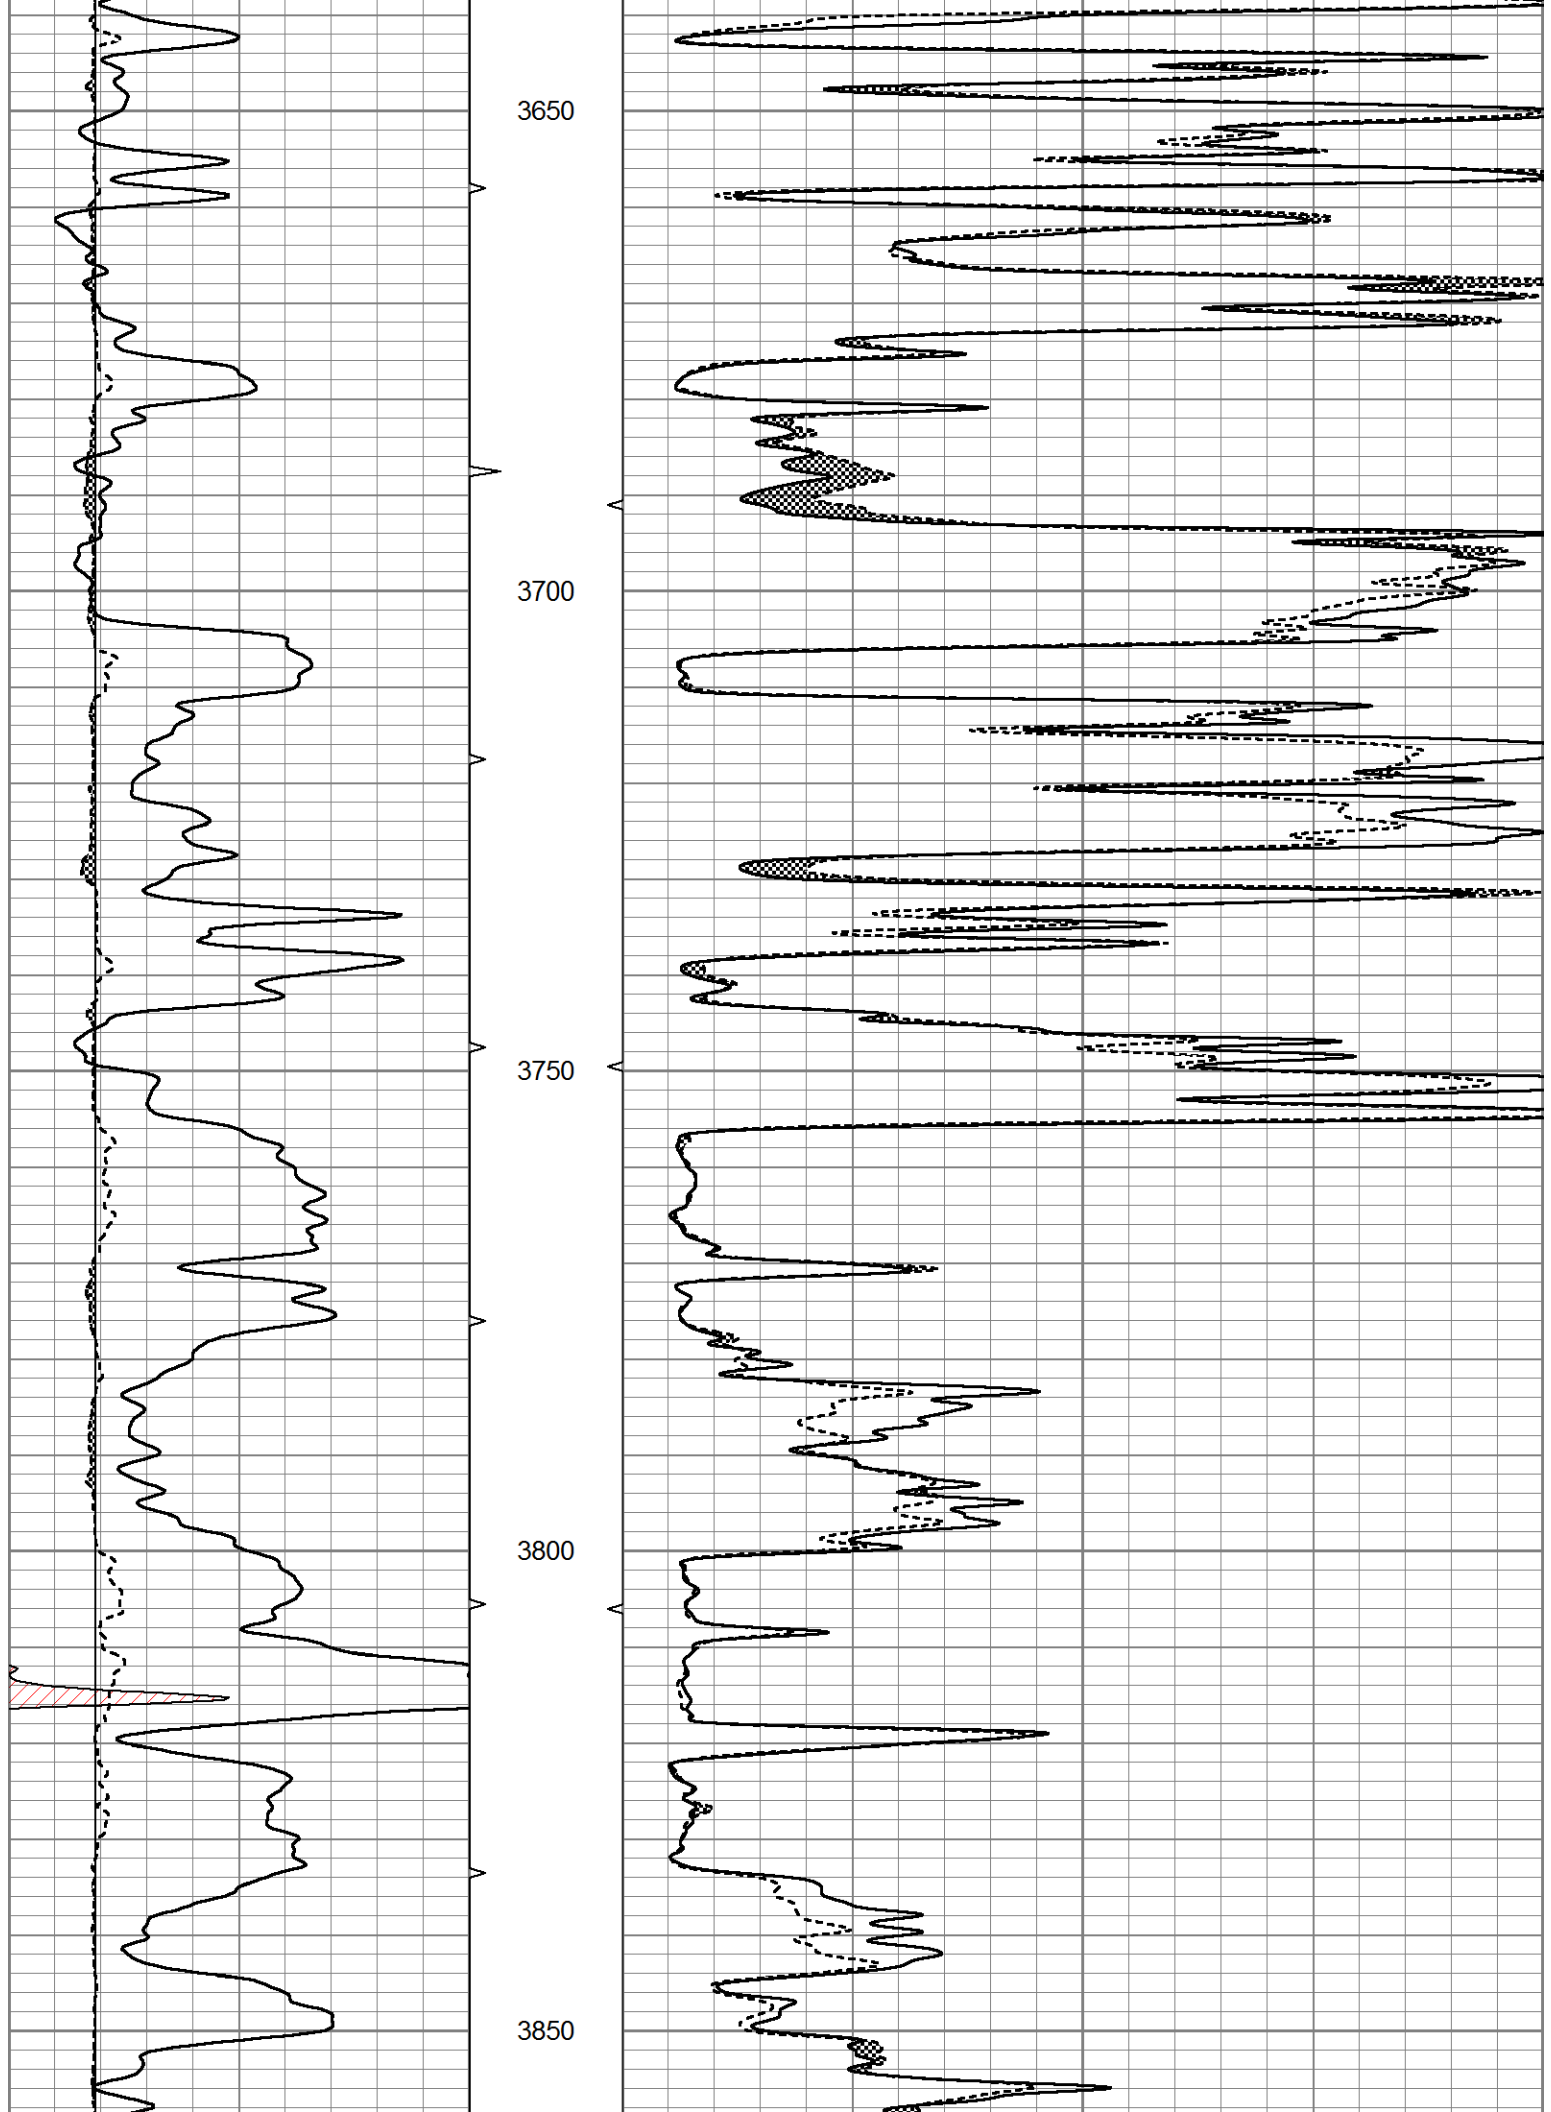

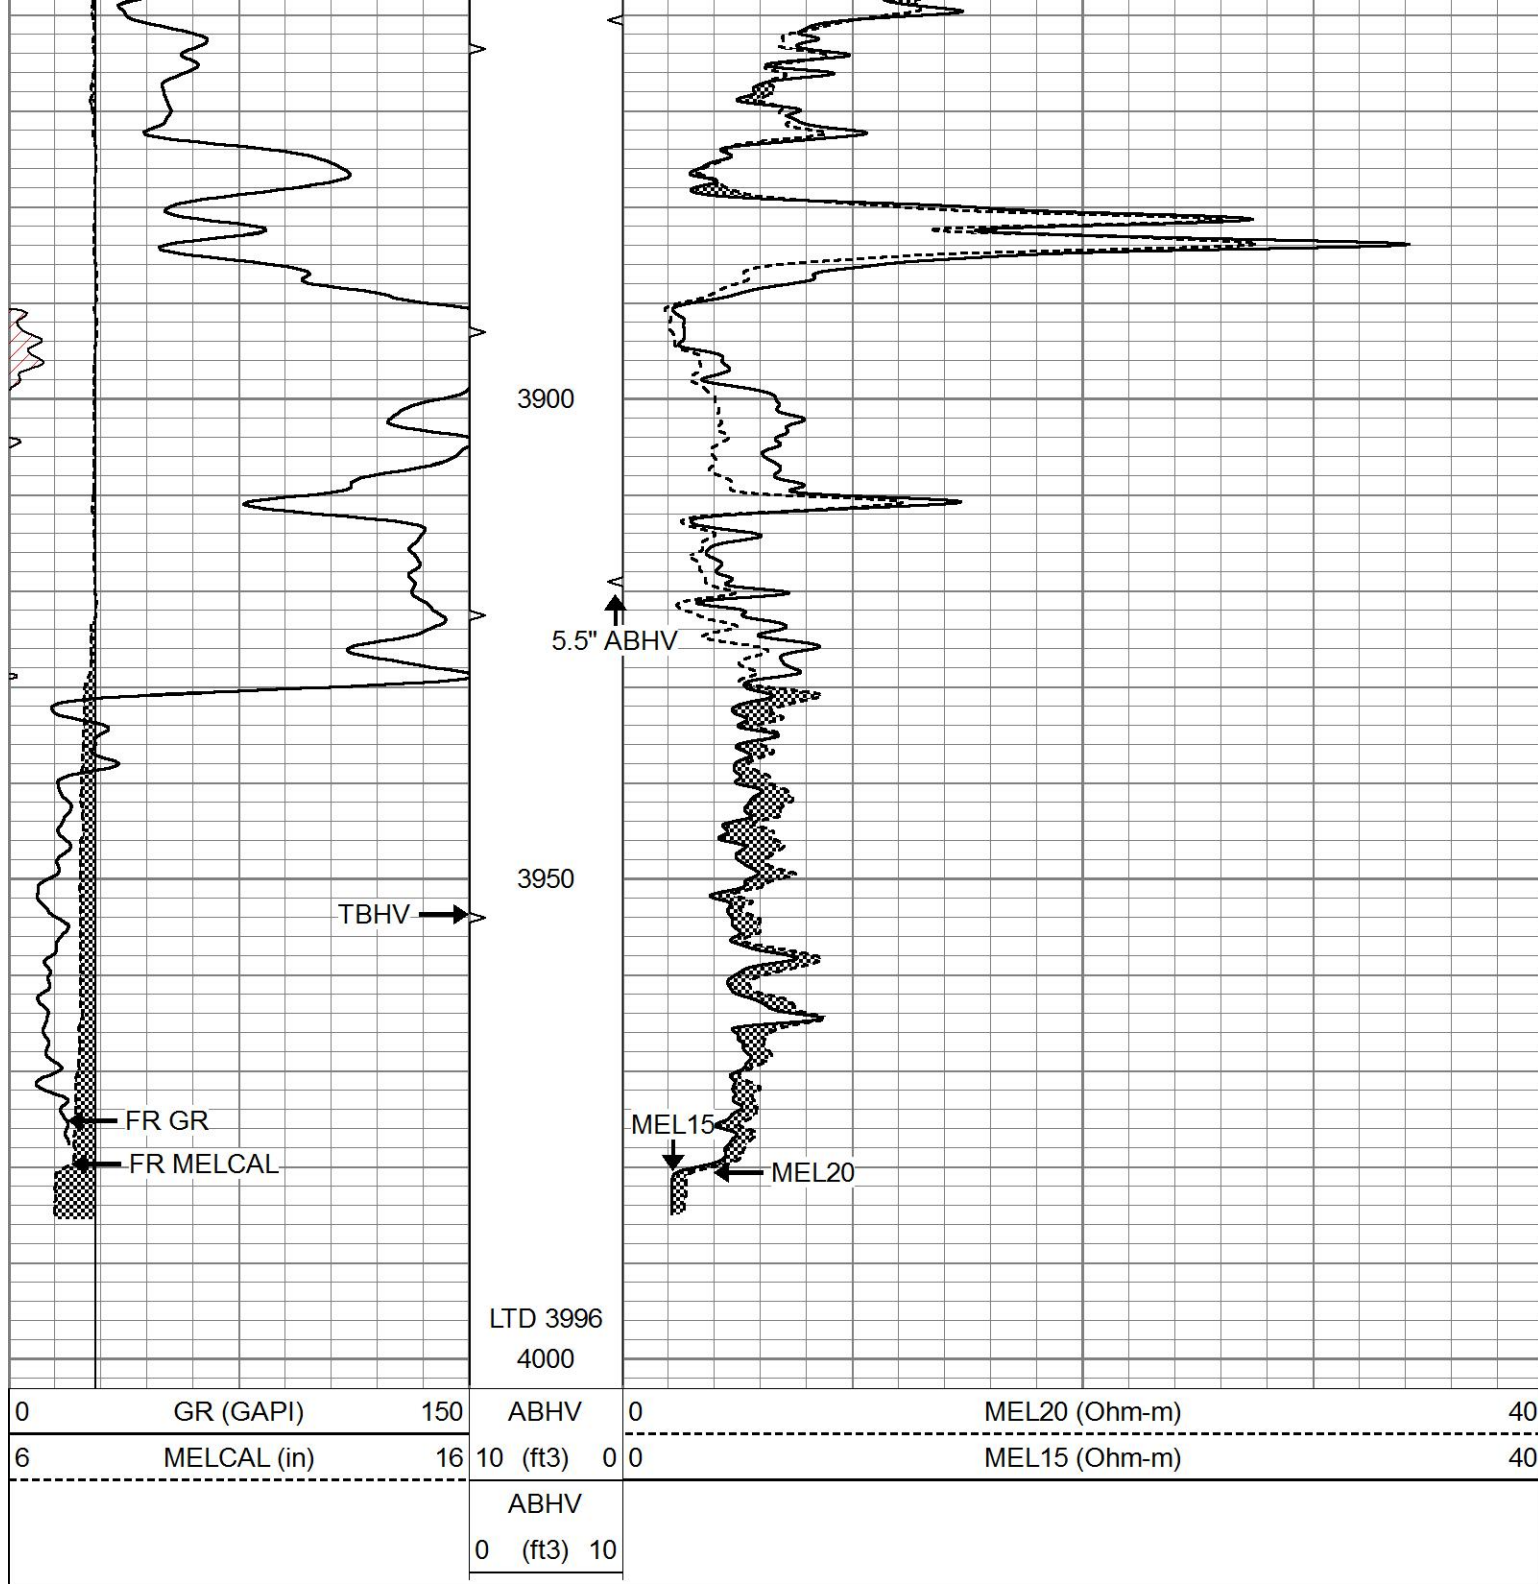


REPEAT SECTION

Database File 7266pe.db
 Dataset Pathname pass5.5
 Presentation Format micro
 Dataset Creation Thu Apr 06 17:53:54 2023
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40

ABHV
0 (ft3) 10

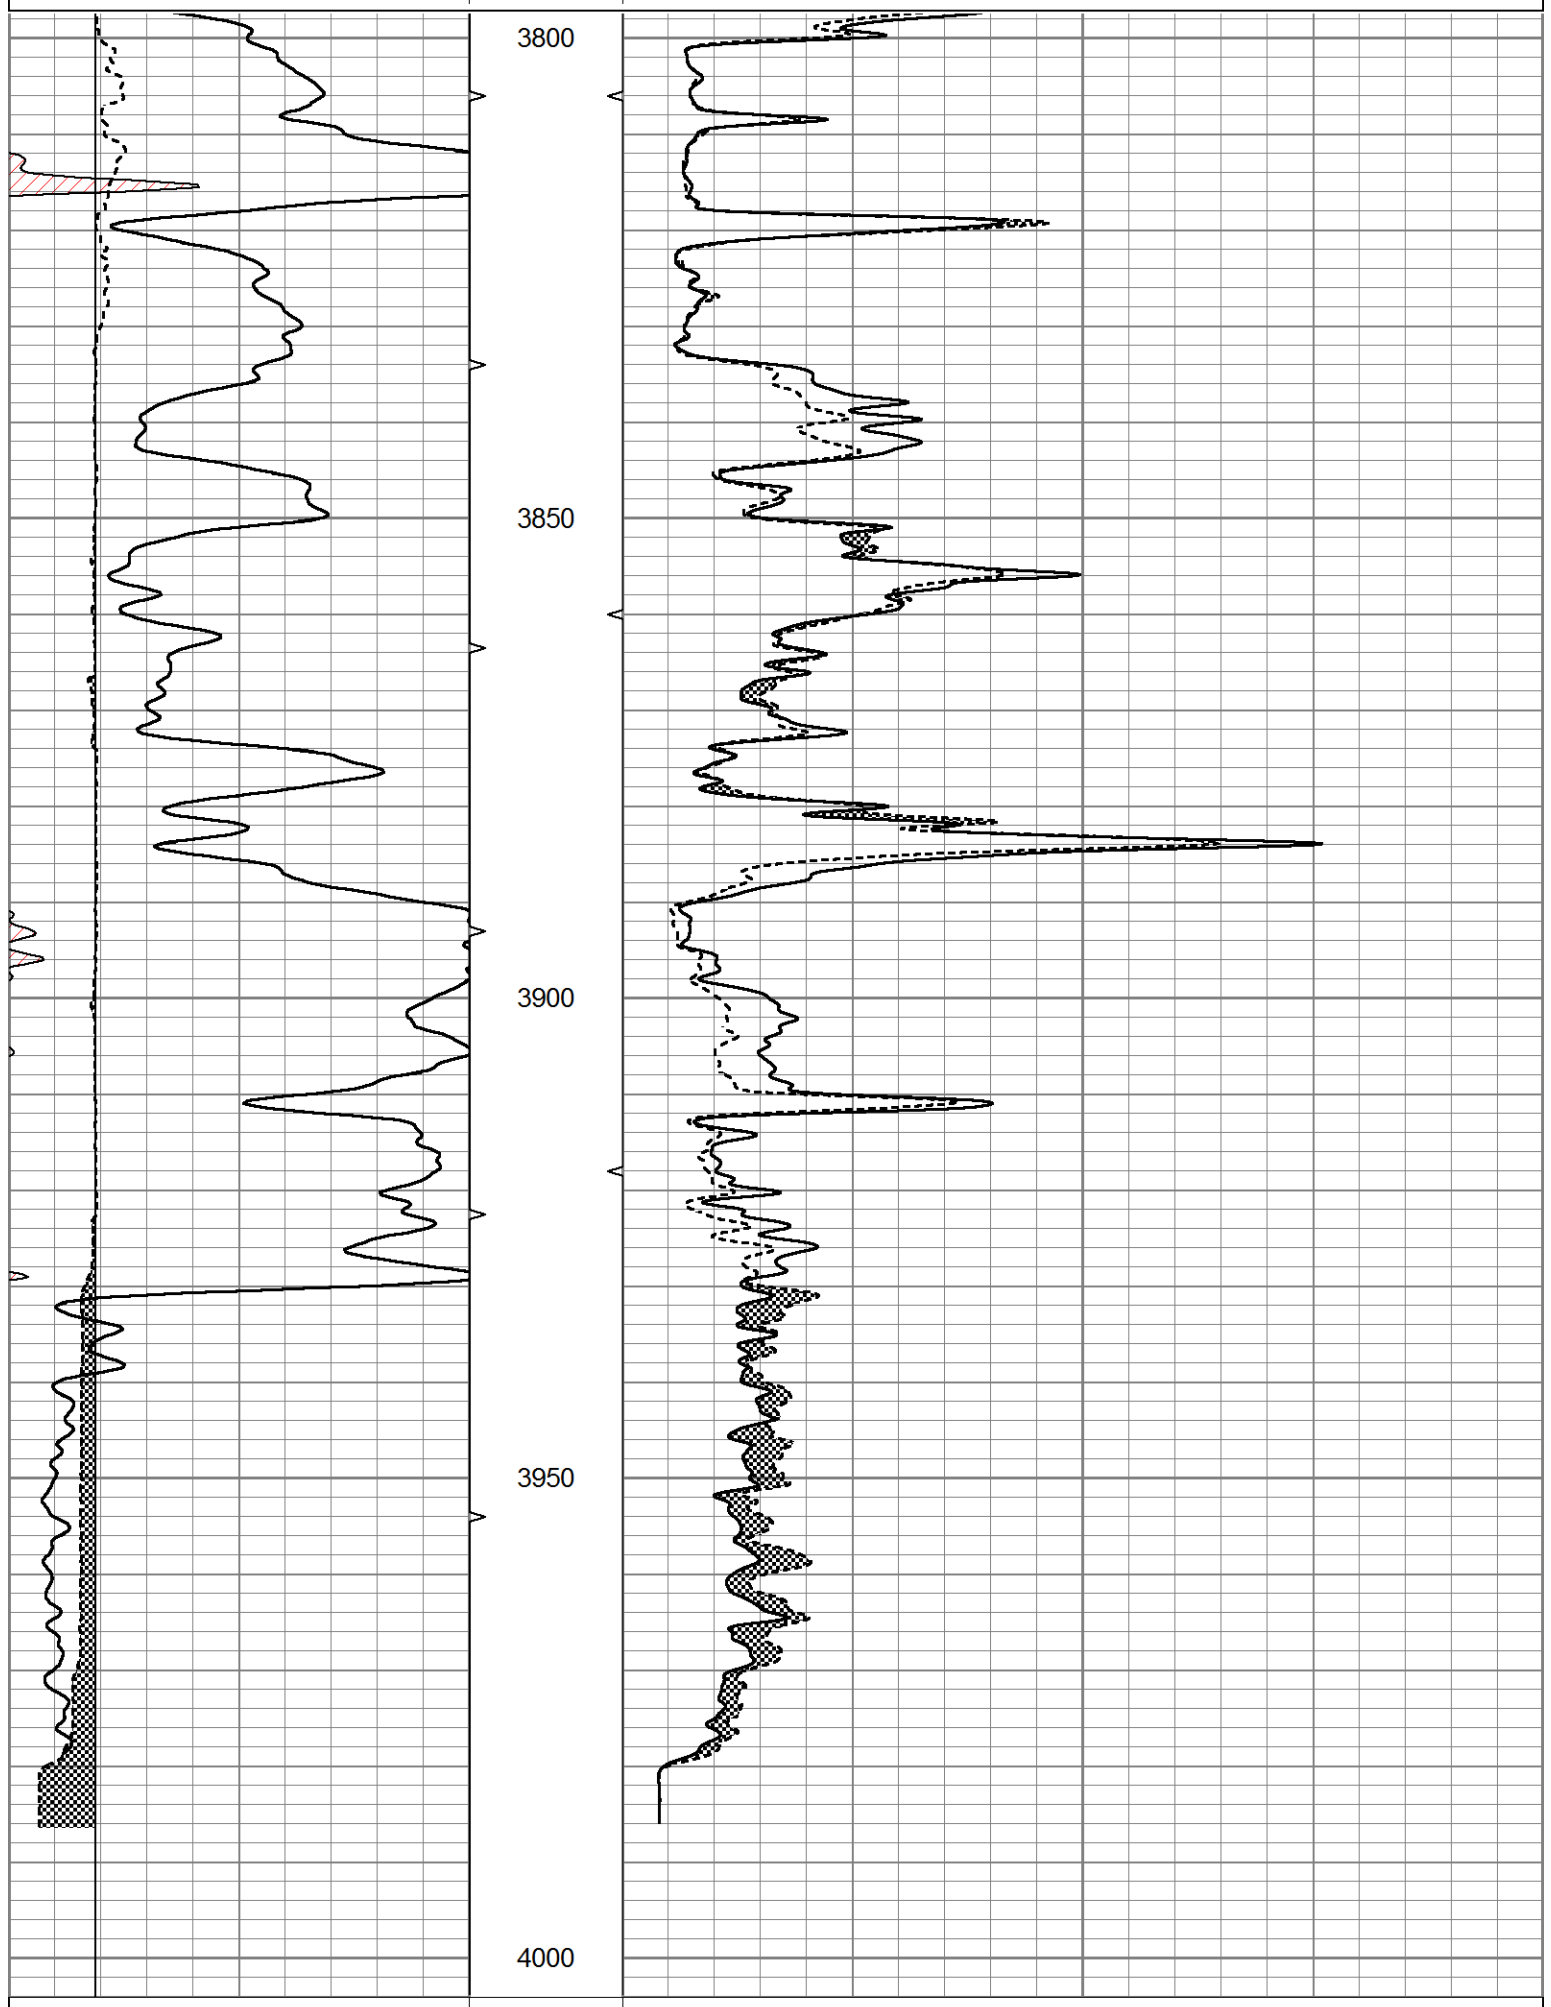

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

Calibration Report			
Database File	7266pe.db		
Dataset Pathname	pass6.5		
Dataset Creation	Thu Apr 06 18:23:12 2023		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Wed Mar 29 14:30:11 2023		
Caliper Calibration:	Gain=5.195	Offset=1.455	
	Low Cal	High Cal	
References	8.000	16.000	
Readings	1.260	2.800	
1.5" Calibration:	Gain=35.000	Offset=0.000	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.001	1.291	
2" Calibration:	Gain=55.000	Offset=-1.200	
	Low Cal	High Cal	
References	0.000	20.000	
Readings	0.003	1.103	
Gamma Ray Calibration Report			
Serial Number:	070558		
Tool Model:	OPEN_GR		
Performed:	Thu Apr 06 15:44:26 2023		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.3000	GAPI/cps	