



MICRO LOG

Company	ANCHOR BAY PETROLEUM, LLC.	Company	ANCHOR BAY PETROLEUM, LLC.
Well	SIMPSON "A" #1	Well	SIMPSON "A" #1
Field	BRUNGARDT SOUTHWEST	Field	BRUNGARDT SOUTHWEST
County	ELLIS	County	ELLIS
State	KANSAS	State	KANSAS
Location:	API # : 15-051-27081-0000	Other Services CDL/CNL DIL	
Permanent Datum	GROUND LEVEL	Elevation	1846
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
	SEC 10 TWP 11S RGE 17W		
Date	5/5/23		
Run Number	TWO		
Depth Driller	3550		
Depth Logger	3550		
Bottom Logged Interval	3548		
Top Log Interval	2100		
Casing Driller	8 5/8" @ 223'		
Casing Logger	221		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 7.200 PPM	
Density / Viscosity	9.1/50		
pH / Fluid Loss	10.0/5.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.500 @ 84F		
Rmf @ Meas. Temp	.375 @ 84F		
Rmc @ Meas. Temp	.600 @ 84F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.375 @ 112F		
Time Circulation Stopped	3.5 HOURS		
Time Logger on Bottom	4.30 A.M.		
Maximum Recorded Temperature	112F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	ED GLASSMAN		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-051-27081-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
CODELL & SALINE RIVER RD., 1N. TO "MENDOTA RD.", JOG W., S. INTO




MAIN SECTION

Database File	7877ddn.db
Dataset Pathname	pass6.5
Presentation Format	micro
Dataset Creation	Fri May 05 05:47:58 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

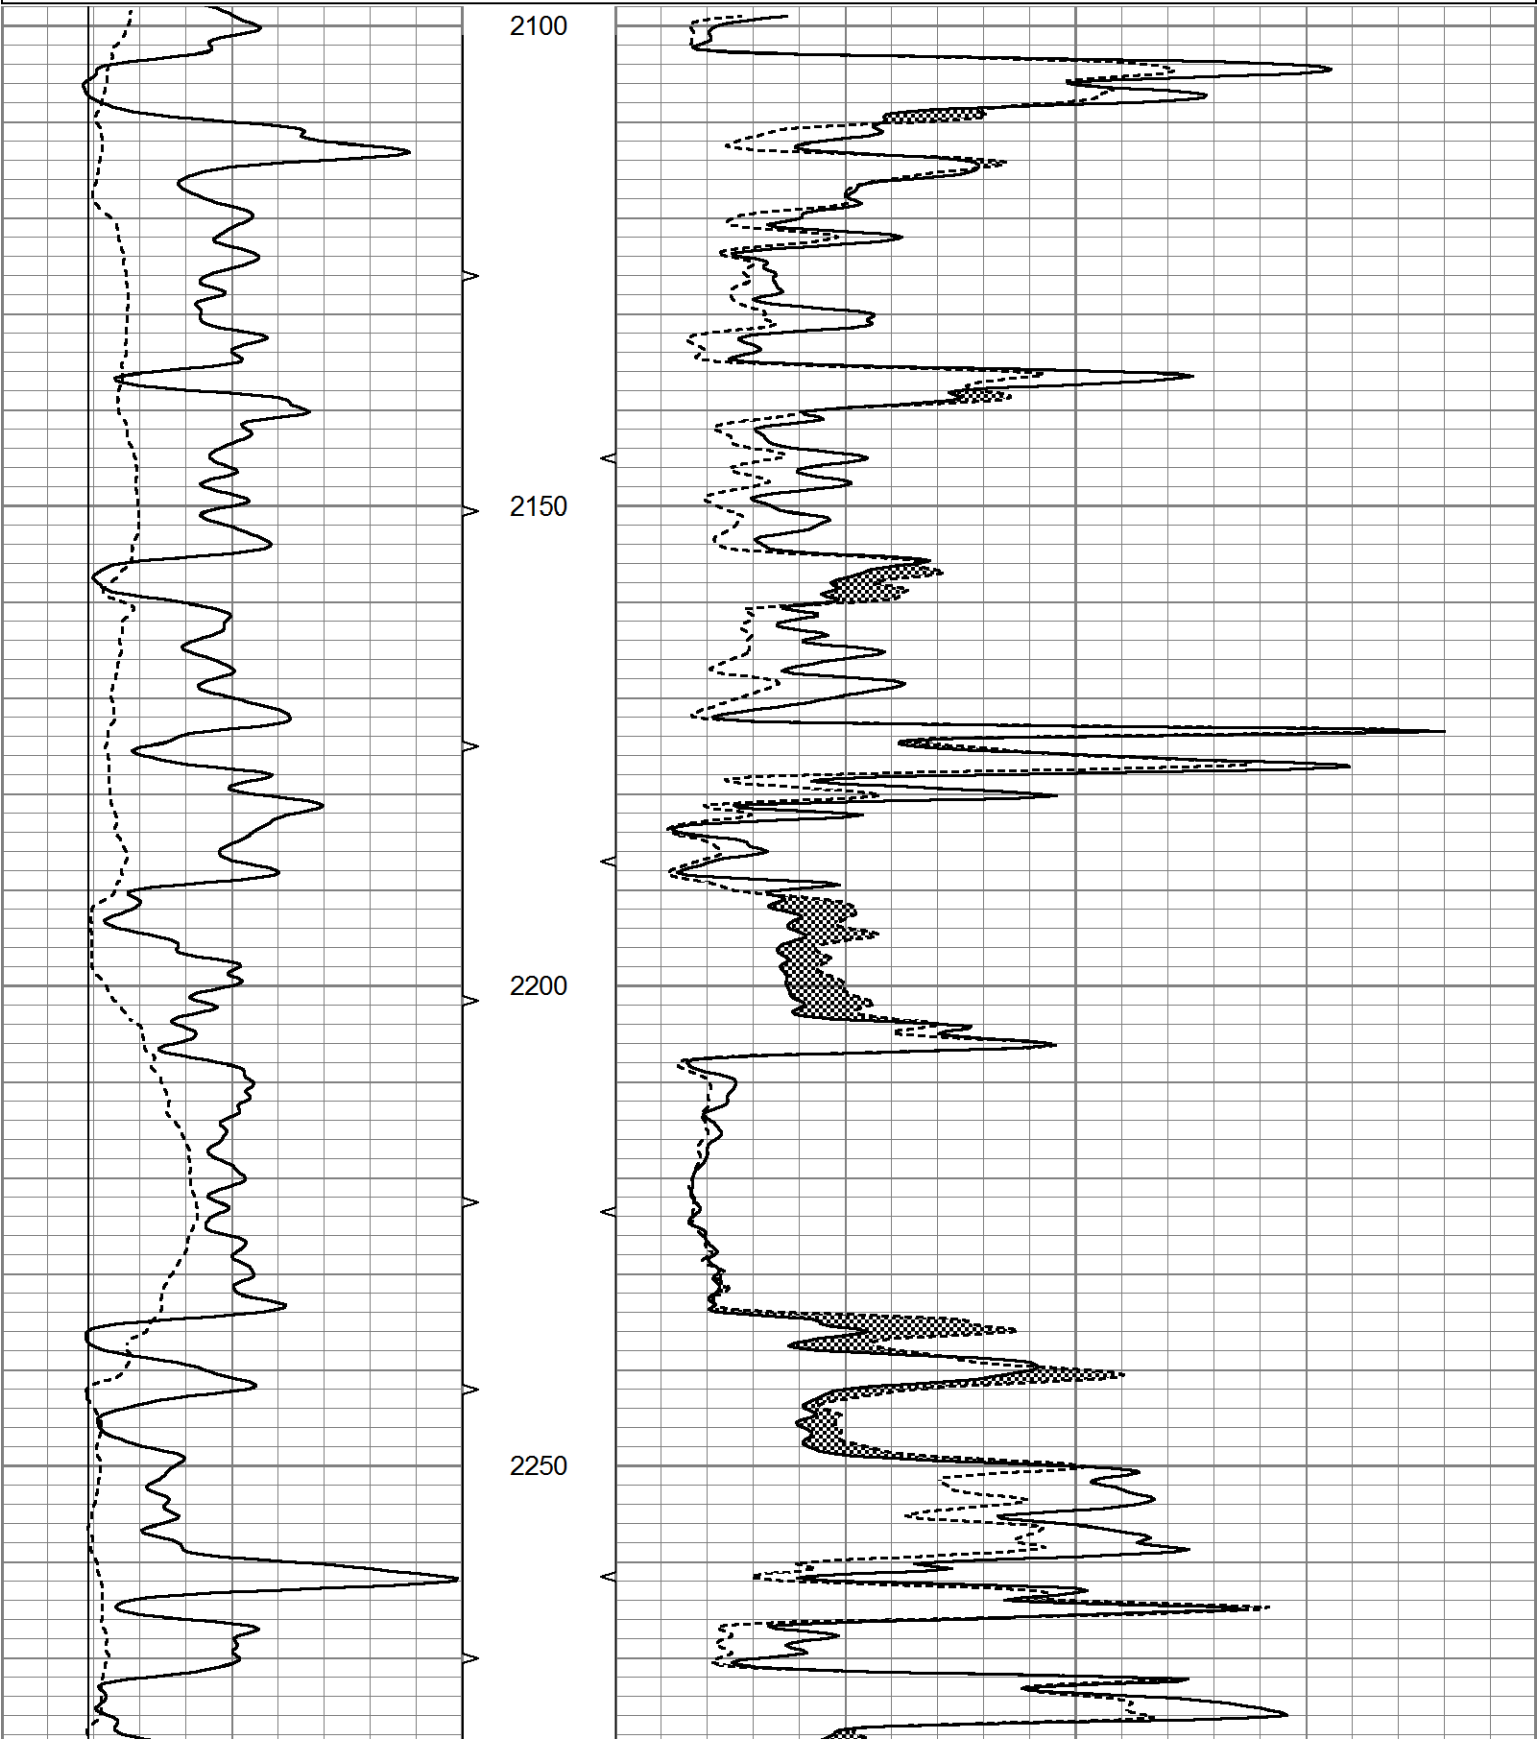

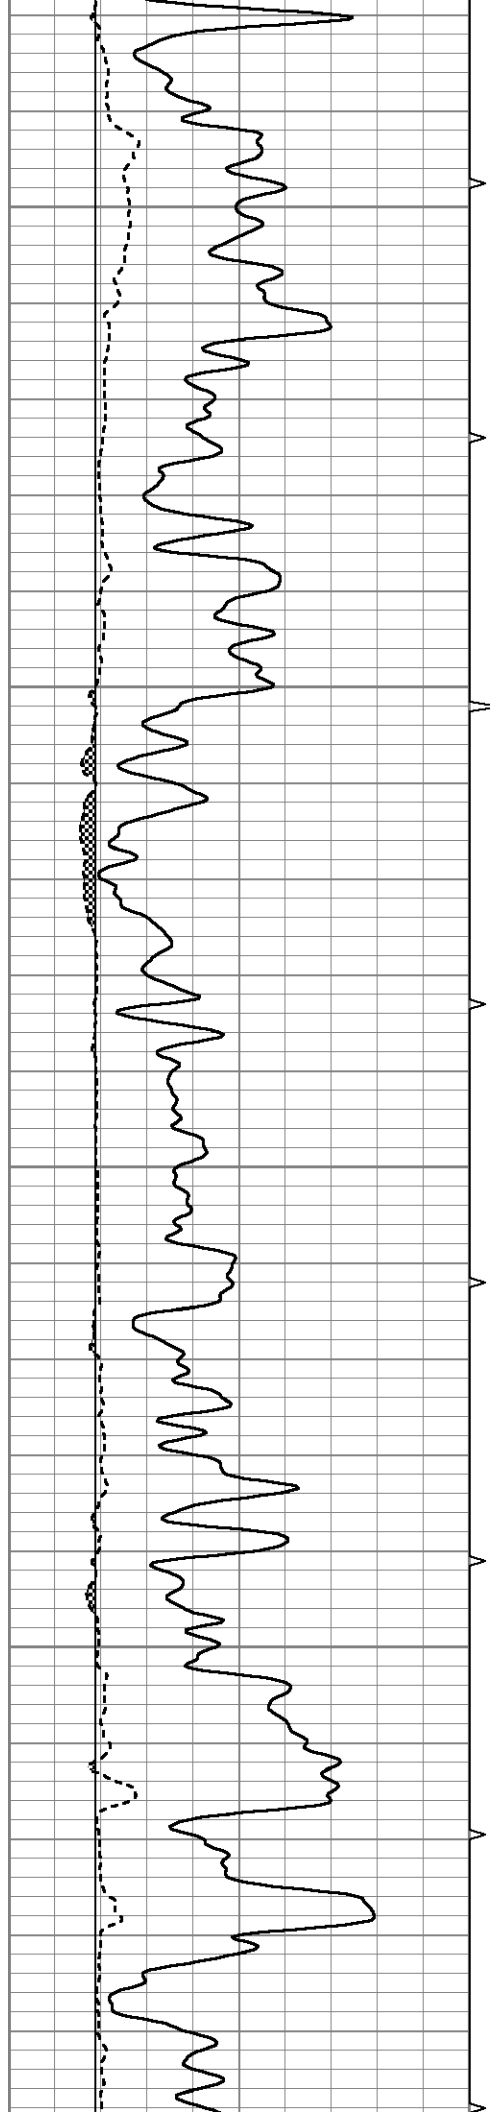



2300


2350

2400

2450

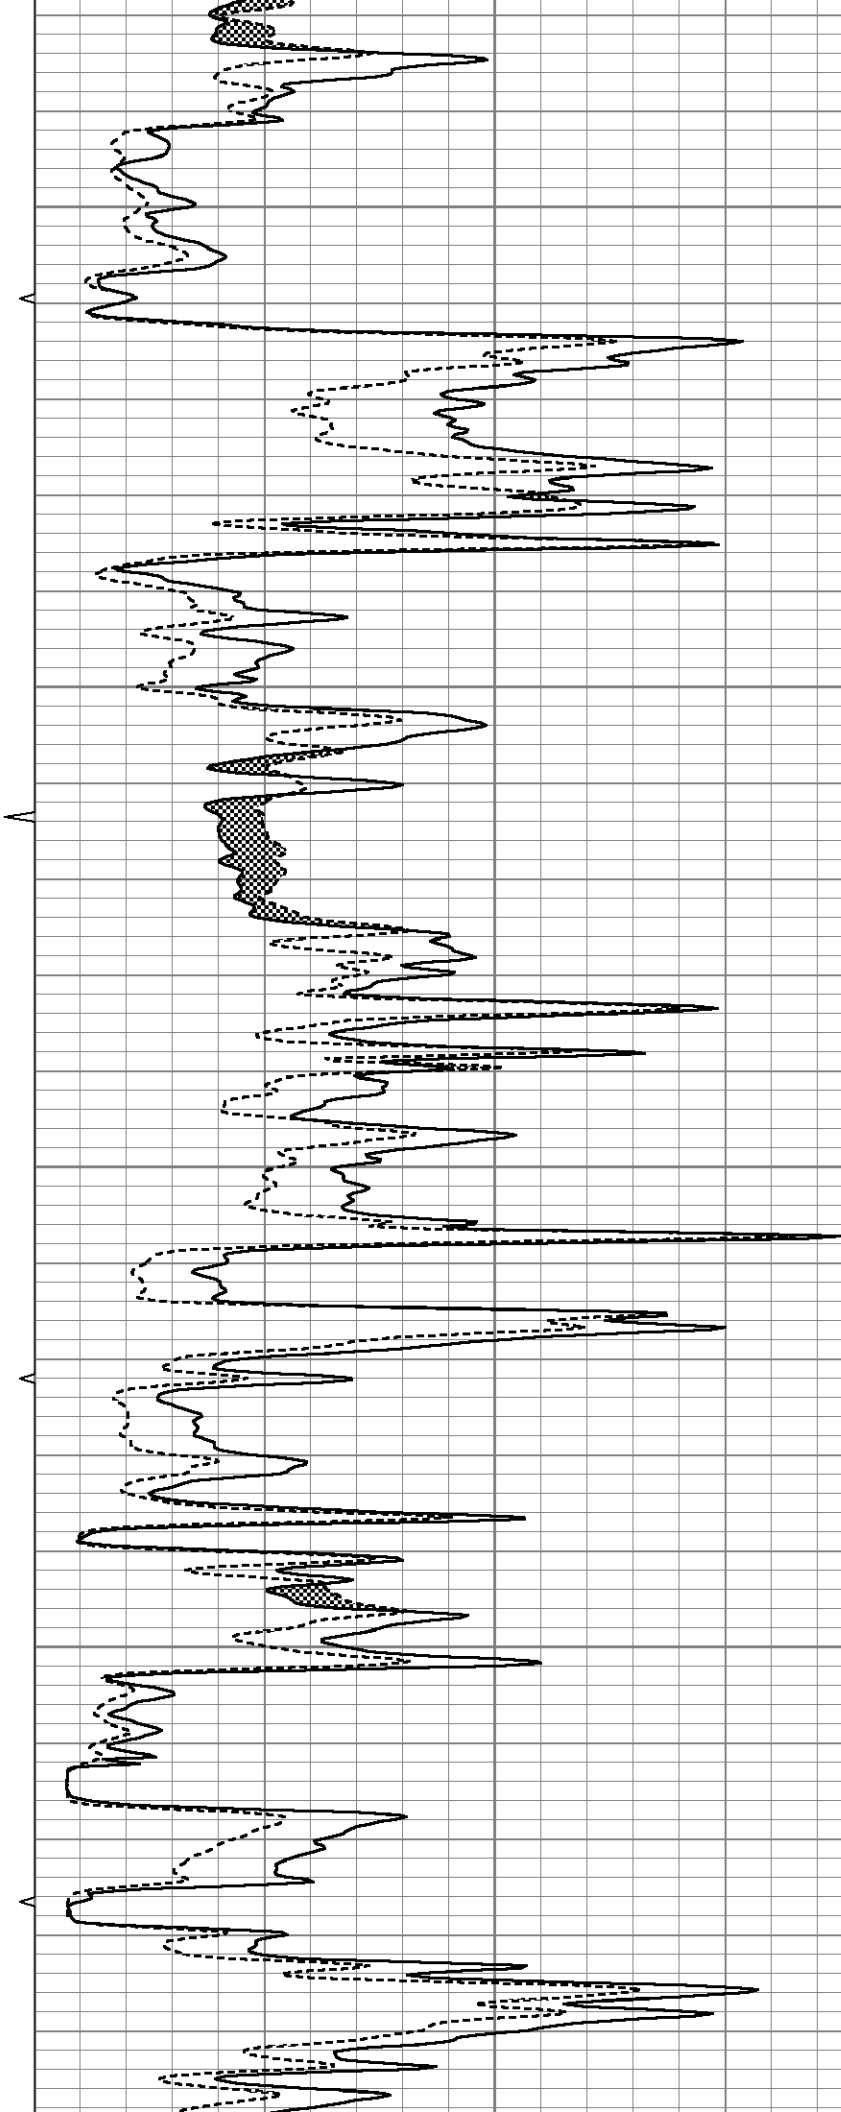

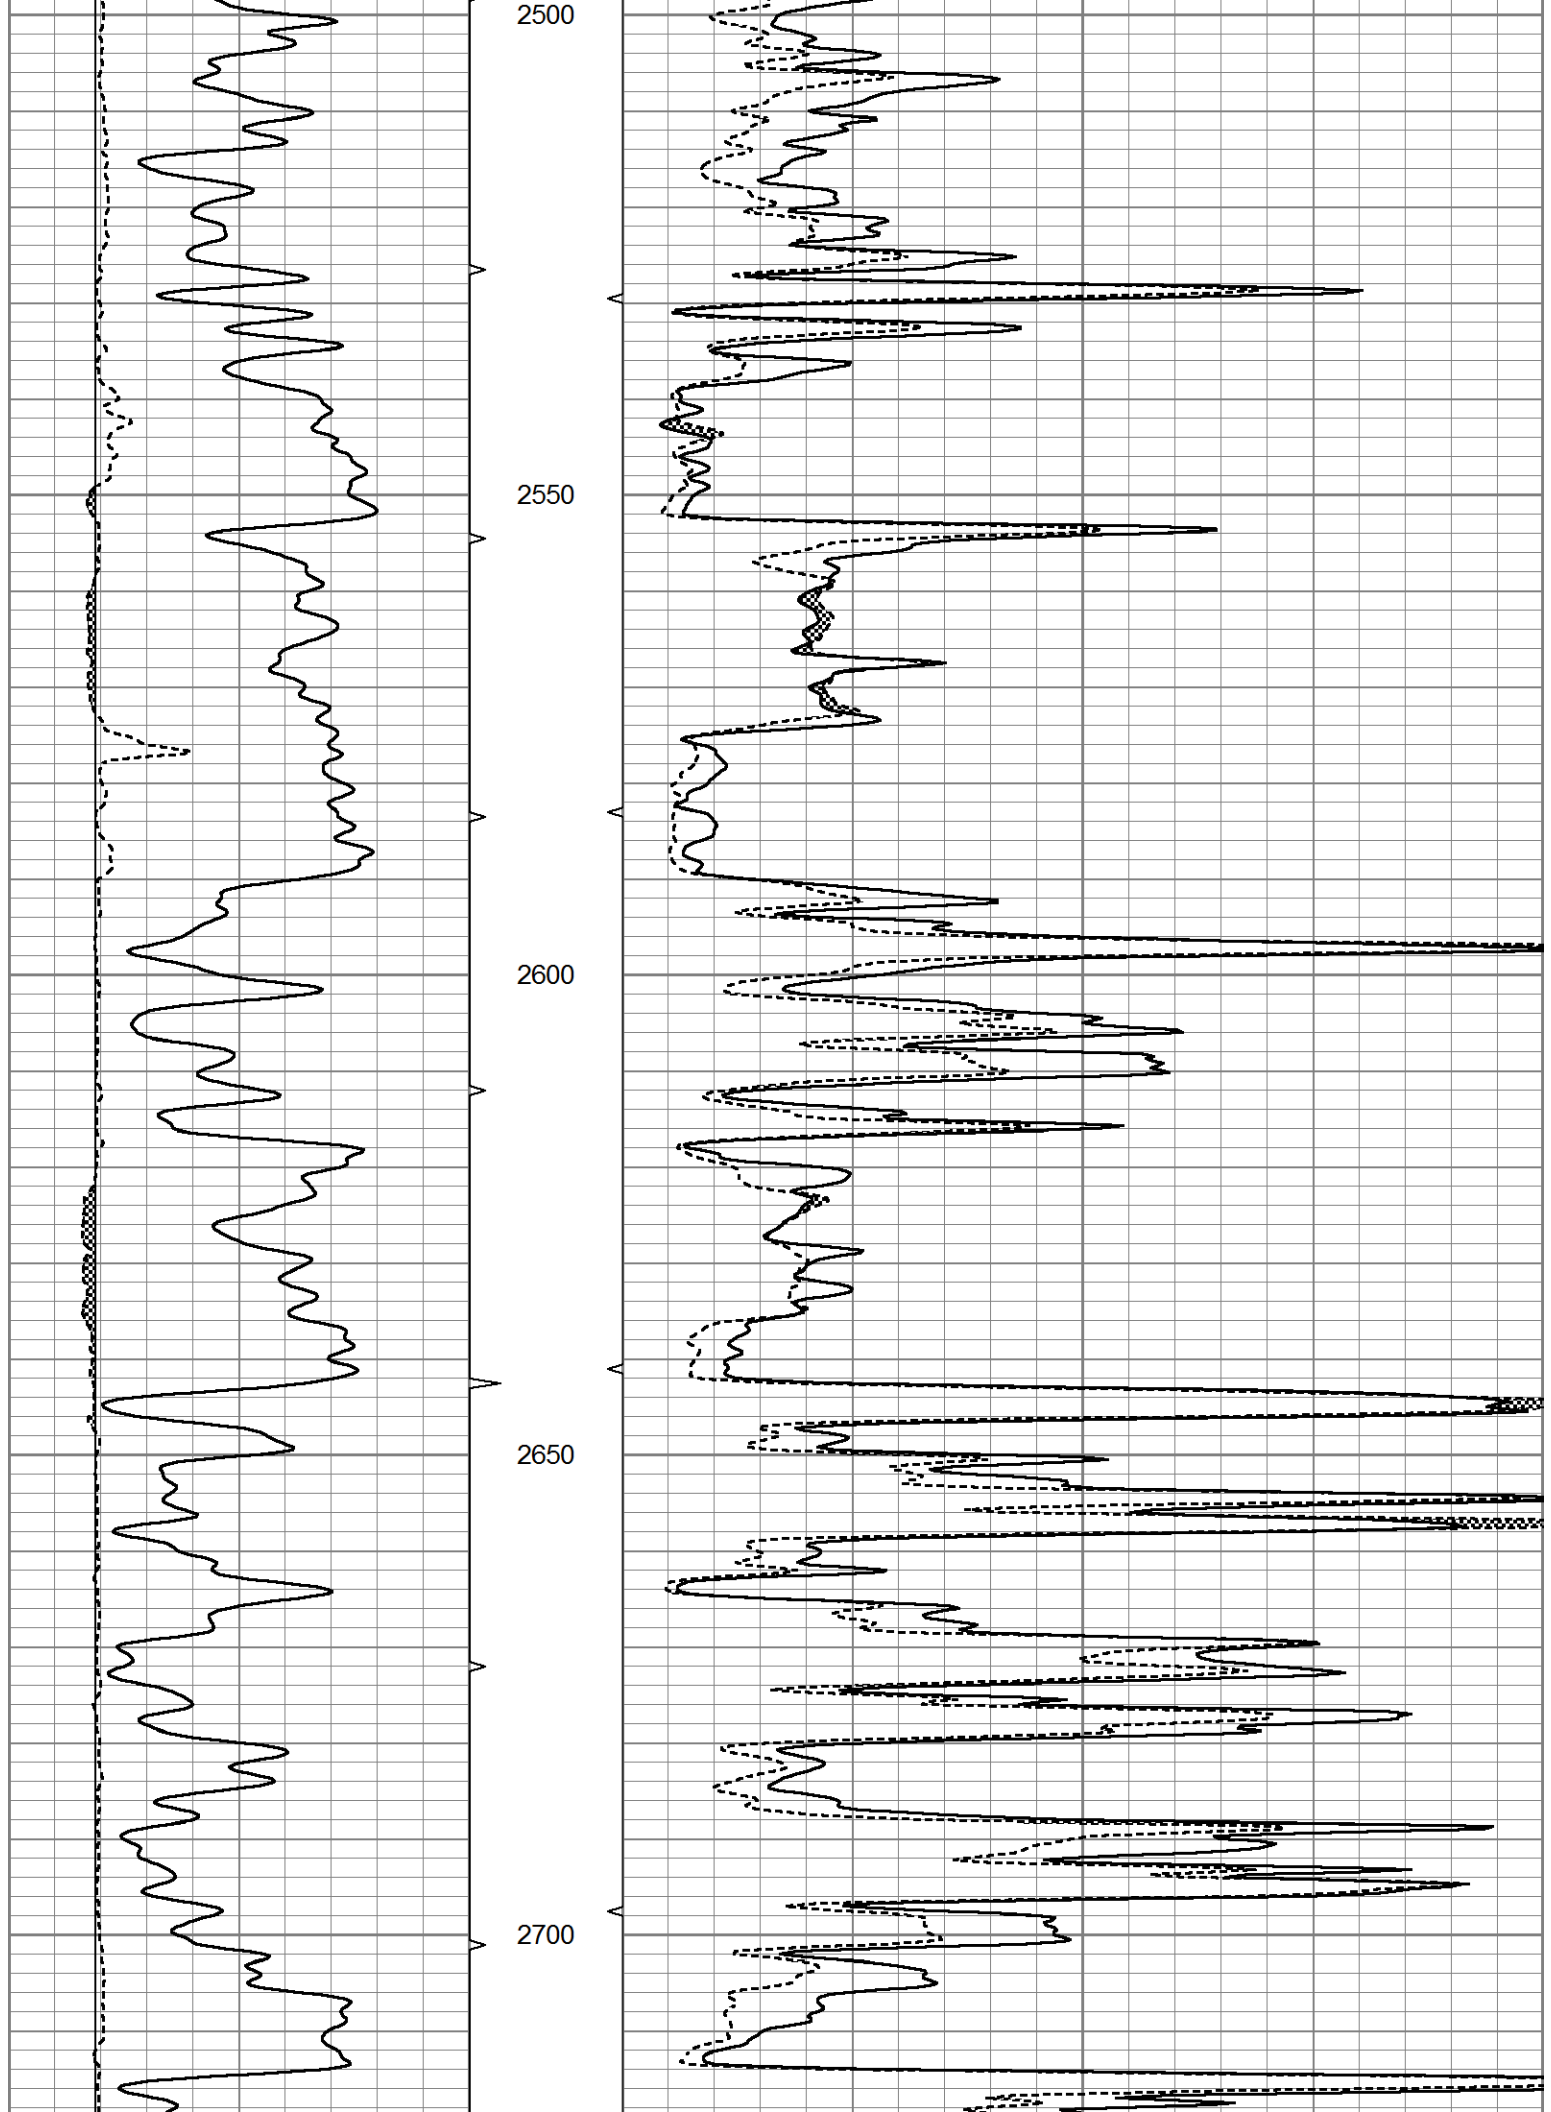

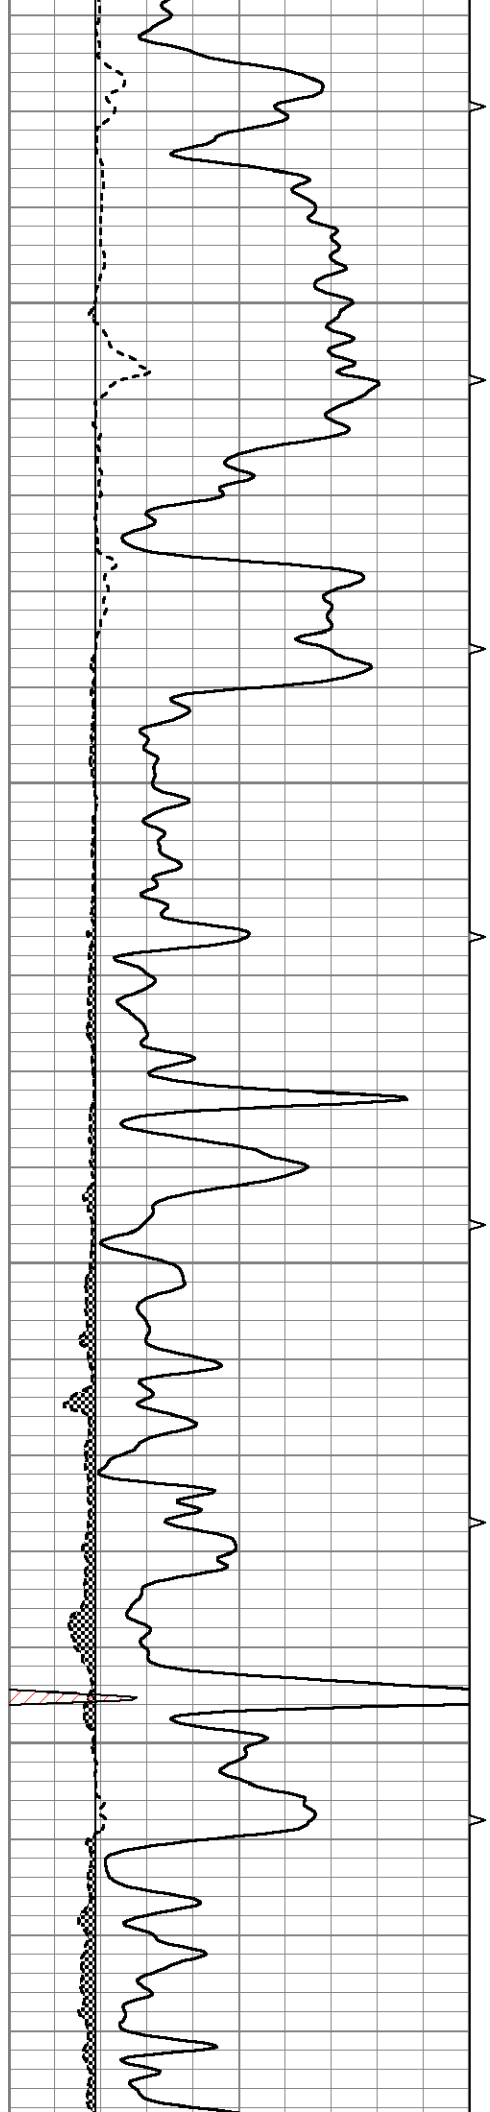



2750

2800

2850

2900

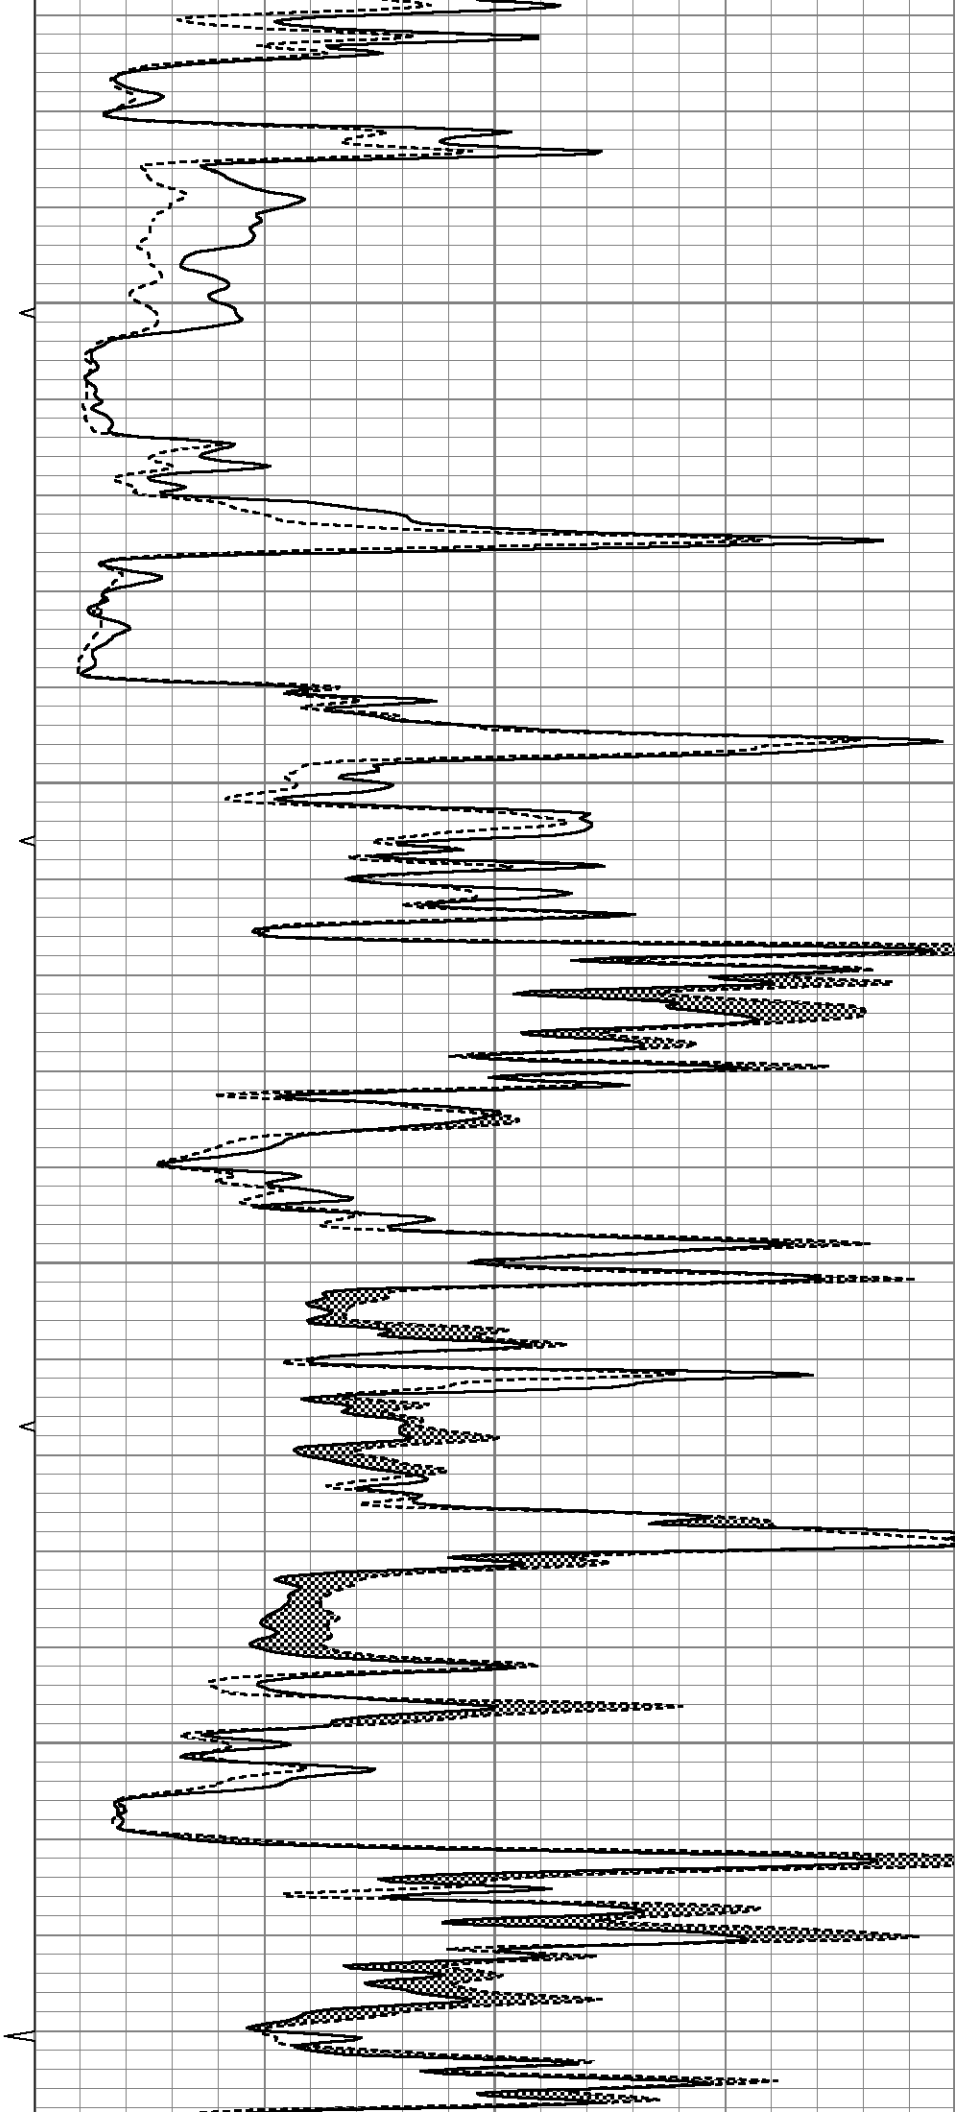

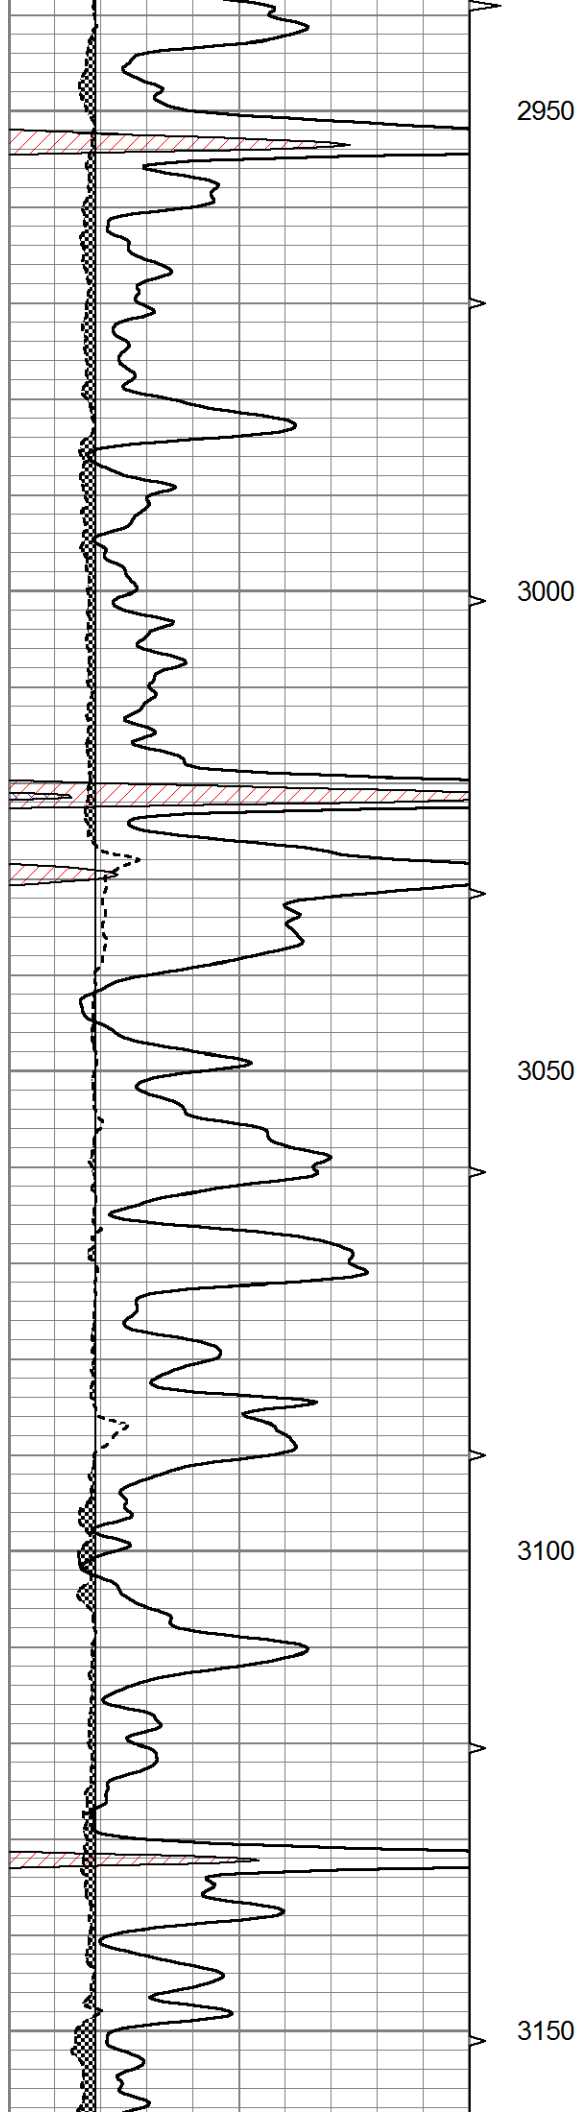


2950


3000


3050

3100

3150

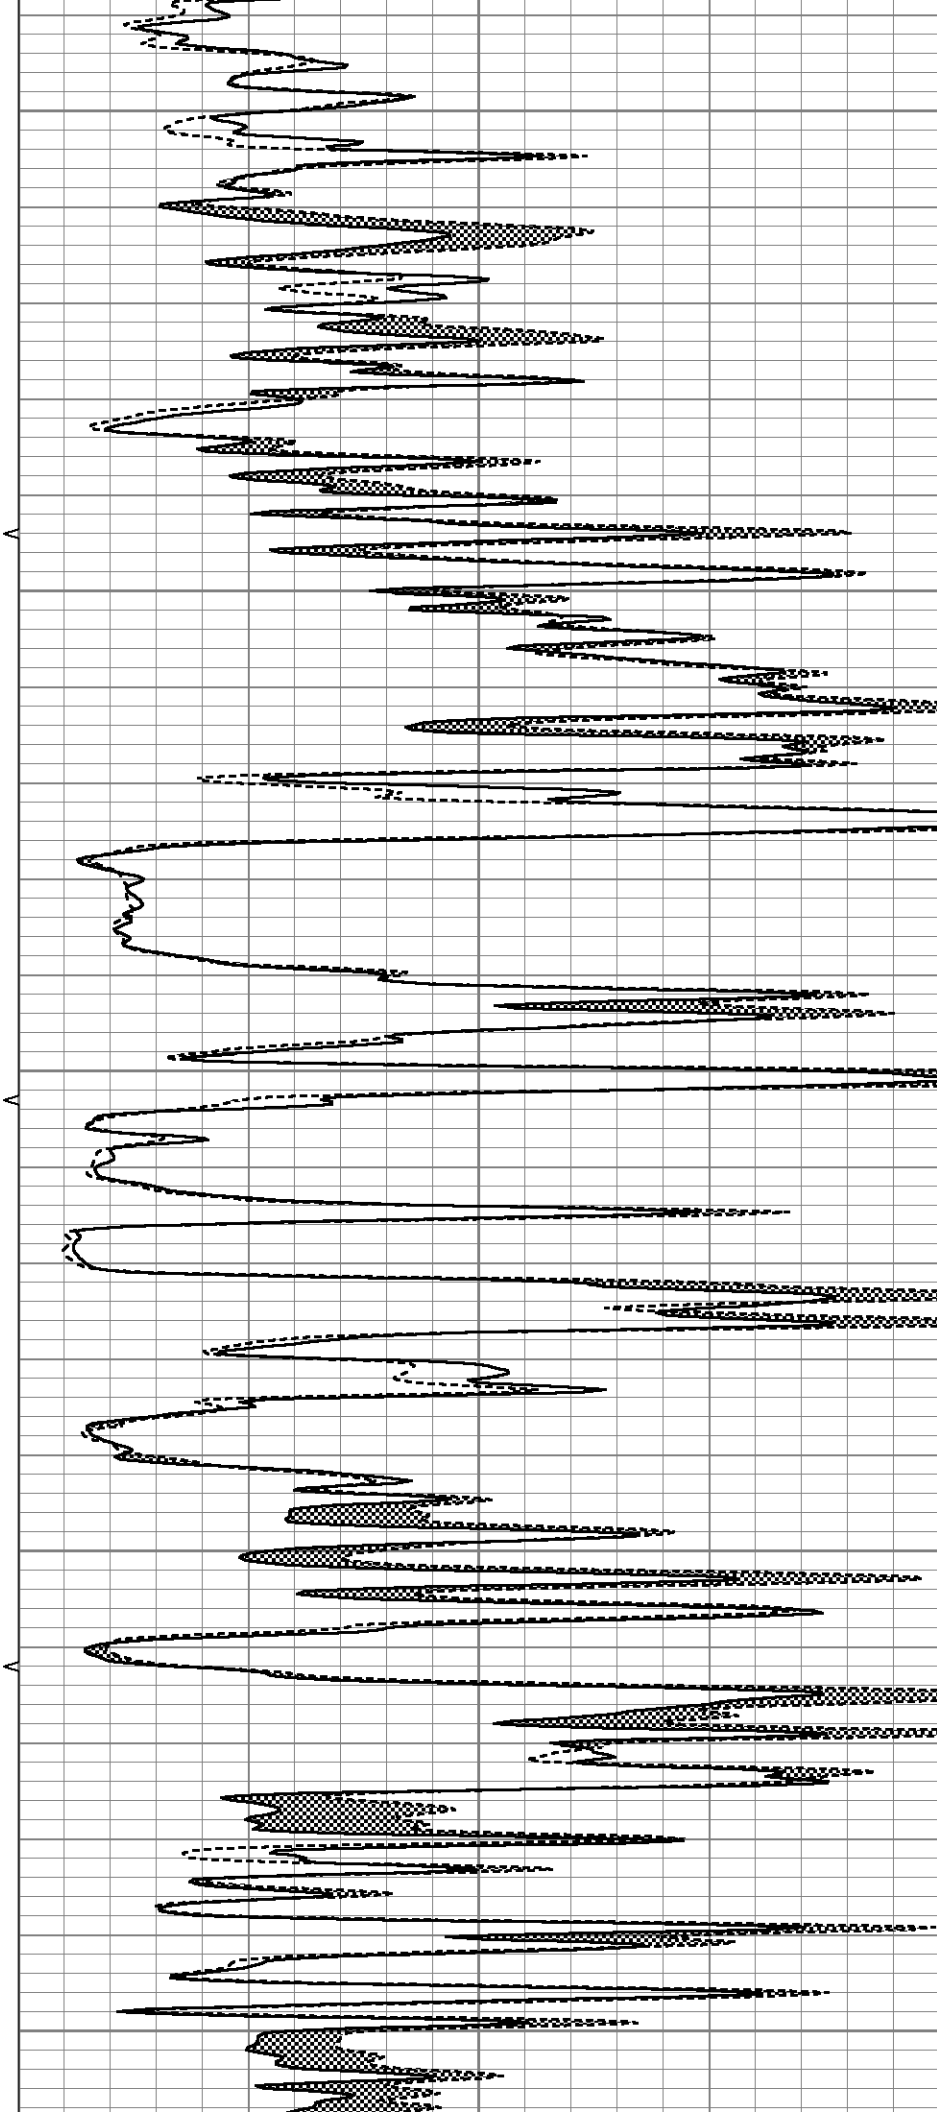


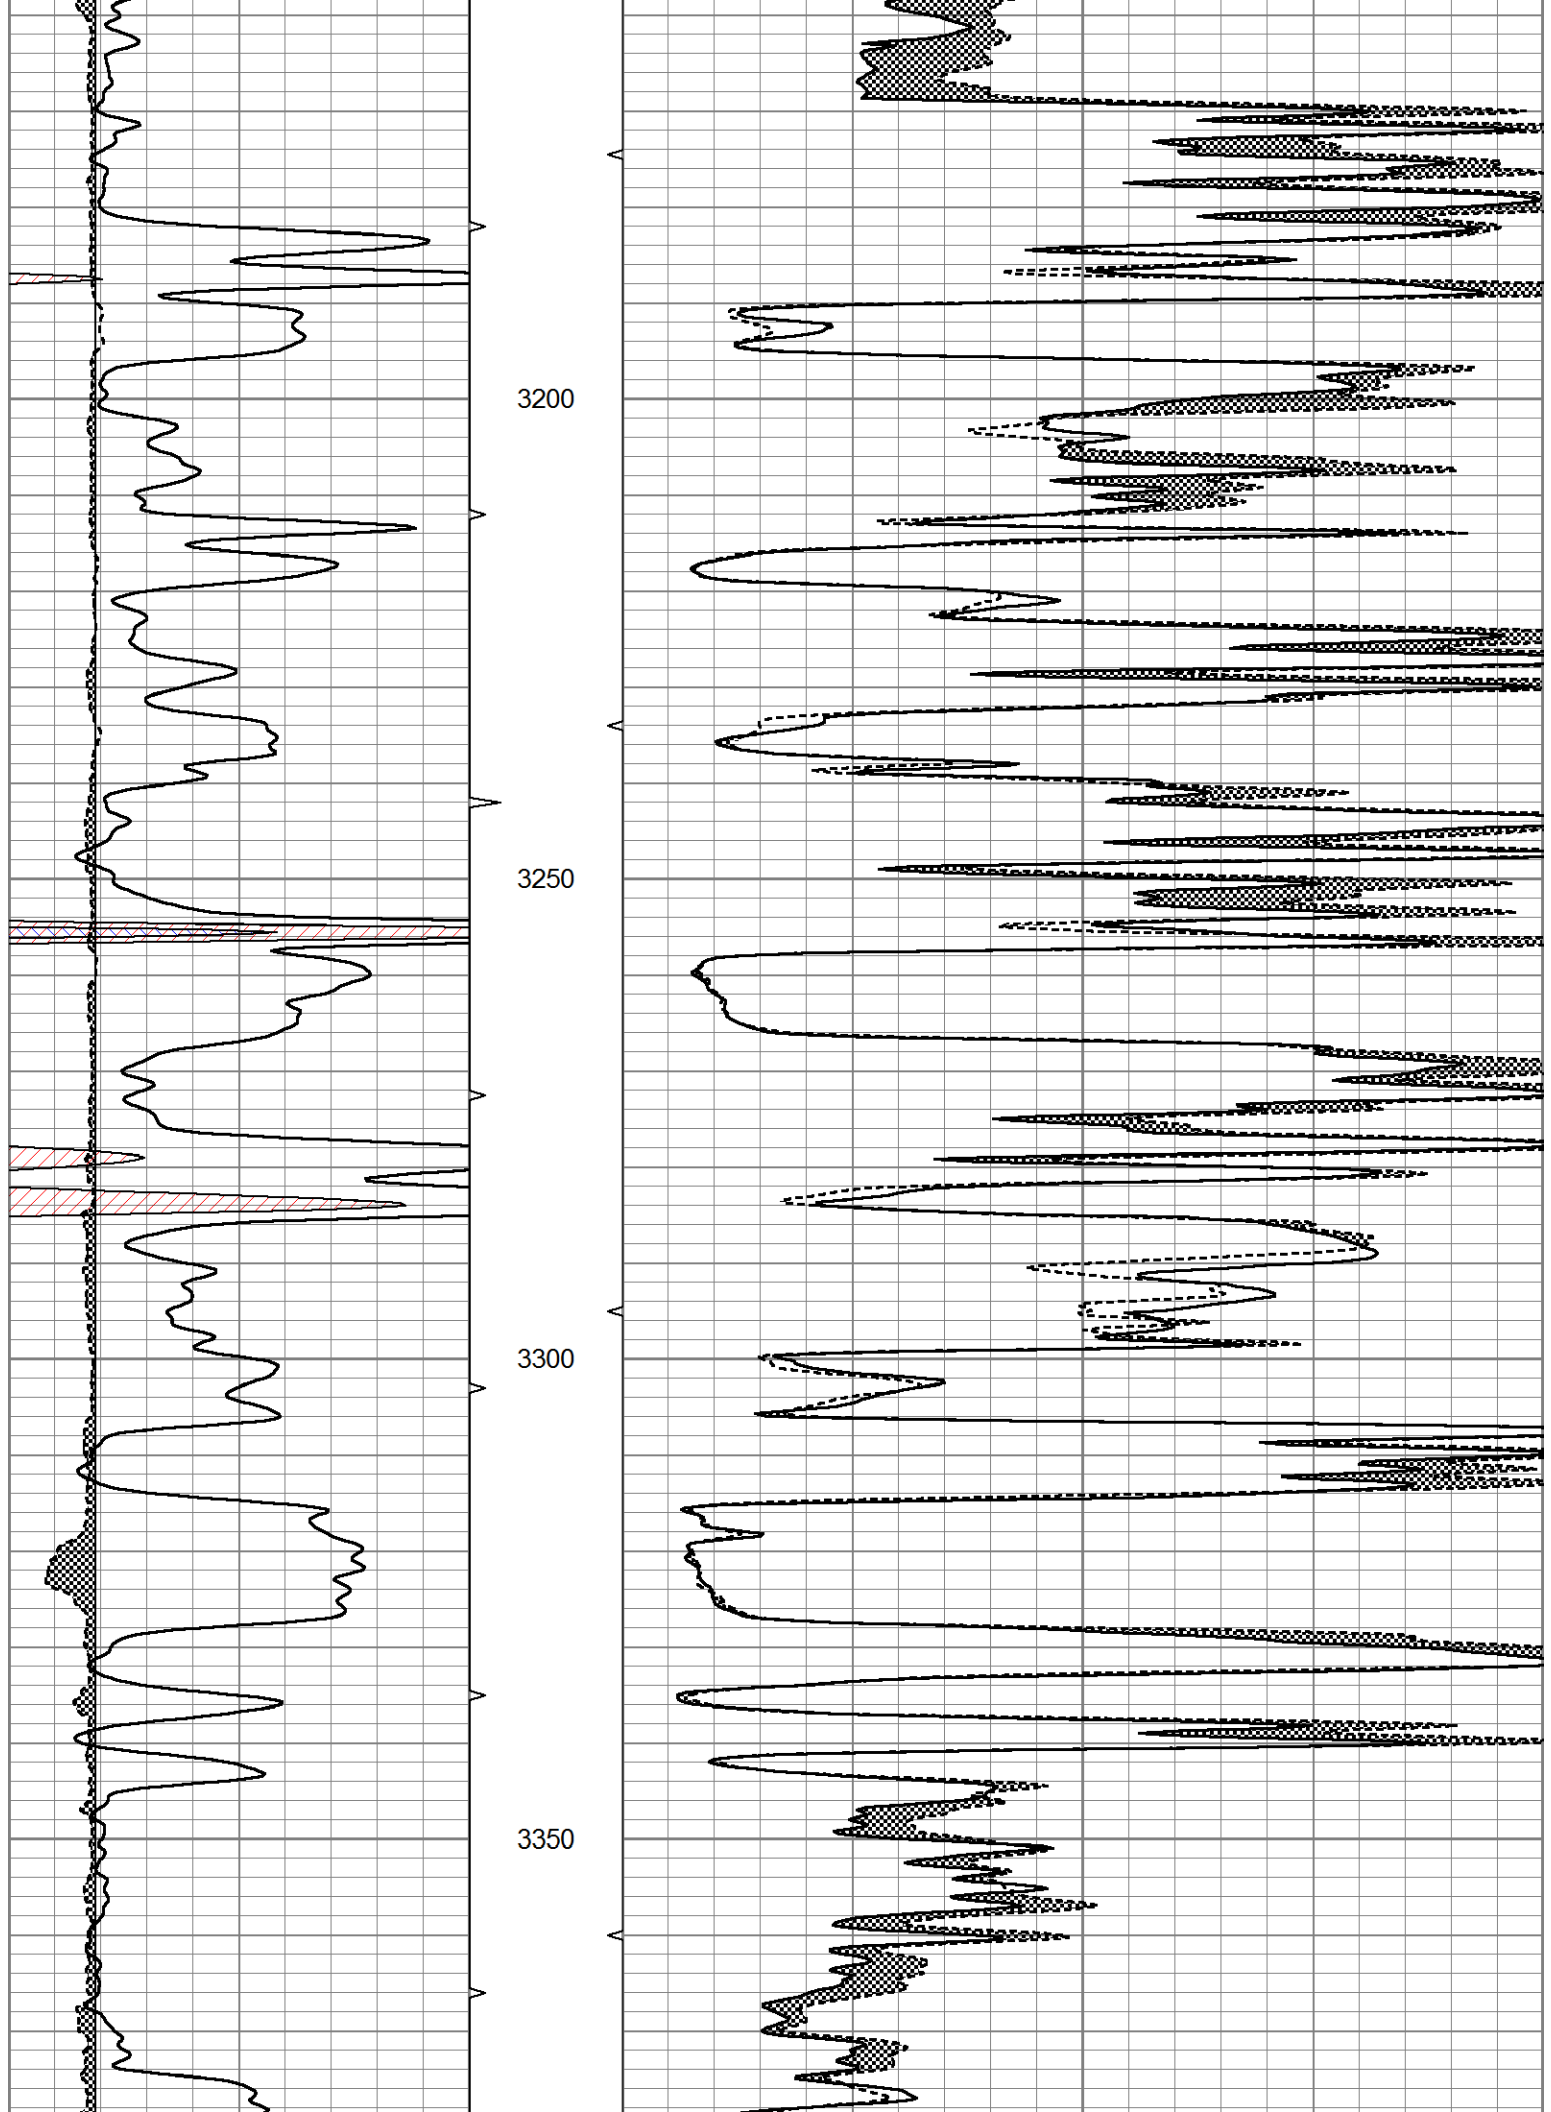


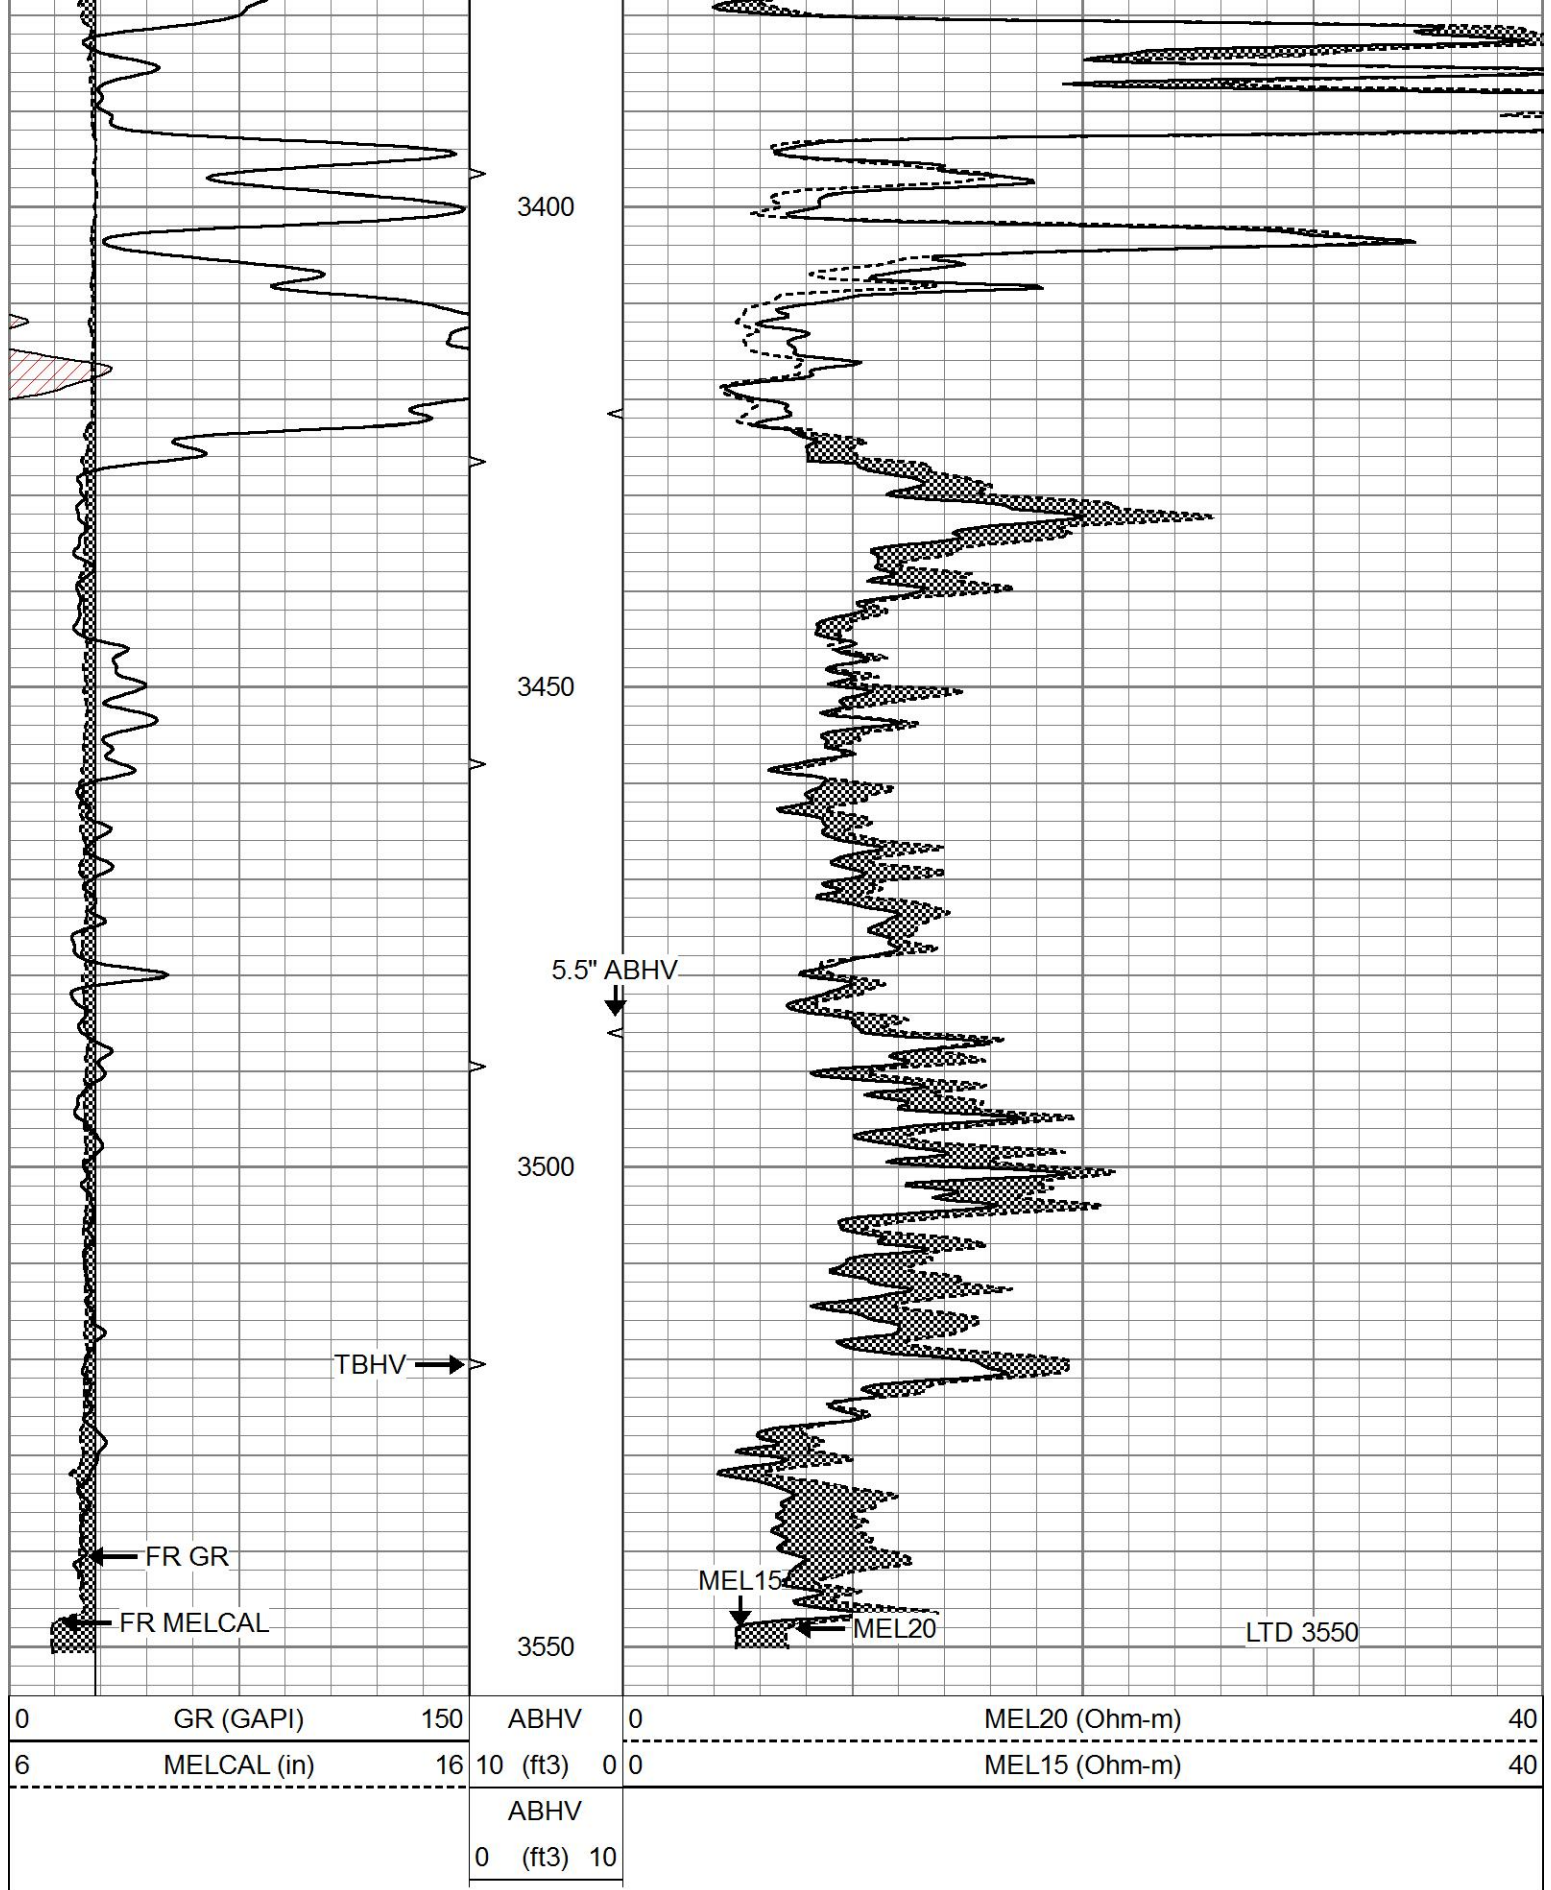

REPEAT SECTION

Database File		7877ddn.db					
Dataset Pathname		pass5.5					
Presentation Format		micro					
Dataset Creation		Fri May 05 05:16:31 2023					
Charted by		Depth in Feet scaled 1:240					
0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)		40
6	MELCAL (in)	16		10 (ft3)	0 0	MEL15 (Ohm-m)	
			ABHV				
			0 (ft3)	10			

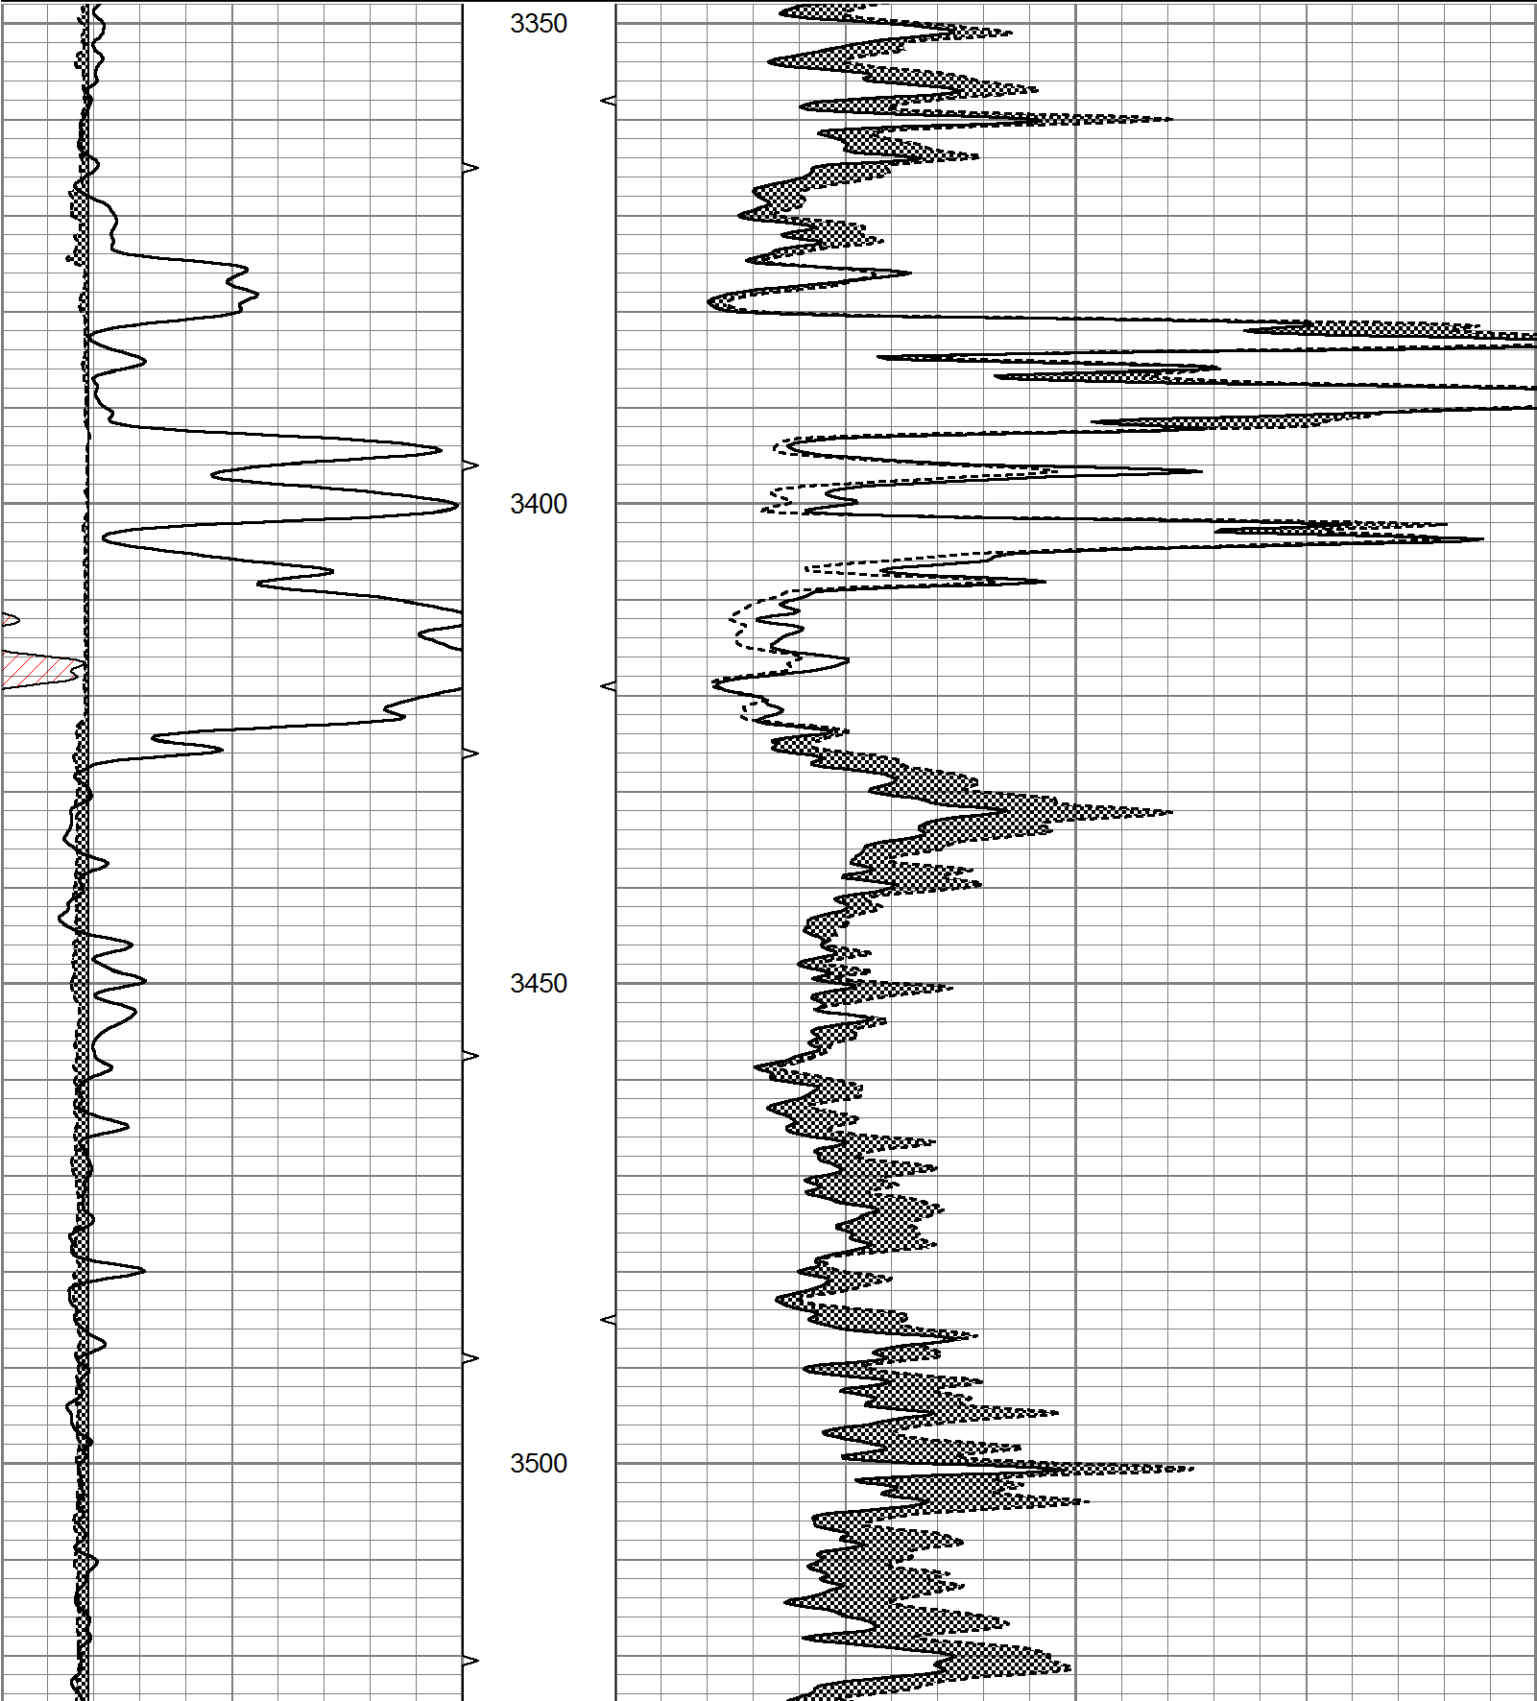

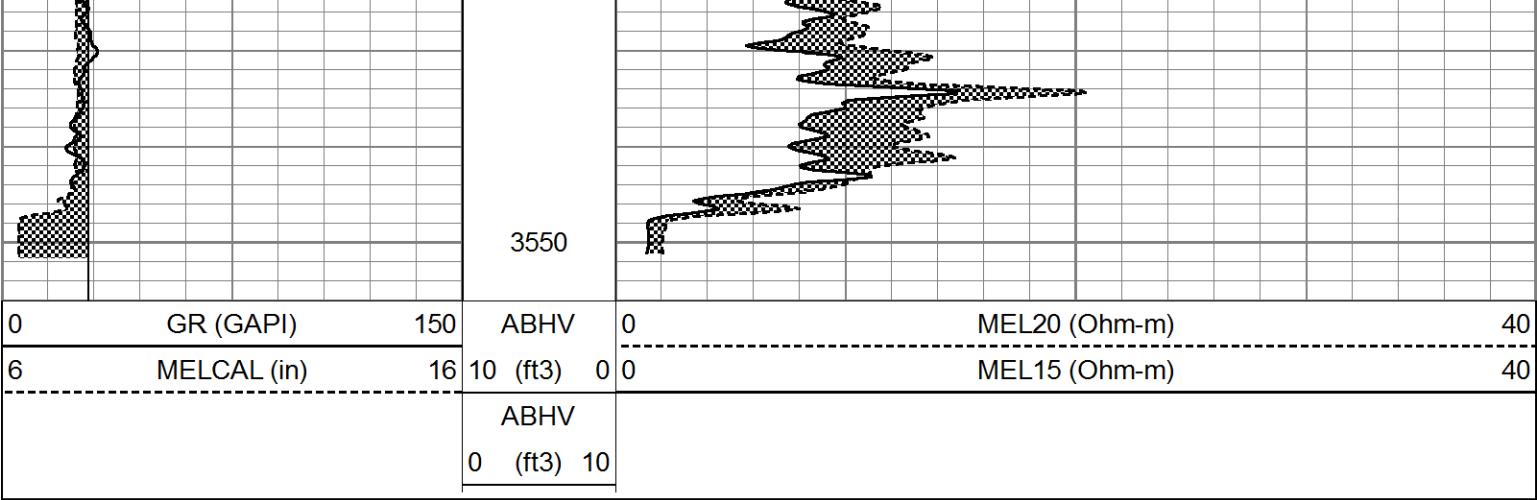

Calibration Report			
Database File	7877ddn.db		
Dataset Pathname	pass6.5		
Dataset Creation	Fri May 05 05:47:58 2023		
MICRO Calibration Report			
Serial Number:	070910		
Tool Model:	ProbeN		
Performed:	Fri May 05 05:00:08 2023		
Caliper Calibration:	Gain=3.478	Offset=2.087	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.700	4.000	
1.5" Calibration:	Gain=45.000	Offset=-0.200	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	1.216	
2" Calibration:	Gain=55.000	Offset=-0.400	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.002	1.053	
Gamma Ray Calibration Report			
Serial Number:	070559		
Tool Model:	OPEN_GR		
Performed:	Fri May 05 04:46:49 2023		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	0.5000	GAPI/cps	