



MICRO LOG

Company	PATTERSON ENERGY	Company	PATTERSON ENERGY
Well	BITTER #2	Well	BITTER #2
Field	TRAPP	Field	TRAPP
County	BARTON	County	BARTON
State	KANSAS	State	KANSAS
Location:	API # : 15 009 26393 1310' FSL & 1760' FEL	Other Services	DIL CDNL
Permanent Datum	SEC 6 TWP 16S RGE 13W	Elevation	
Log Measured From	Ground Level	Elevation	1919
Drilling Measured From	KB 8' AGL	K.B. 1927 D.F. 1925 G.L. 1919	
Date	04/30/23		
Run Number	Two		
Depth Driller	3450		
Depth Logger	3451		
Bottom Logged Interval	3449		
Top Log Interval	2750		
Casing Driller	8 5/8"@460'		
Casing Logger	460'		
Bit Size	7 7/8"		
Type Fluid in Hole	Chemical		
Density / Viscosity	9.0/48		
pH / Fluid Loss	9.5/9.2		
Source of Sample	Pit		
Rm @ Meas. Temp	1.4@60degf		
Rmf @ Meas. Temp	1.05@60degf		
Rmc @ Meas. Temp	1.68@60degf		
Source of Rmf / Rmc	Calculated		
Rm @ BHT	.88@96degf		
Time Circulation Stopped	3:00 AM		
Time Logger on Bottom	6:00 AM		
Maximum Recorded Temperature	96degf		
Equipment Number	T-605		
Location	Hays, KS.		
Recorded By	COLBY DREILING		
Witnessed By	AUSTIN KLAUS		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.


Comments

RUSSELL SOUTH 13 MILES TO NW220 RD, EAST 2.75 MILES
NORTH INTO.


Thanks for using Gemini Wireline LLC
785-625-1182


Database File pebitter#2oh.db
Dataset Pathname pass6
Presentation Format kml
Dataset Creation Sun Apr 30 07:42:25 2023
Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

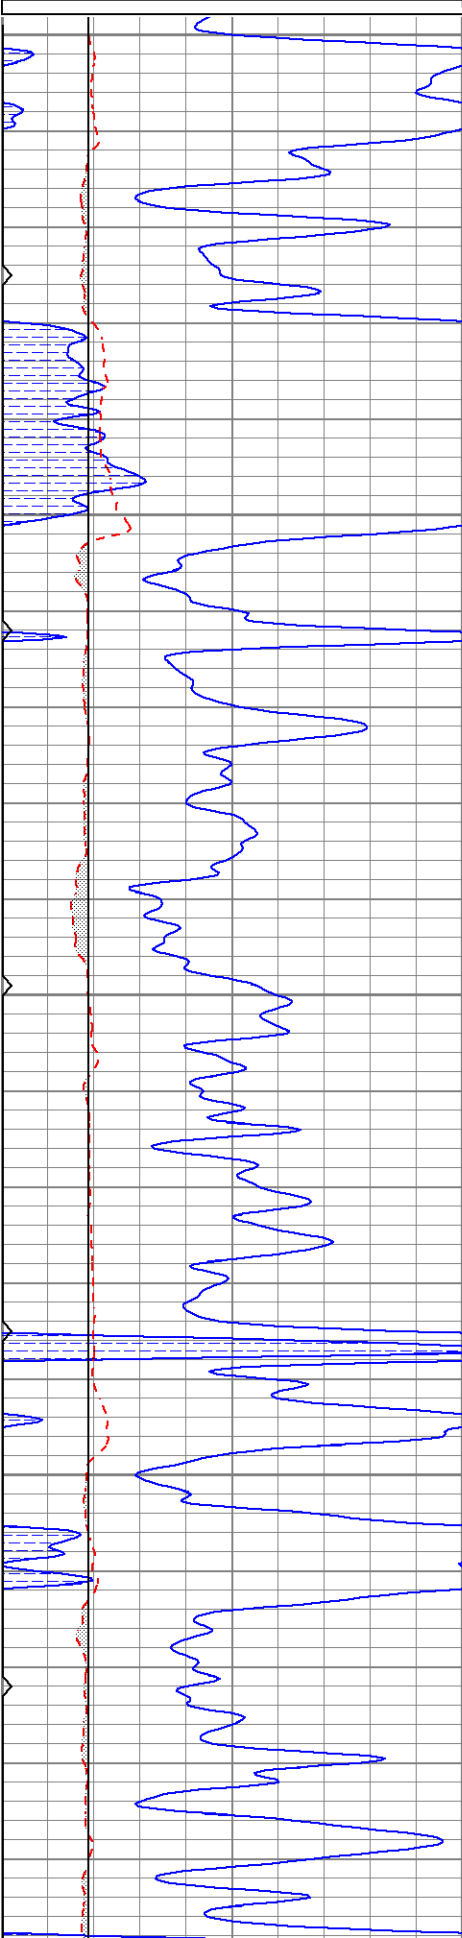

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

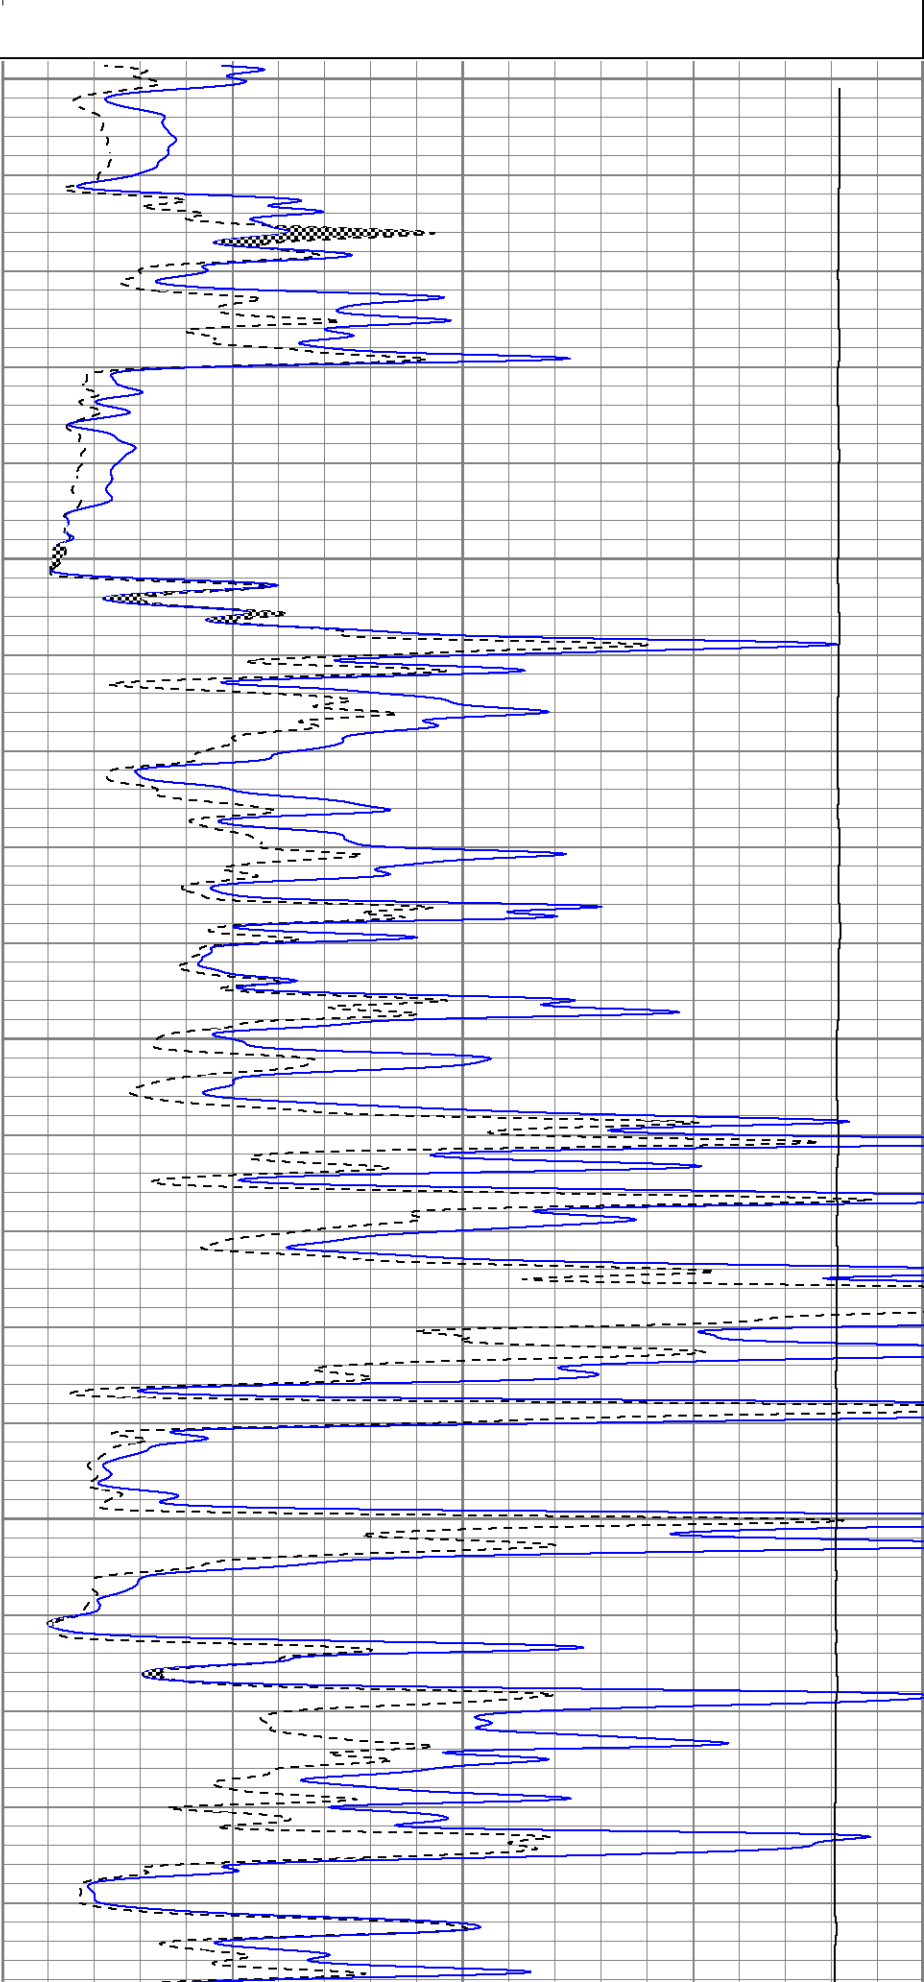

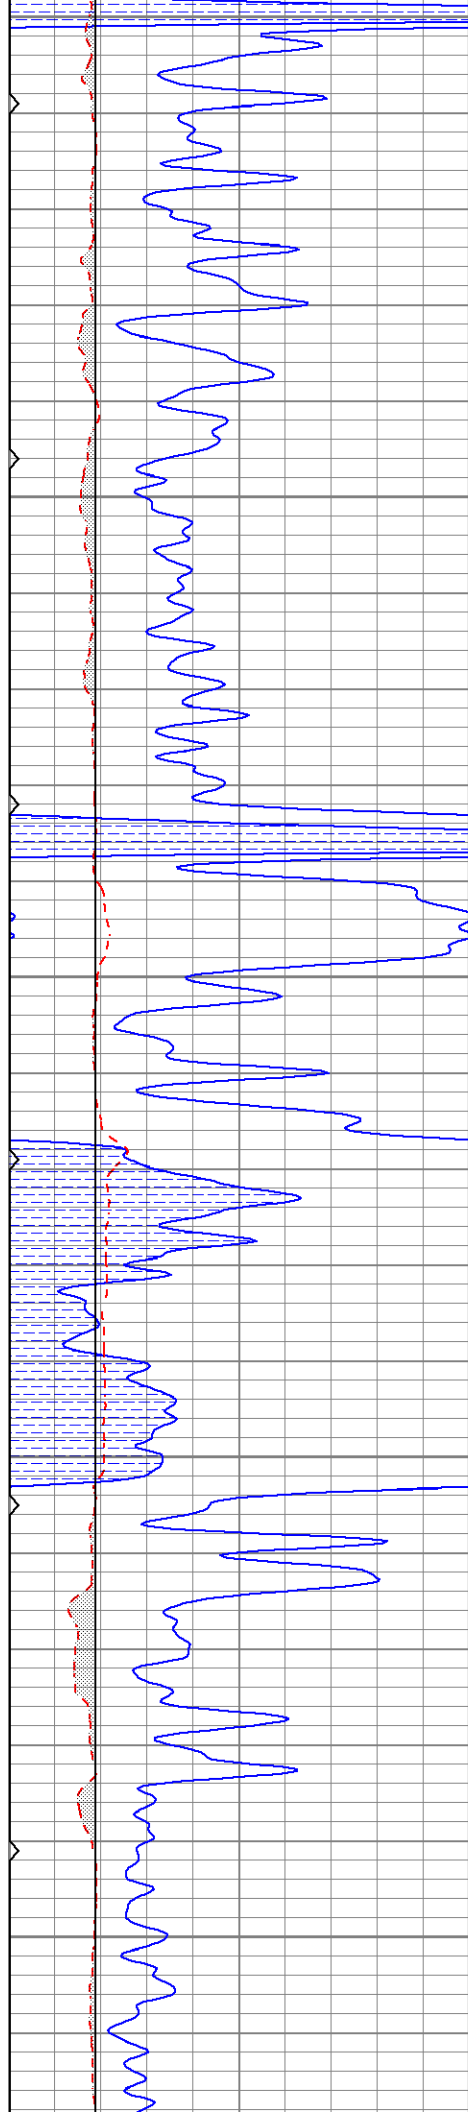


2950


3000

3050

3100

3150

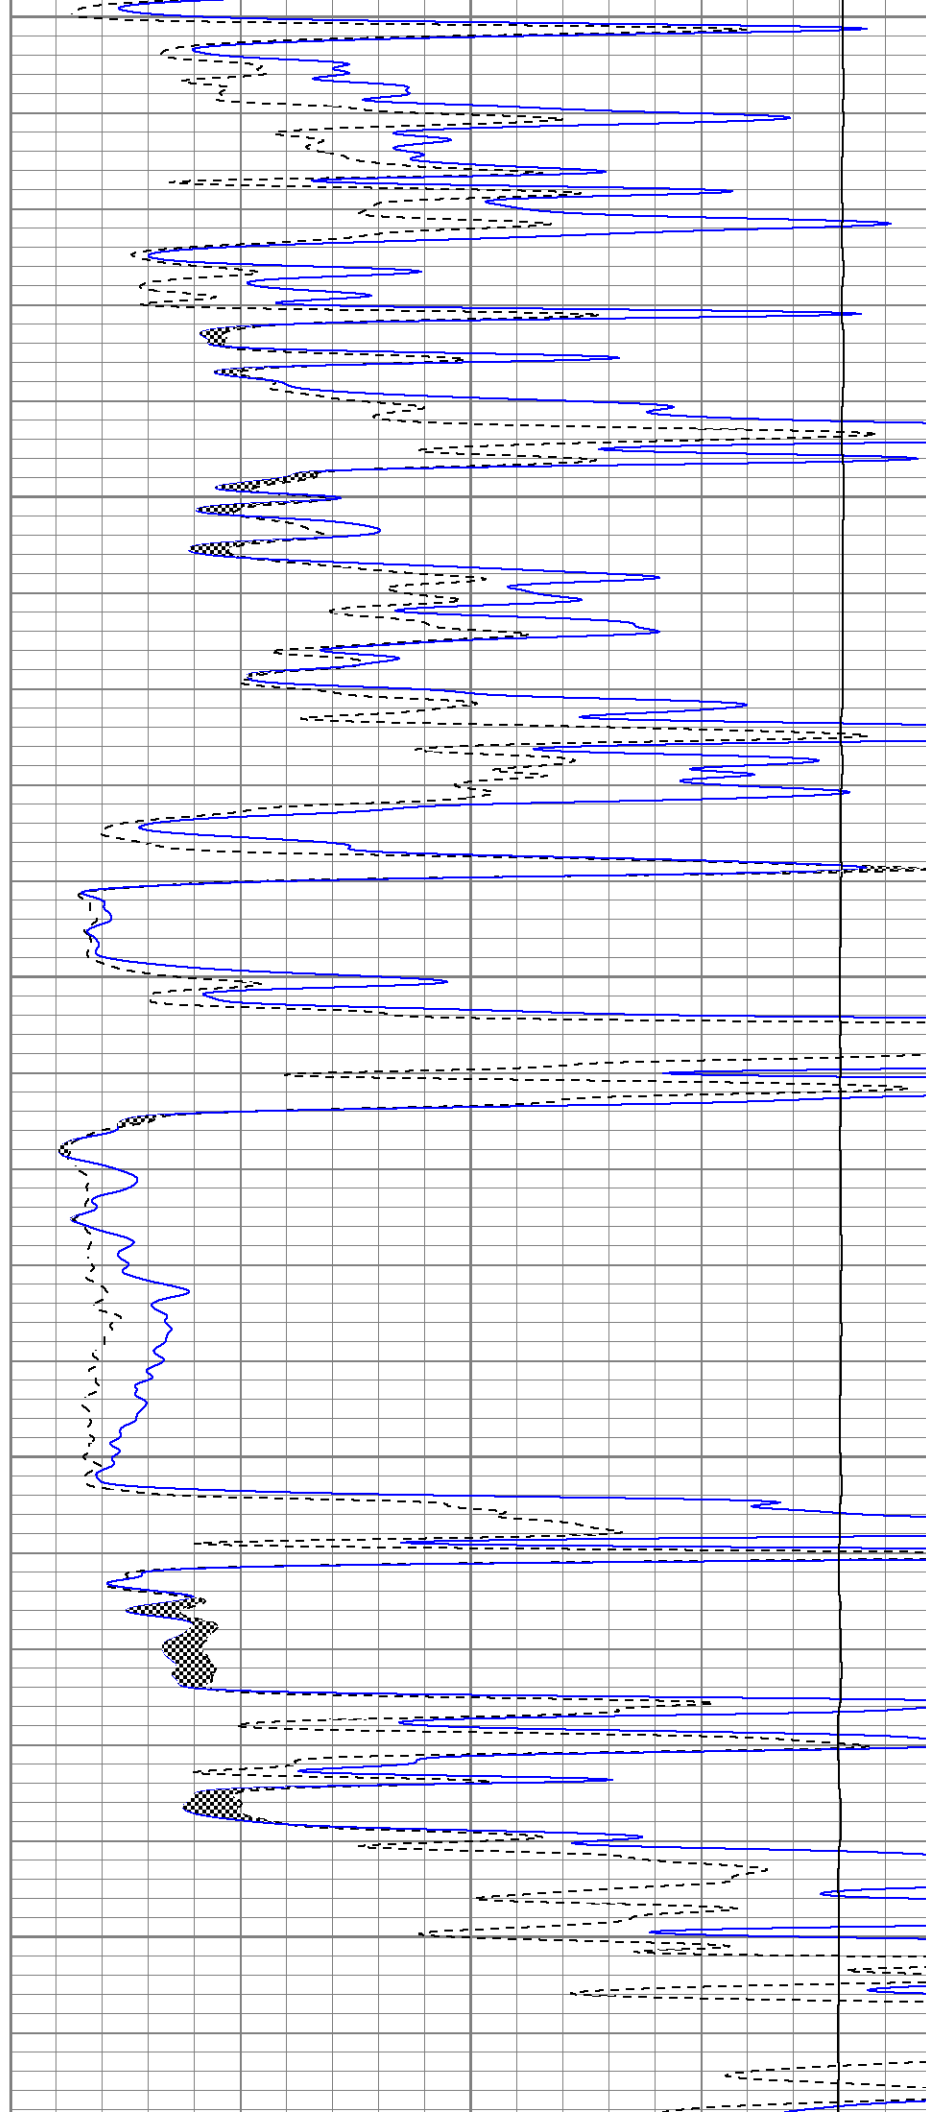

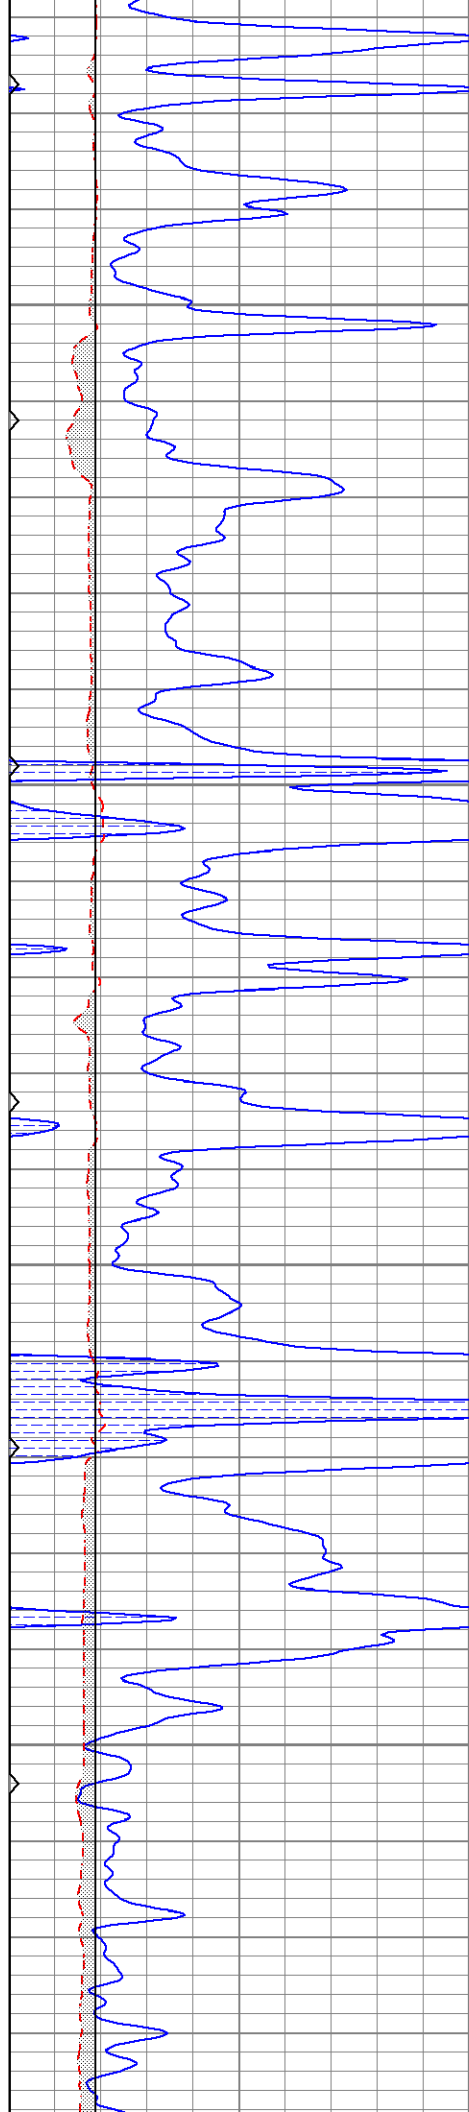



3200

3250

3300

3350

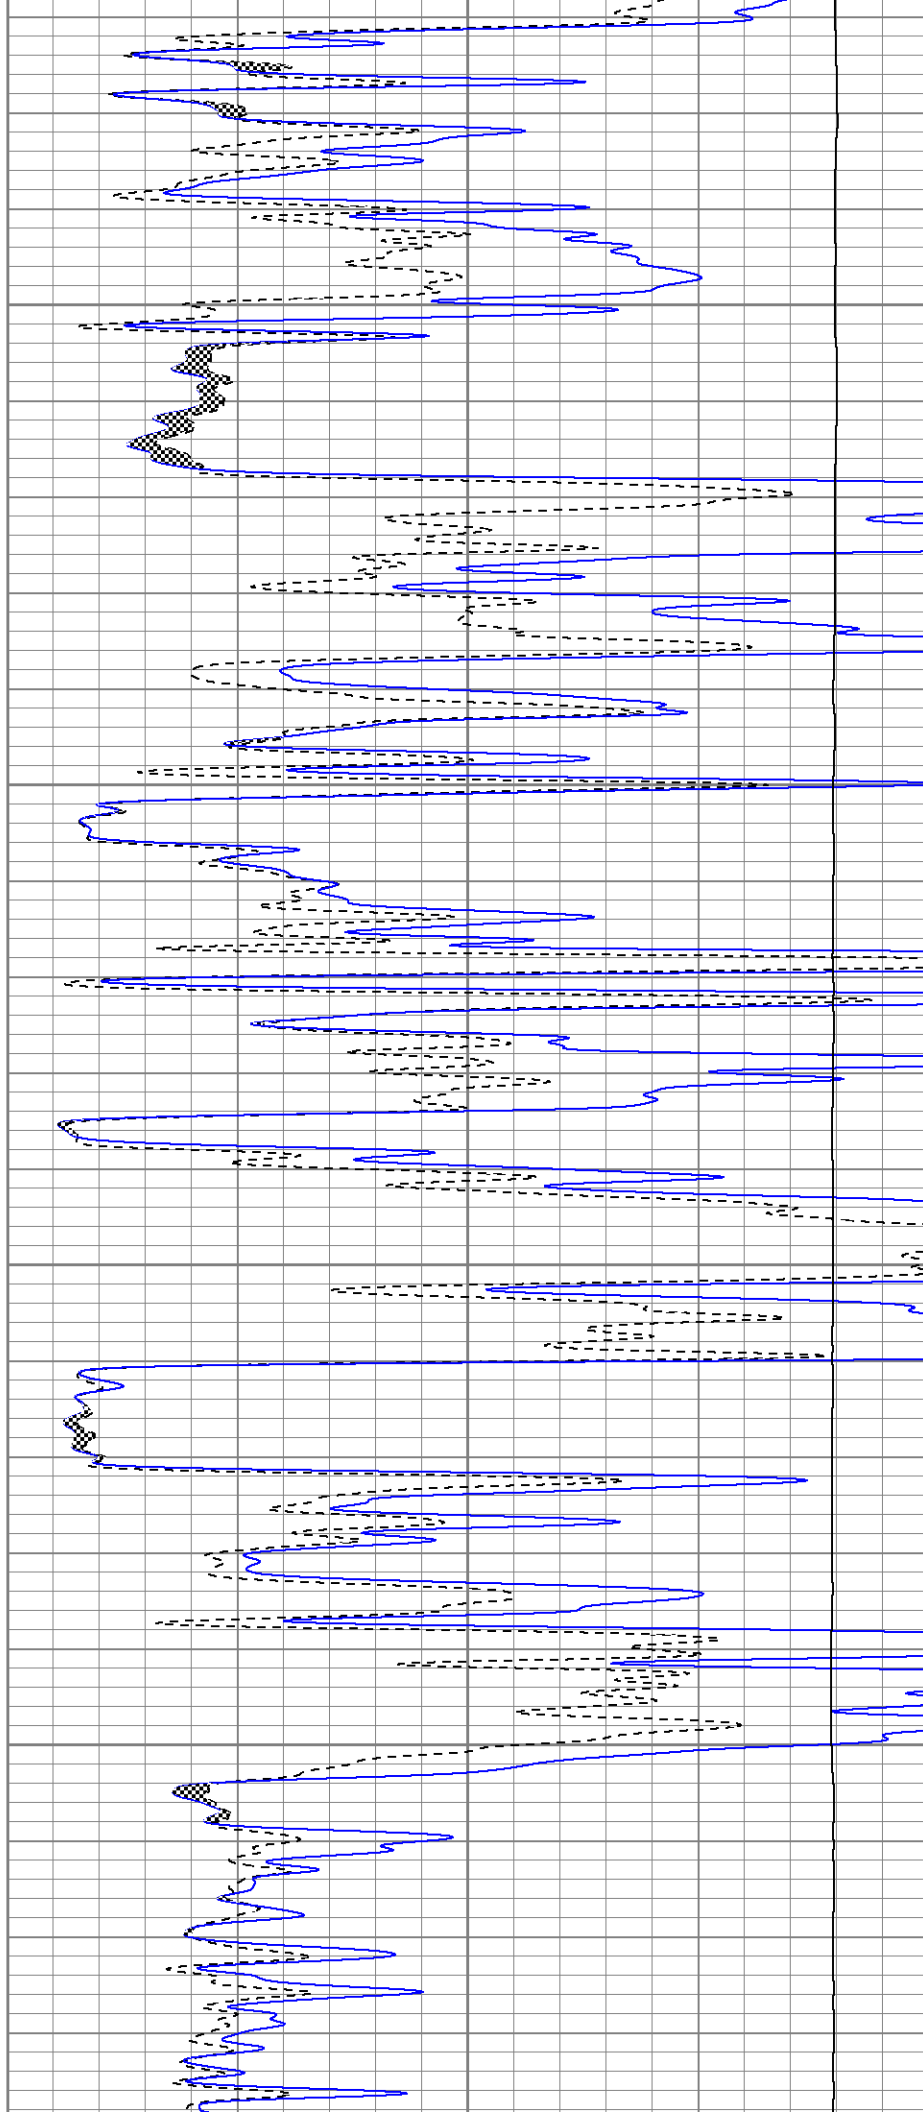


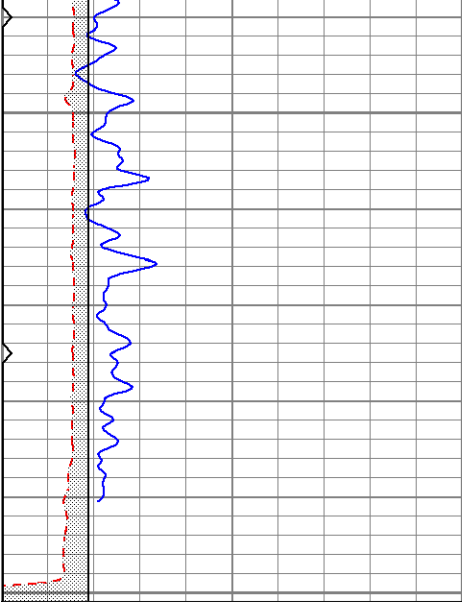

3400

3450

0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

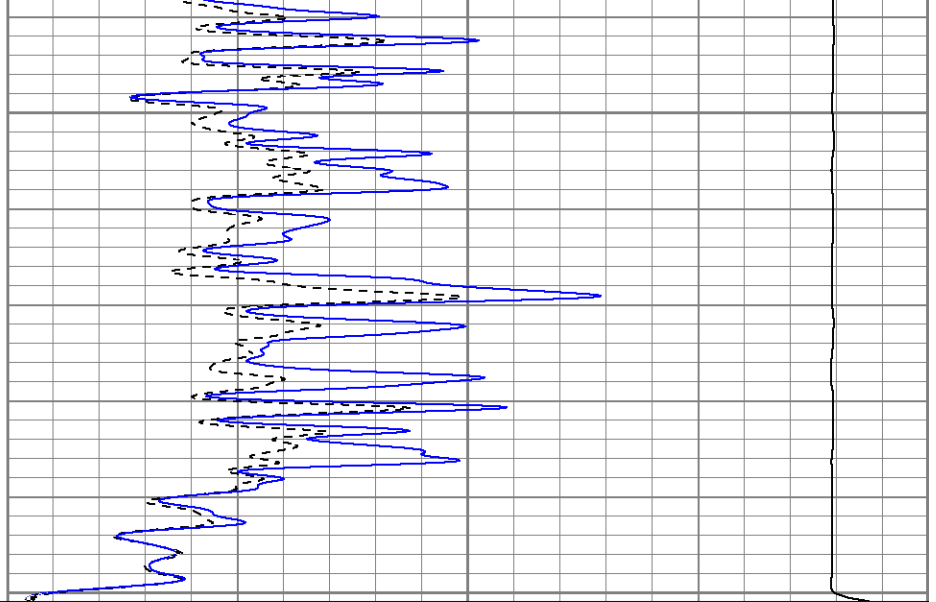


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

Database File pebitter#2oh.db
 Dataset Pathname pass6
 Presentation Format kml
 Dataset Creation Sun Apr 30 07:42:25 2023
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50


0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

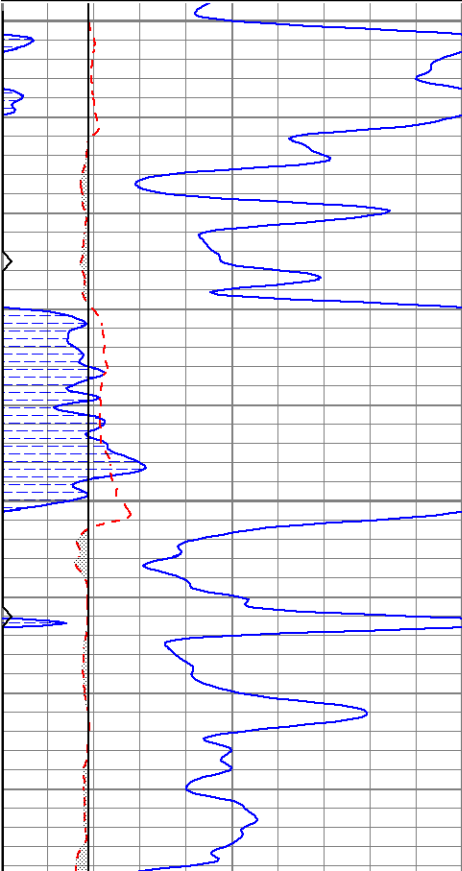

2750

2800

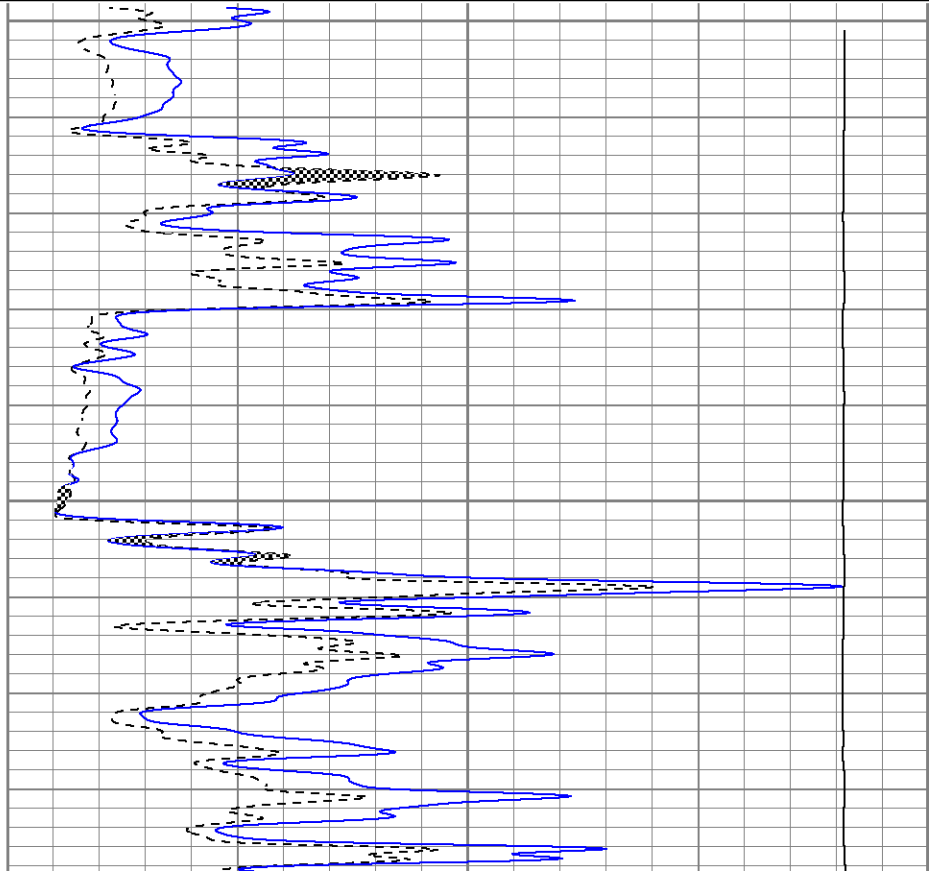

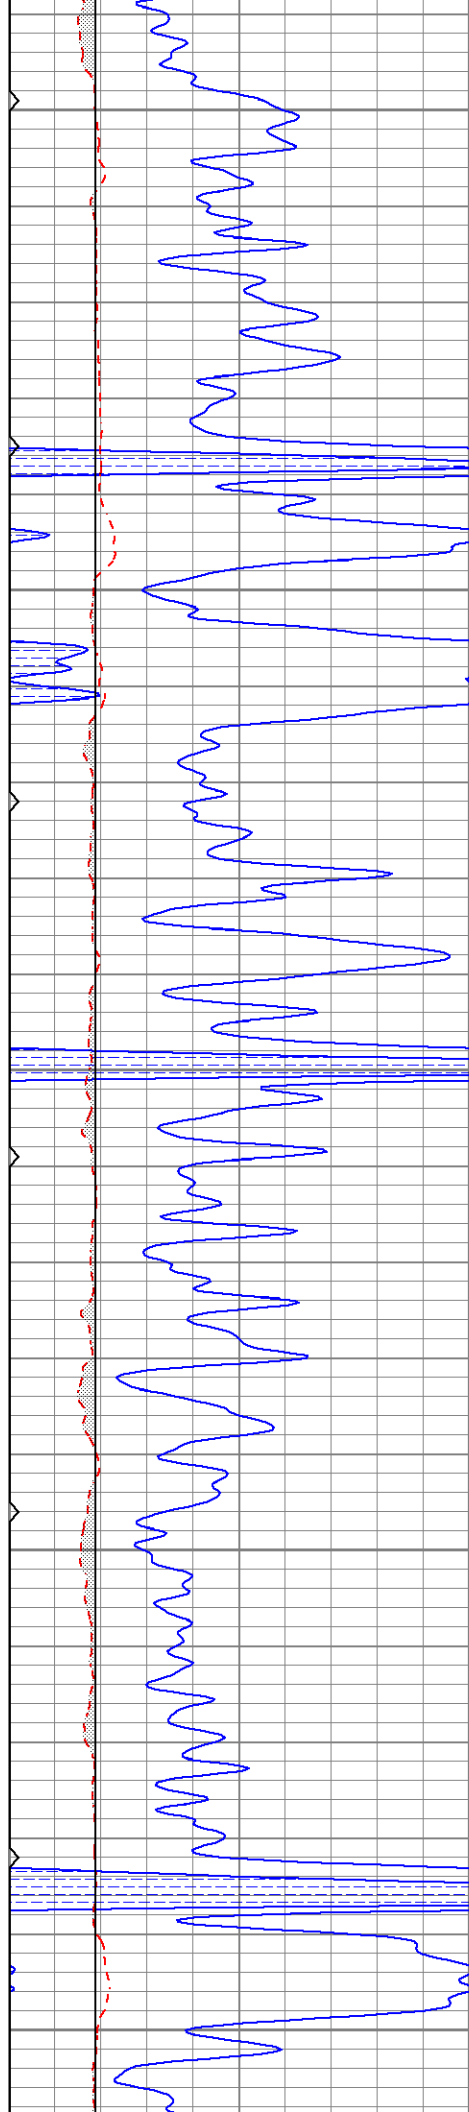


2850


2900

2950

3000

3050

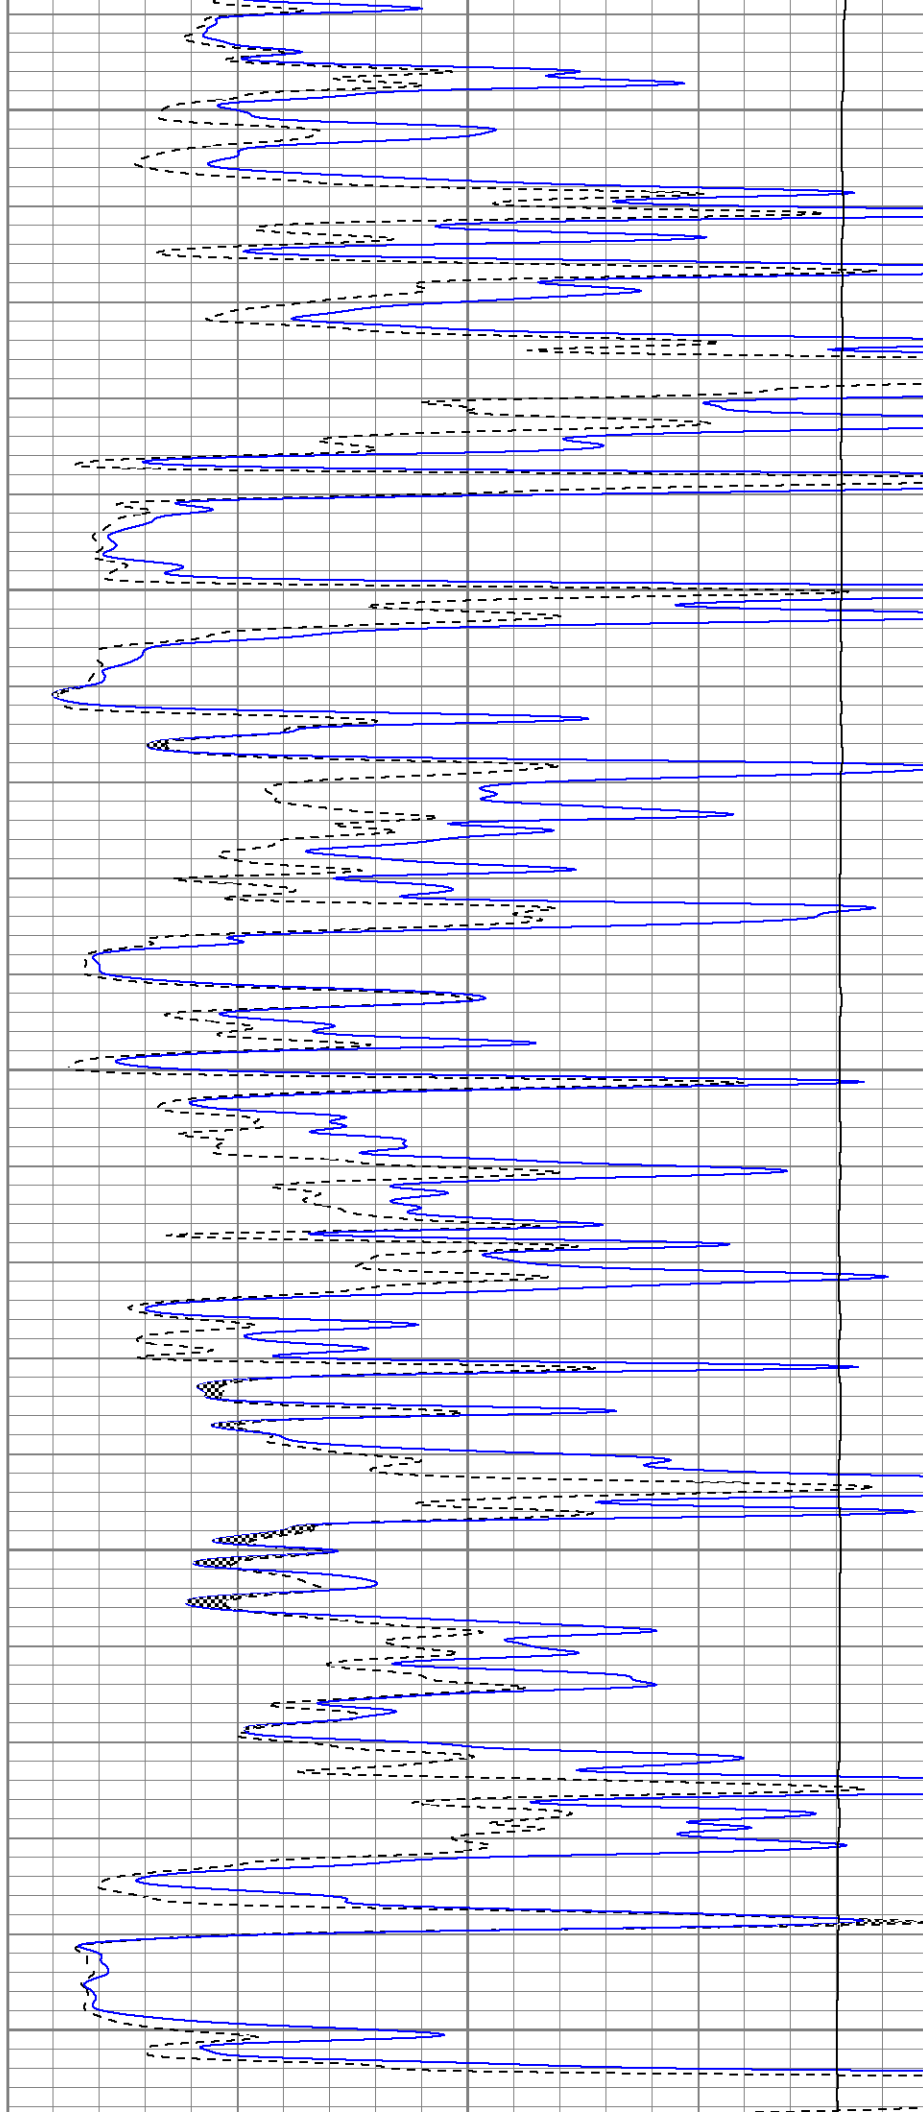

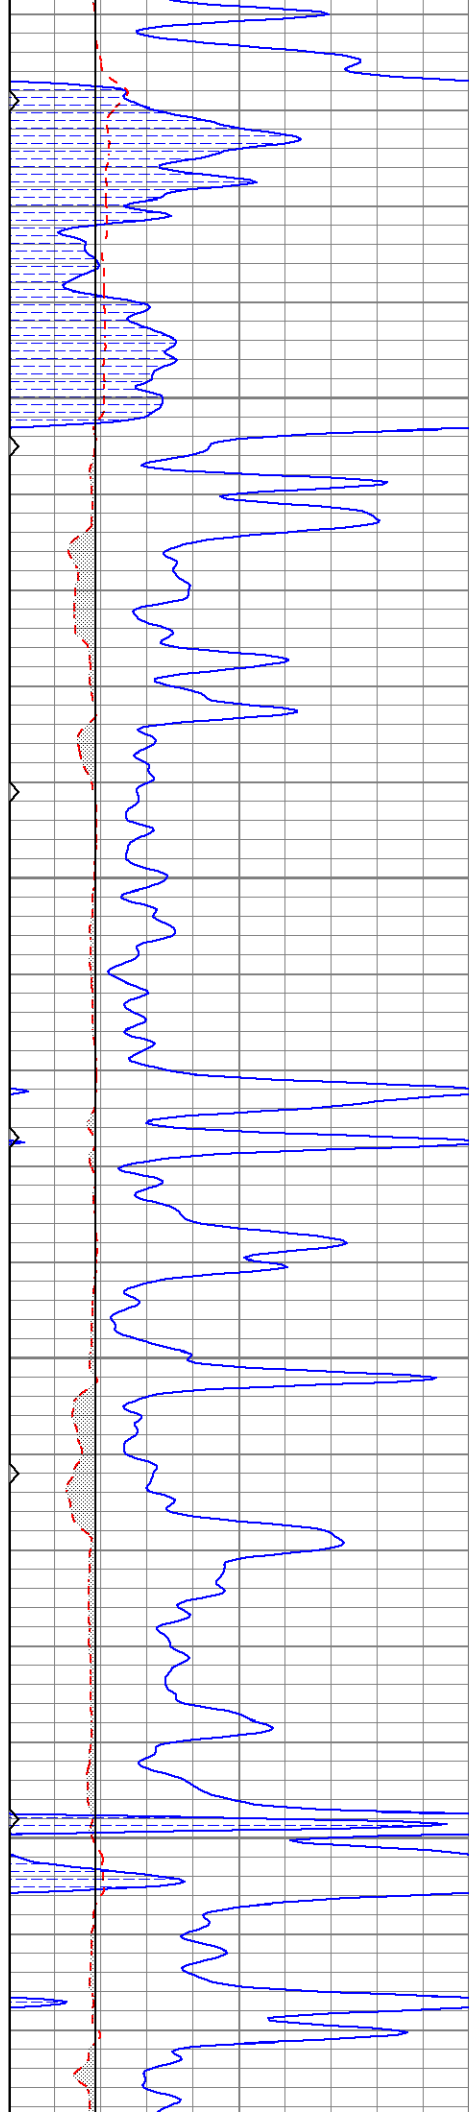



3100

3150

3200

3250

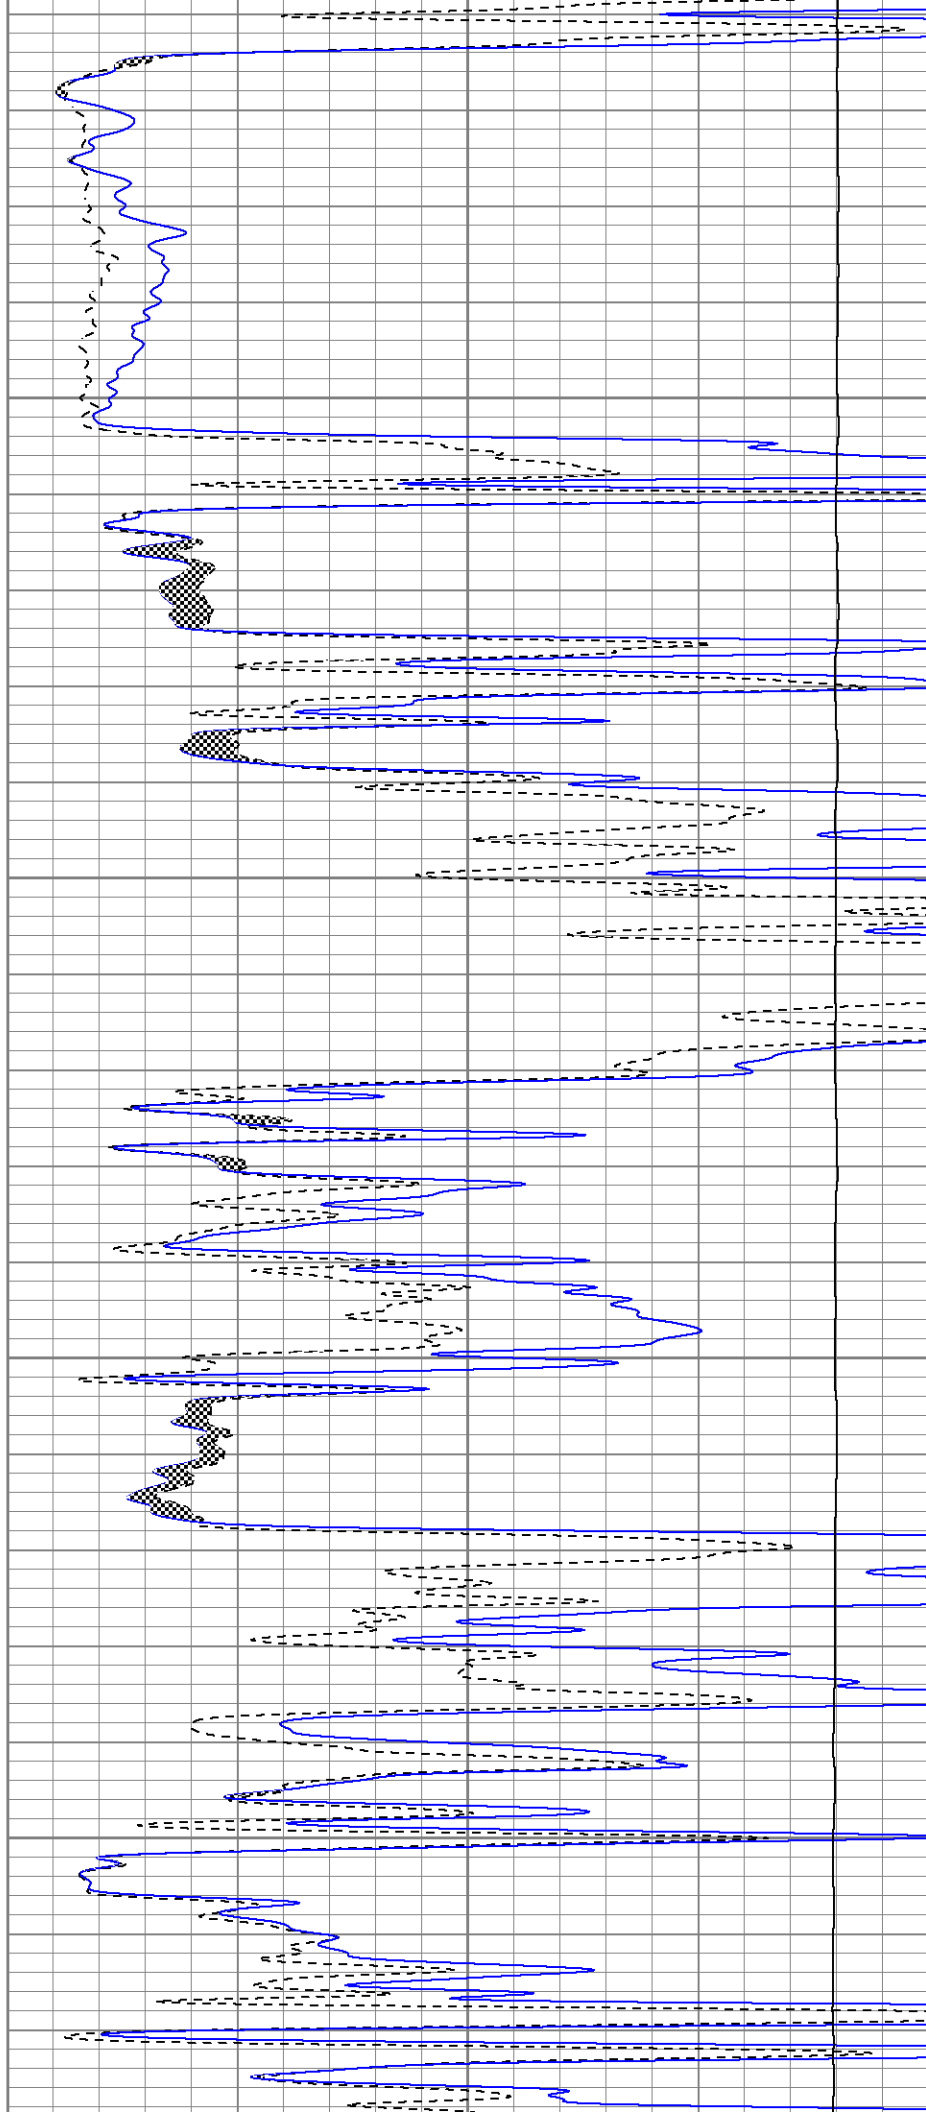

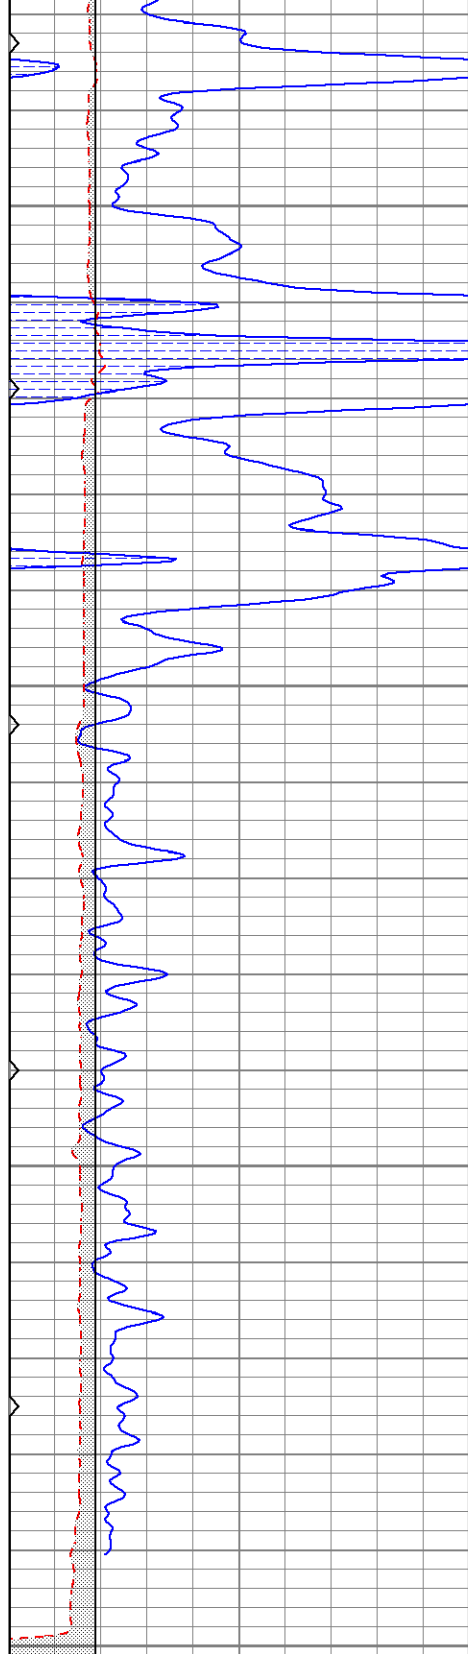


0	GR (GAPI)	150
6	MCAL (in)	16
6	BOREID (in)	16
0	MINMK	50

3300

3350

3400

3450

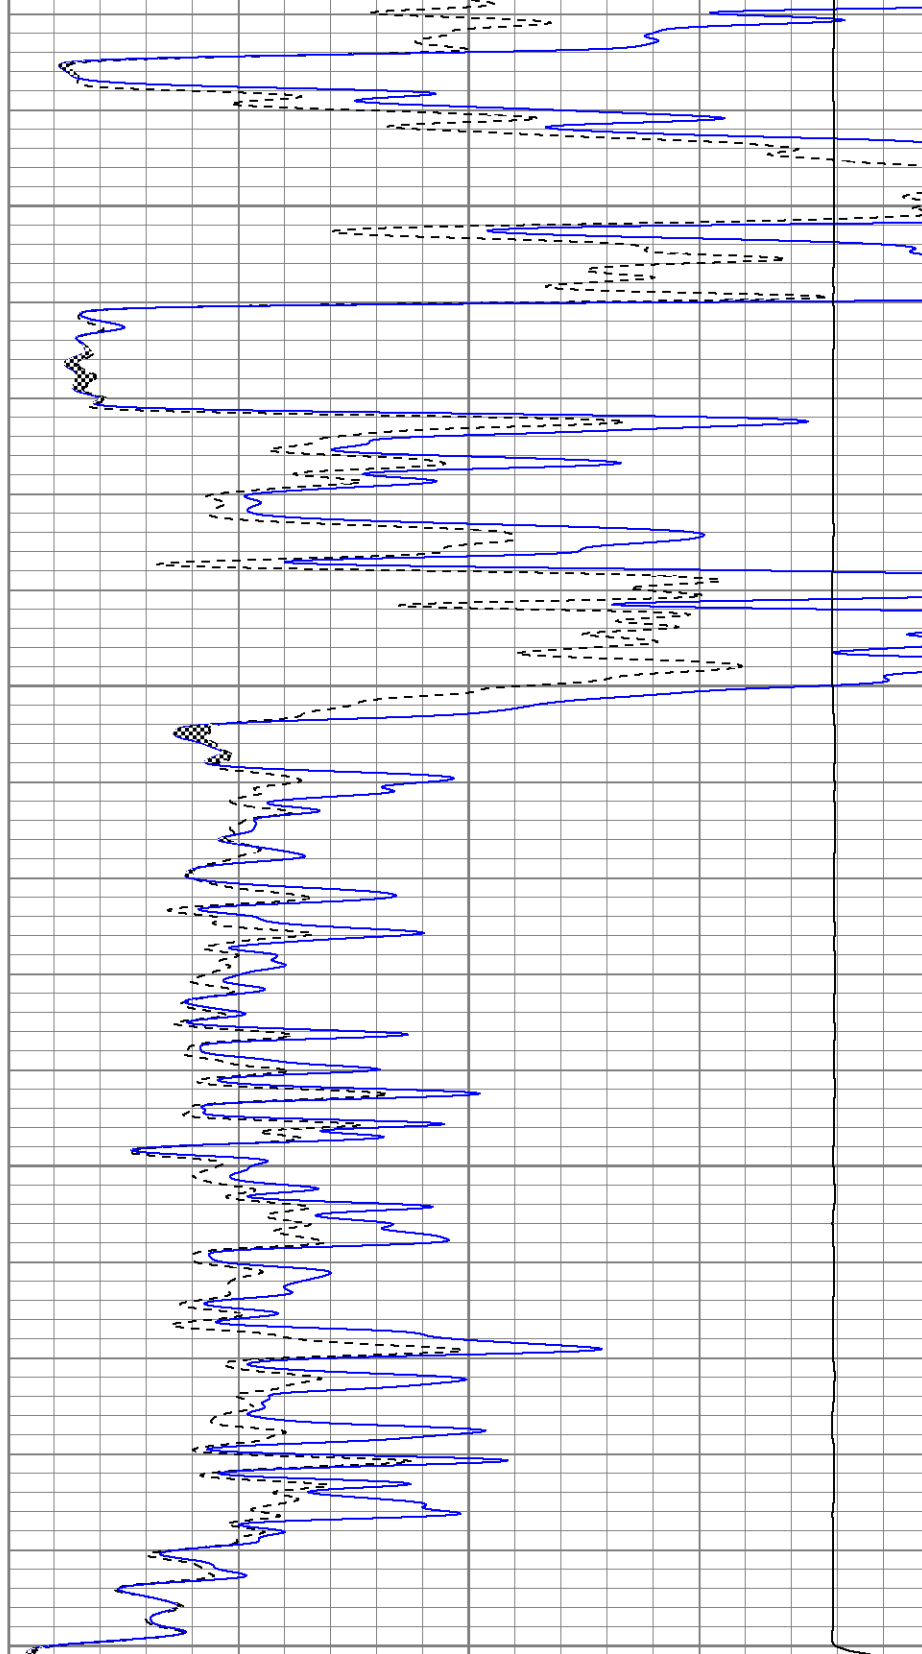

0	MN 2" (Ohm-m)	20
0	MI 1" (Ohm-m)	20
10000	LTEN (lb)	0

Calibration Report

Database File pebitter#2oh.db
 Dataset Pathname pass6
 Dataset Creation Sun Apr 30 07:42:25 2023

Serial-Model:
Performed:

1600-Pengo
Sun Apr 30 07:40:20 2023

Readings

References

Results

Zero

Cal

Zero

Cal

m

b

Normal	-0.0289	0.4935	V	0.0000	10.0000	Ohm-m	19.1426	0.5535
Inverse	-0.0264	0.6515	V	0.0000	10.0000	Ohm-m	14.7525	0.3889
Caliper	3.2319	6.4483	V	8.0000	15.0000	in	2.1364	0.6662

Gamma Ray Calibration Report

Serial Number:	2001
Tool Model:	OH
Performed:	Mon Mar 13 07:38:49 2023
Calibrator Value:	1.0 GAPI
Background Reading:	0.0 cps
Calibrator Reading:	1.0 cps
Sensitivity:	1.0000 GAPI/cps