



MICRO LOG

Company	VINCENT OIL CORPORATION		
Well	KEOUGH #15-34		
Field	MULBERRY CREEK		
County	FORD	State	KANSAS
Location:	API # : 15-057-21051-0000		Other Services CDL/CNL/PE DIL/SON
Permanent Datum	SEC 34 TWP 28S RGE 23W	Elevation	
Log Measured From	GROUND LEVEL	Elevation	2520
Drilling Measured From	KELLY BUSHING 13' A.G.L. KELLY BUSHING	D.F.	2531
		G.L.	2520
Date	6/26/21		
Run Number	TWO		
Depth Driller	5320		
Depth Logger	5320		
Bottom Logged Interval	5302		
Top Log Interval	4200		
Casing Driller	8 5/8" @ 703		
Casing Logger	703		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES	13200 PPM
Density / Viscosity	9.4/78		
pH / Fluid Loss	9.5/13.6		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.40 @ 80F		
Rmf @ Meas. Temp	.30 @ 80F		
Rmc @ Meas. Temp	.48 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.25 @ 128F		
Time Circulation Stopped	2 HOURS		
Time Logger on Bottom	////		
Maximum Recorded Temperature	128F		
Equipment Number	3802		
Location	HAYS, KANSAS		
Recorded By	JASON CAPPELLUCCI		
Witnessed By	KEN LeBLANC		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. - 2 NORTH TO WILBURN RD. - 3 3/4 WEST - NORTH INTO




MAIN SECTION

Database File	5628pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Sat Jun 26 03:21:00 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

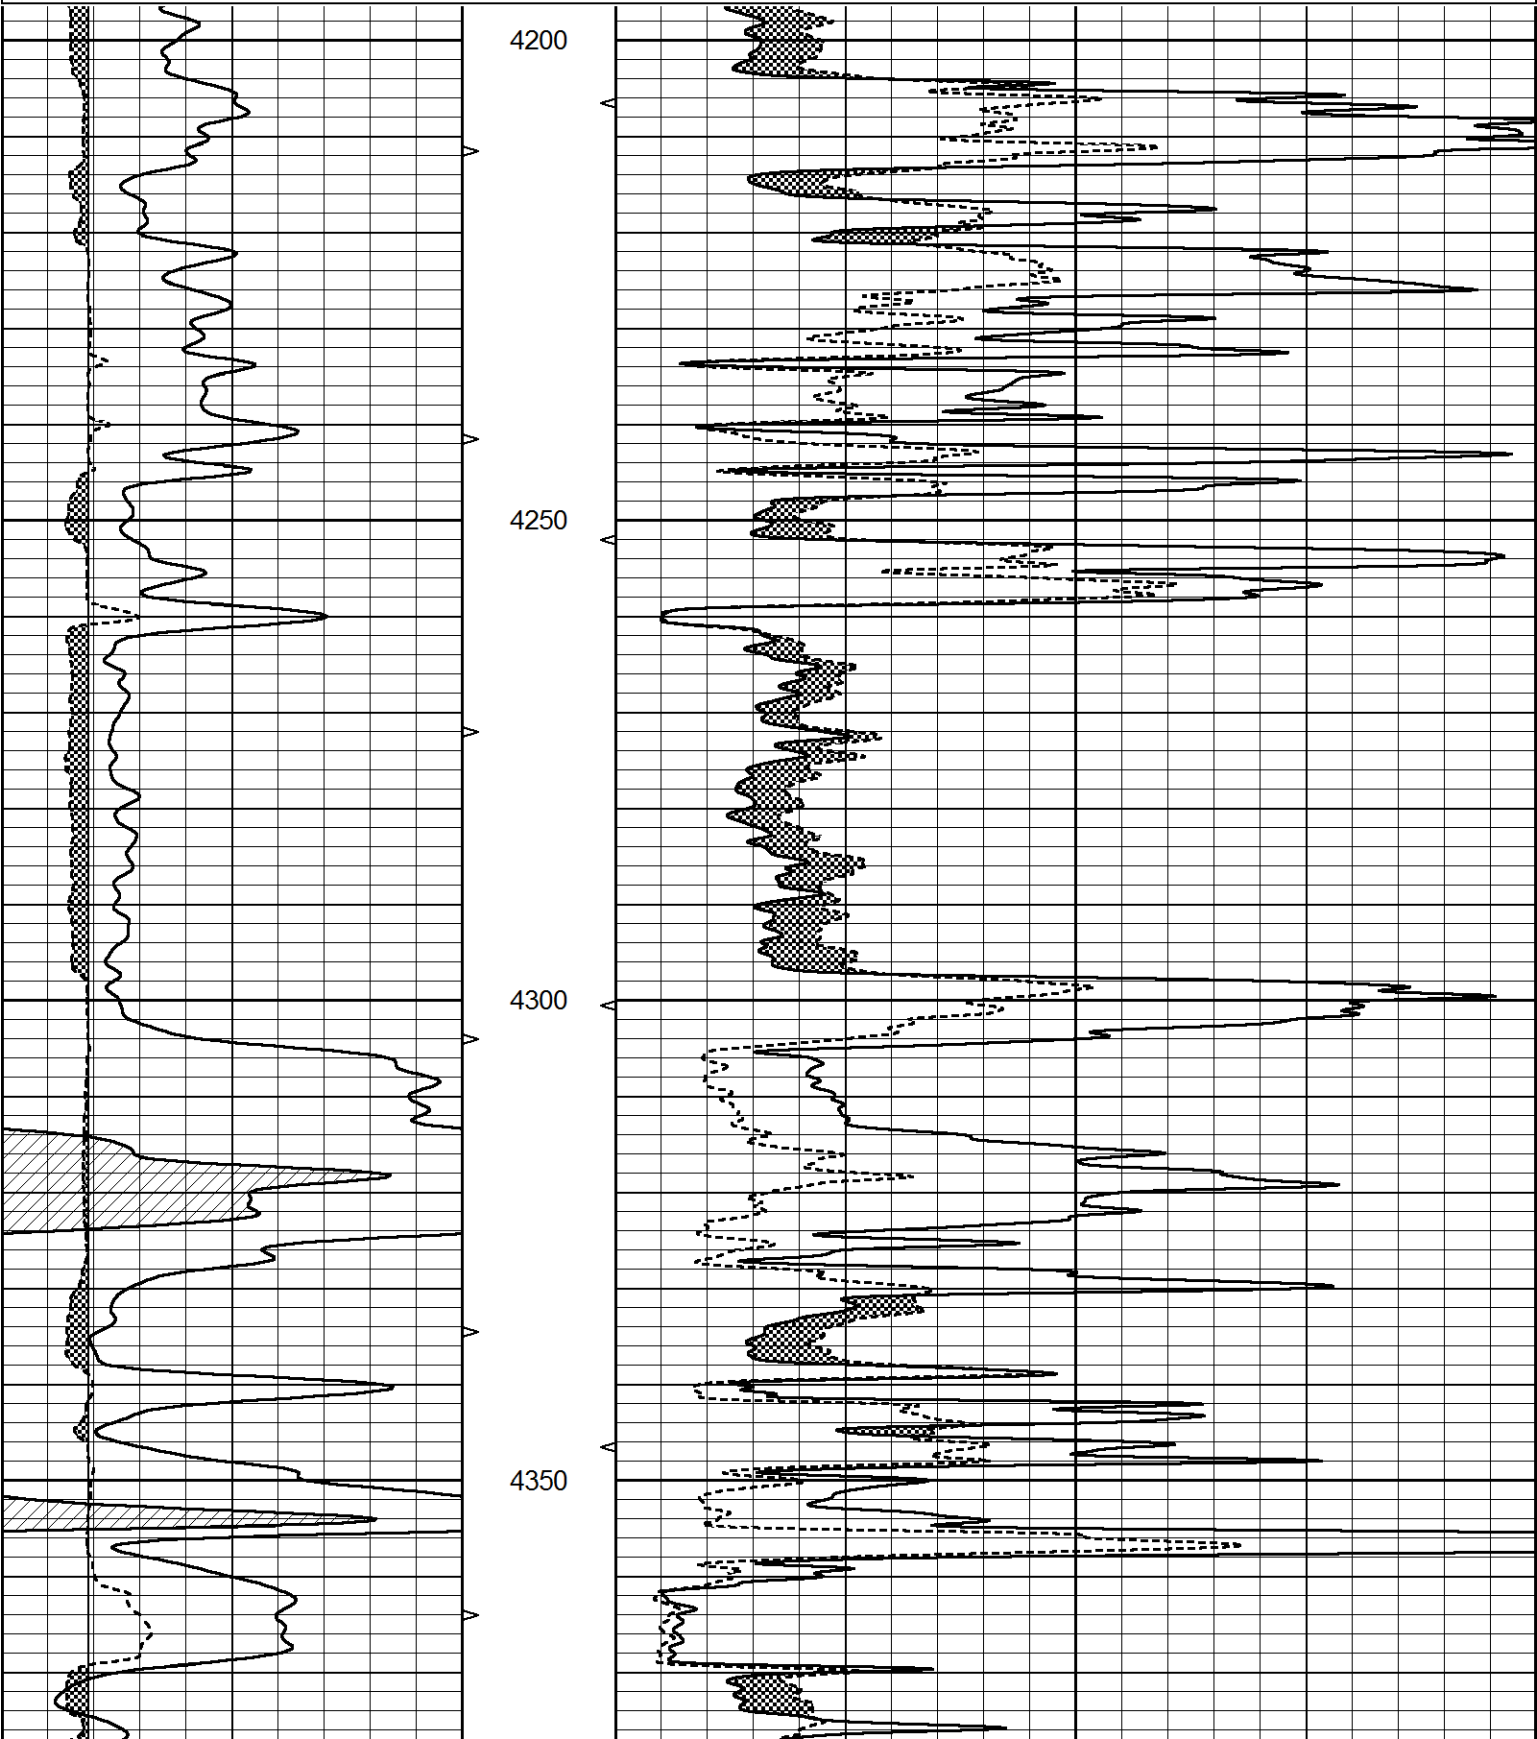

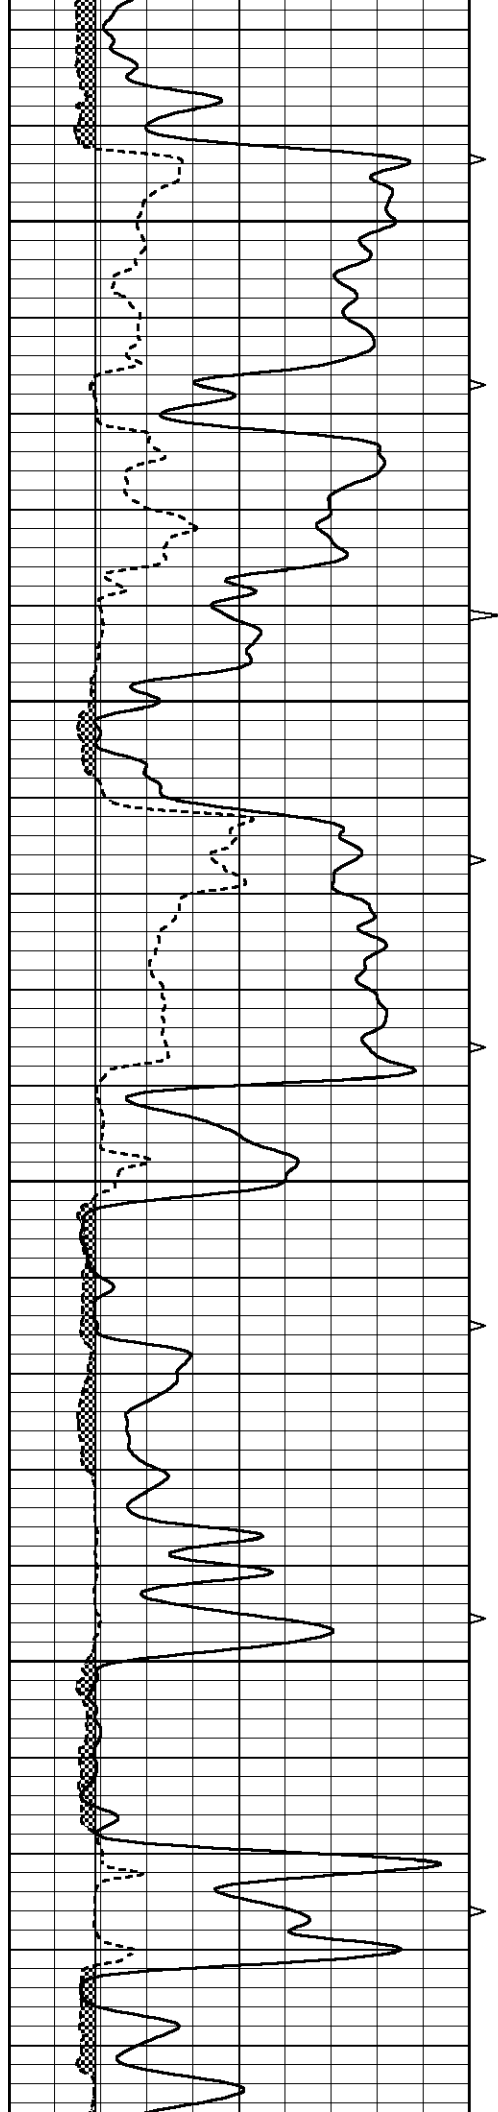



4400

4450

4500

4550

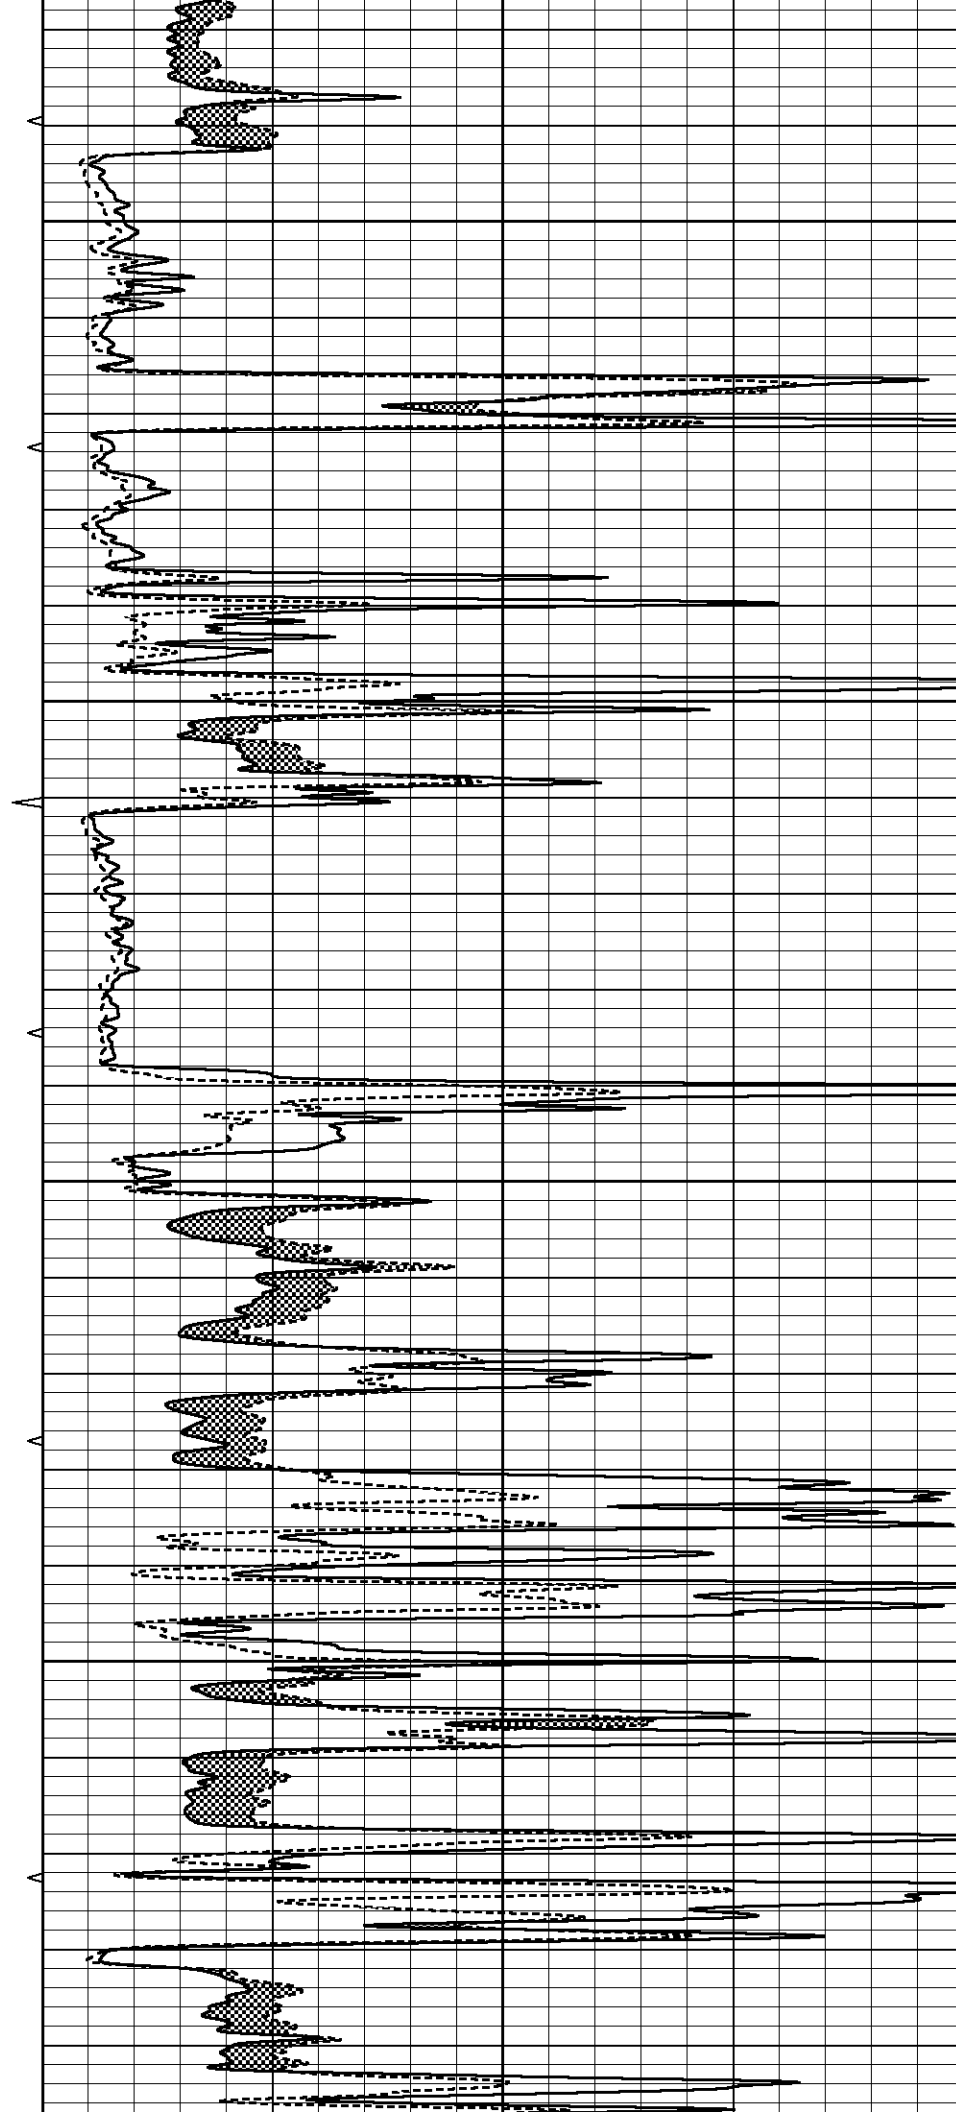

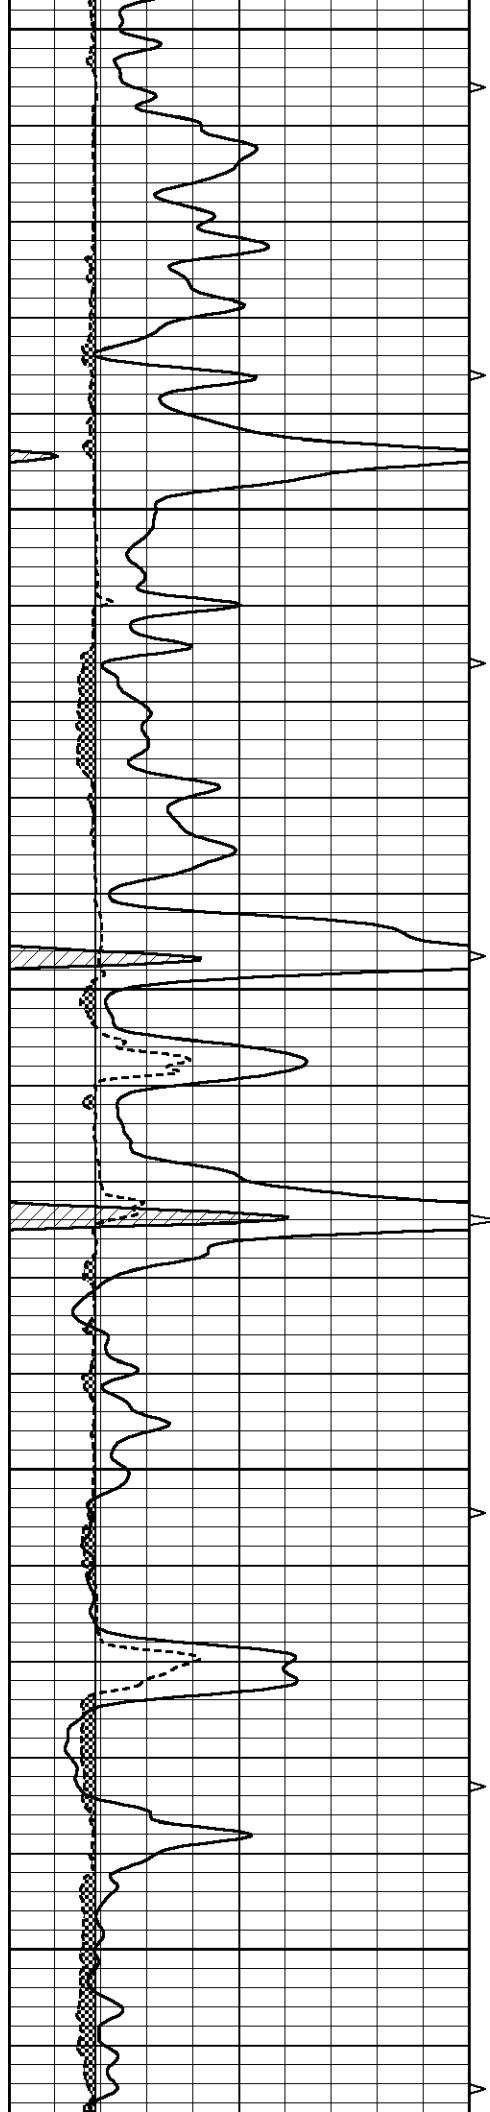


4600


4650

4700

4750

4800

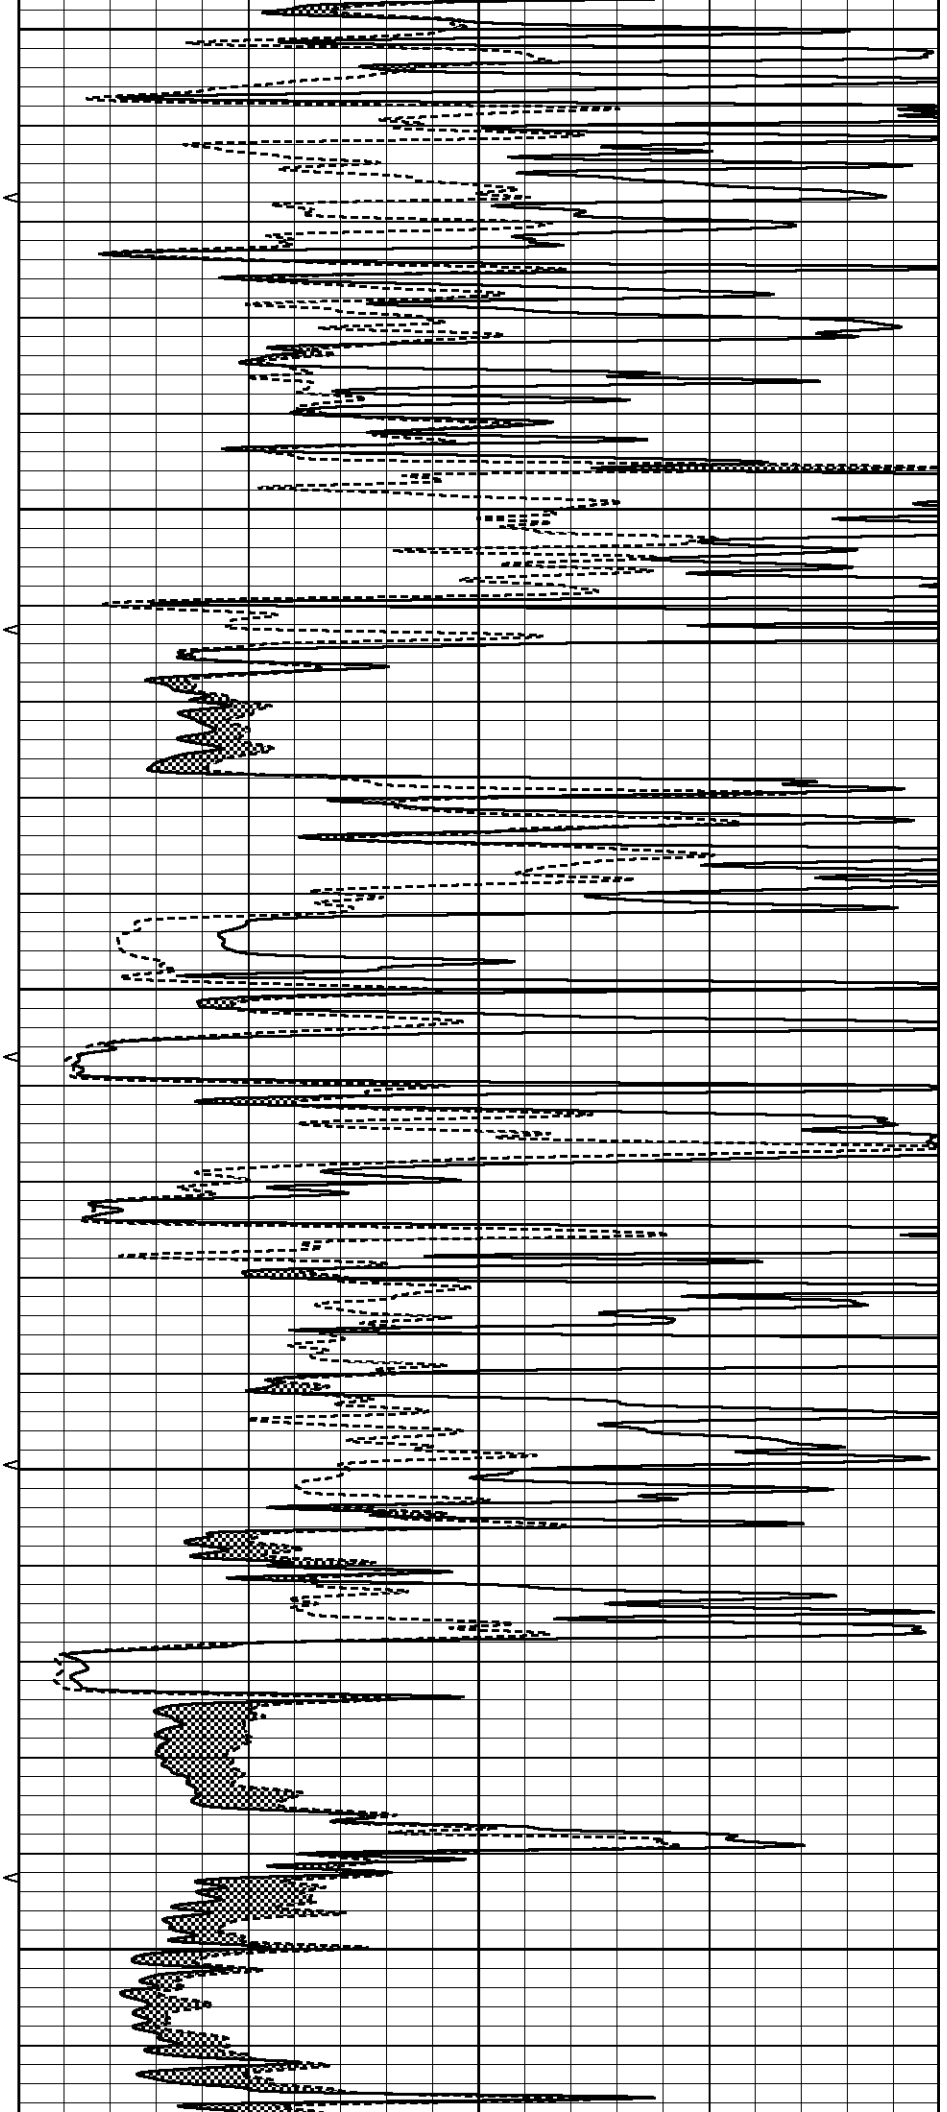

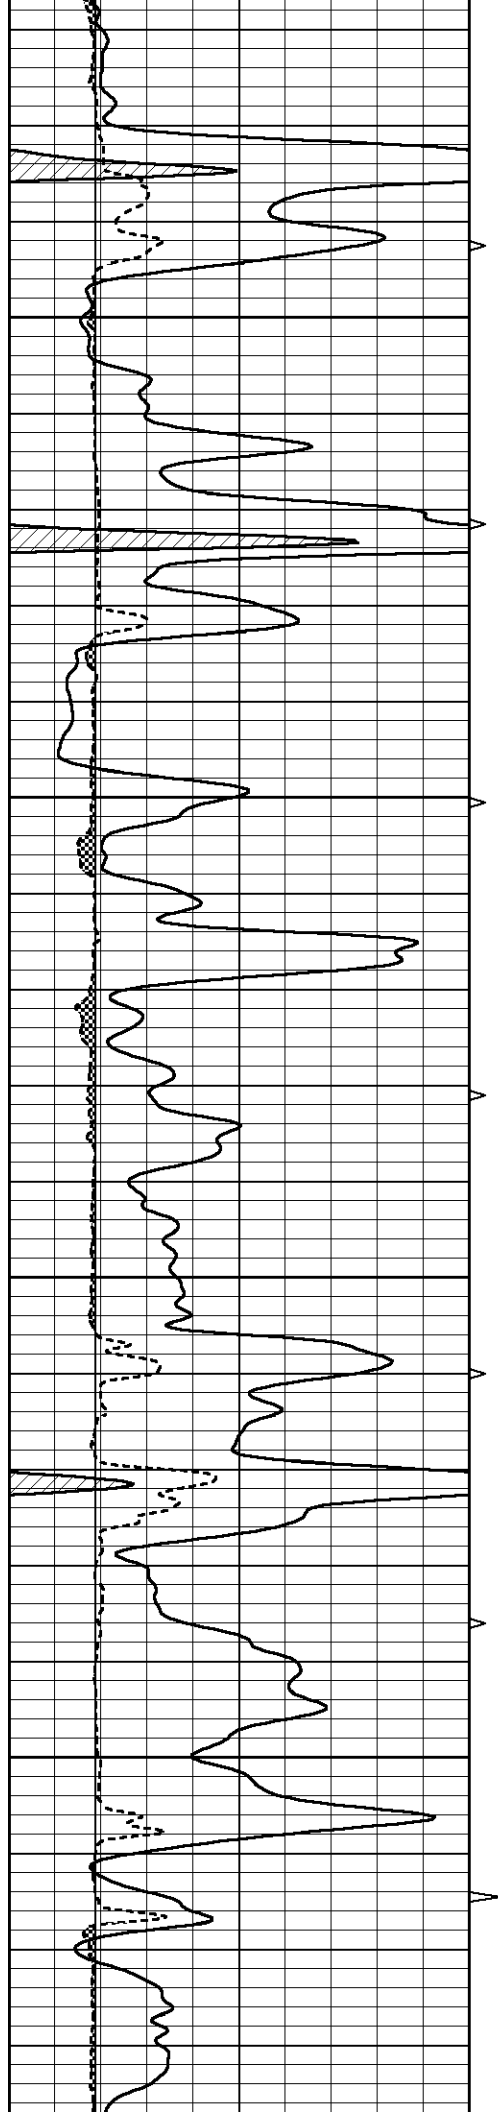



4850


4900

4950

5000


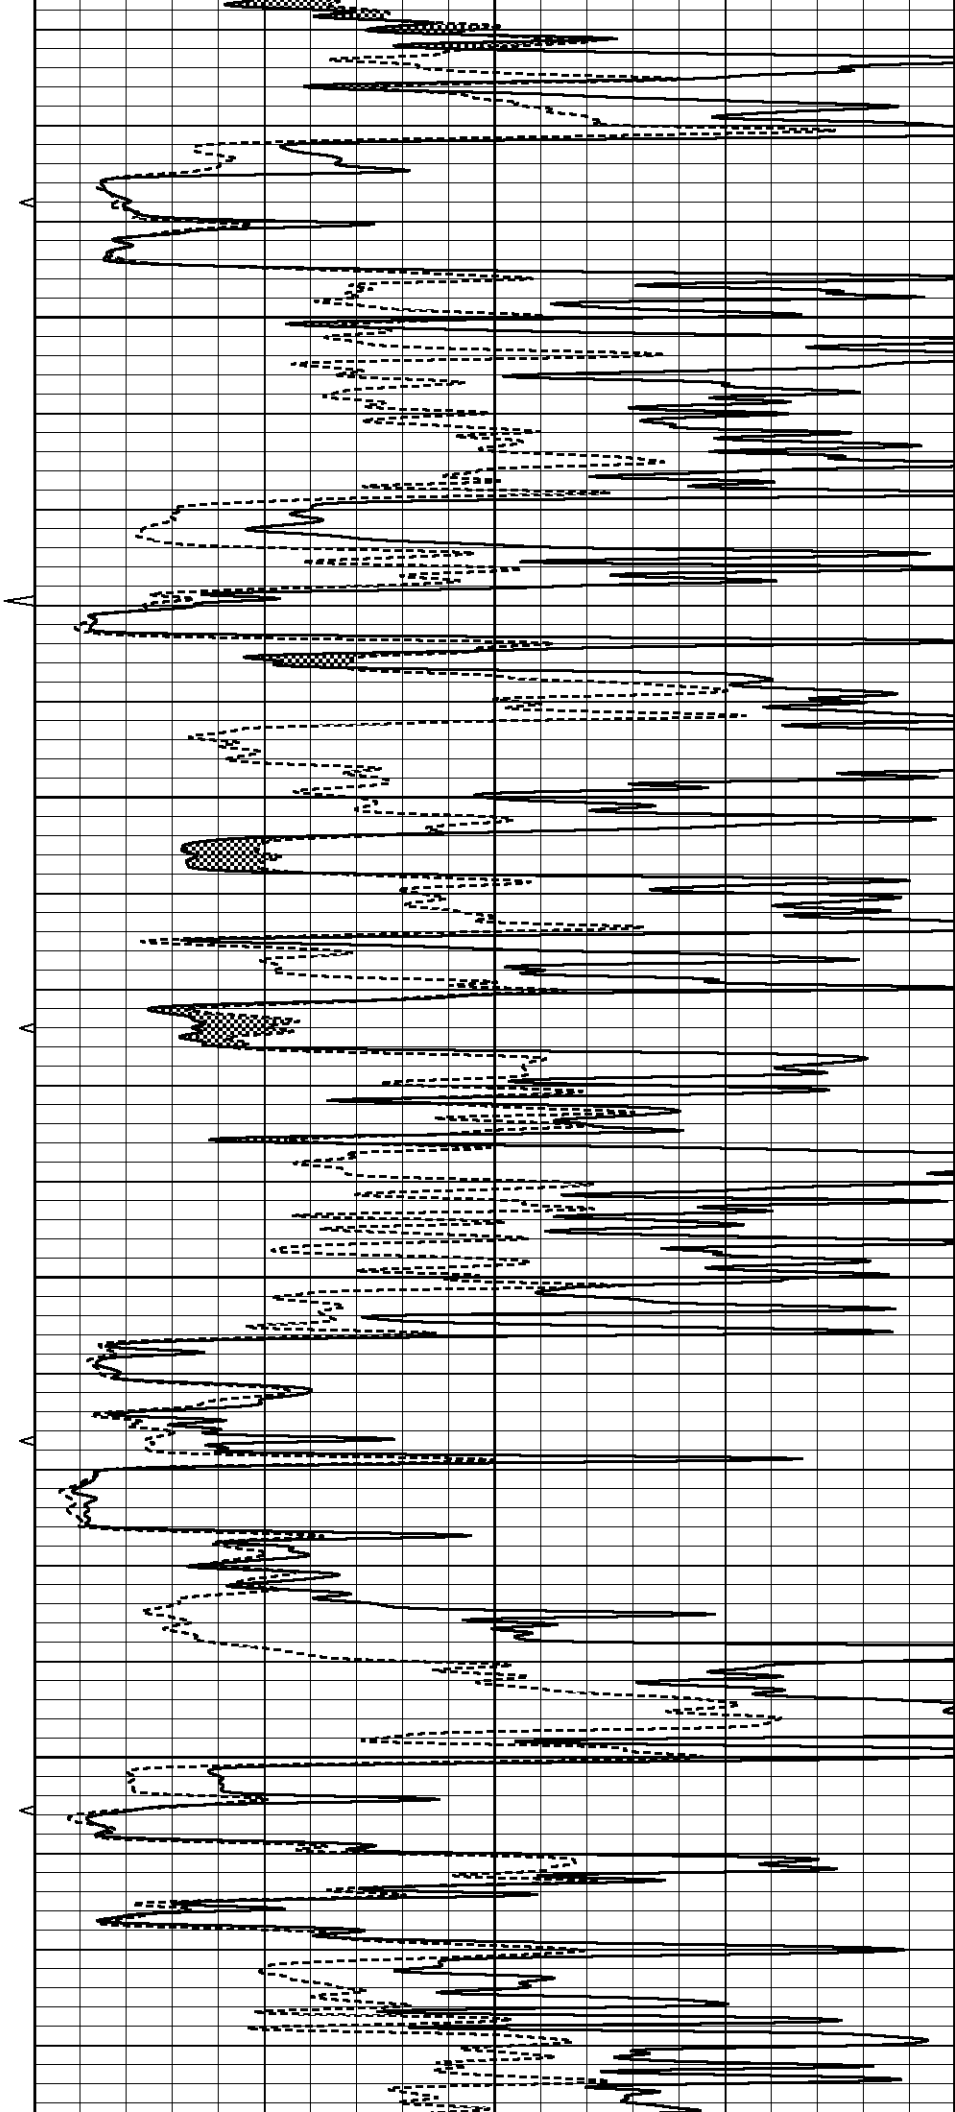


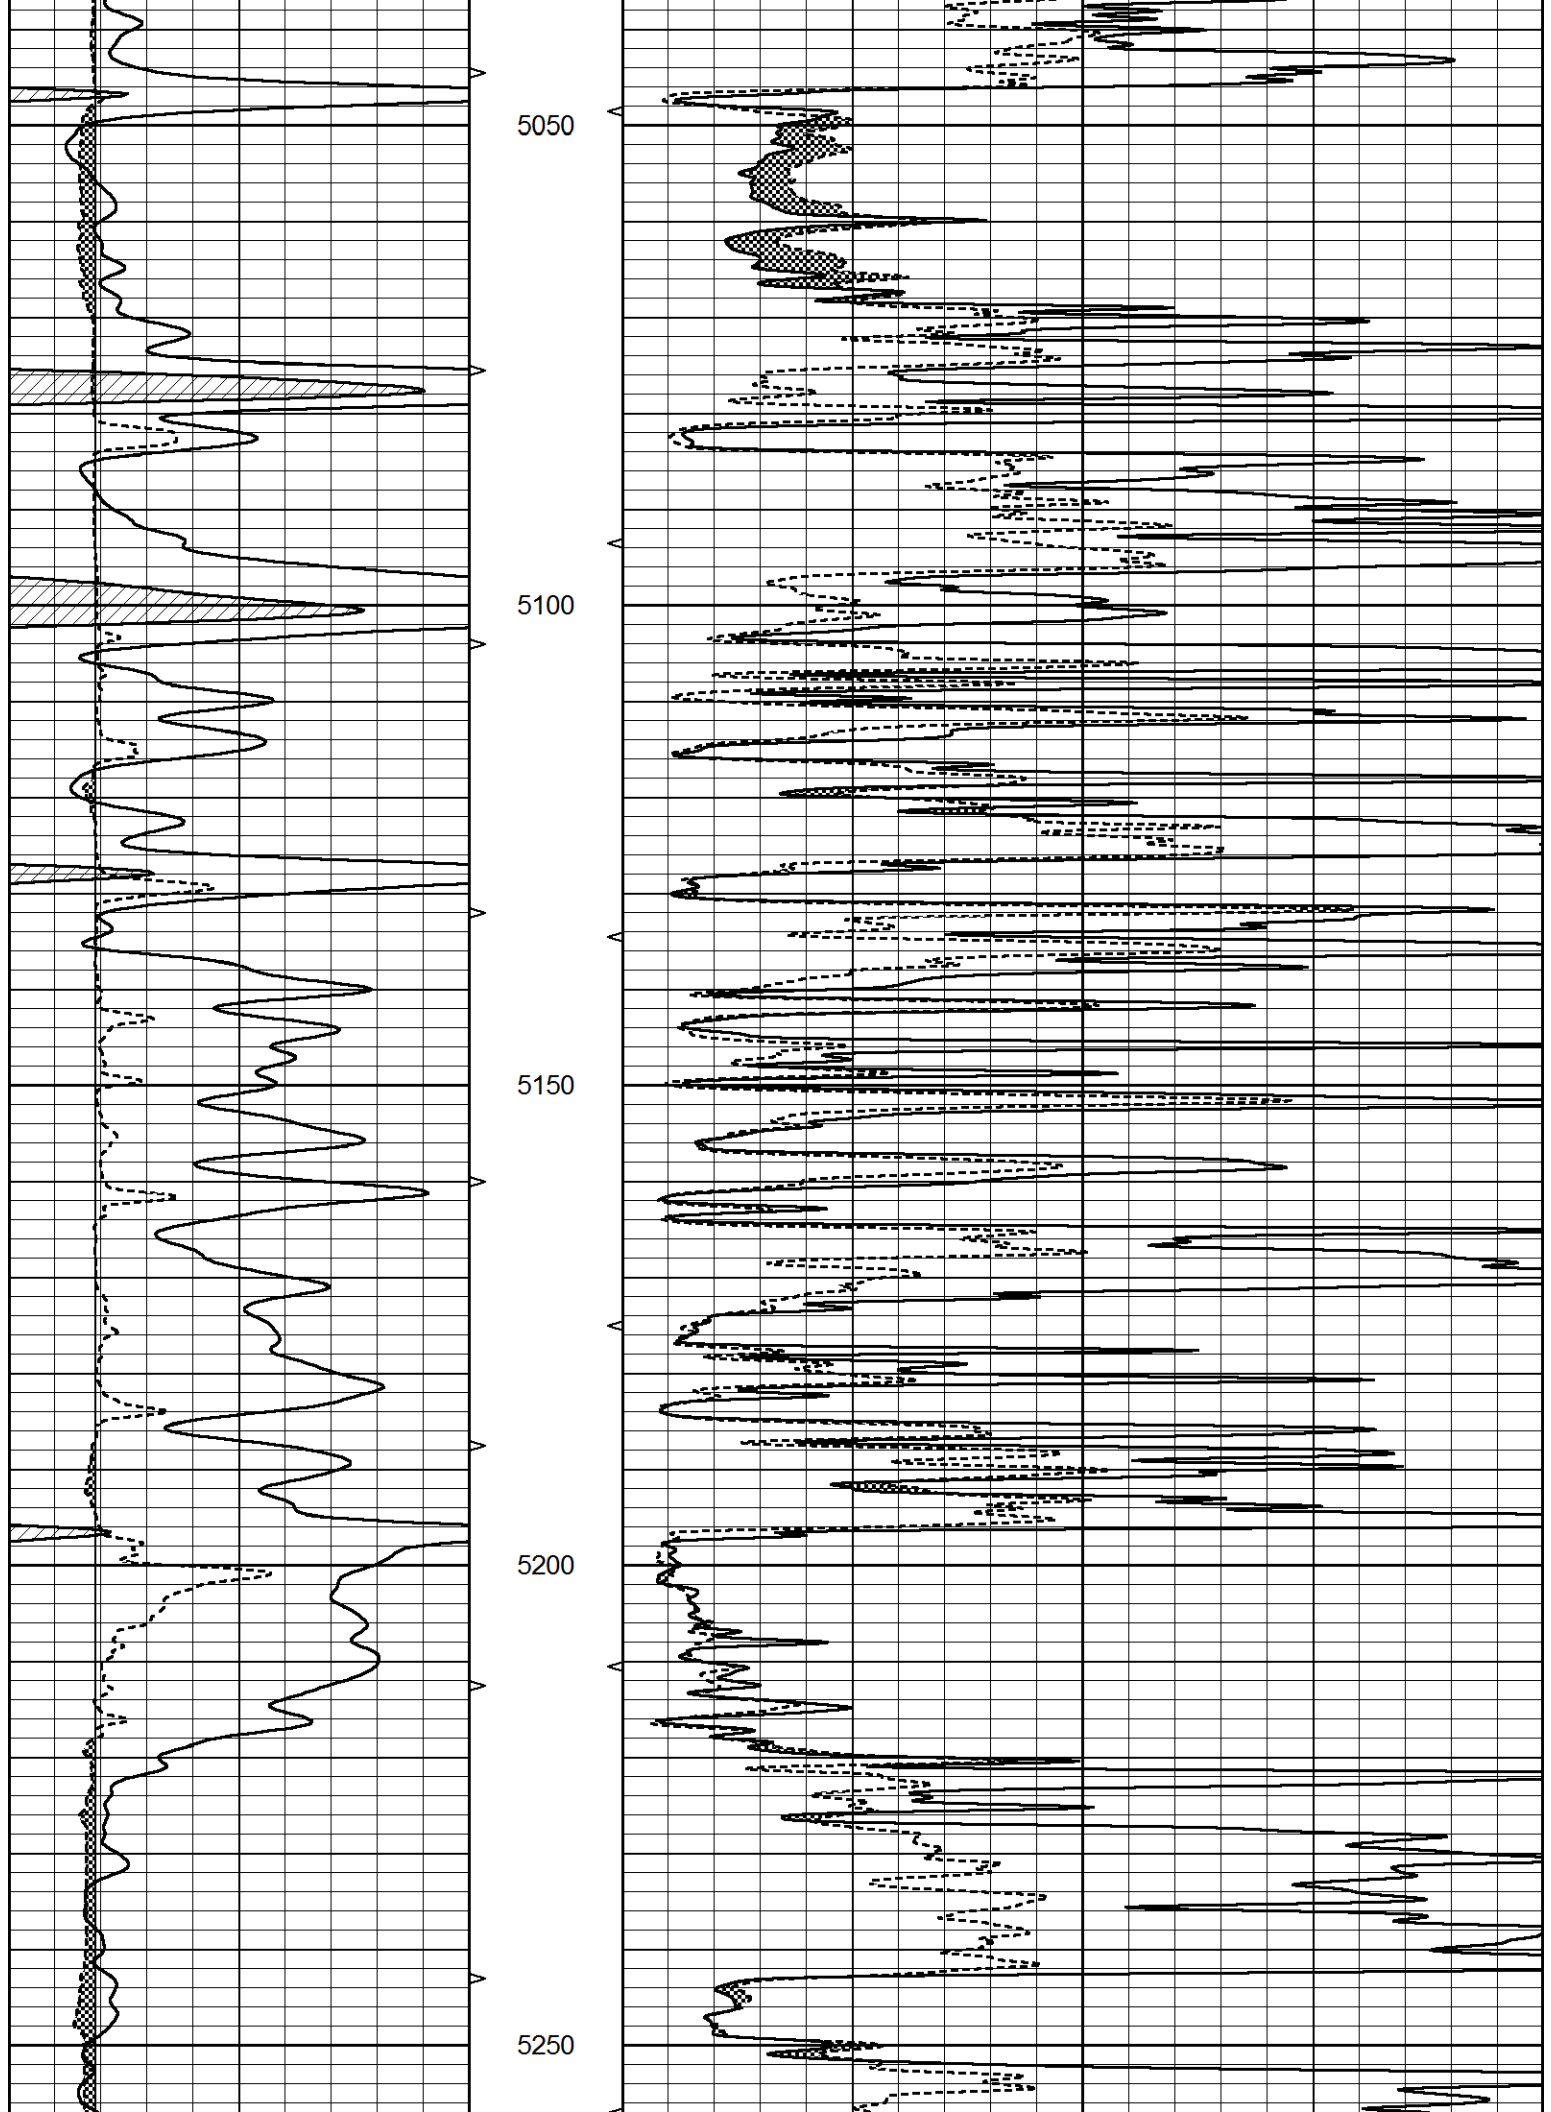


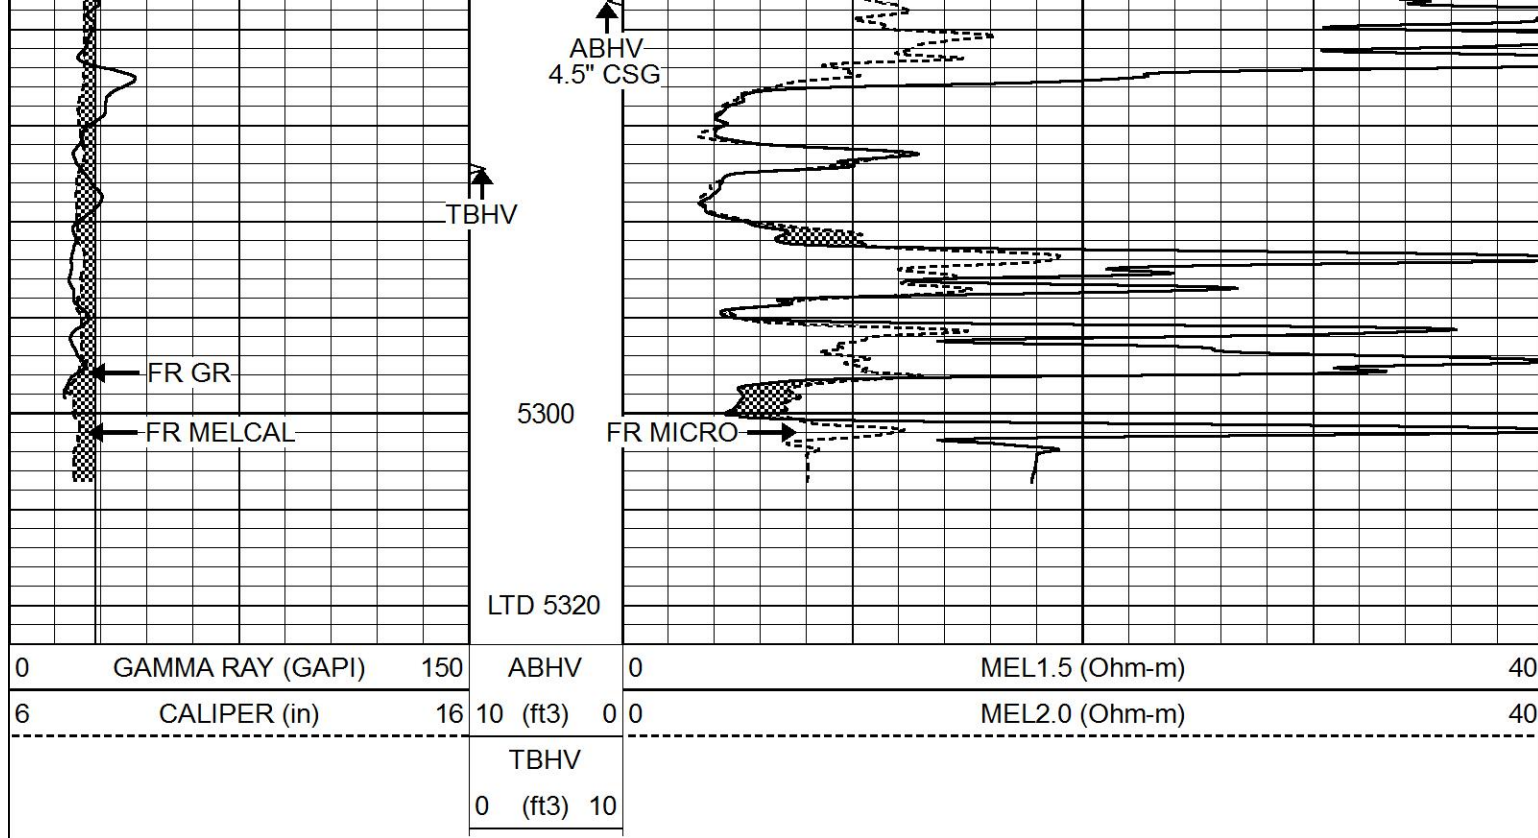

REPEAT SECTION

Database File 5628pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Sat Jun 26 03:05:53 2021
 Charted by Depth in Feet scaled 1:240

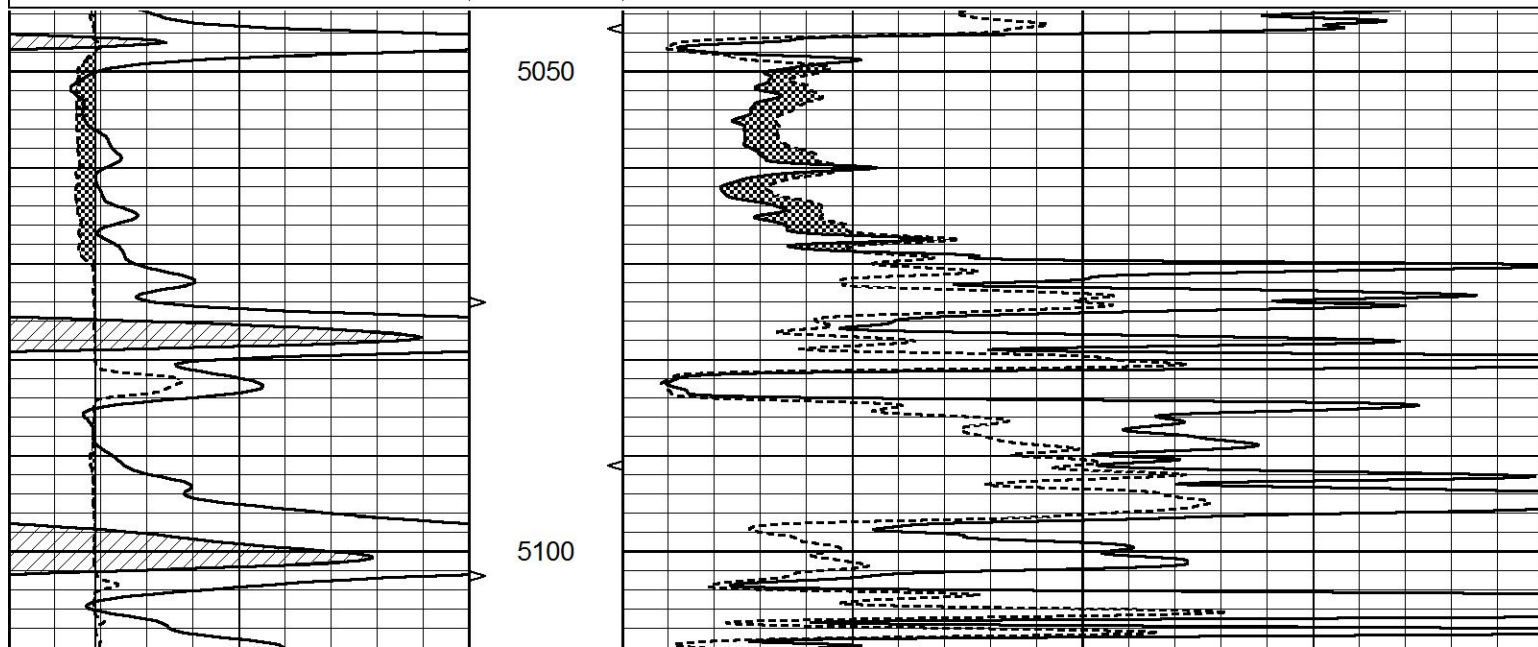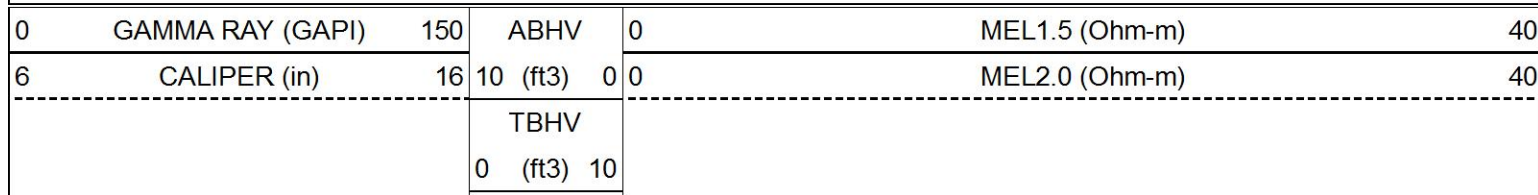

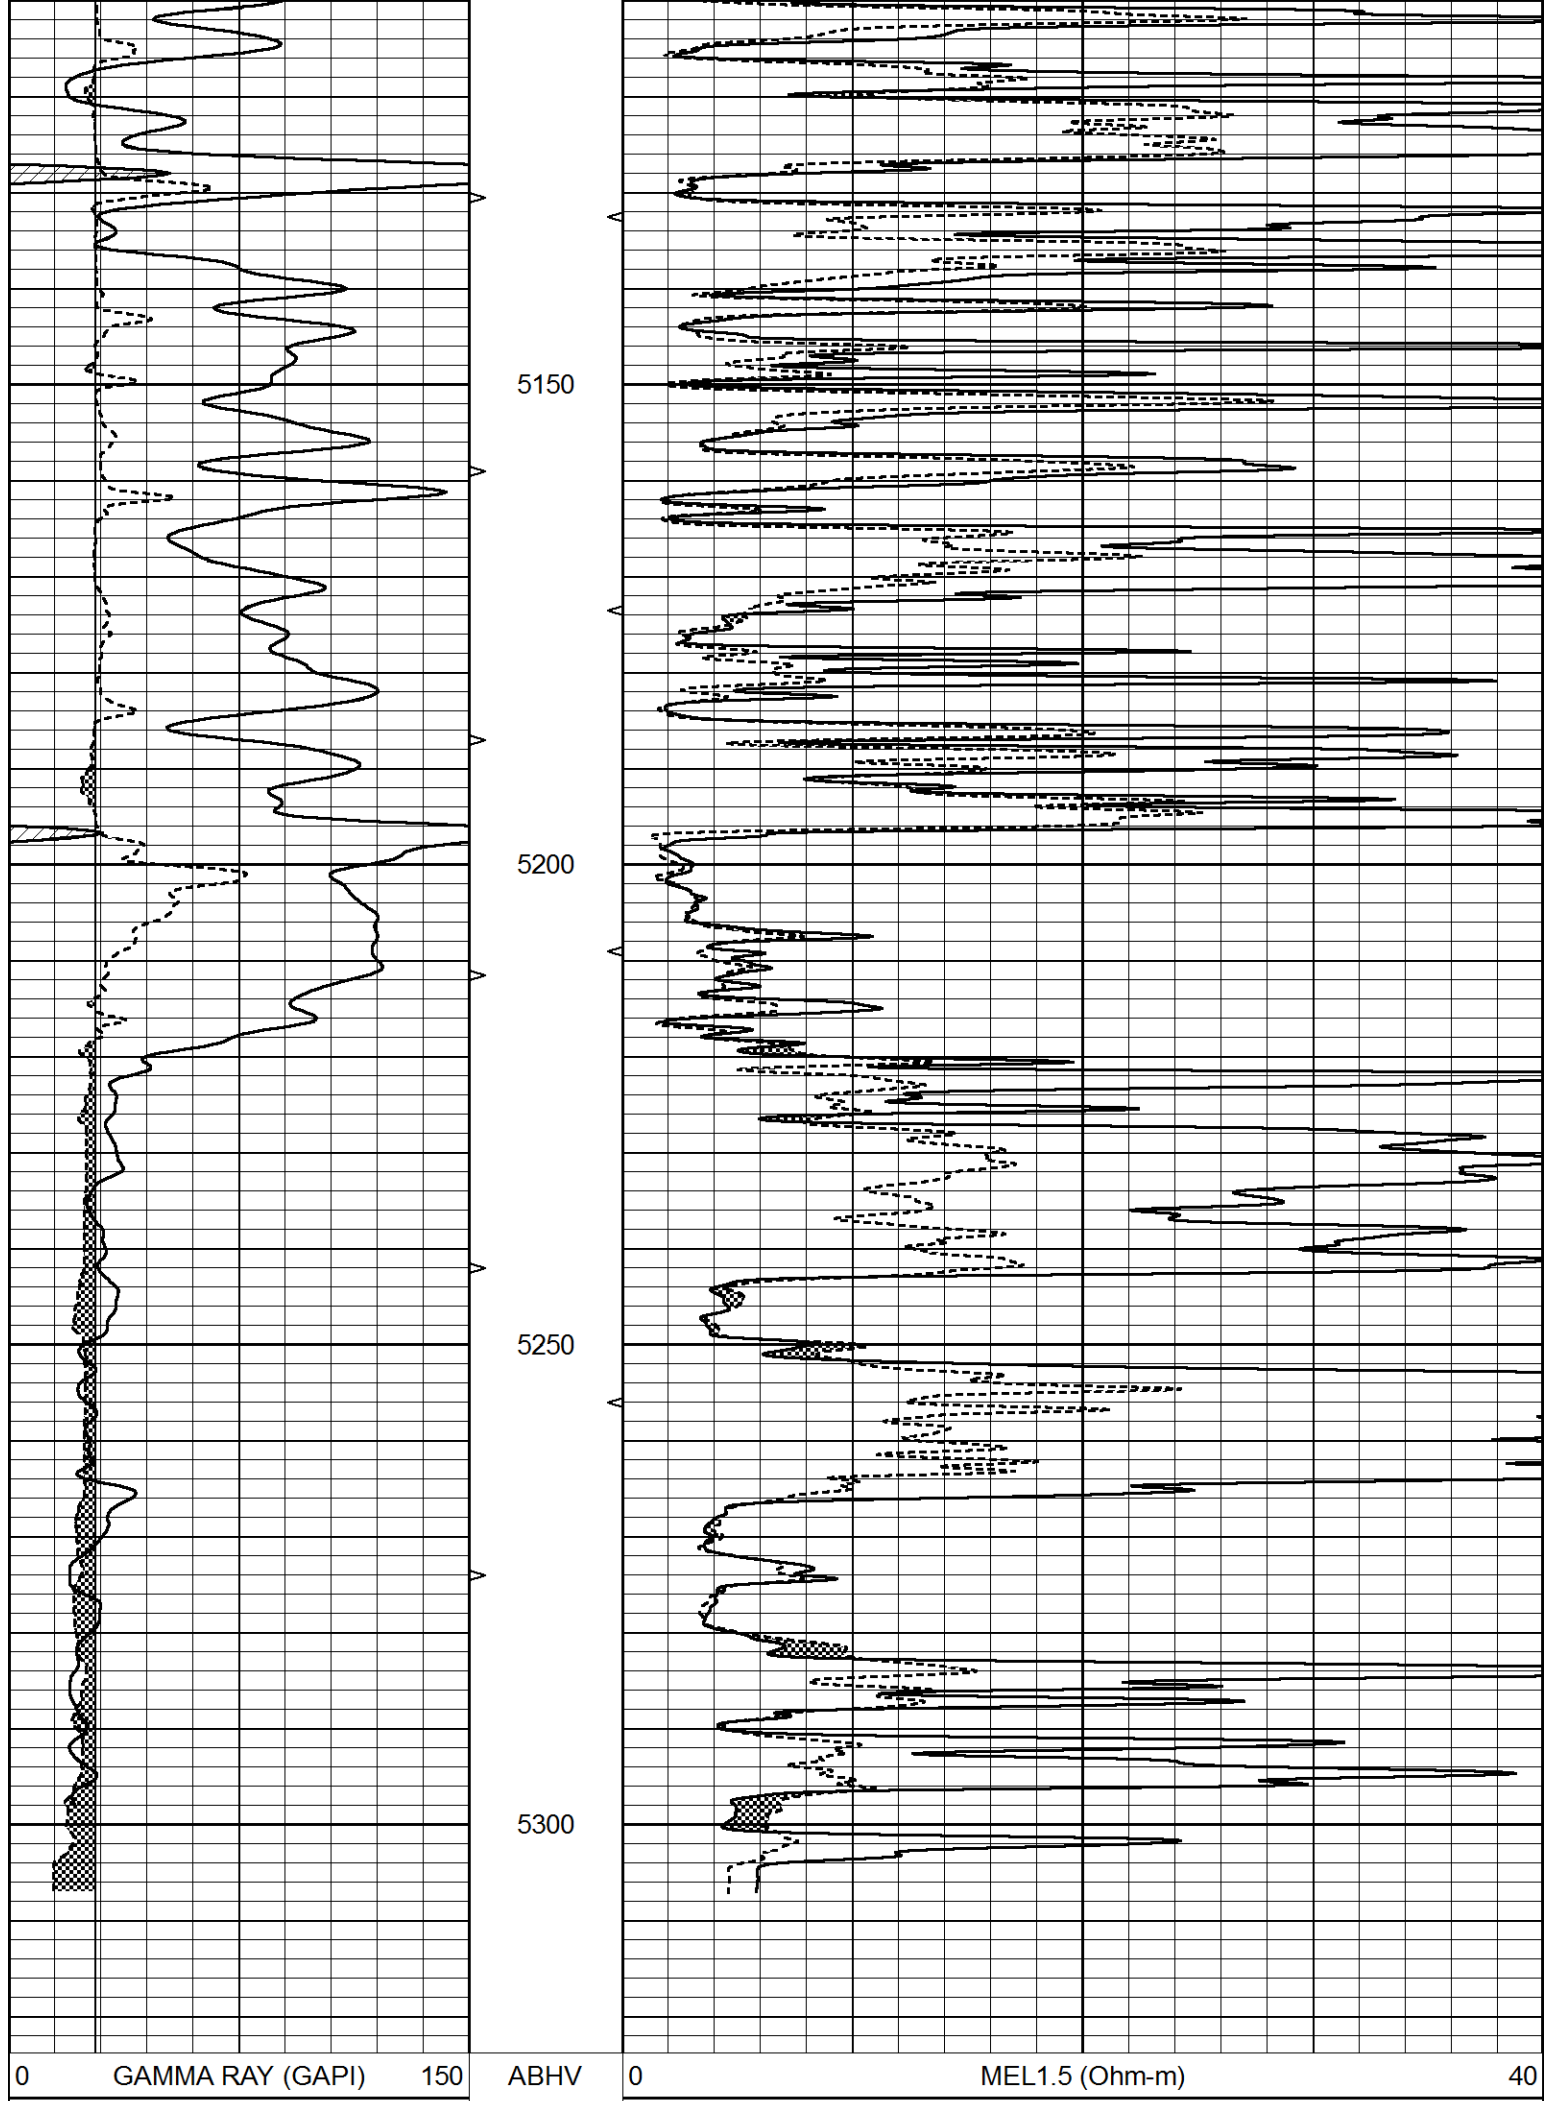

6	CALIPER (in)	16	10 (ft3)	0 0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

Calibration Report	
Database File	5628pe.db
Dataset Pathname	pass6.1
Dataset Creation	Sat Jun 26 03:05:53 2021

MICRO_USR Calibration Report

Serial Number:	070910
Tool Model:	ProbeL
Performed:	Thu Jun 10 10:36:57 2021

Caliper Calibration:	Gain=7.192	Offset=2.802
References	Low Cal 8.000	High Cal 14.000
Readings	0.723	1.557

1.5" Calibration:	Gain=50.000	Offset=-0.067
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.335

2" Calibration:	Gain=95.000	Offset=-1.400
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	1.029

Microlog Calibration Report

Serial-Model:	070910-ProbeL
Performed:	(Not Performed)

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Oct 30 21:32:56 2020	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.2700	GAPI/cps