

**COMPENSATED
DENSITY/NEUTRON
PE LOG**

Company VINCENT OIL CORPORATION
Well KEOUGH #15-34
Field MULBERRY CREEK
County FORD
State KANSAS

Company VINCENT OIL CORPORATION
Well KEOUGH #15-34
Field MULBERRY CREEK
County FORD State KANSAS

Location: 407 FSL & 330' FWL
API #: 15-057-21051-0000
Permanent Datum GROUND LEVEL Elevation 2520
Log Measured From KELLY BUSHING 13' A.G.L.
Drilling Measured From KELLY BUSHING
SEC 34 TWP 28S RGE 23W
Elevation
K.B. 2533
D.F. 2531
G.L. 2520

Date	6/26/21
Run Number	ONE
Depth Driller	5320
Depth Logger	5320
Bottom Logged Interval	5296
Top Log Interval	4200
Casing Driller	8 5/8" @ 703
Casing Logger	703
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.4/78
pH / Fluid Loss	9.5/13.6
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.40 @ 80F
Rmf @ Meas. Temp	.30 @ 80F
Rmc @ Meas. Temp	.48 @ 80F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.25 @ 128F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	128F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	JASON CAPPELLUCCI
Witnessed By	KEN LeBLANC

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
KINGSDOWN, KS. - 2 NORTH TO WILBURN RD. - 3 3/4 WEST - NORTH INTO




MAIN SECTION


Database File 5628pe.db
 Dataset Pathname pass4.1
 Presentation Format _ldt_neu
 Dataset Creation Sat Jun 26 01:05:30 2021
 Charted by Depth in Feet scaled 1:240



0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0	COMPENSATED NEUTRON (pu)	-10
			TBHV	0	PE	10 -0.25
			0 (ft3)	10	CORRECTION (g/cc)	0.25

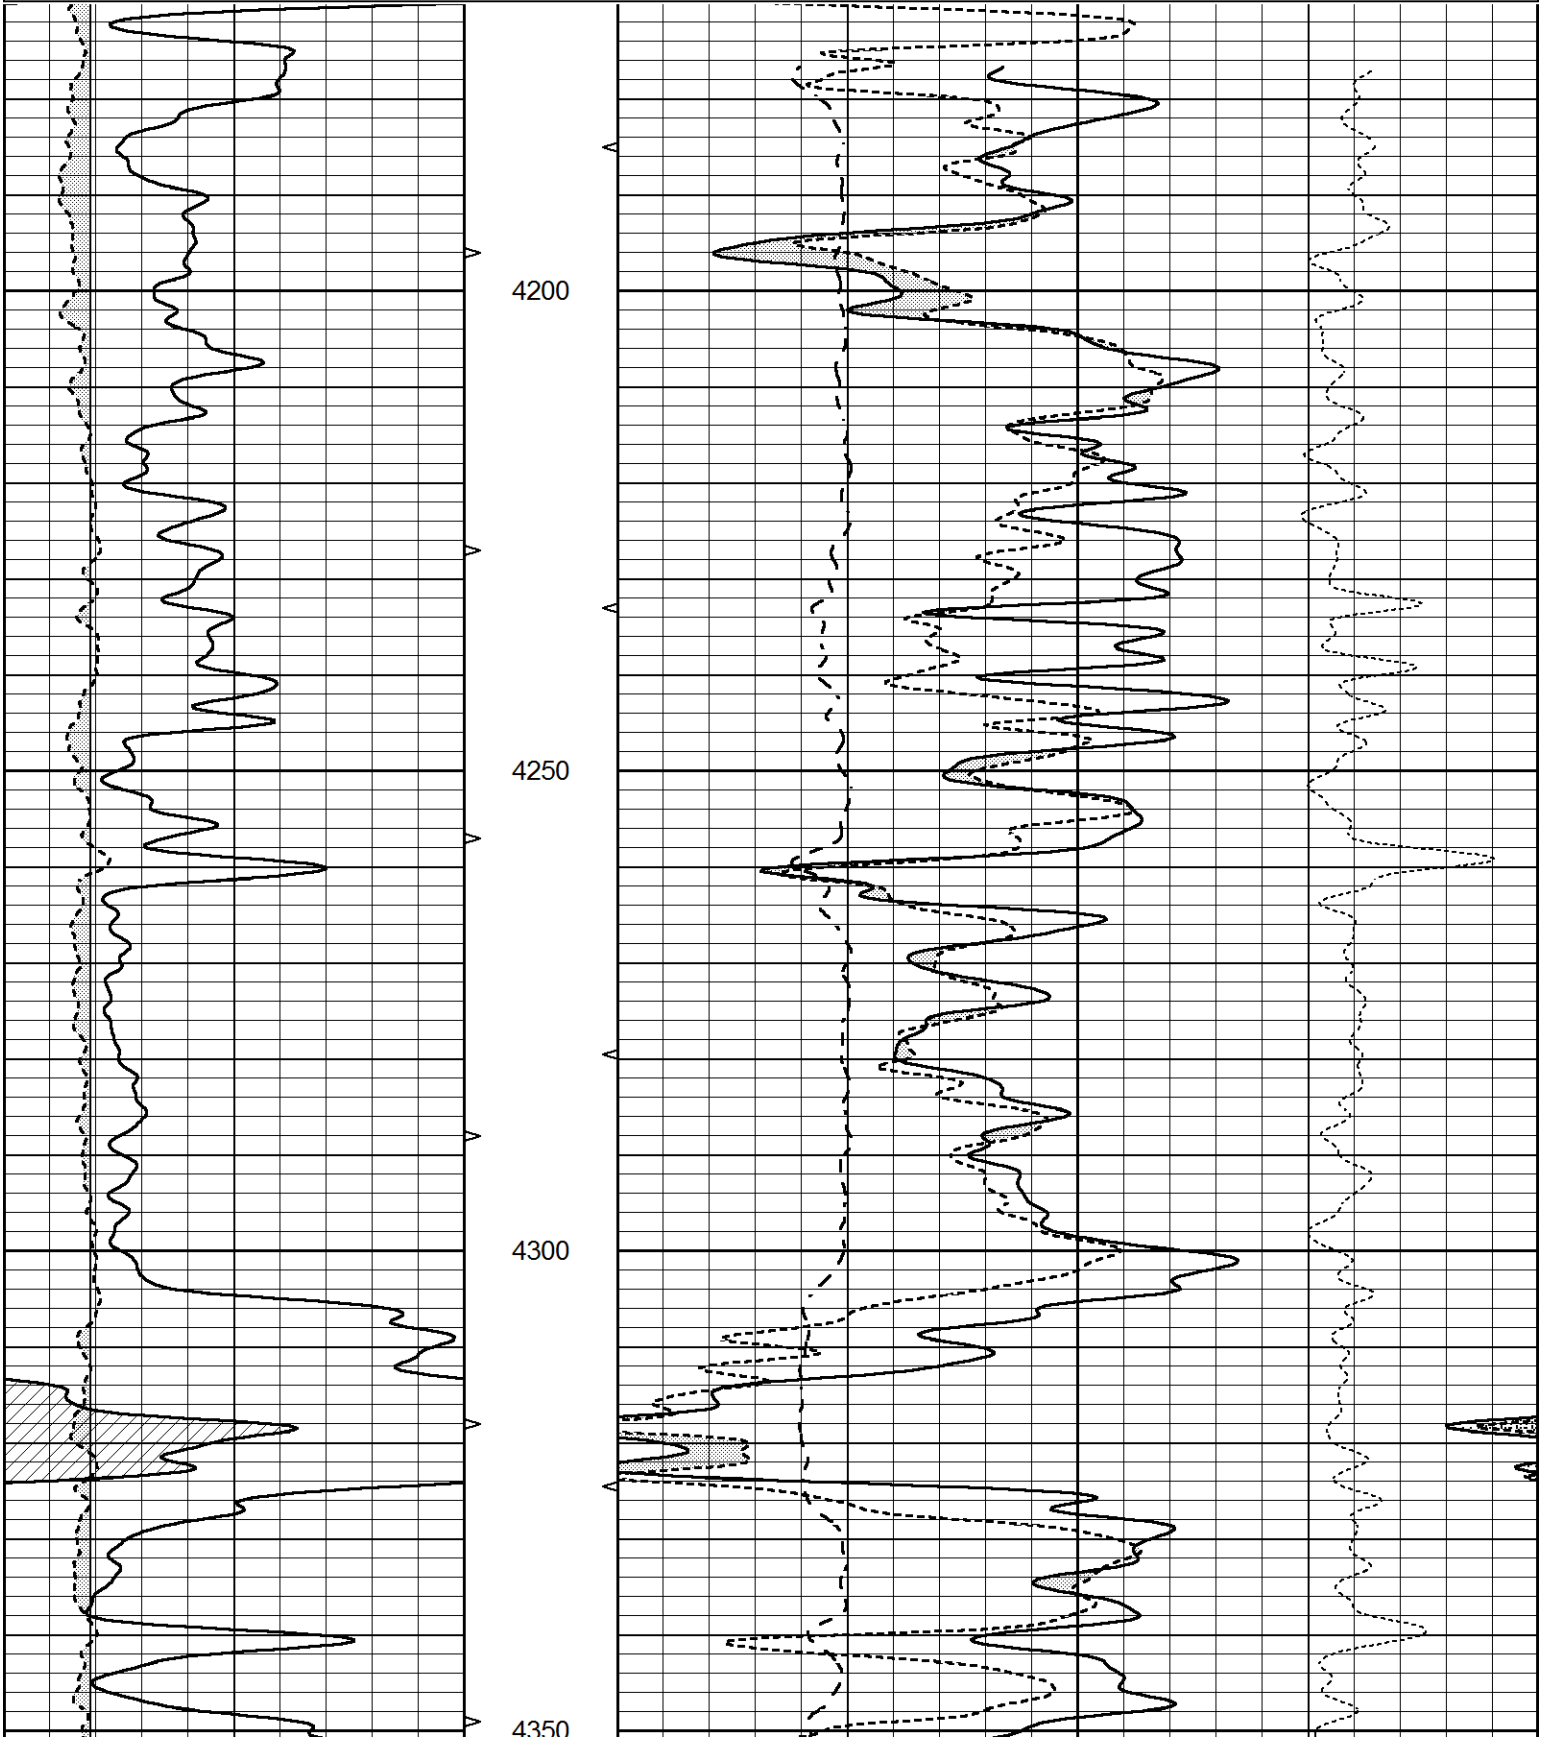


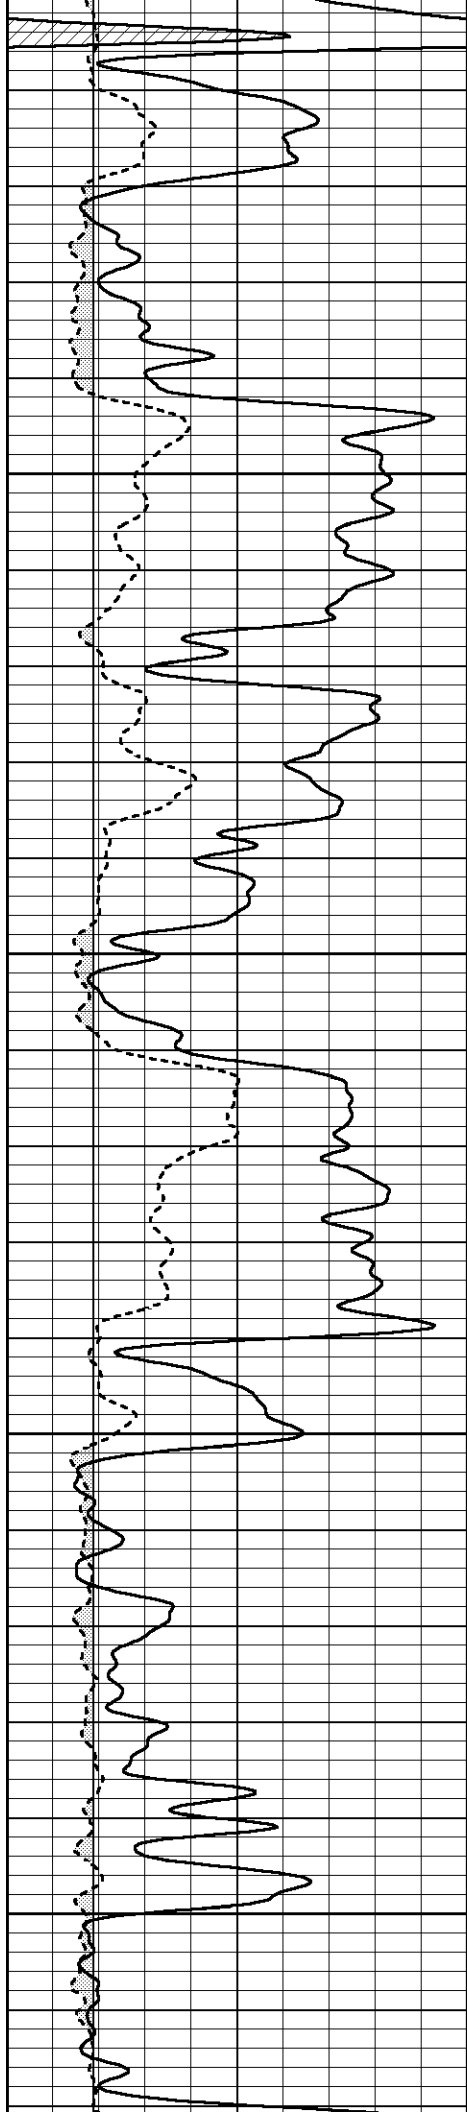



4400
4450
4500
4550

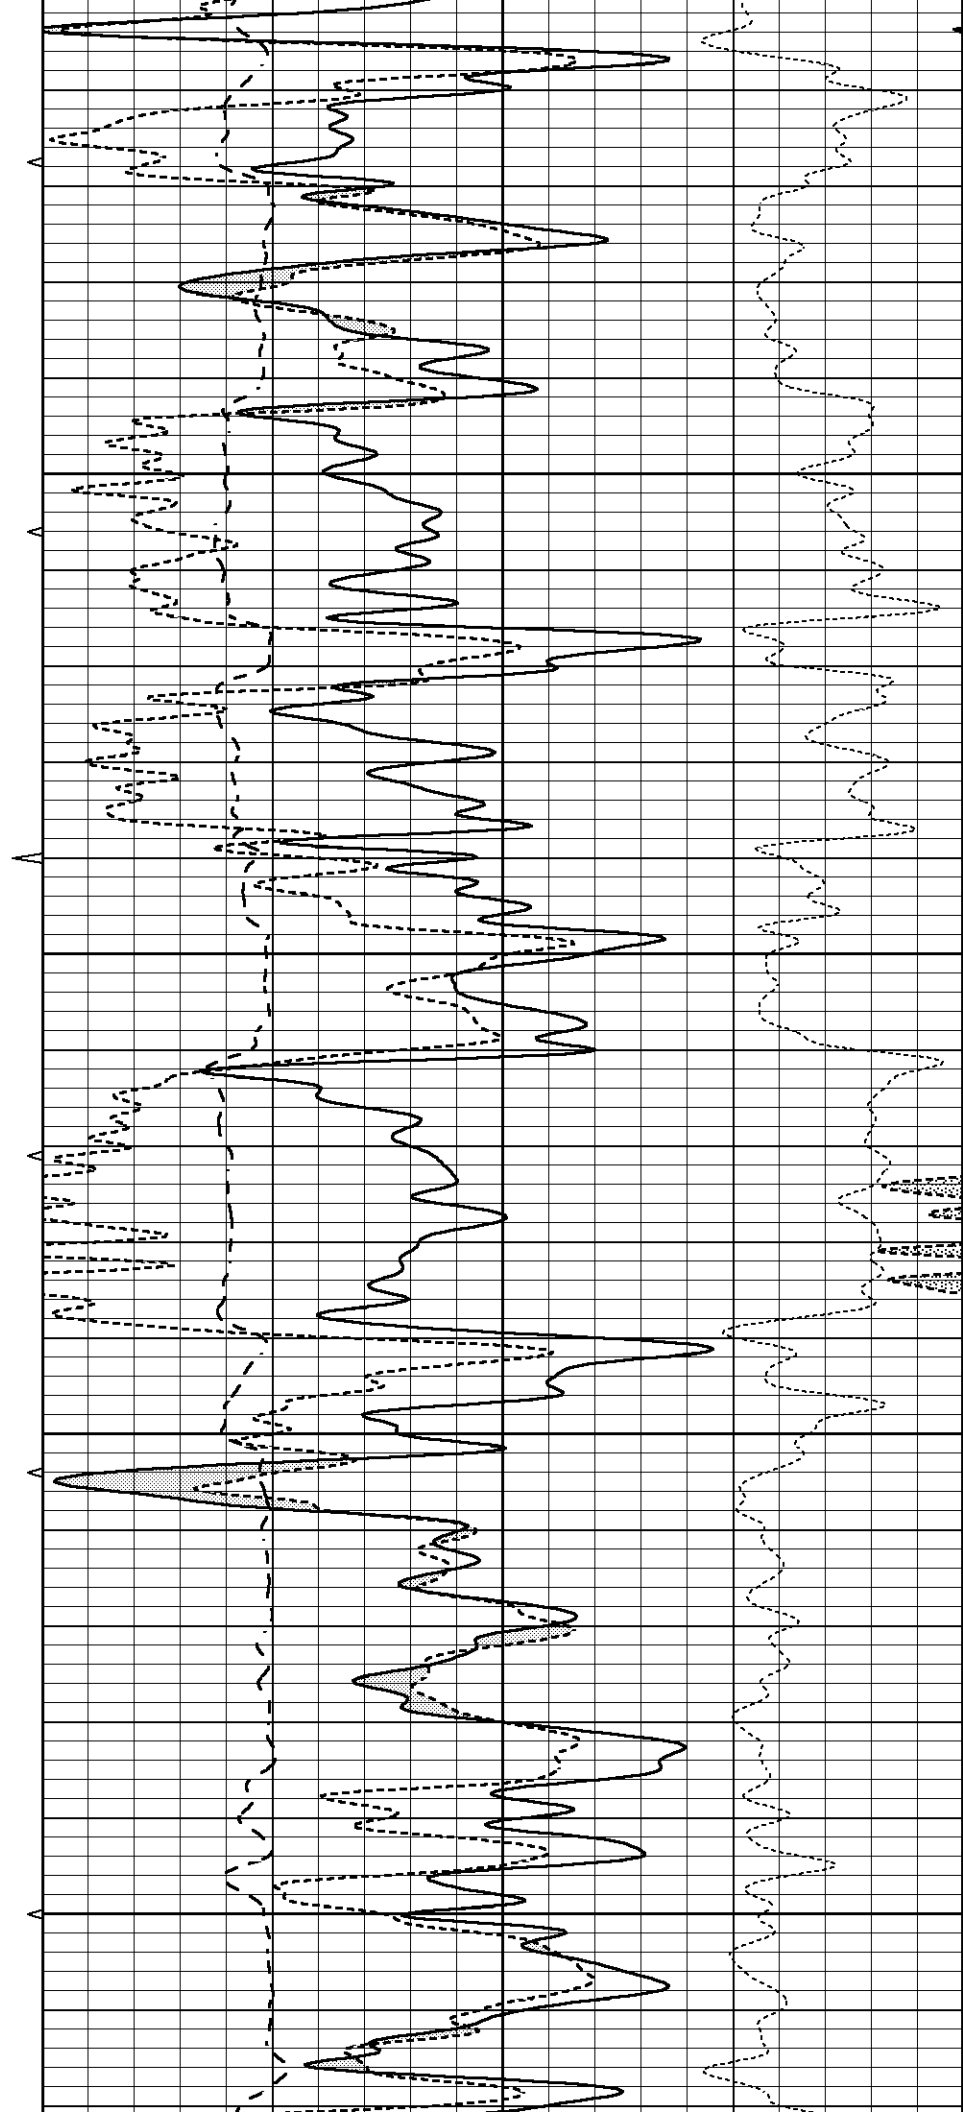

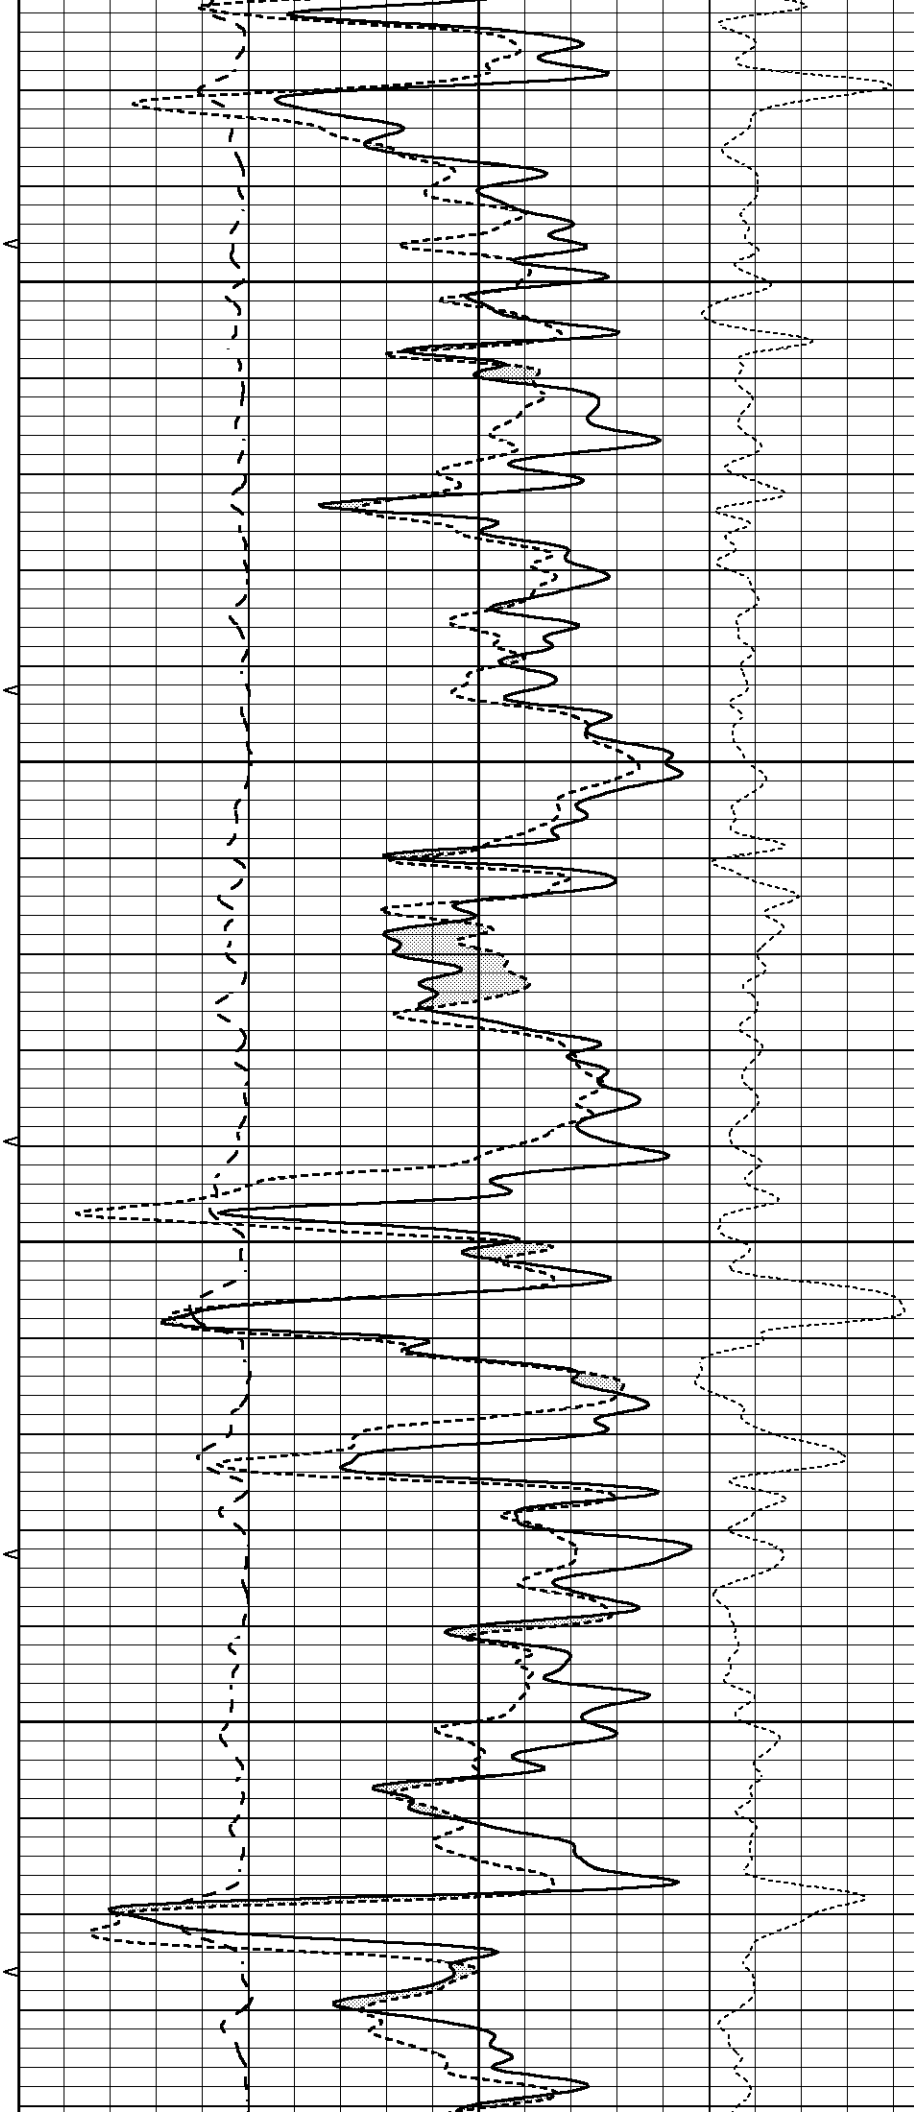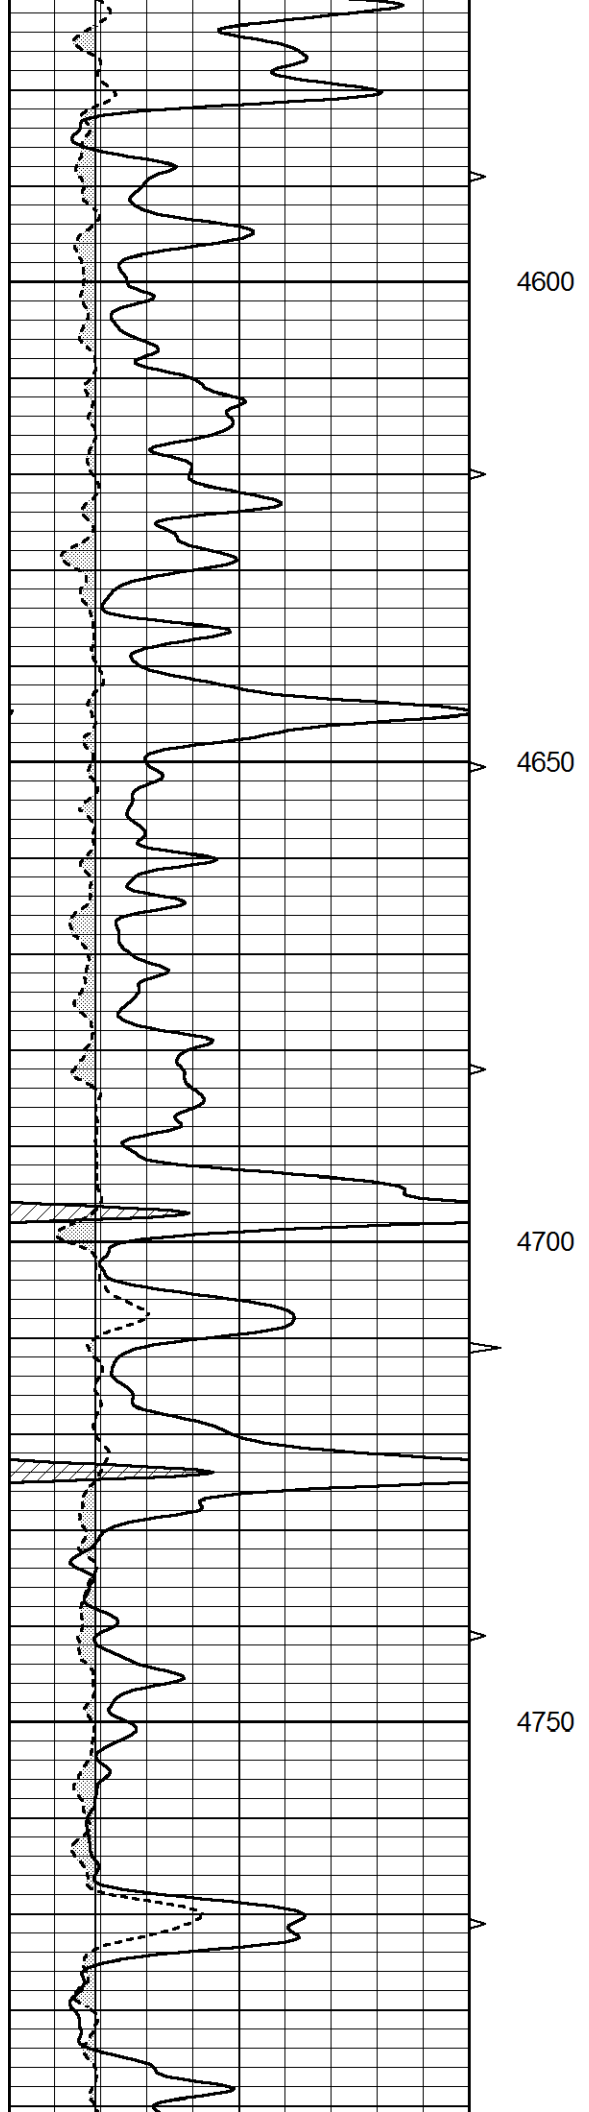

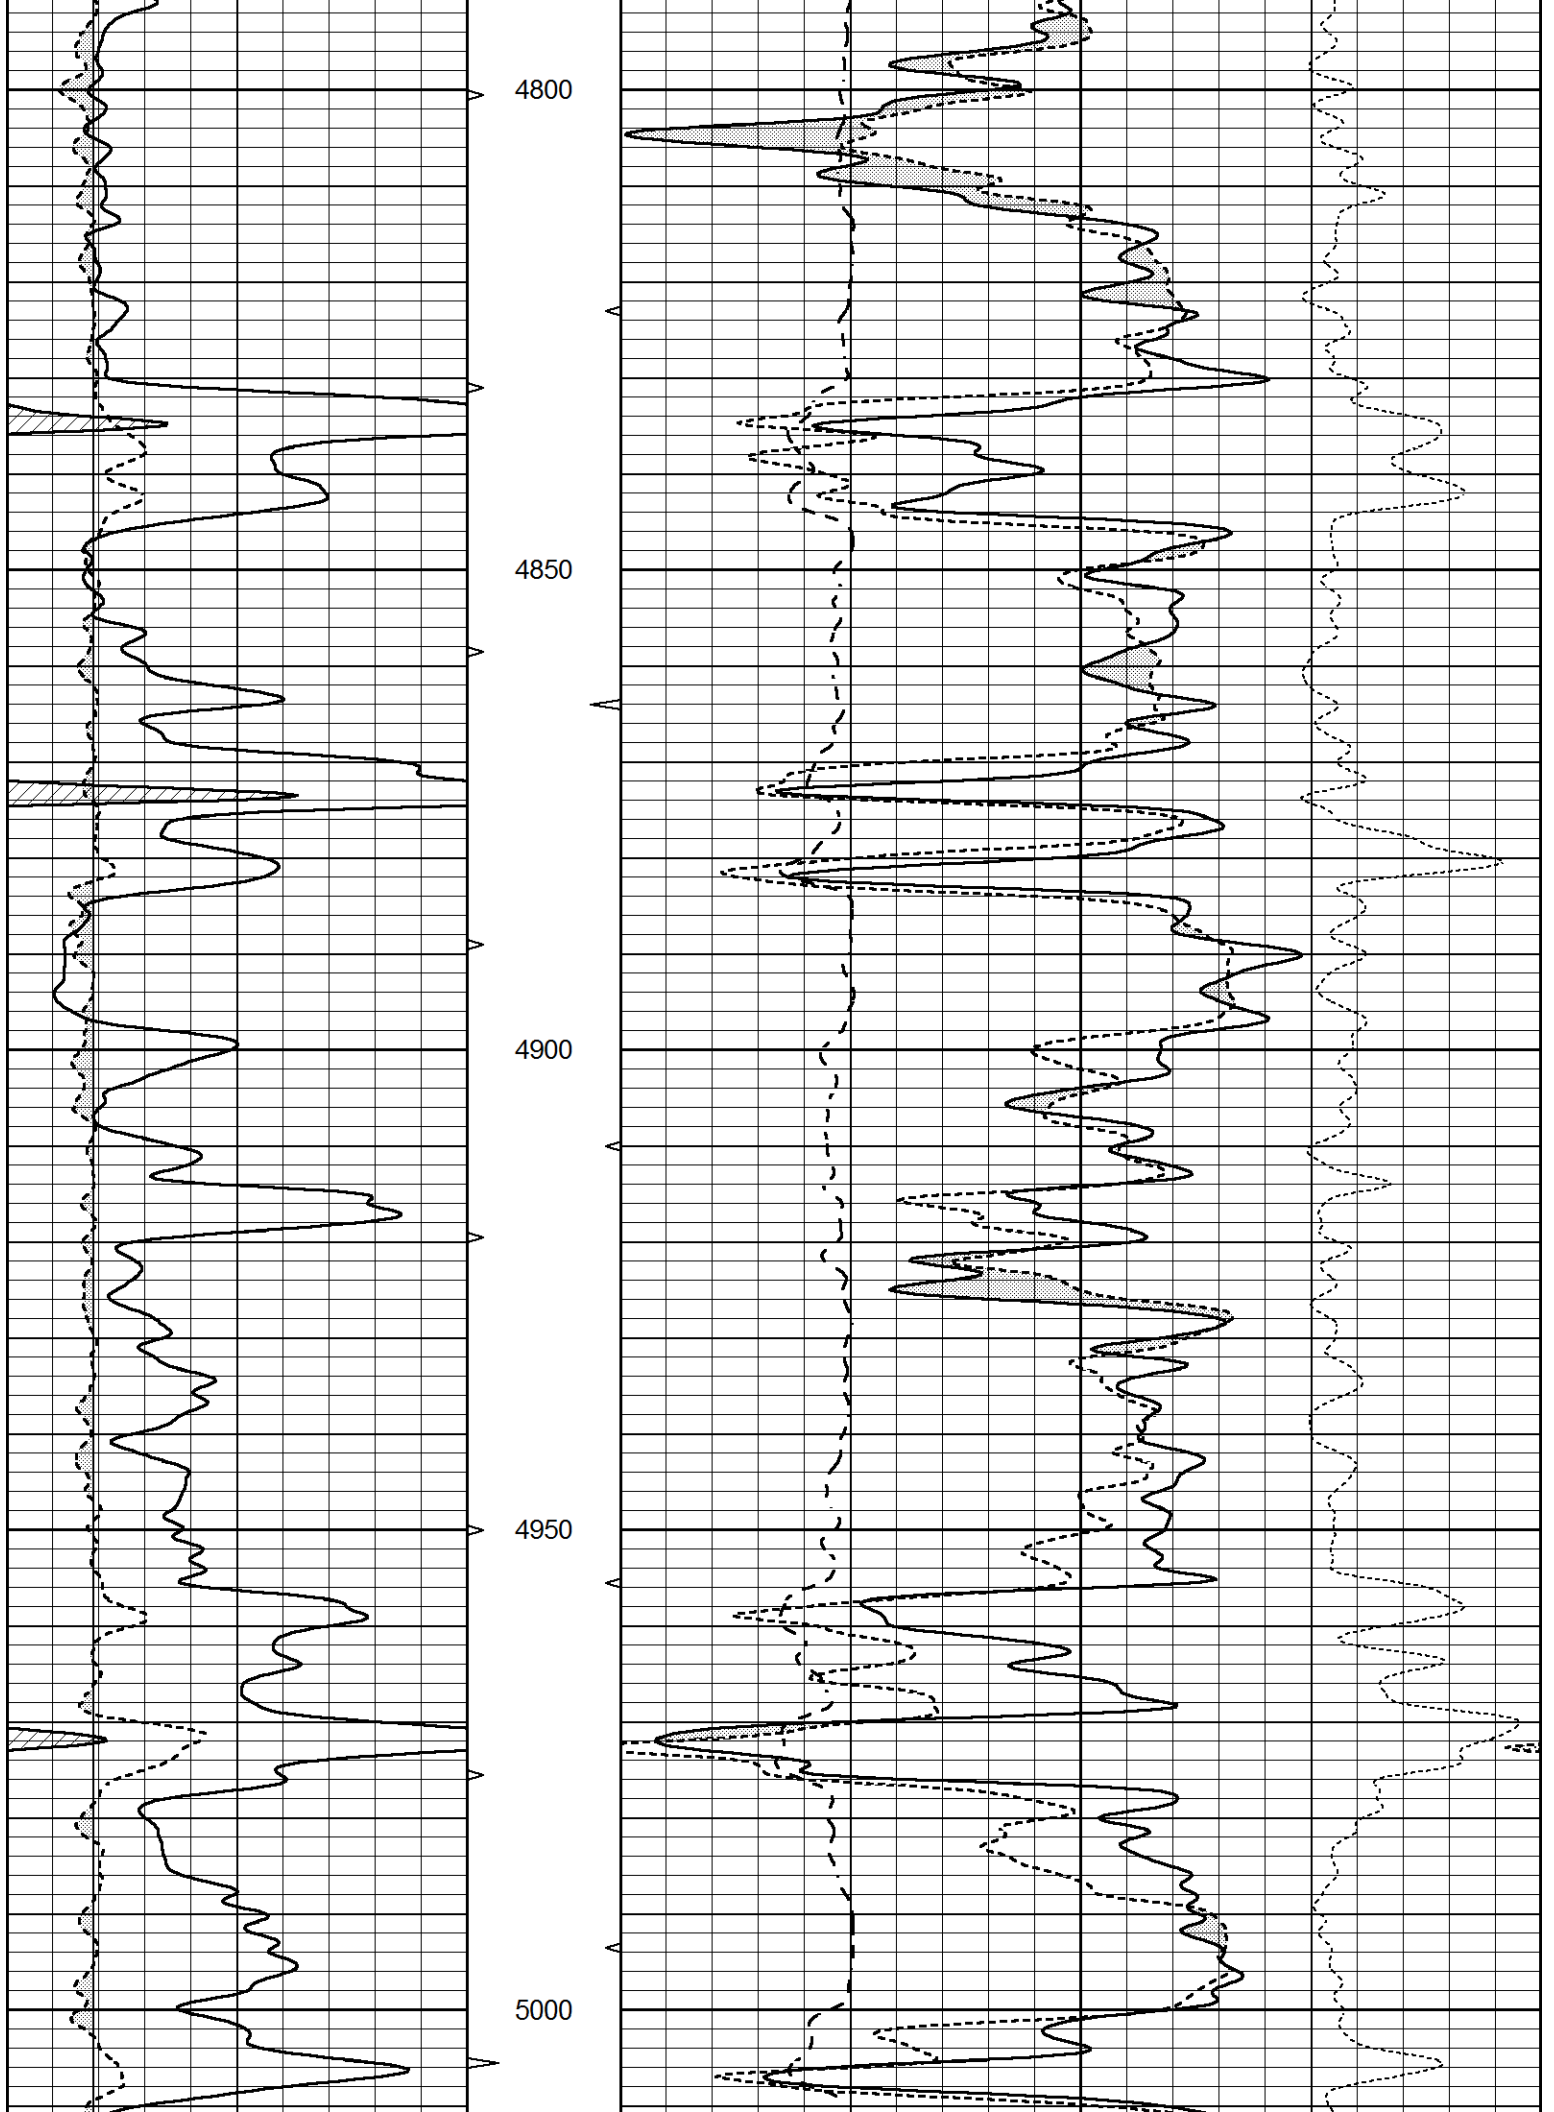

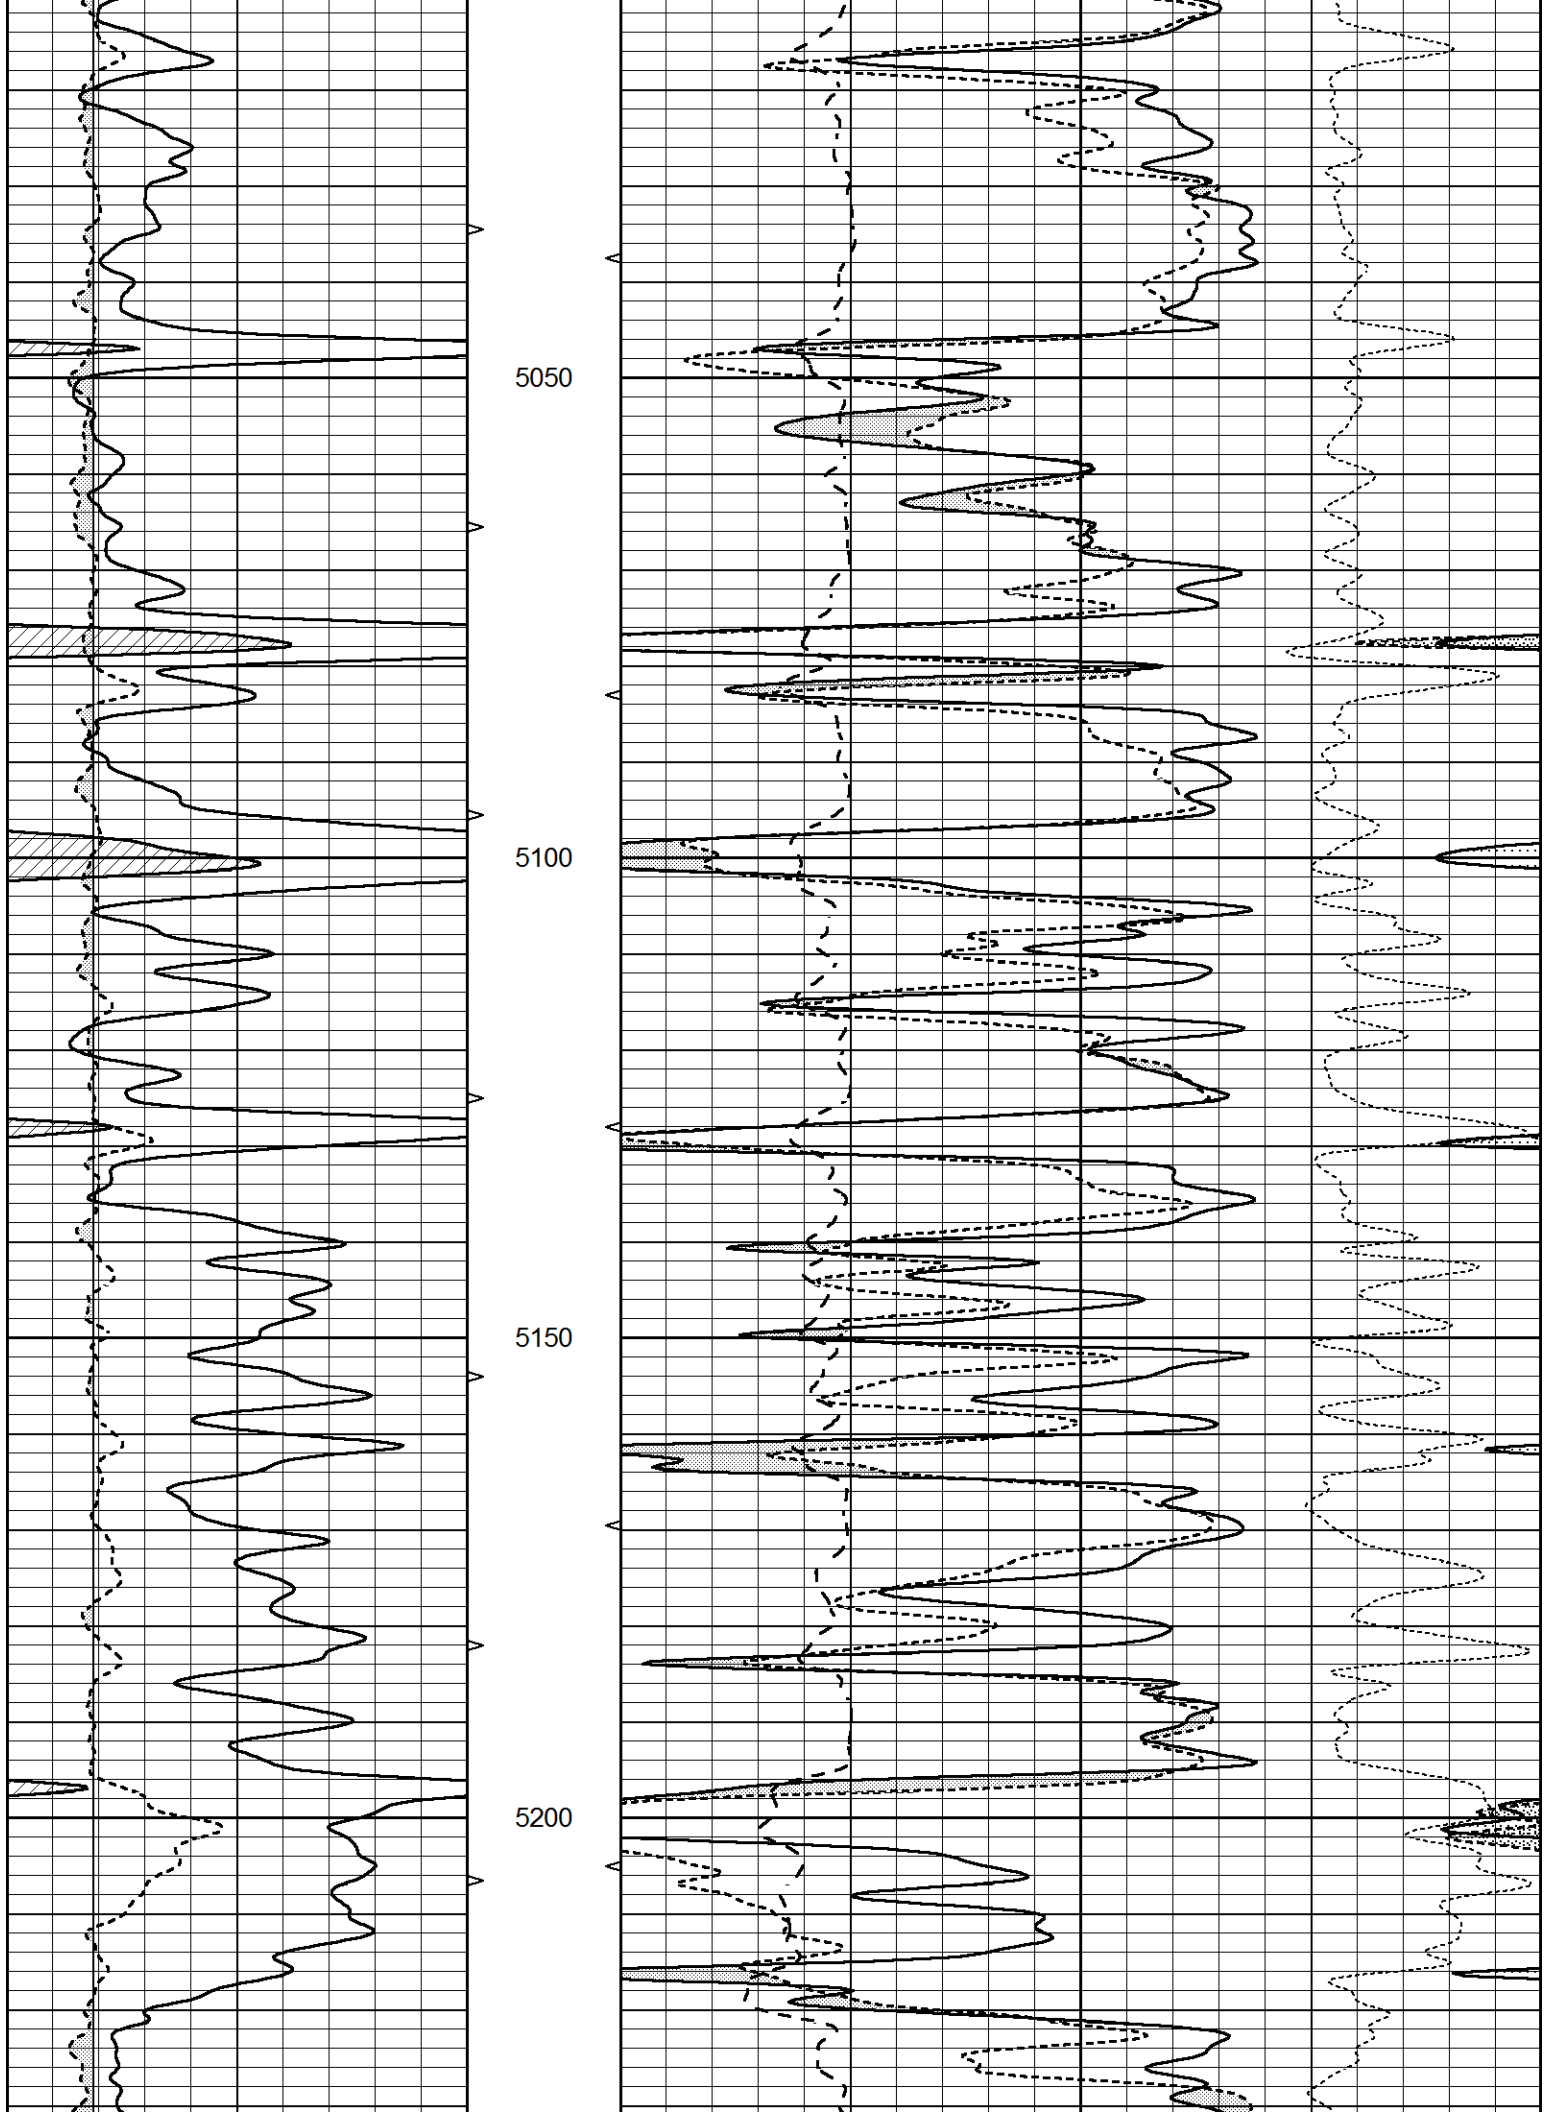


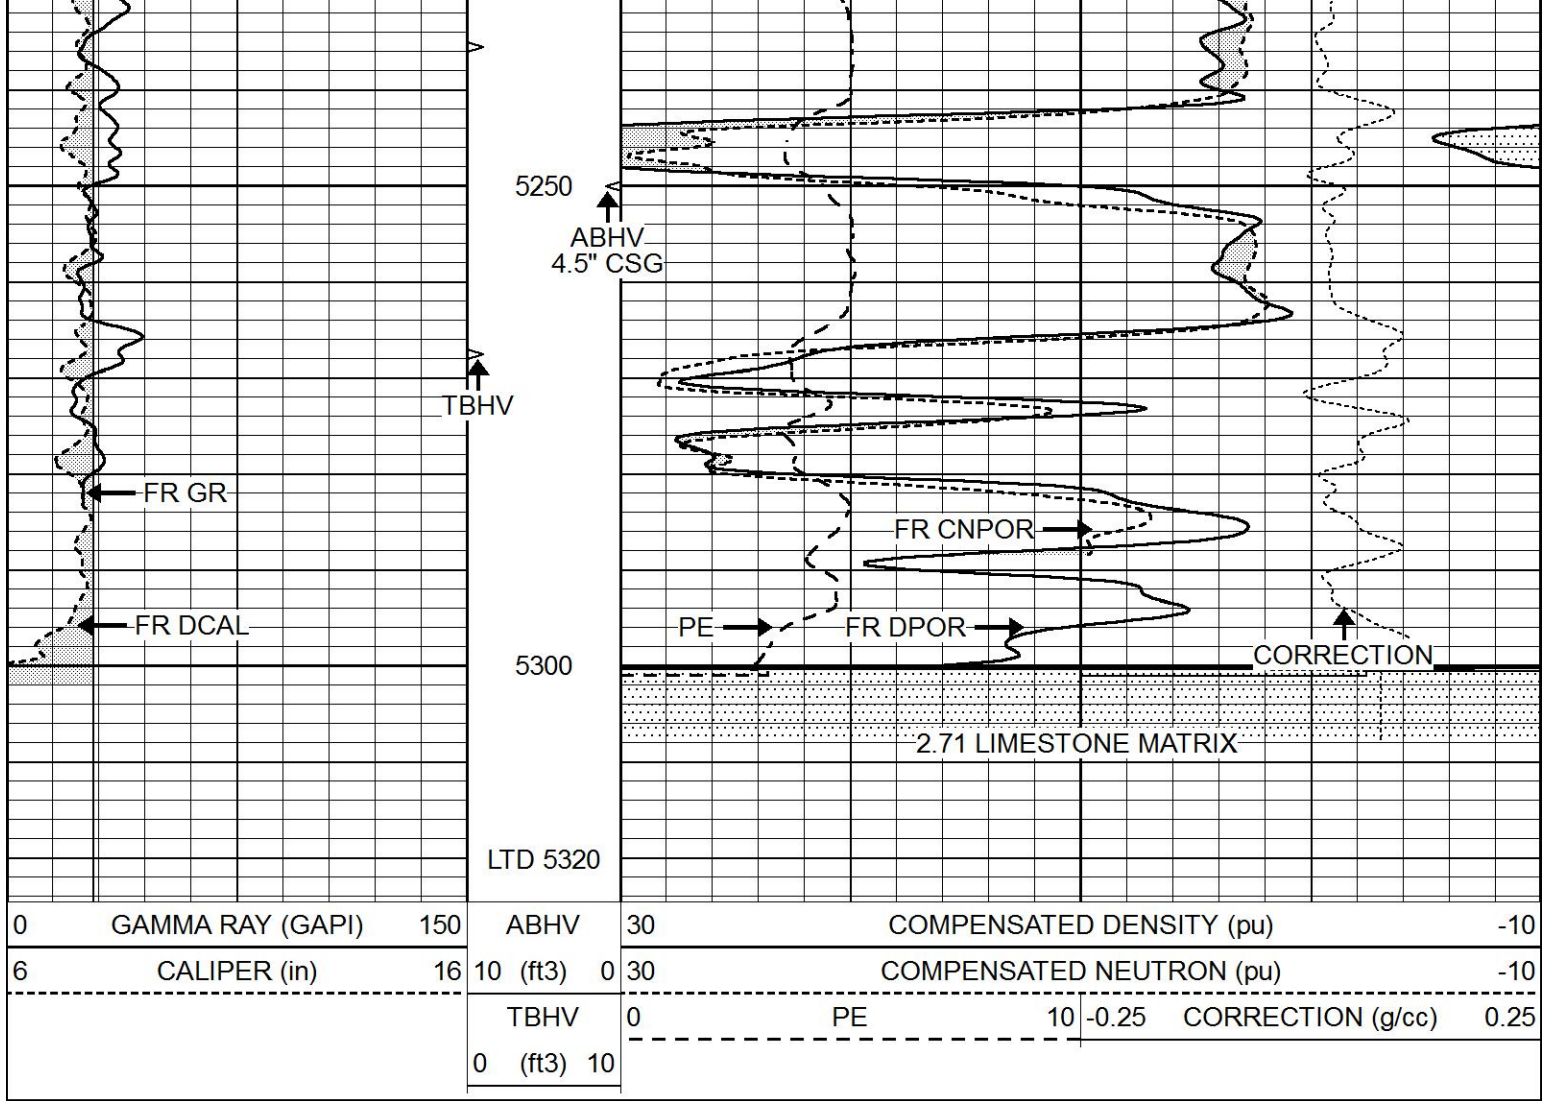



REPEAT SECTION

Database File 5628pe.db
 Dataset Pathname pass3.1
 Presentation Format _ldt_neu
 Dataset Creation Sat Jun 26 00:55:20 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	30	COMPENSATED DENSITY (pu)	-10
6	CALIPER (in)	16	10 (ft3)	0 30	COMPENSATED NEUTRON (pu)	-10
			TBHV	0	PE	10 -0.25
			0 (ft3)	10		CORRECTION (g/cc) 0.25

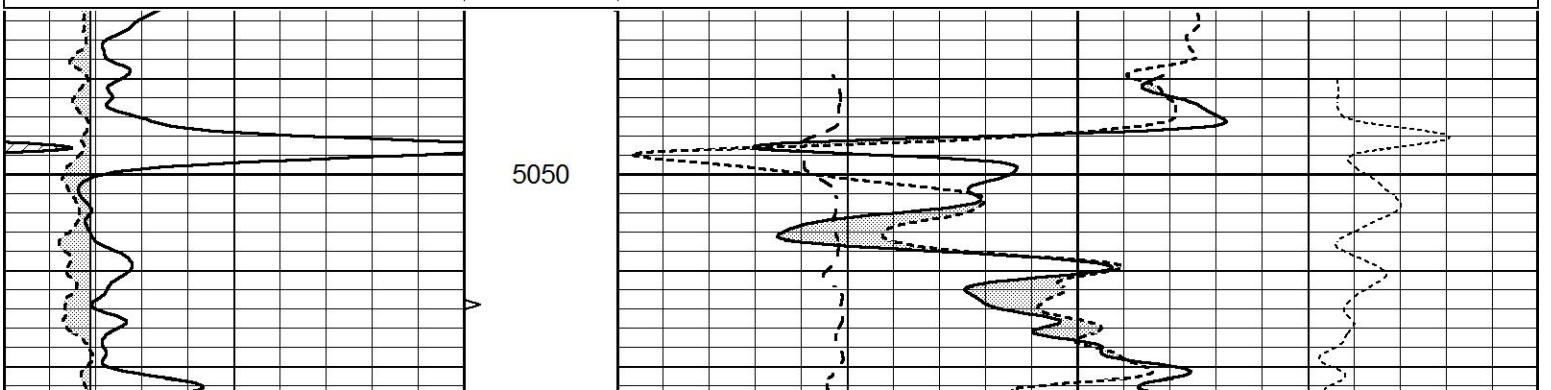

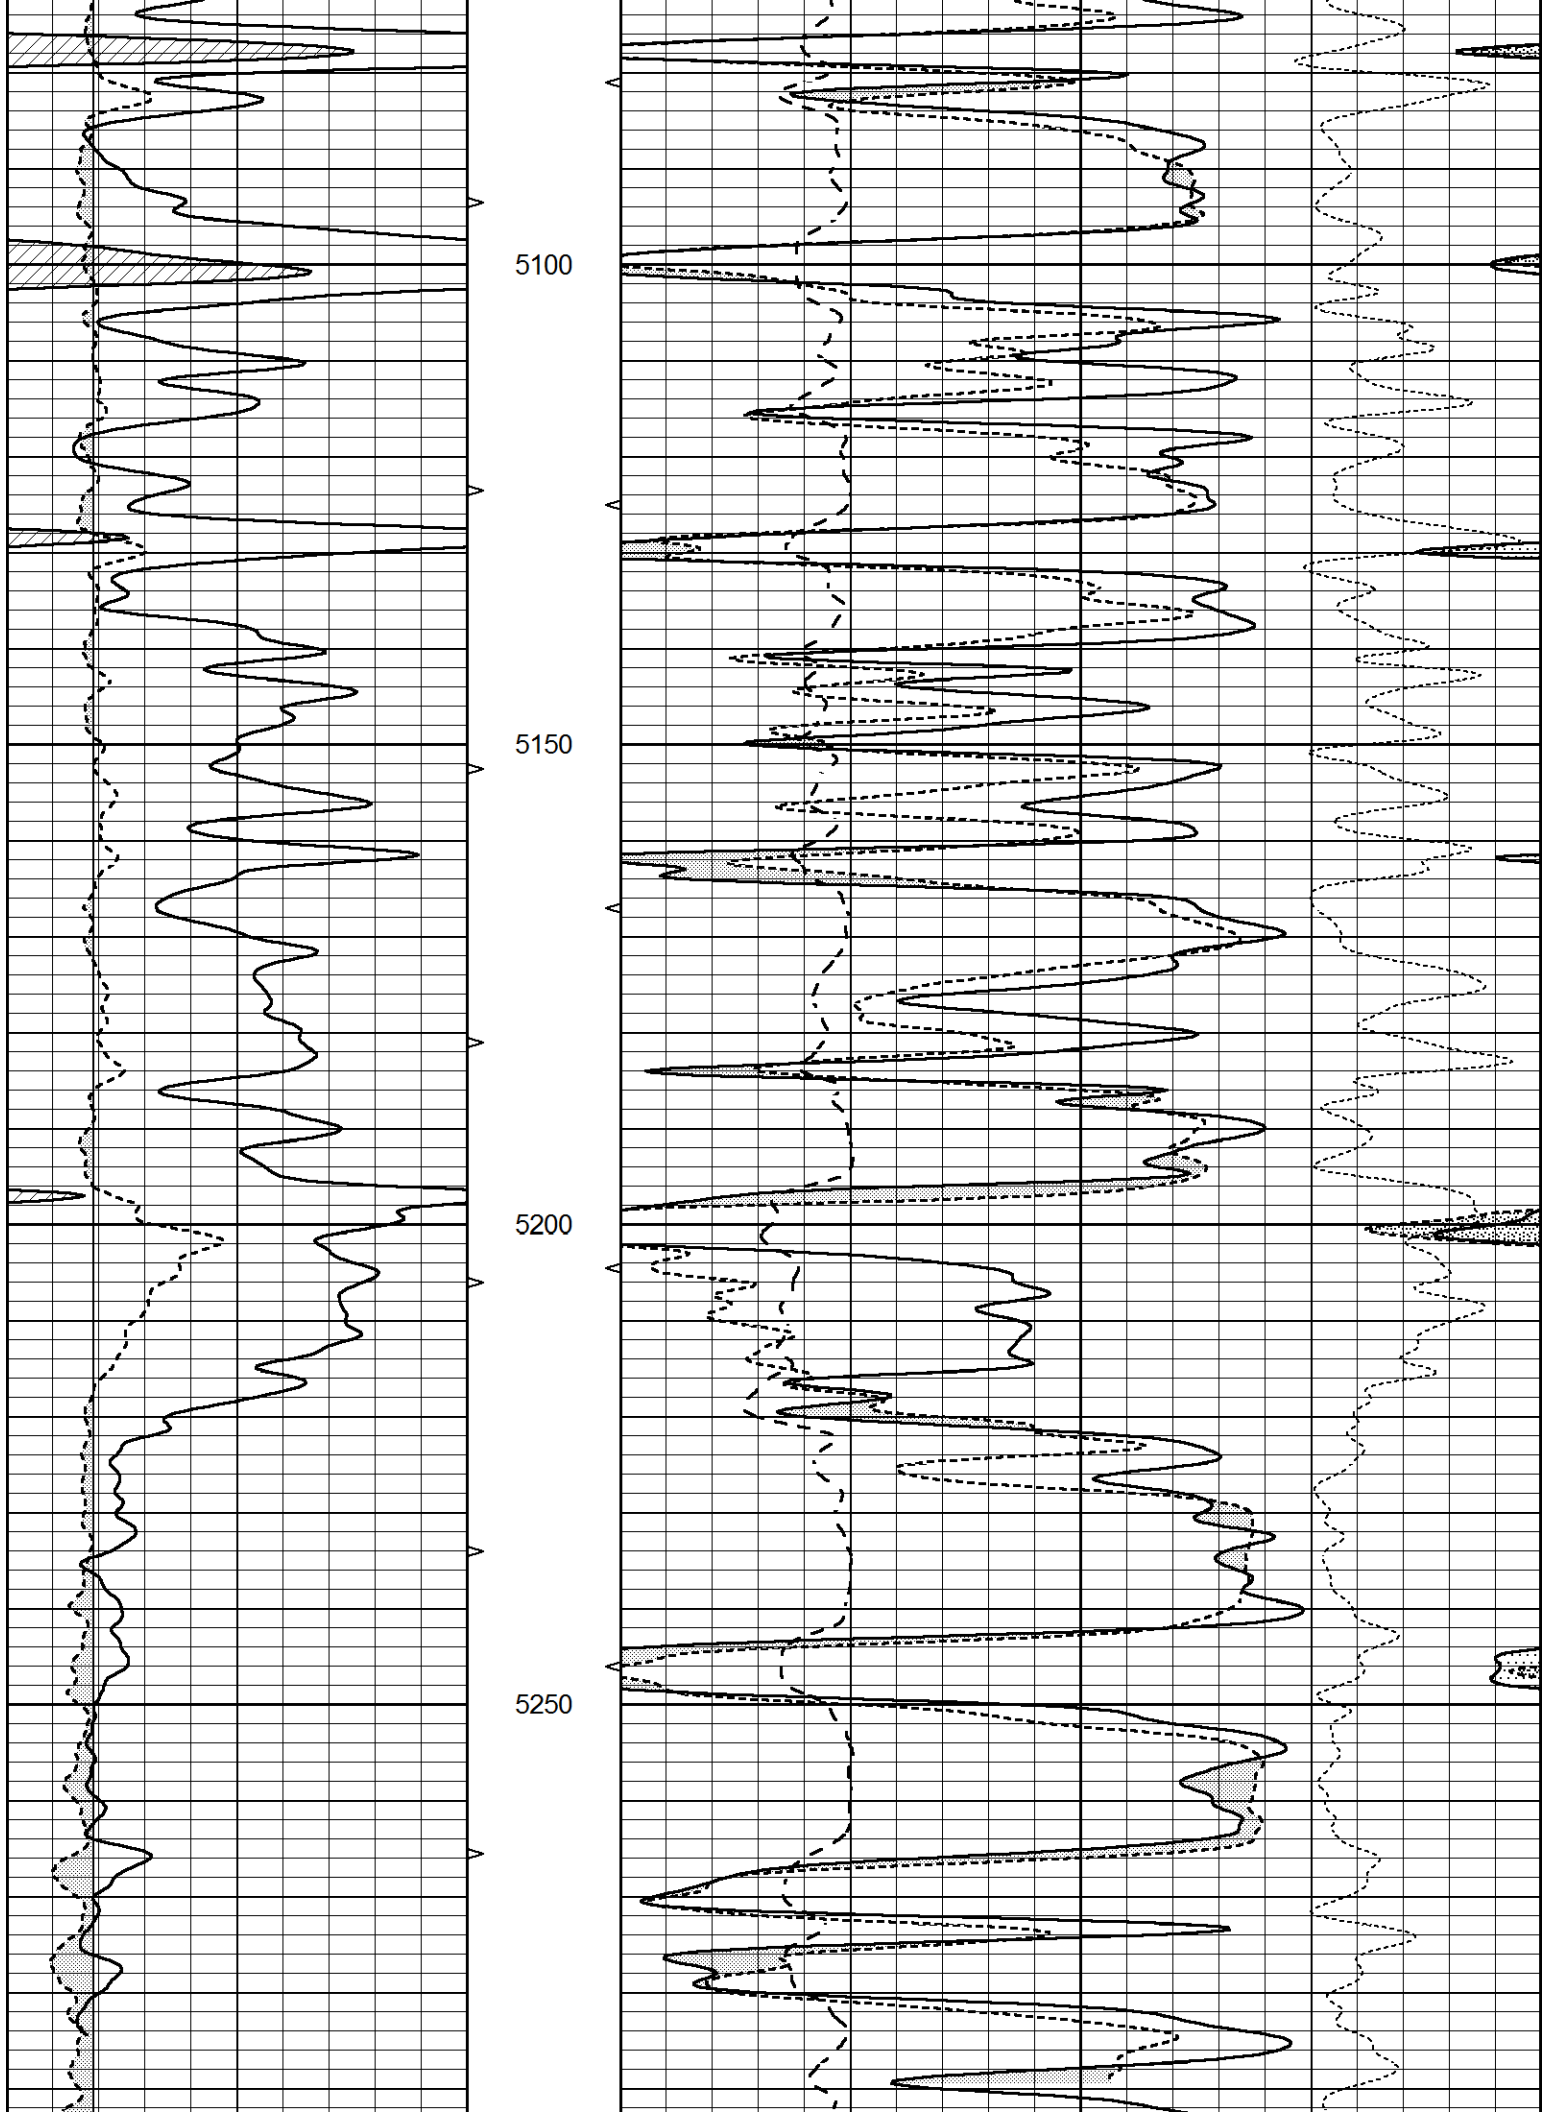

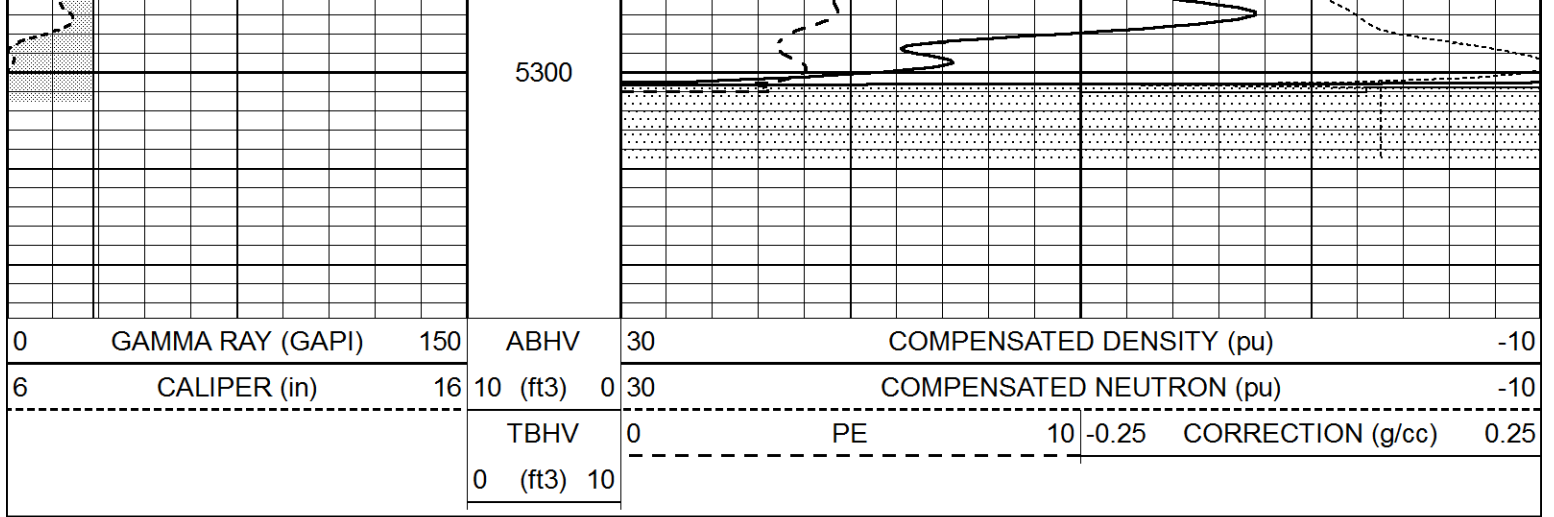

Calibration Report

Database File 5628pe.db
 Dataset Pathname pass3.1
 Dataset Creation Sat Jun 26 00:55:20 2021

Dual Induction Calibration Report

Serial-Model: FW1410-55-Probe
 Surface Cal Performed: Tue Feb 19 11:44:18 2019
 Downhole Cal Performed: Tue Feb 19 11:44:24 2019
 After Survey Verification Performed: Tue Feb 19 11:44:27 2019

Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop		Air	Loop		m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197
Internal:	Zero	Cal		Zero	Cal		m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251

Downhole Calibration

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		

After Survey Verification

	Readings			Targets			Results	
	Zero	Cal		Zero	Cal		m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

Litho Density Calibration Report

Serial: 140704

Model: V4_10P

Master Calibration

Performed: Mon Dec 07 12:12:14 2020

	<u>Background</u>	<u>Aluminum</u>	<u>Magnesium</u>	
Window 1	557.73	5525.14	24361.20	cps
Window 2	47.08	1245.09	5901.17	cps
Window 4	239.06	1250.70	5456.76	cps
Window 5	564.08	8300.56	16134.07	cps
Window 6	44.21	1356.78	2705.40	cps
Window 8	267.87	2686.97	5150.30	cps
Bulk Density	-	2.6020	1.6830	g/cc
Pe	-	3.0000	2.5070	b/e

LS Alpha: : -1.8719 SS Alpha: : -0.8000 LS CPE: : 1.1424
 LS Beta: : 135562.6841 SS Beta: : 20128.7209 SS CPE: : 1.5489

Before Survey Background Counts Verification

Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

After Survey Background Counts Verification

Performed: Wed Dec 31 18:00:00 1969

Window 1	0.00	cps
Window 2	0.00	cps
Window 4	0.00	cps
Window 5	0.00	cps
Window 6	0.00	cps
Window 8	0.00	cps

Lithodensity Caliper Calibration

Performed: Mon Dec 07 12:12:14 2020

Results		Readings		References (in)		Gain	Offset
<u>Low</u>	<u>High</u>	<u>Low</u>	<u>High</u>				
664.3	1102.8	8.0	14.0			0.0	-0.9

Before Survey Caliper Verification

Performed:

	<u>Reference</u>	<u>Reading</u>
Caliper (in)	_____	_____

After Survey Caliper Verification

Performed:

	<u>Reference</u>	<u>Reading</u>
Caliper (in)	_____	_____

Compensated Neutron Calibration Report

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Tue Jan 19 17:50:08 2021	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5300	GAPI/cps