



MICRO LOG

Company SHELBY RESOURCES, LLC.

Well WELLS TRUST #1-1

Field

County PAWNEE

State

KANSAS

Location:

API # : 15-145-21868-0000

890' FNL & 1200' FWL

SEC 1 TWP 20S RGE 20W

Permanent Datum GROUND LEVEL Elevation 2270
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation

K.B. 2278
D.F. 2276
G.L. 2270

Date 9/11/21

Run Number TWO

Depth Driller 4415

Depth Logger 4416

Bottom Logged Interval 4398

Top Log Interval 2200

Casing Driller 8 5/8" @ 1434

Casing Logger 1434

Bit Size 7 7/8

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9.3/54

pH / Fluid Loss 10.5/9.2

Source of Sample FLOWLINE

Rm @ Meas. Temp .65 @ 90F

Rmf @ Meas. Temp .48 @ 90F

Rmc @ Meas. Temp .78 @ 90F

Source of Rmf / Rmc MEASUREMENT

Rm @ BHT .48 @ 120F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom

Maximum Recorded Temperature 120F

Equipment Number 3802

Location HAYS, KANSAS

Recorded By JASON CAPPELLUCCI

Witnessed By JEREMY SCHWARTZ

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments


THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395
DIRECTIONS
RUSH CENTER, KS. - SOUTH TO RD. X - 9 WEST TO RD. 160 - 1 SOUTH
3/4 WEST - SOUTH INTO




MAIN SECTION

Database File	5852pe.db
Dataset Pathname	pass7.1
Presentation Format	_micro
Dataset Creation	Sat Sep 11 19:06:09 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3)	10		

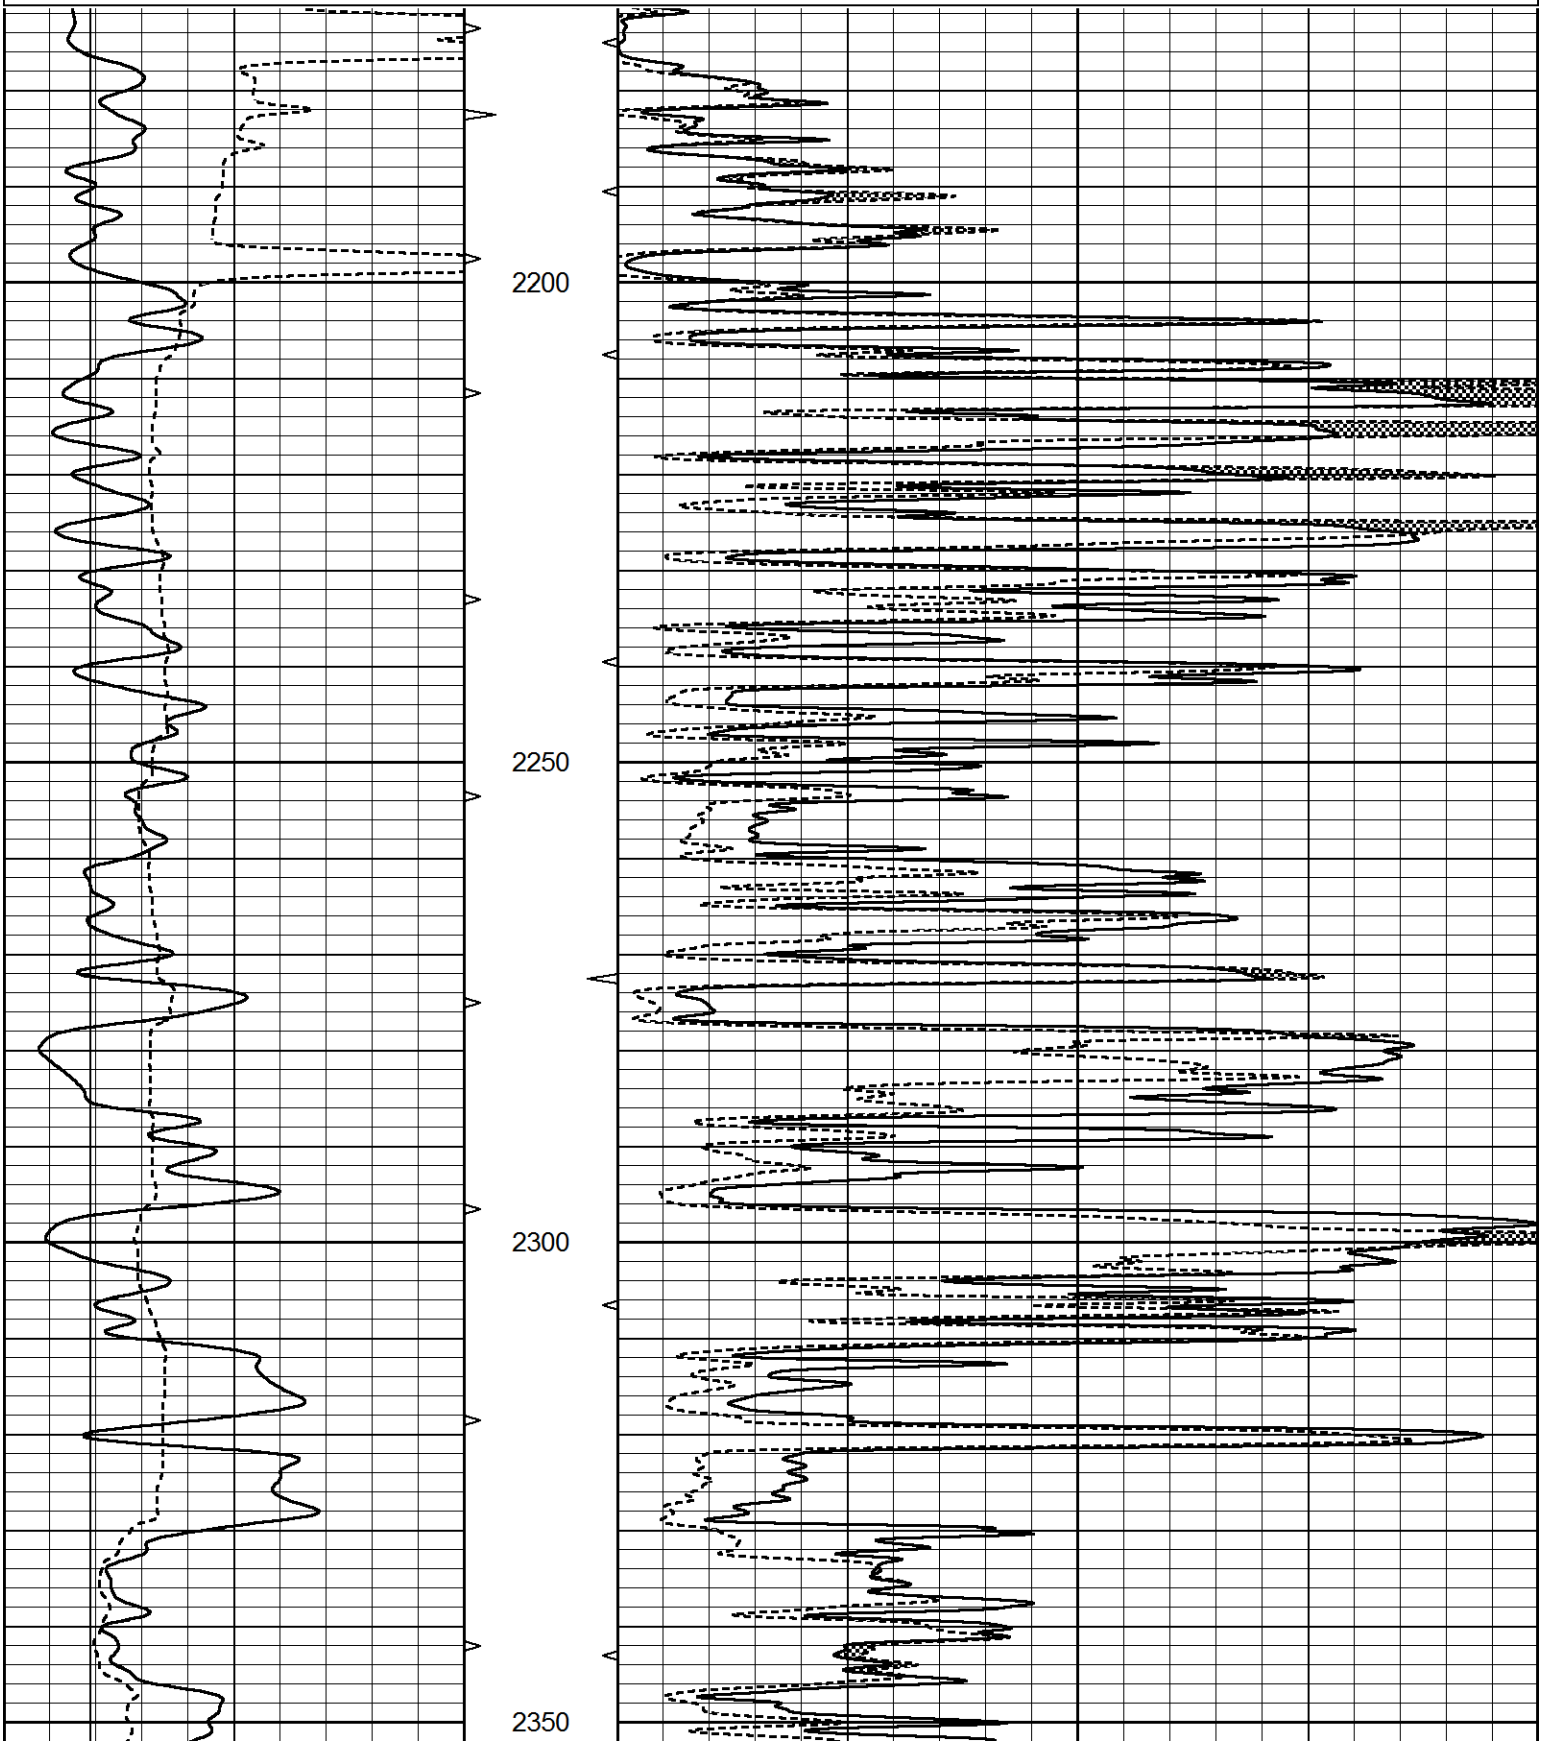

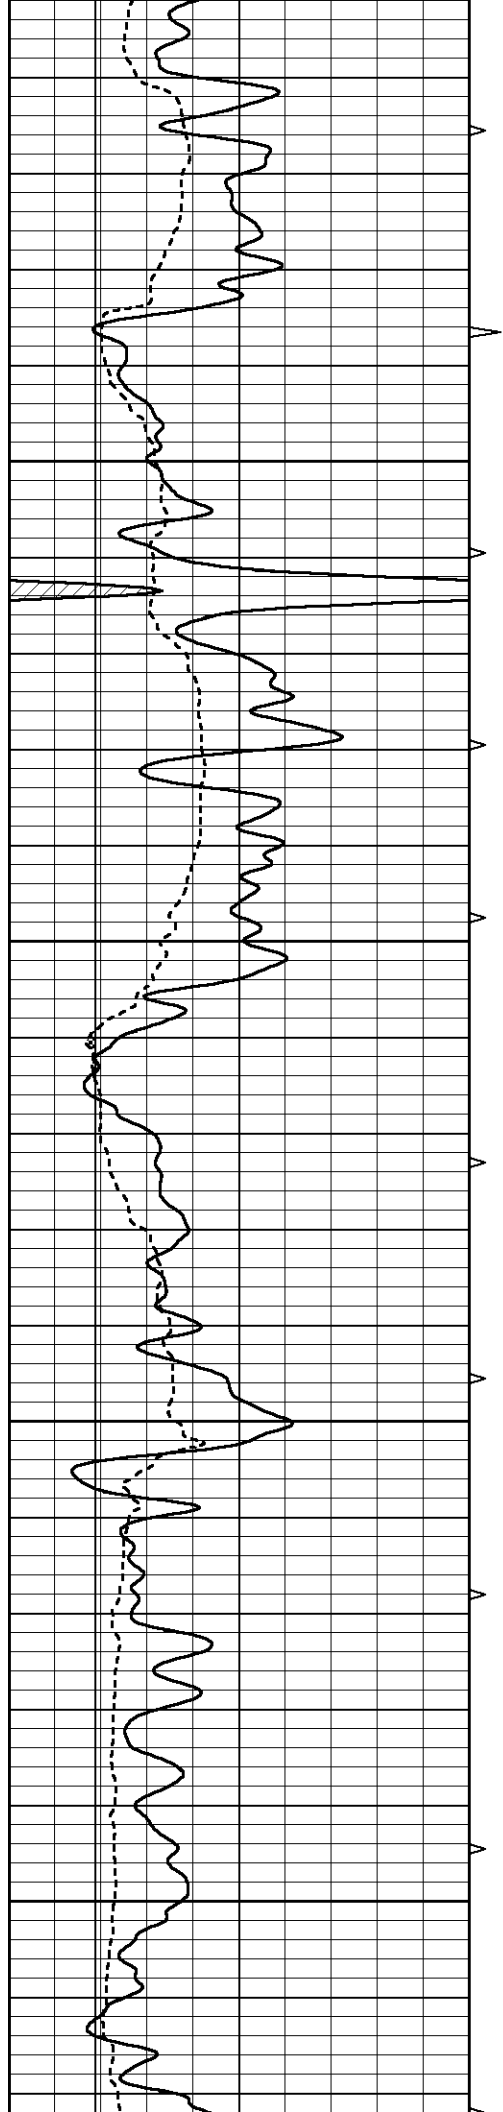



2400

2450

2500

2550

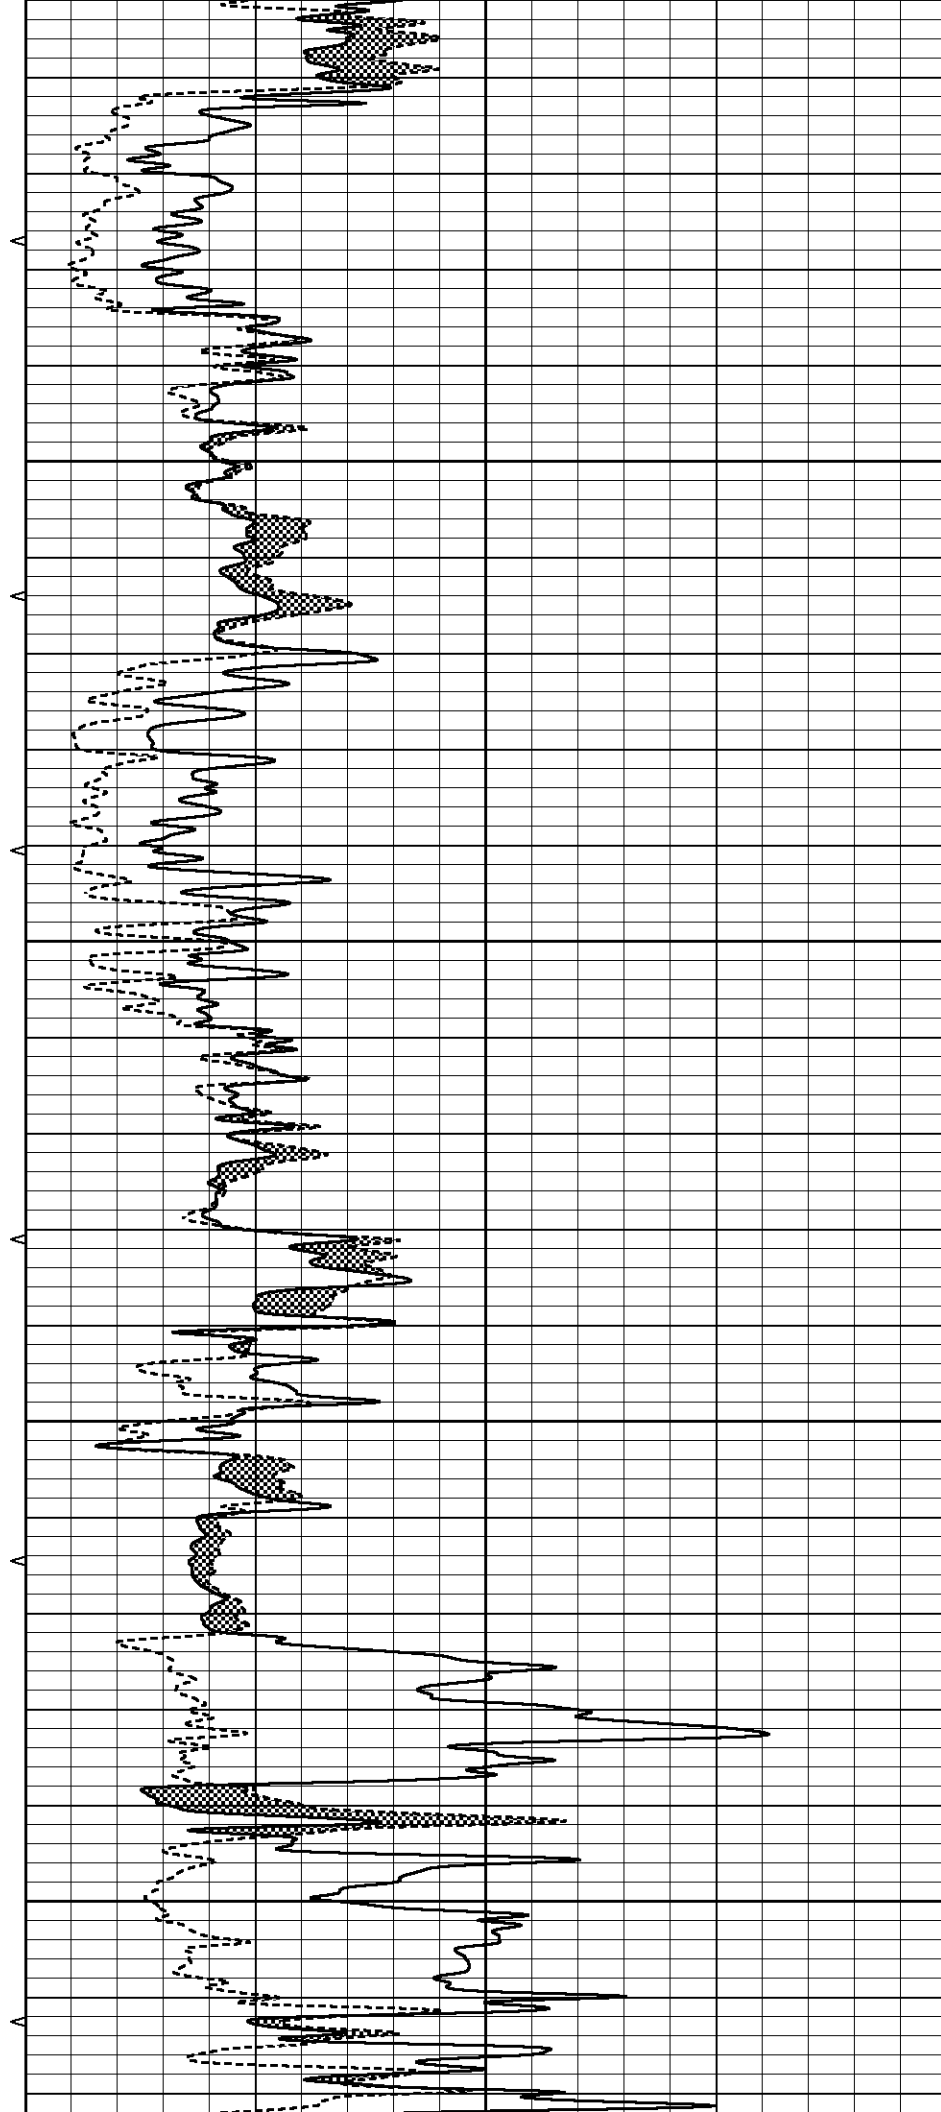

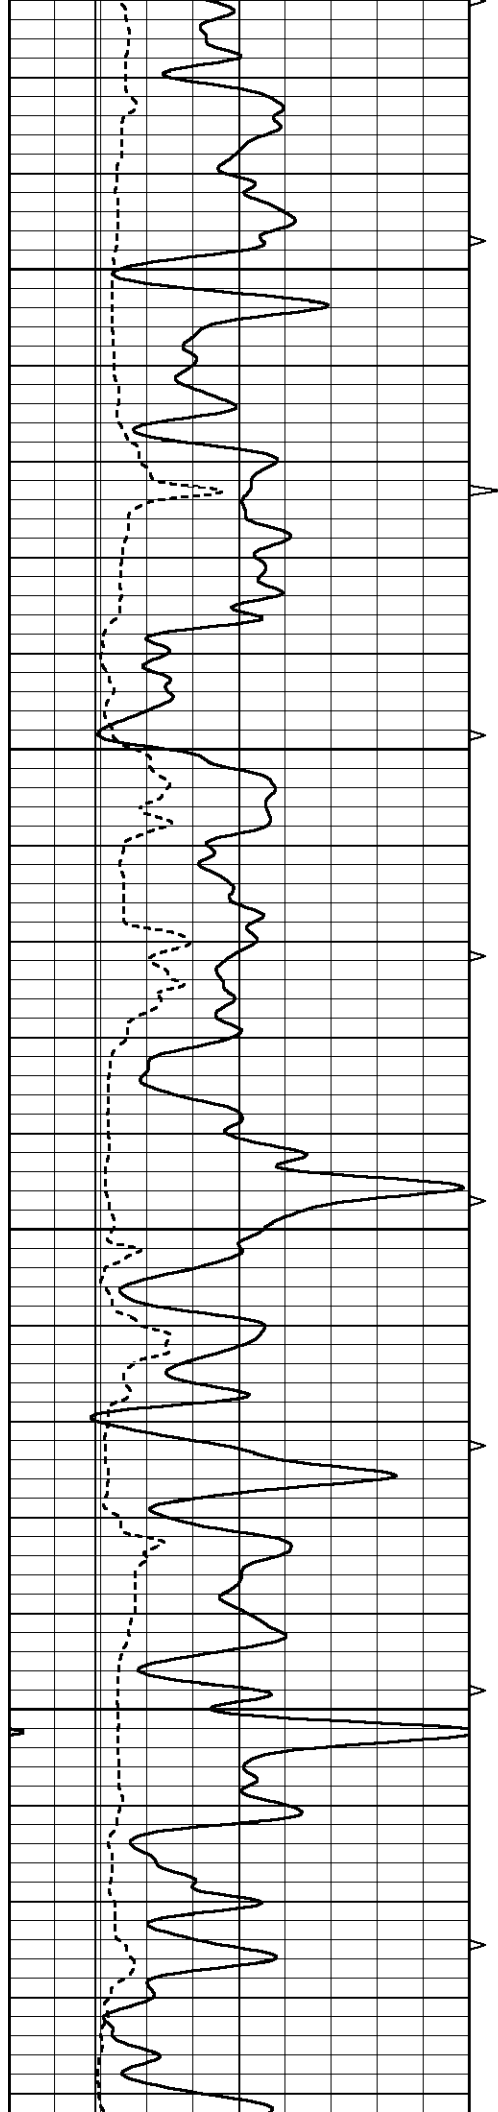




2600


2650

2700

2750

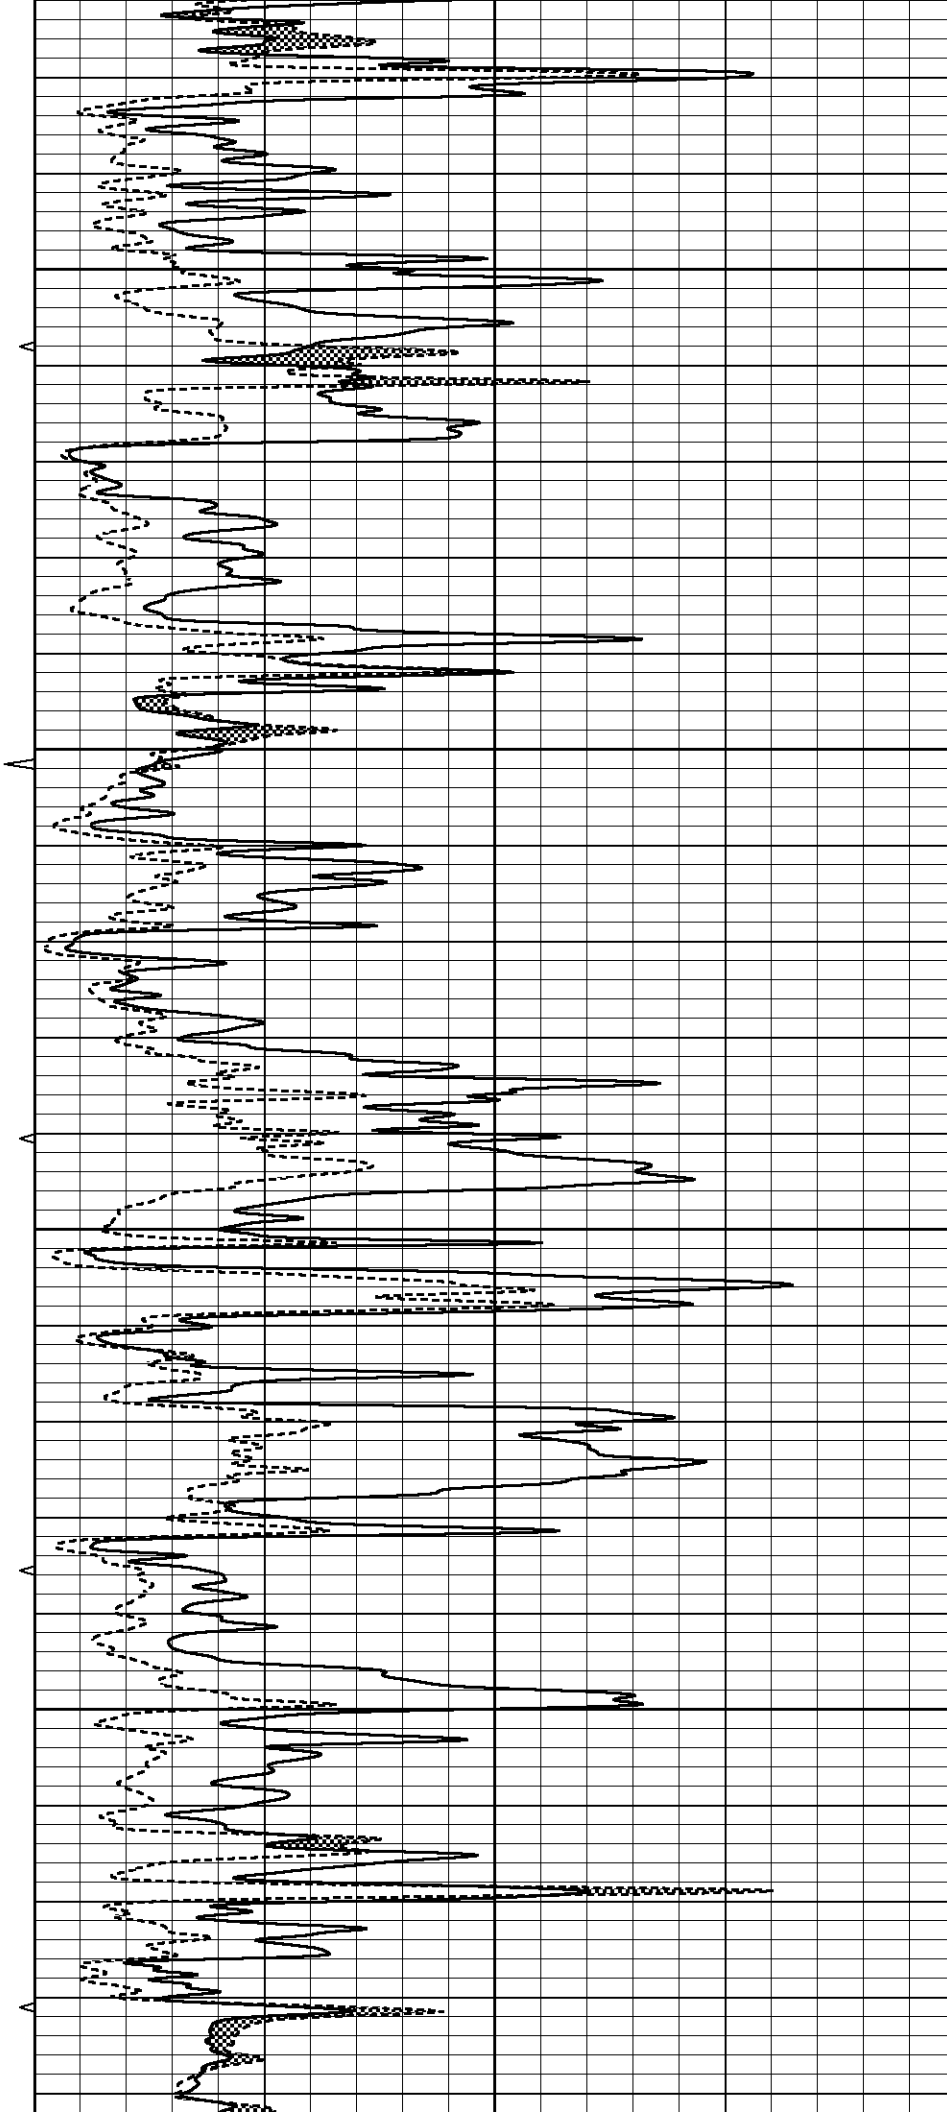

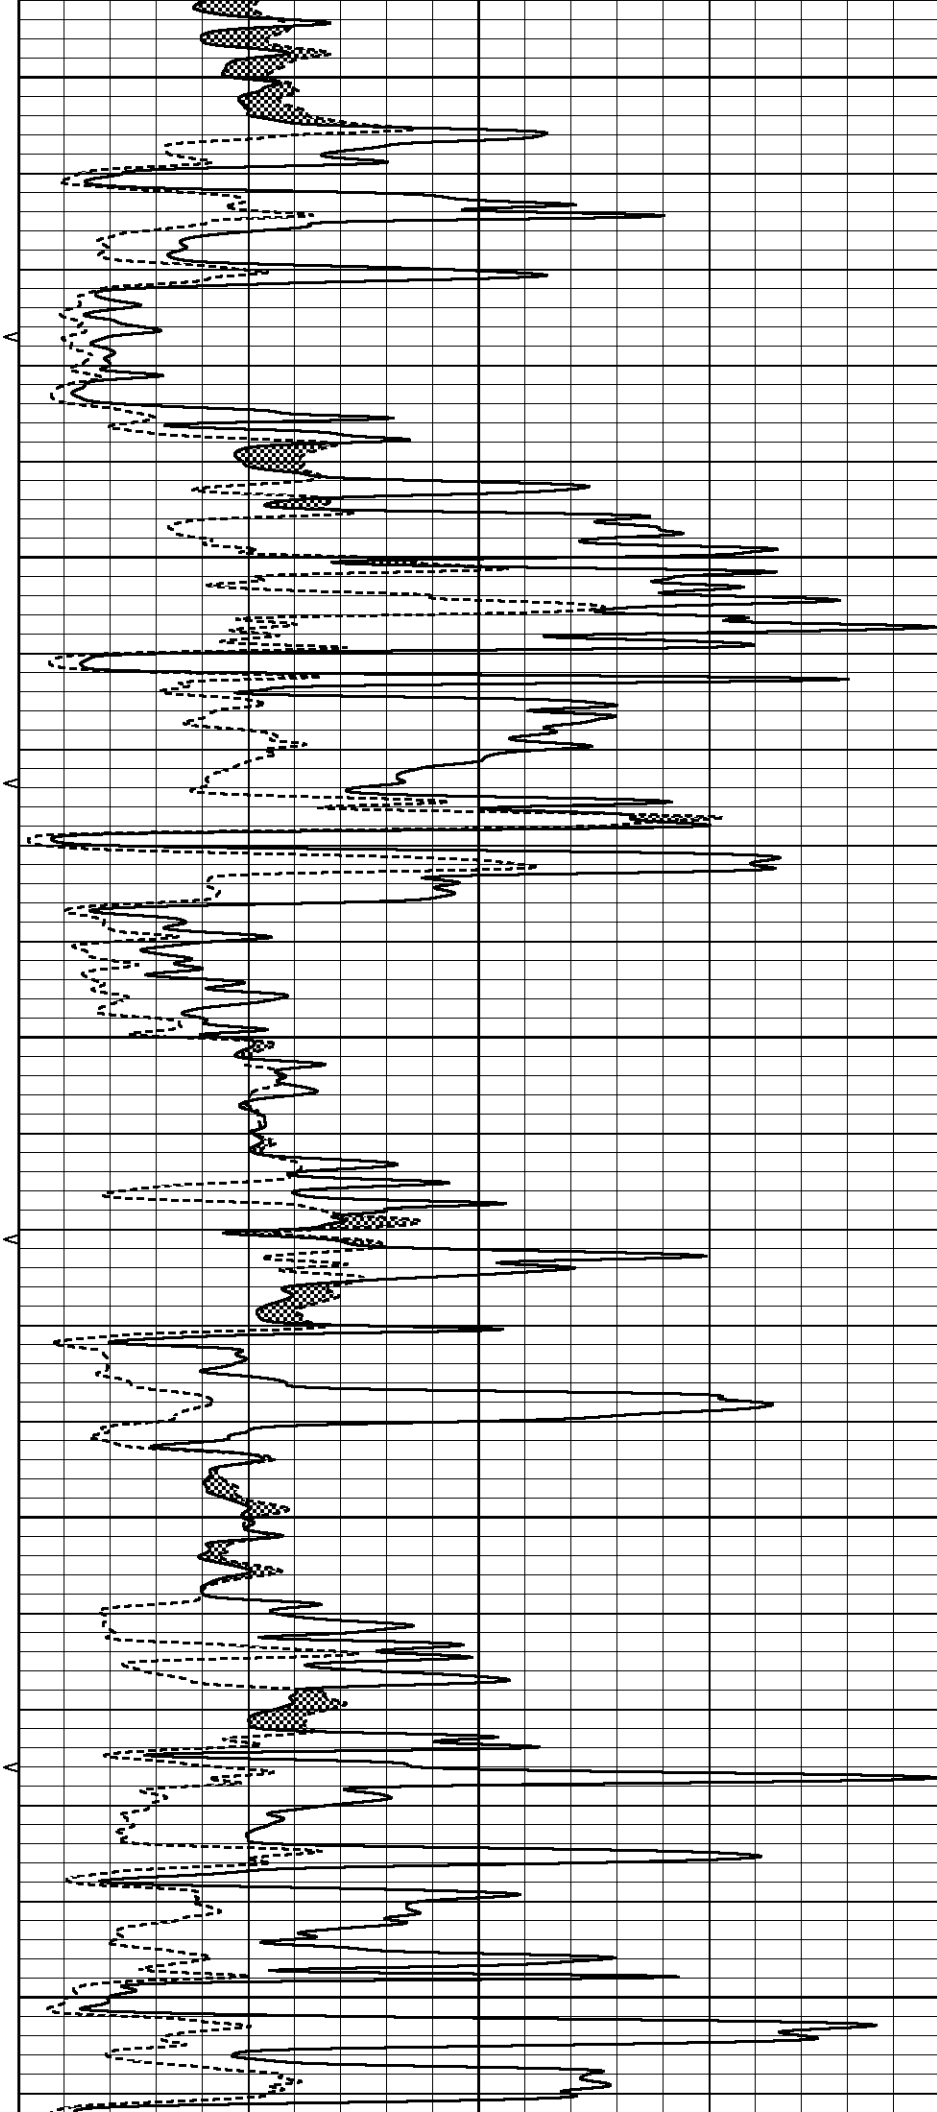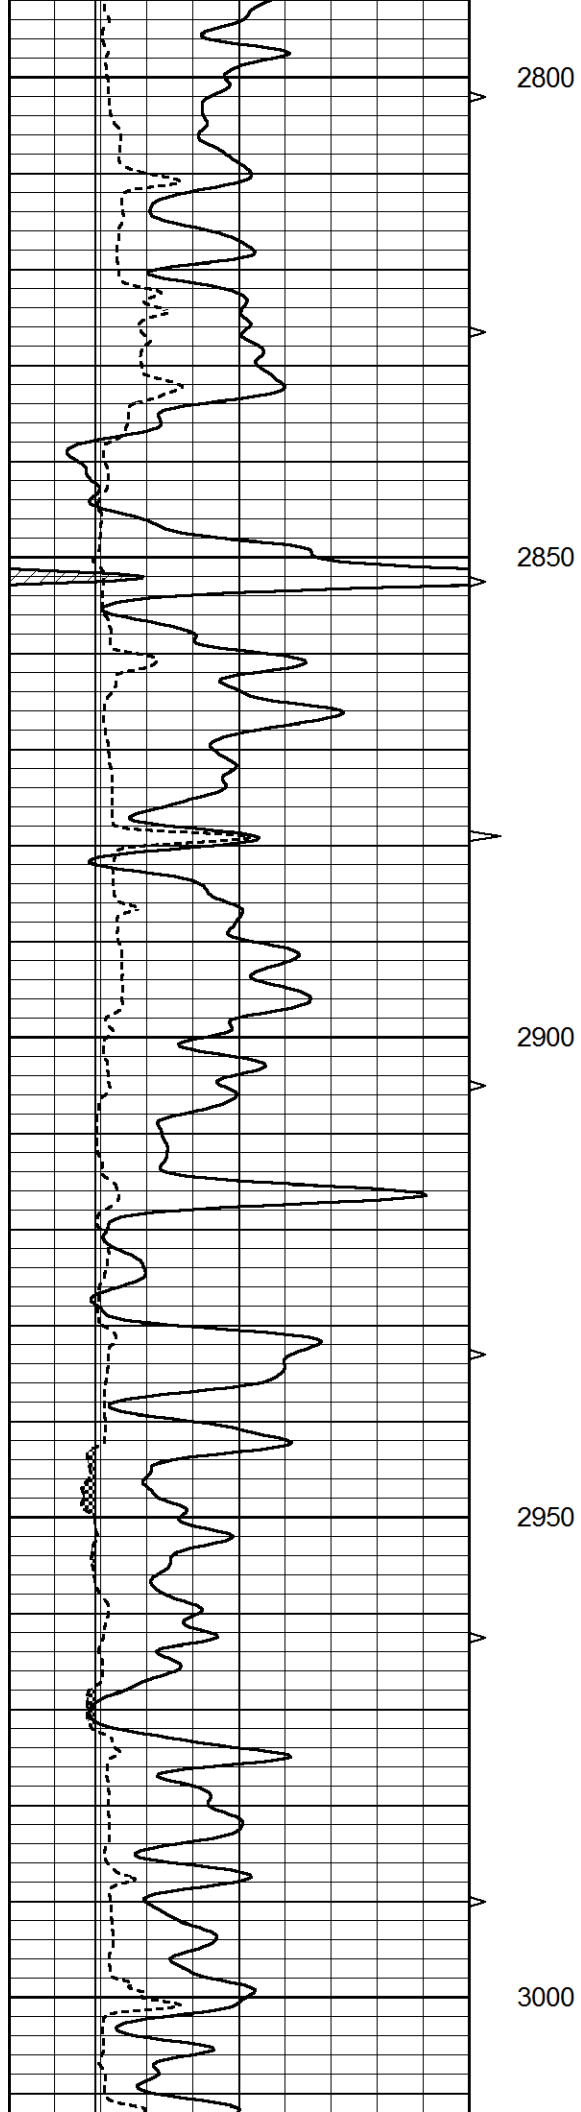

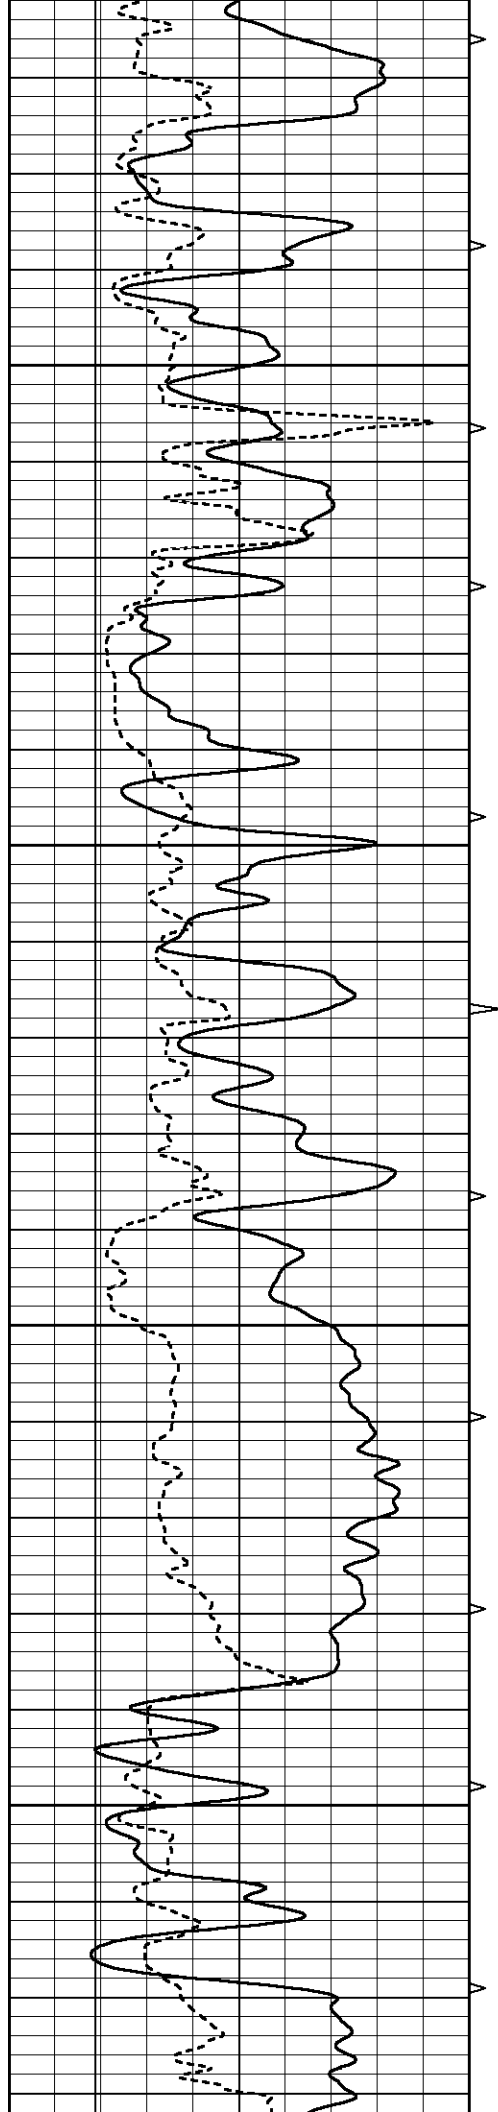



3050

3100

3150

3200

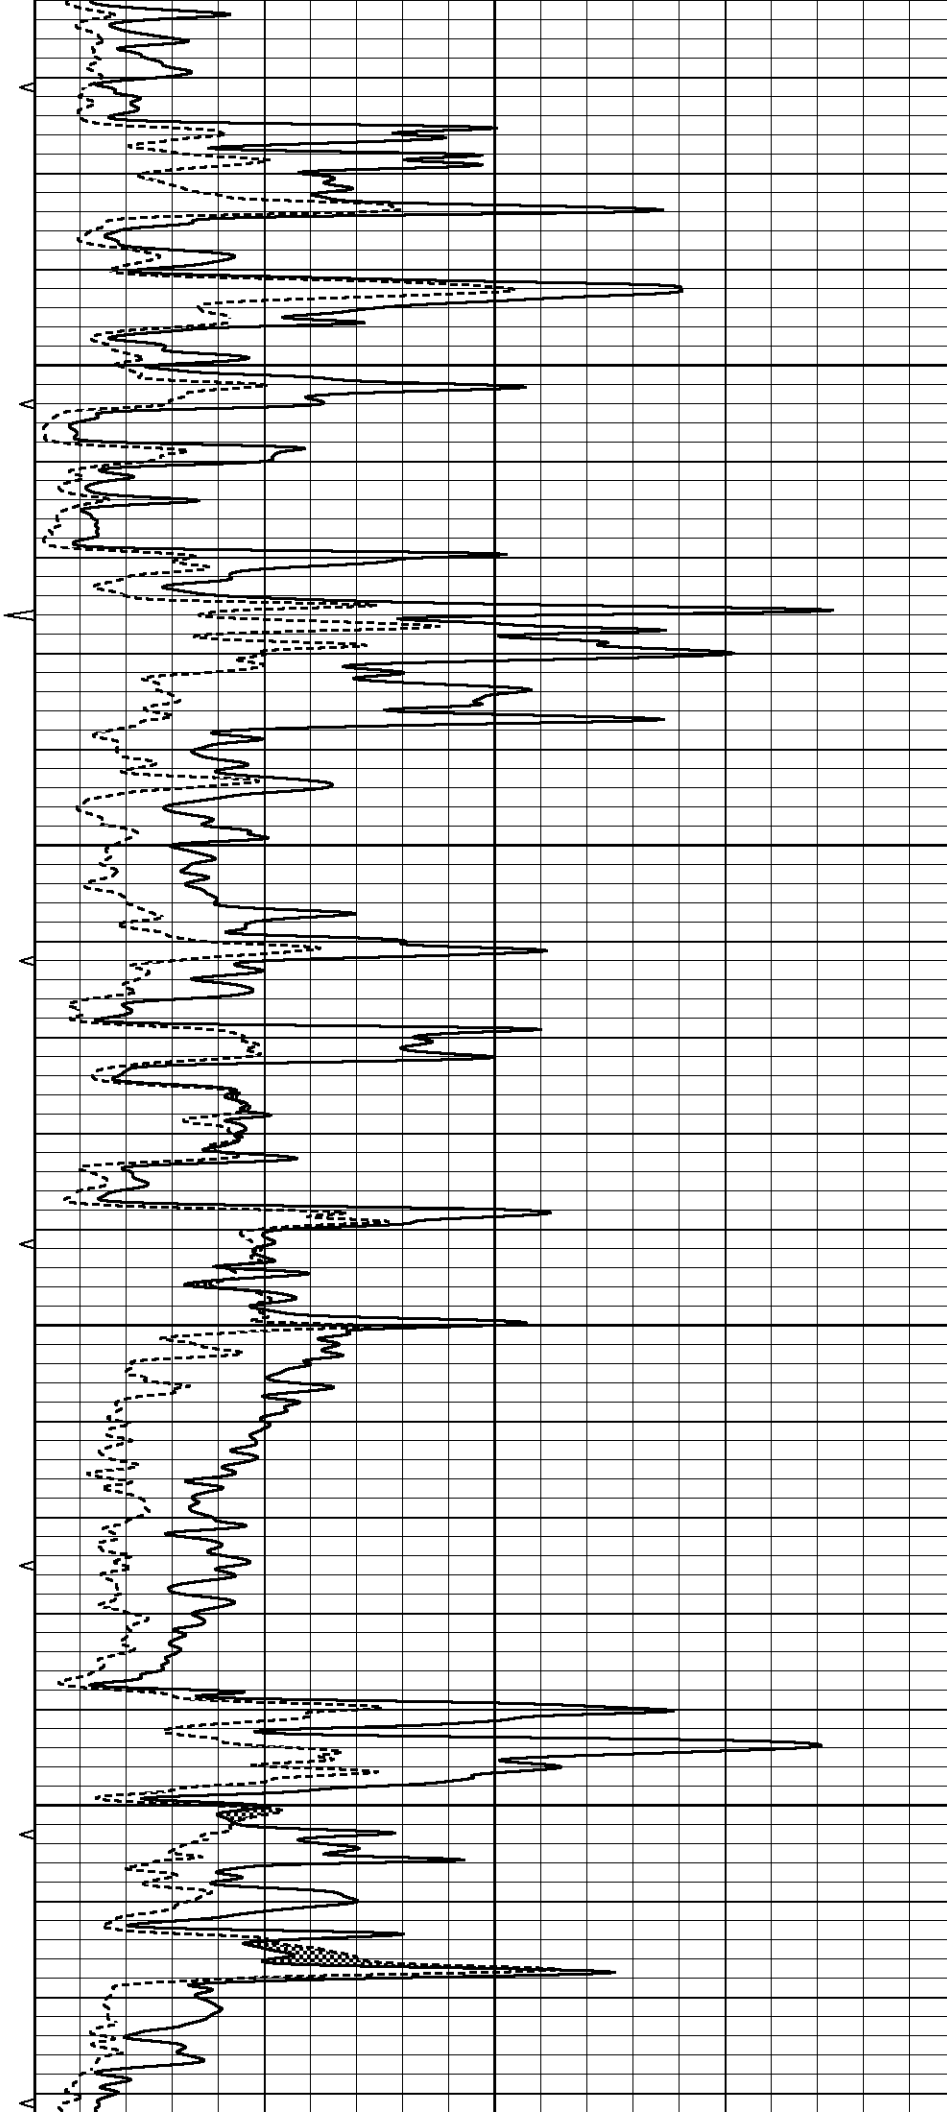

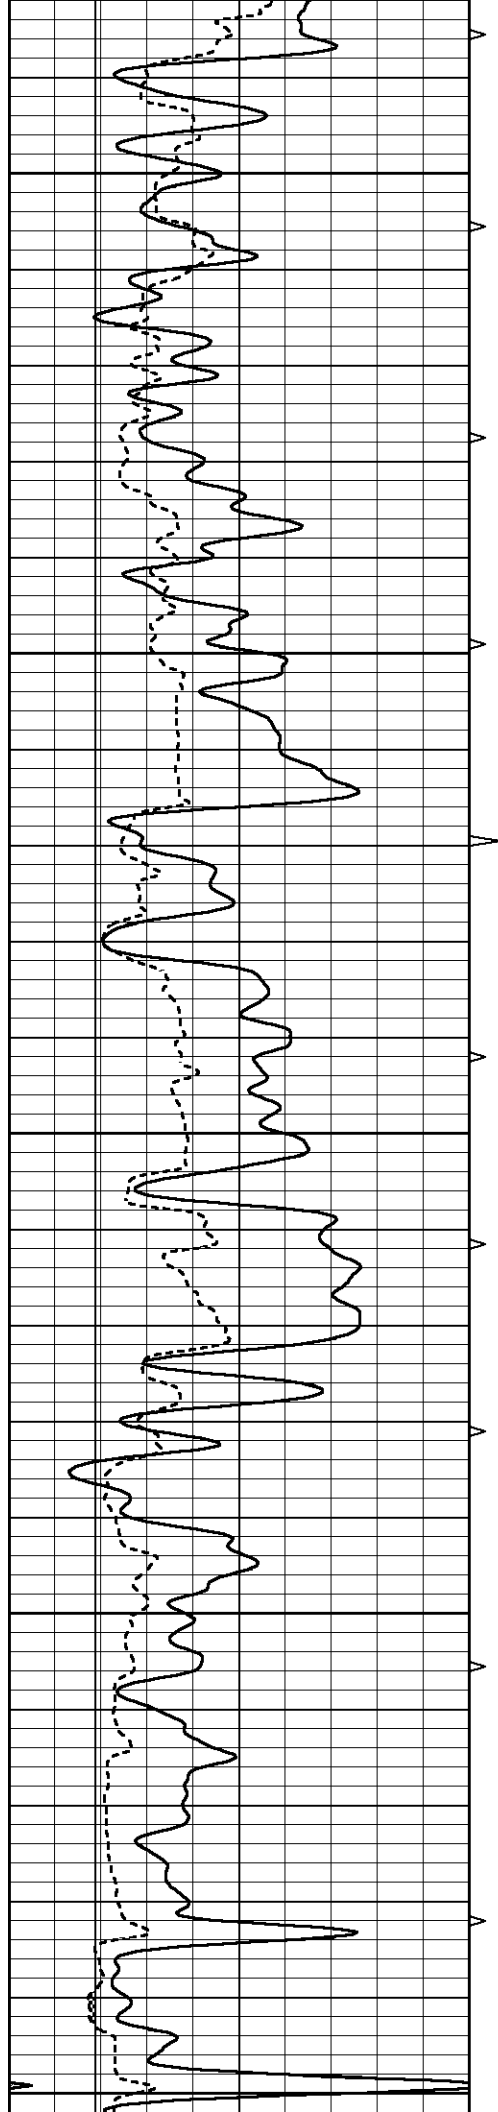


3250


3300

3350

3400

3450

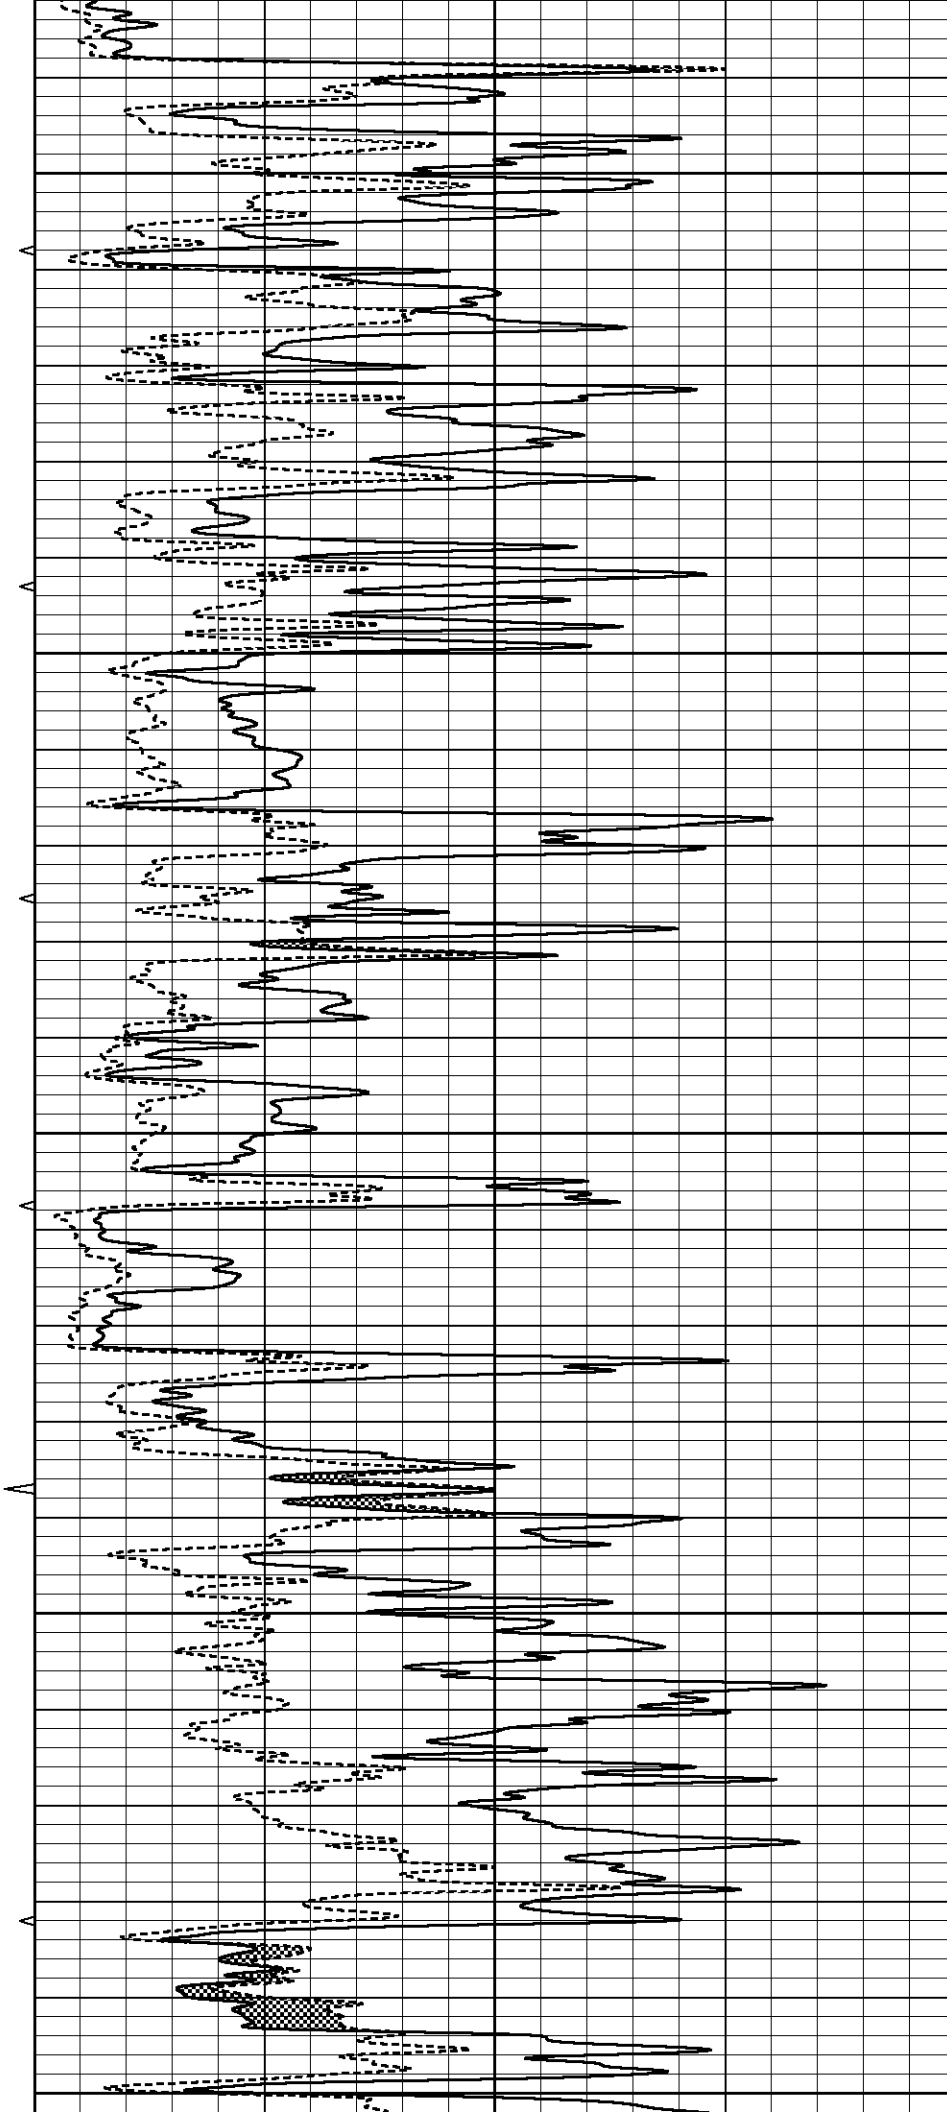

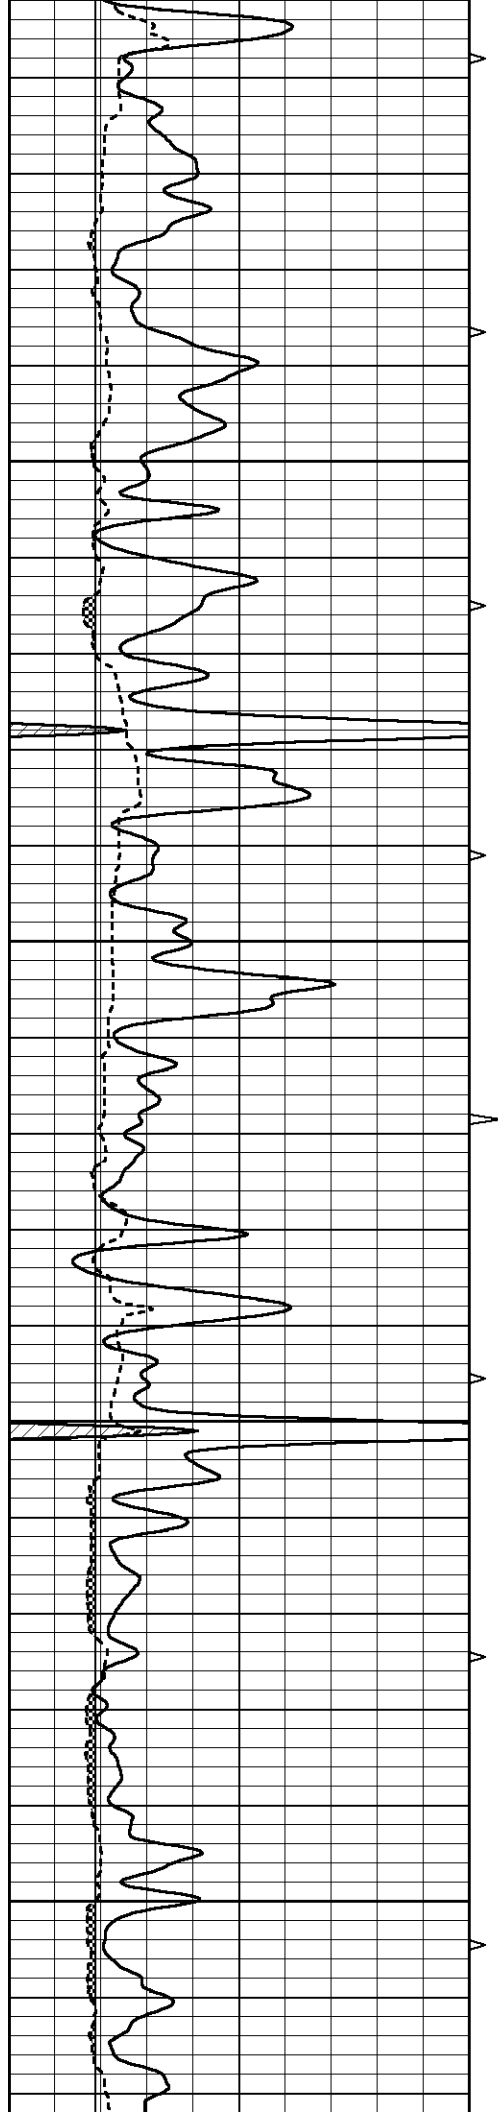



3500

3550

3600

3650

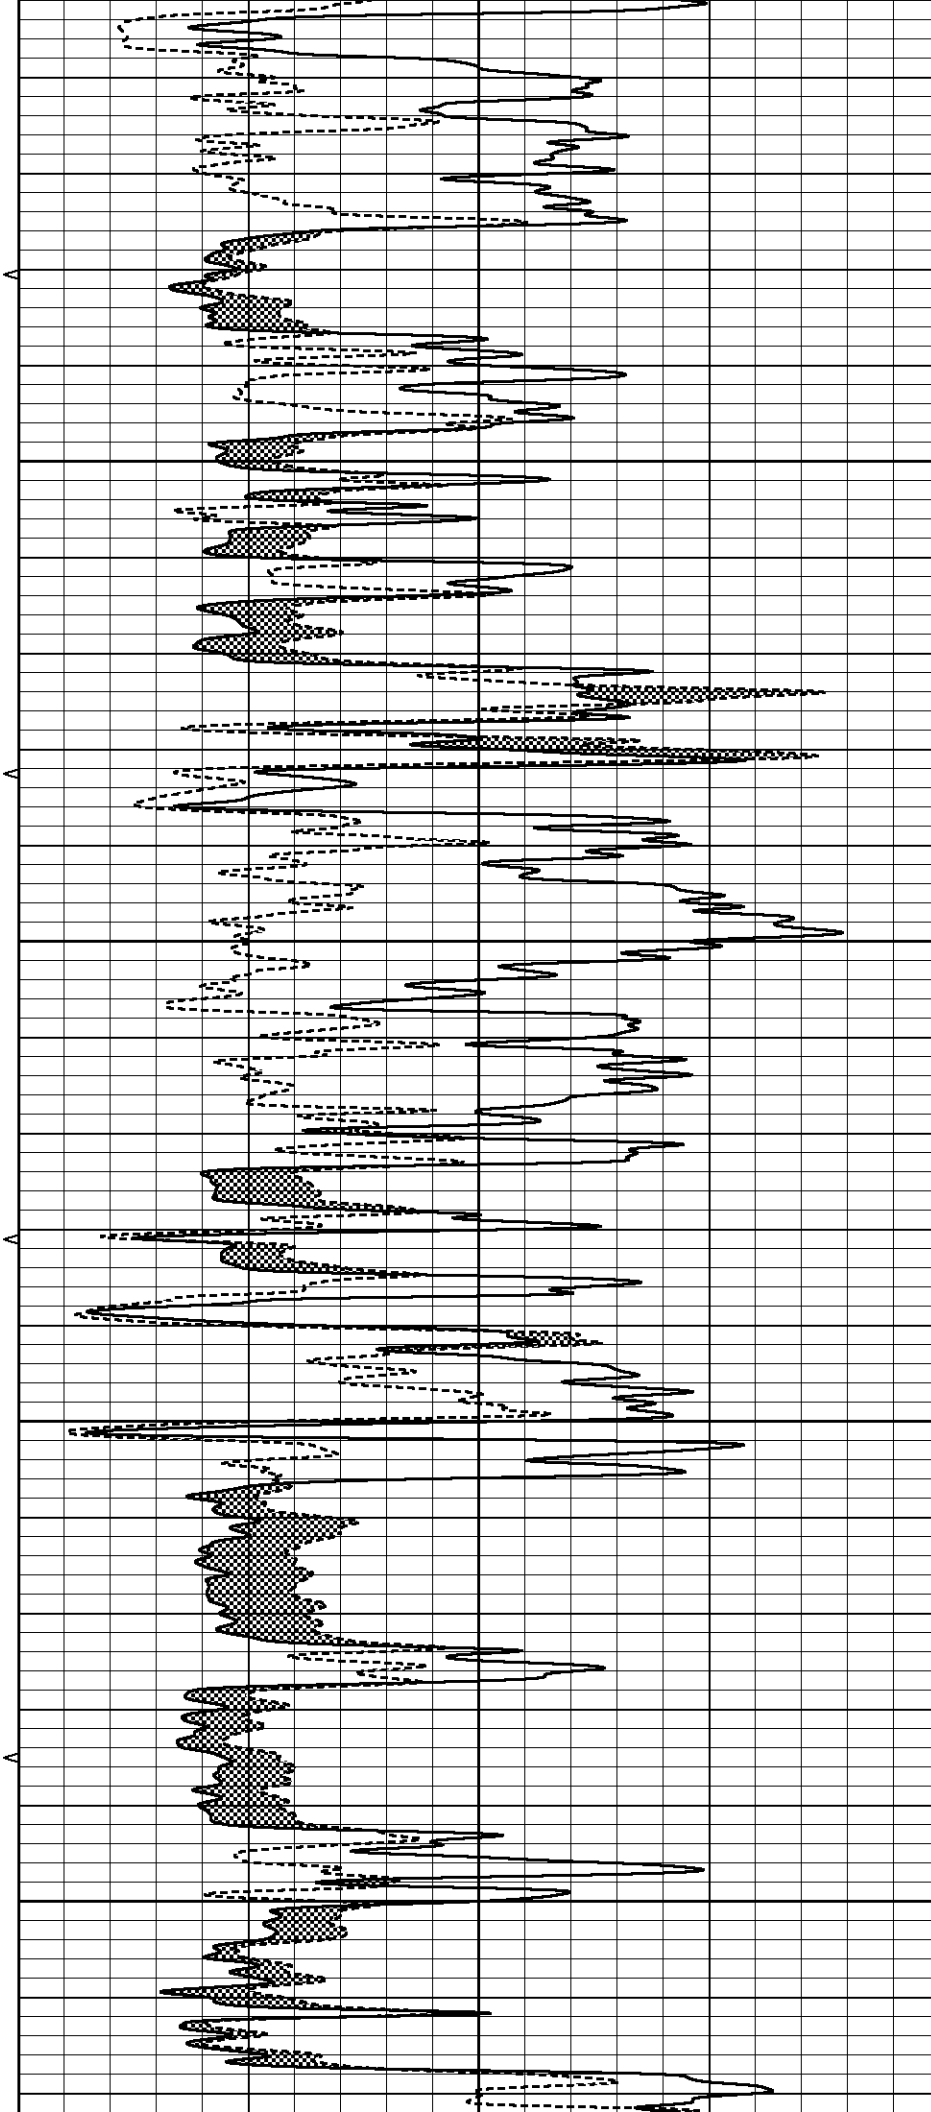

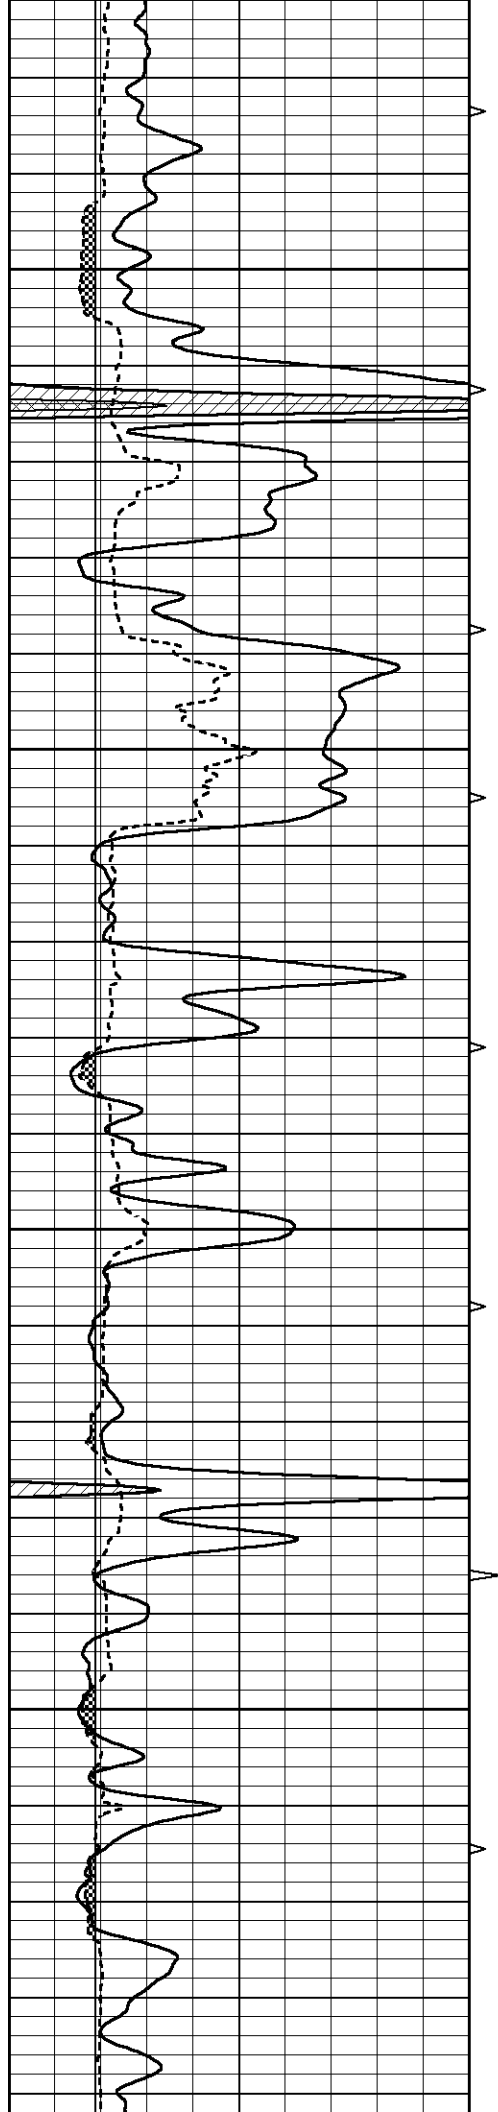




3700


3750

3800

3850

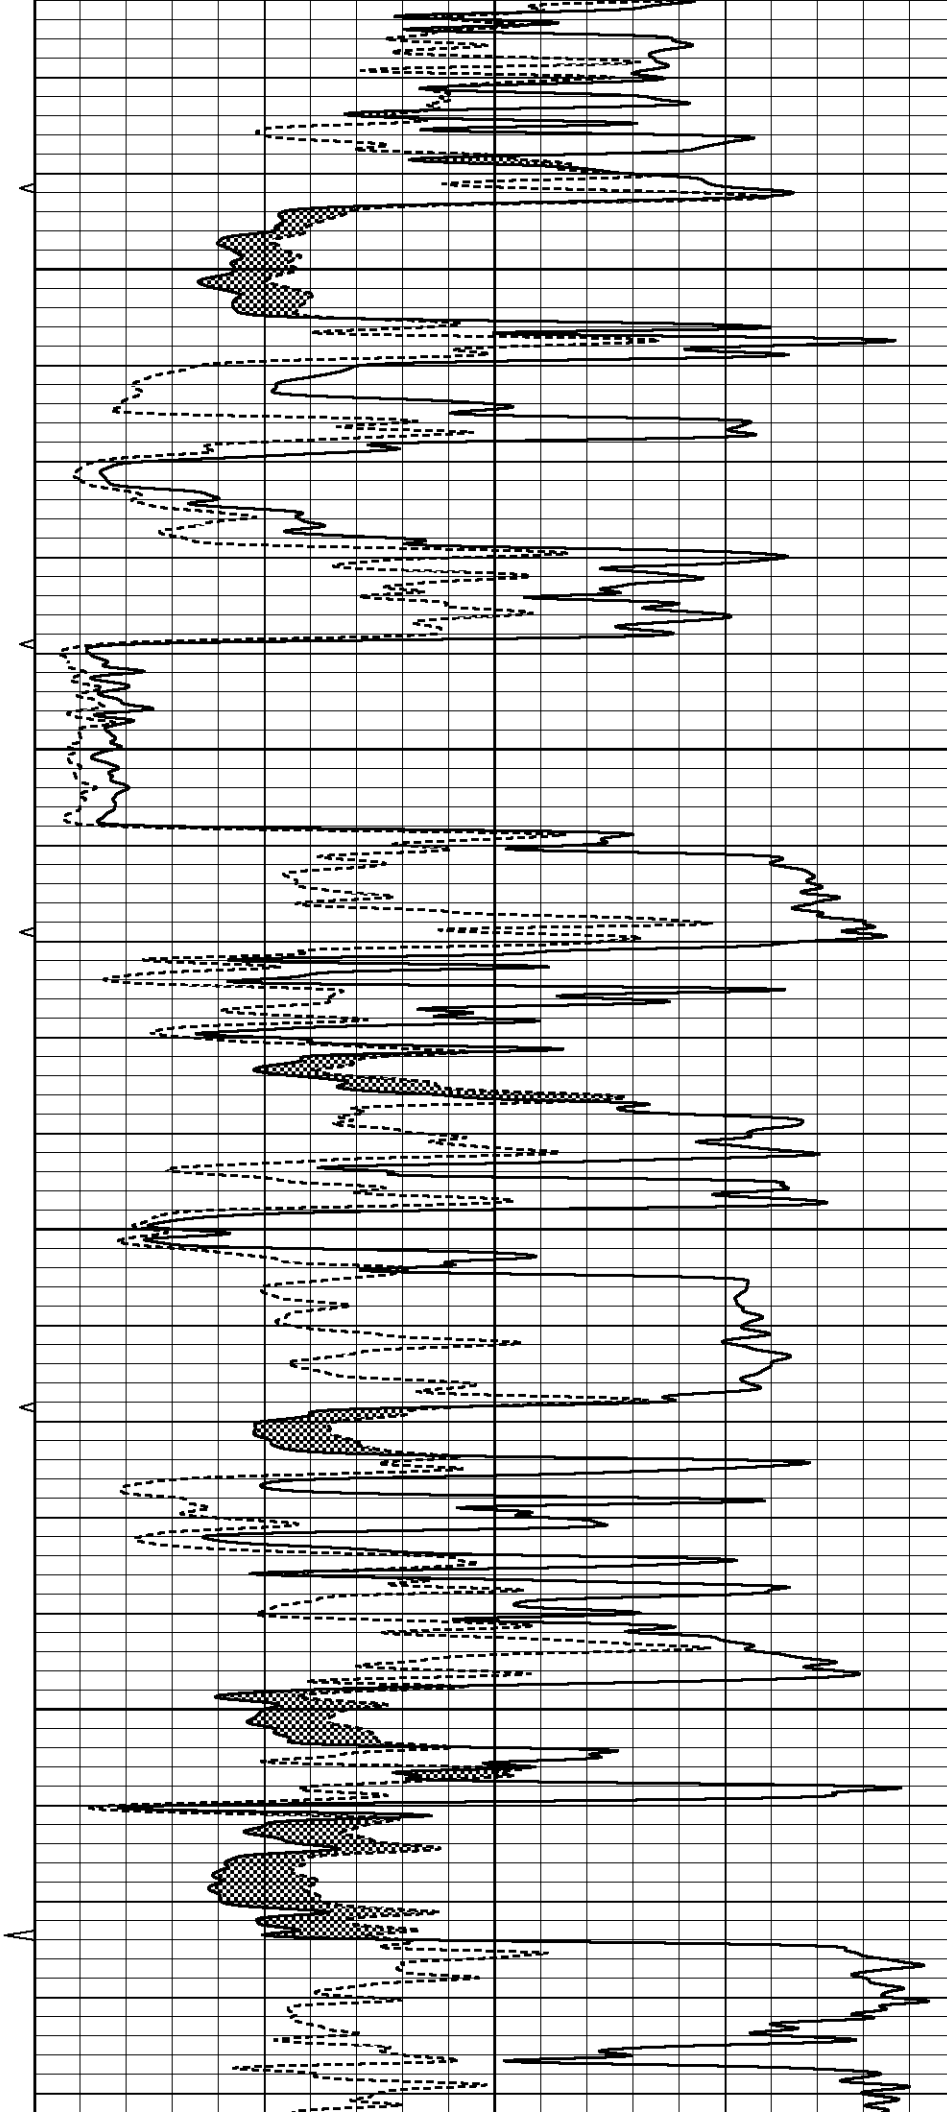

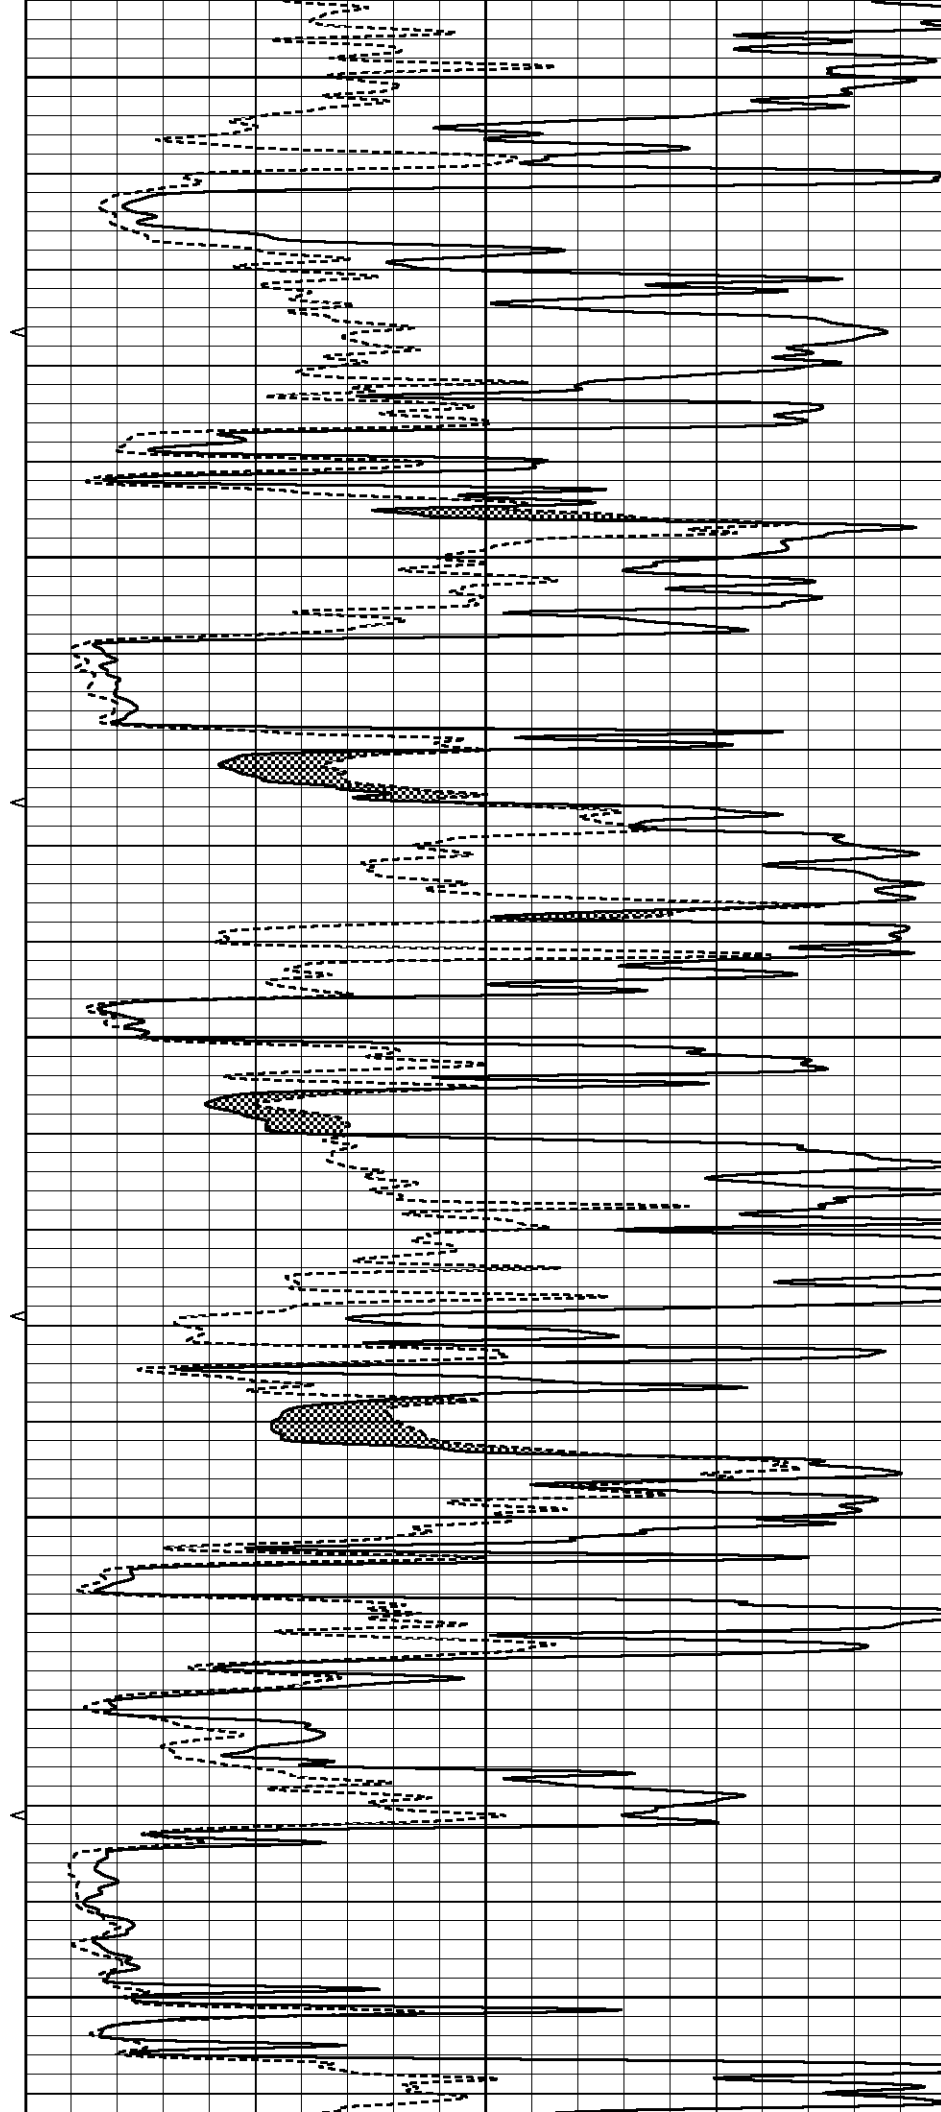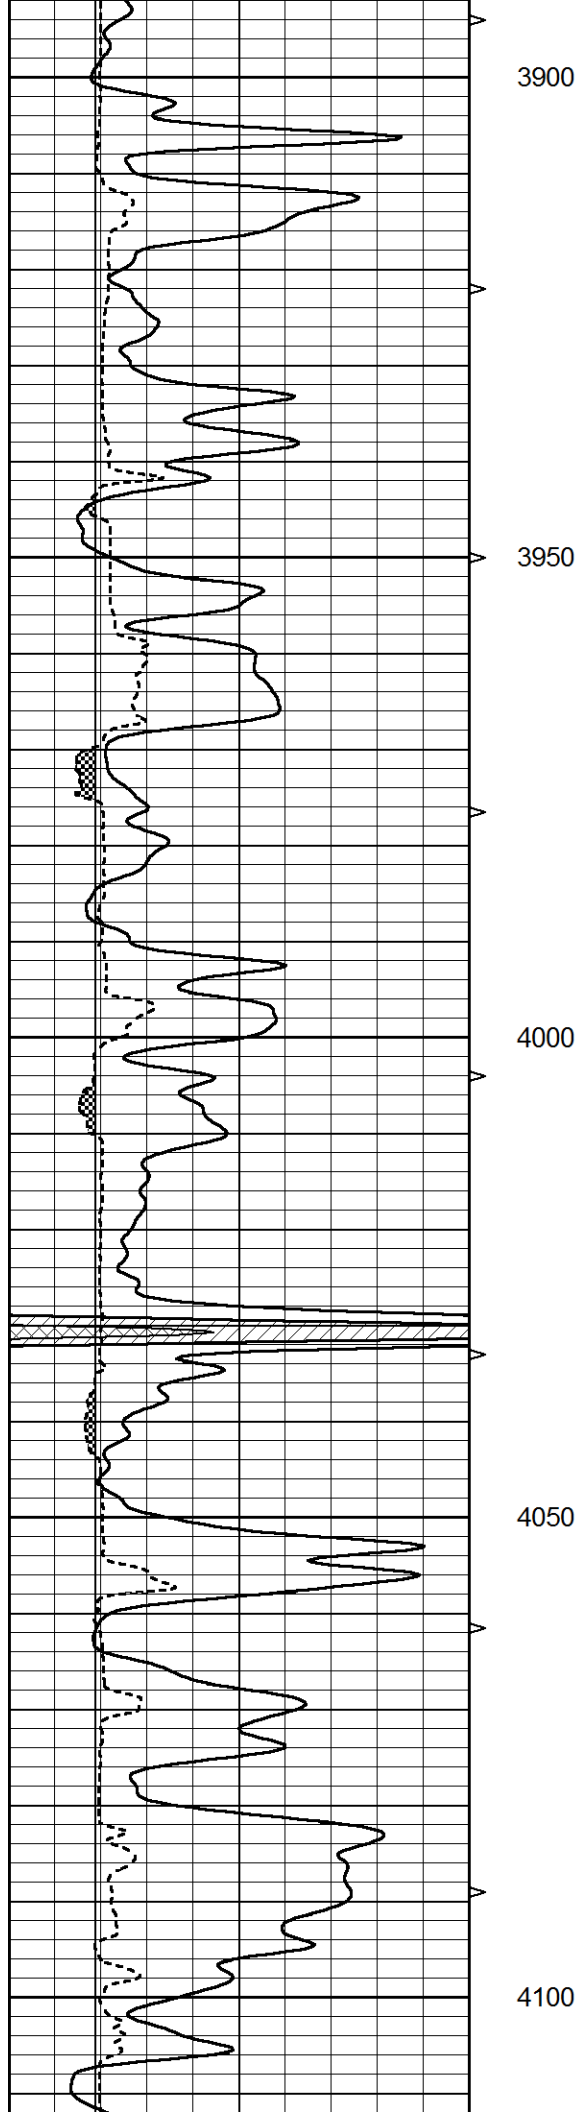

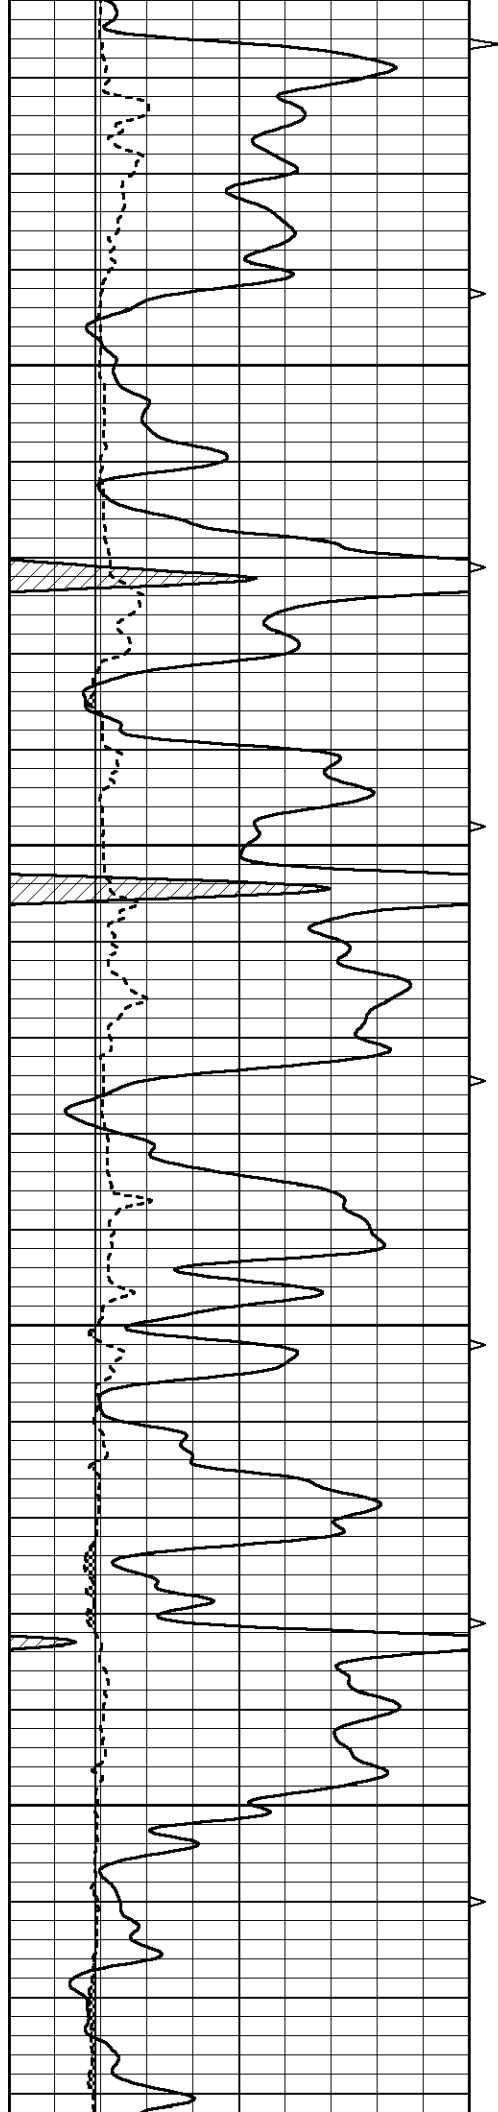


4150


4200

4250

4300

5.5" CSG

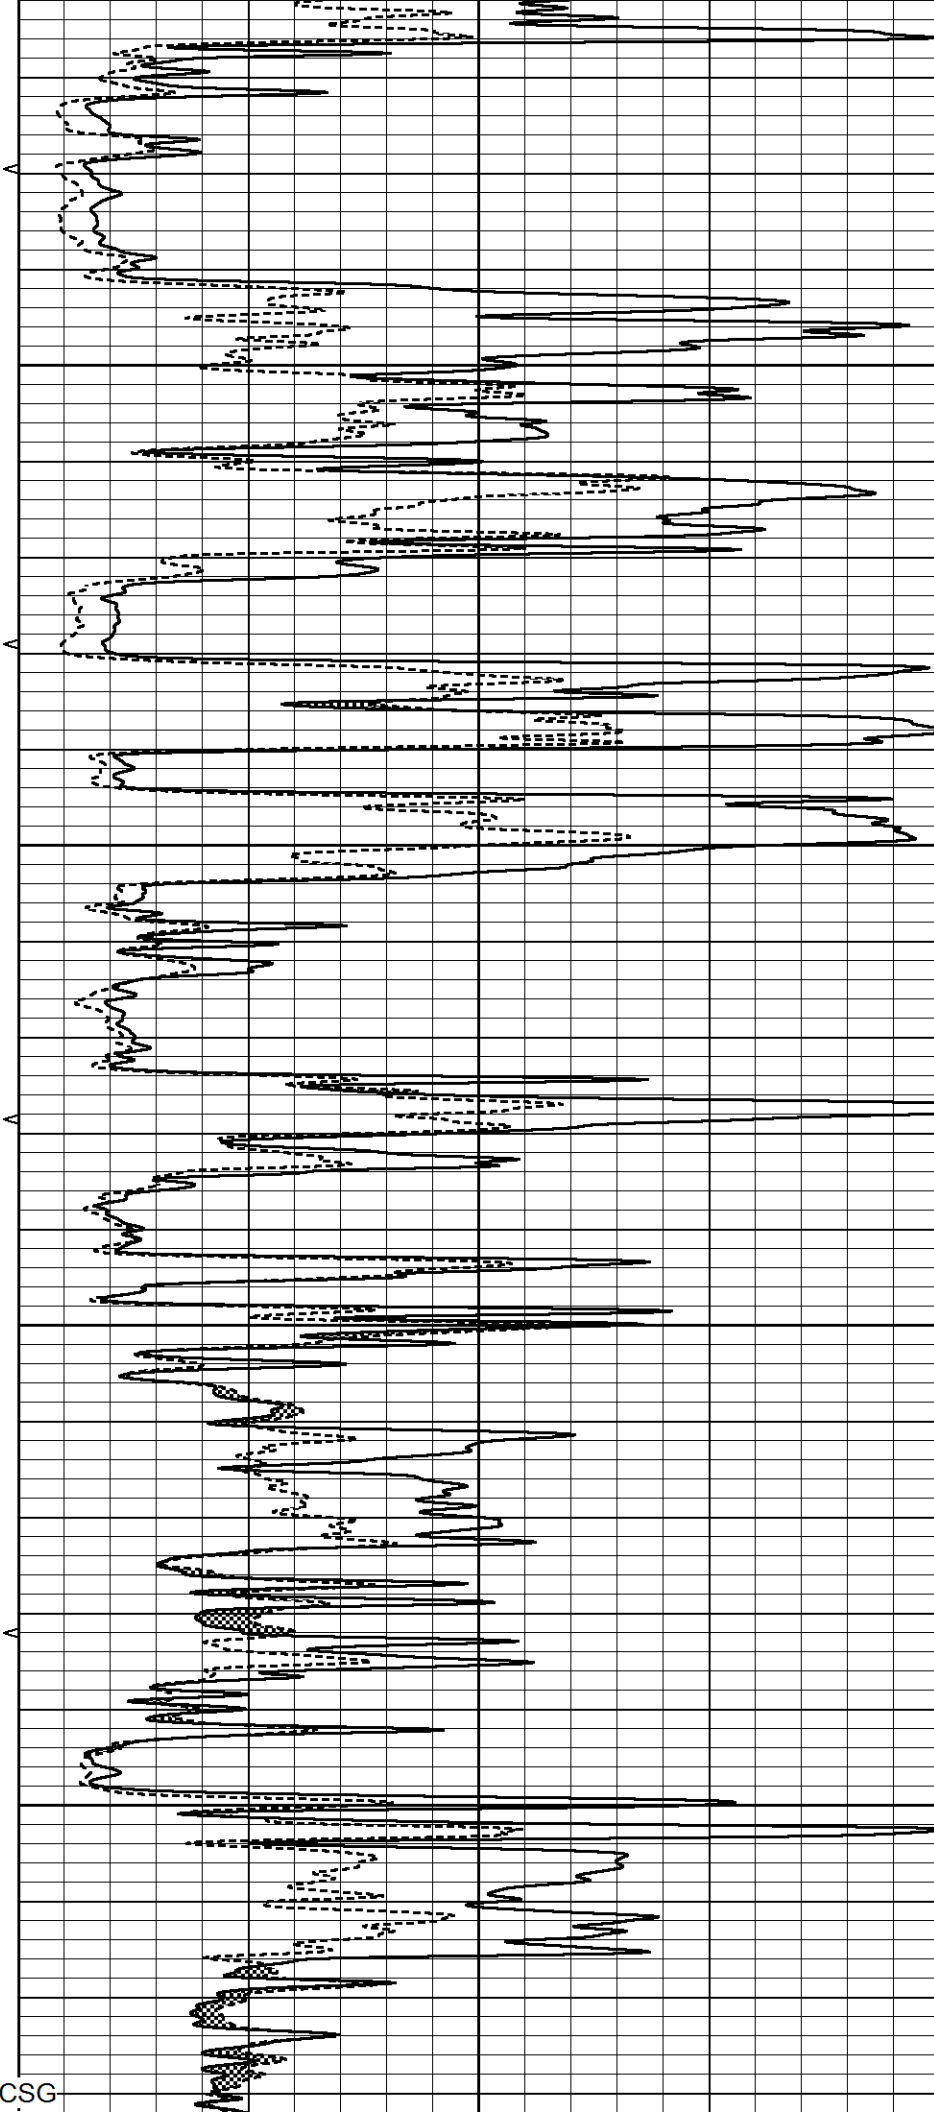


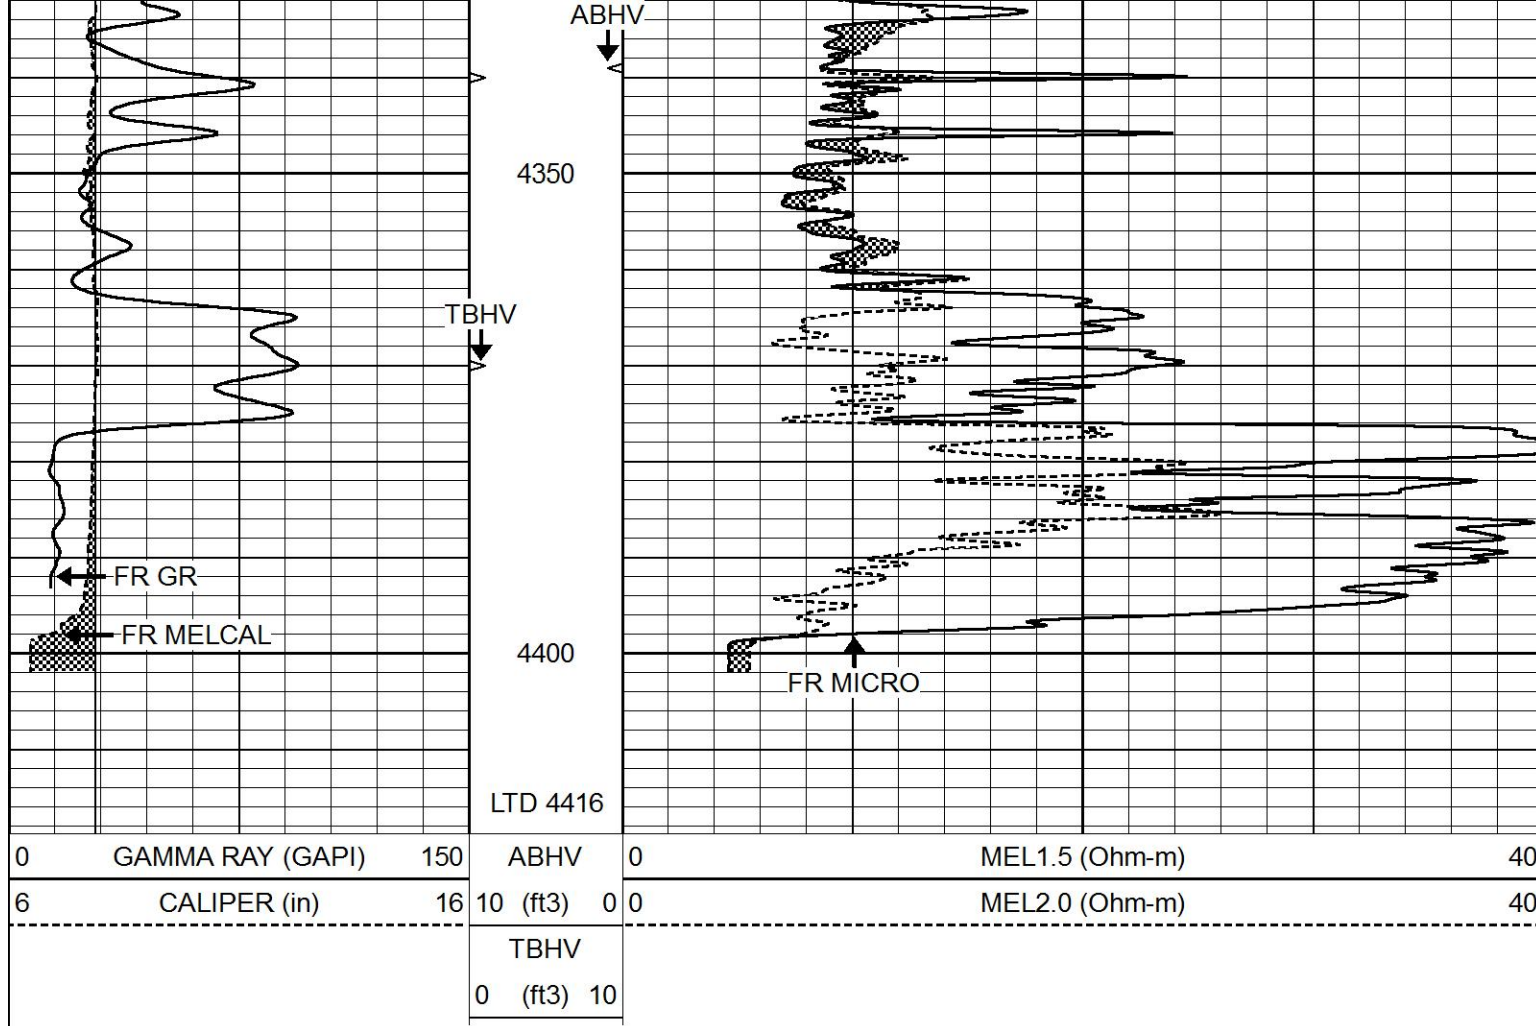


REPEAT SECTION

Database File 5852pe.db
 Dataset Pathname pass6.1
 Presentation Format _micro
 Dataset Creation Sat Sep 11 19:02:28 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
			TBHV			
			0 (ft3) 10			

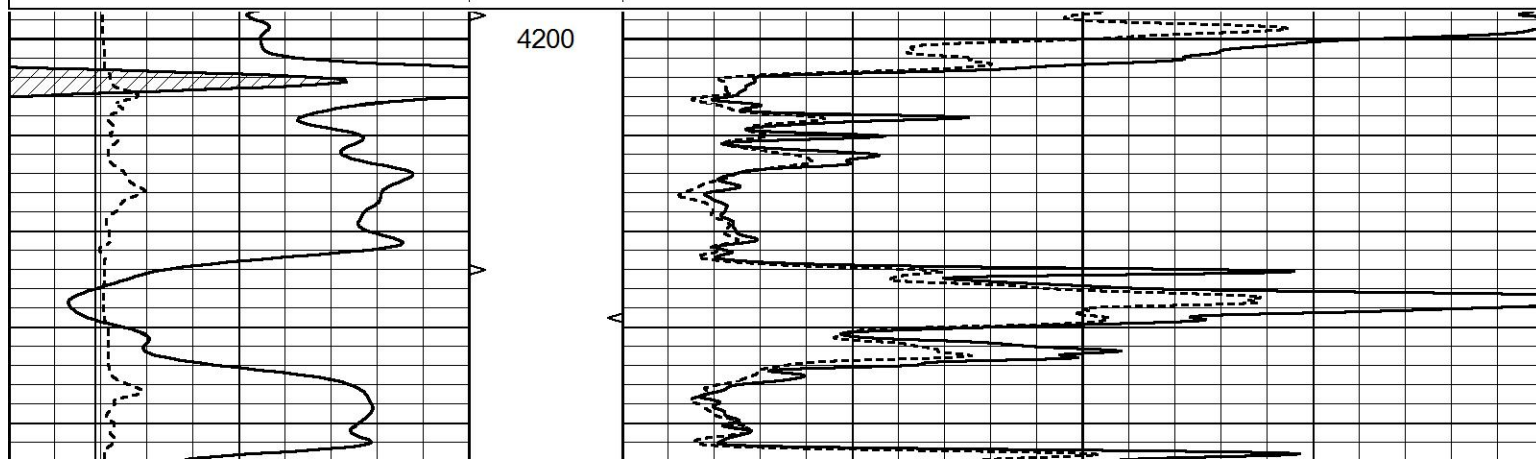

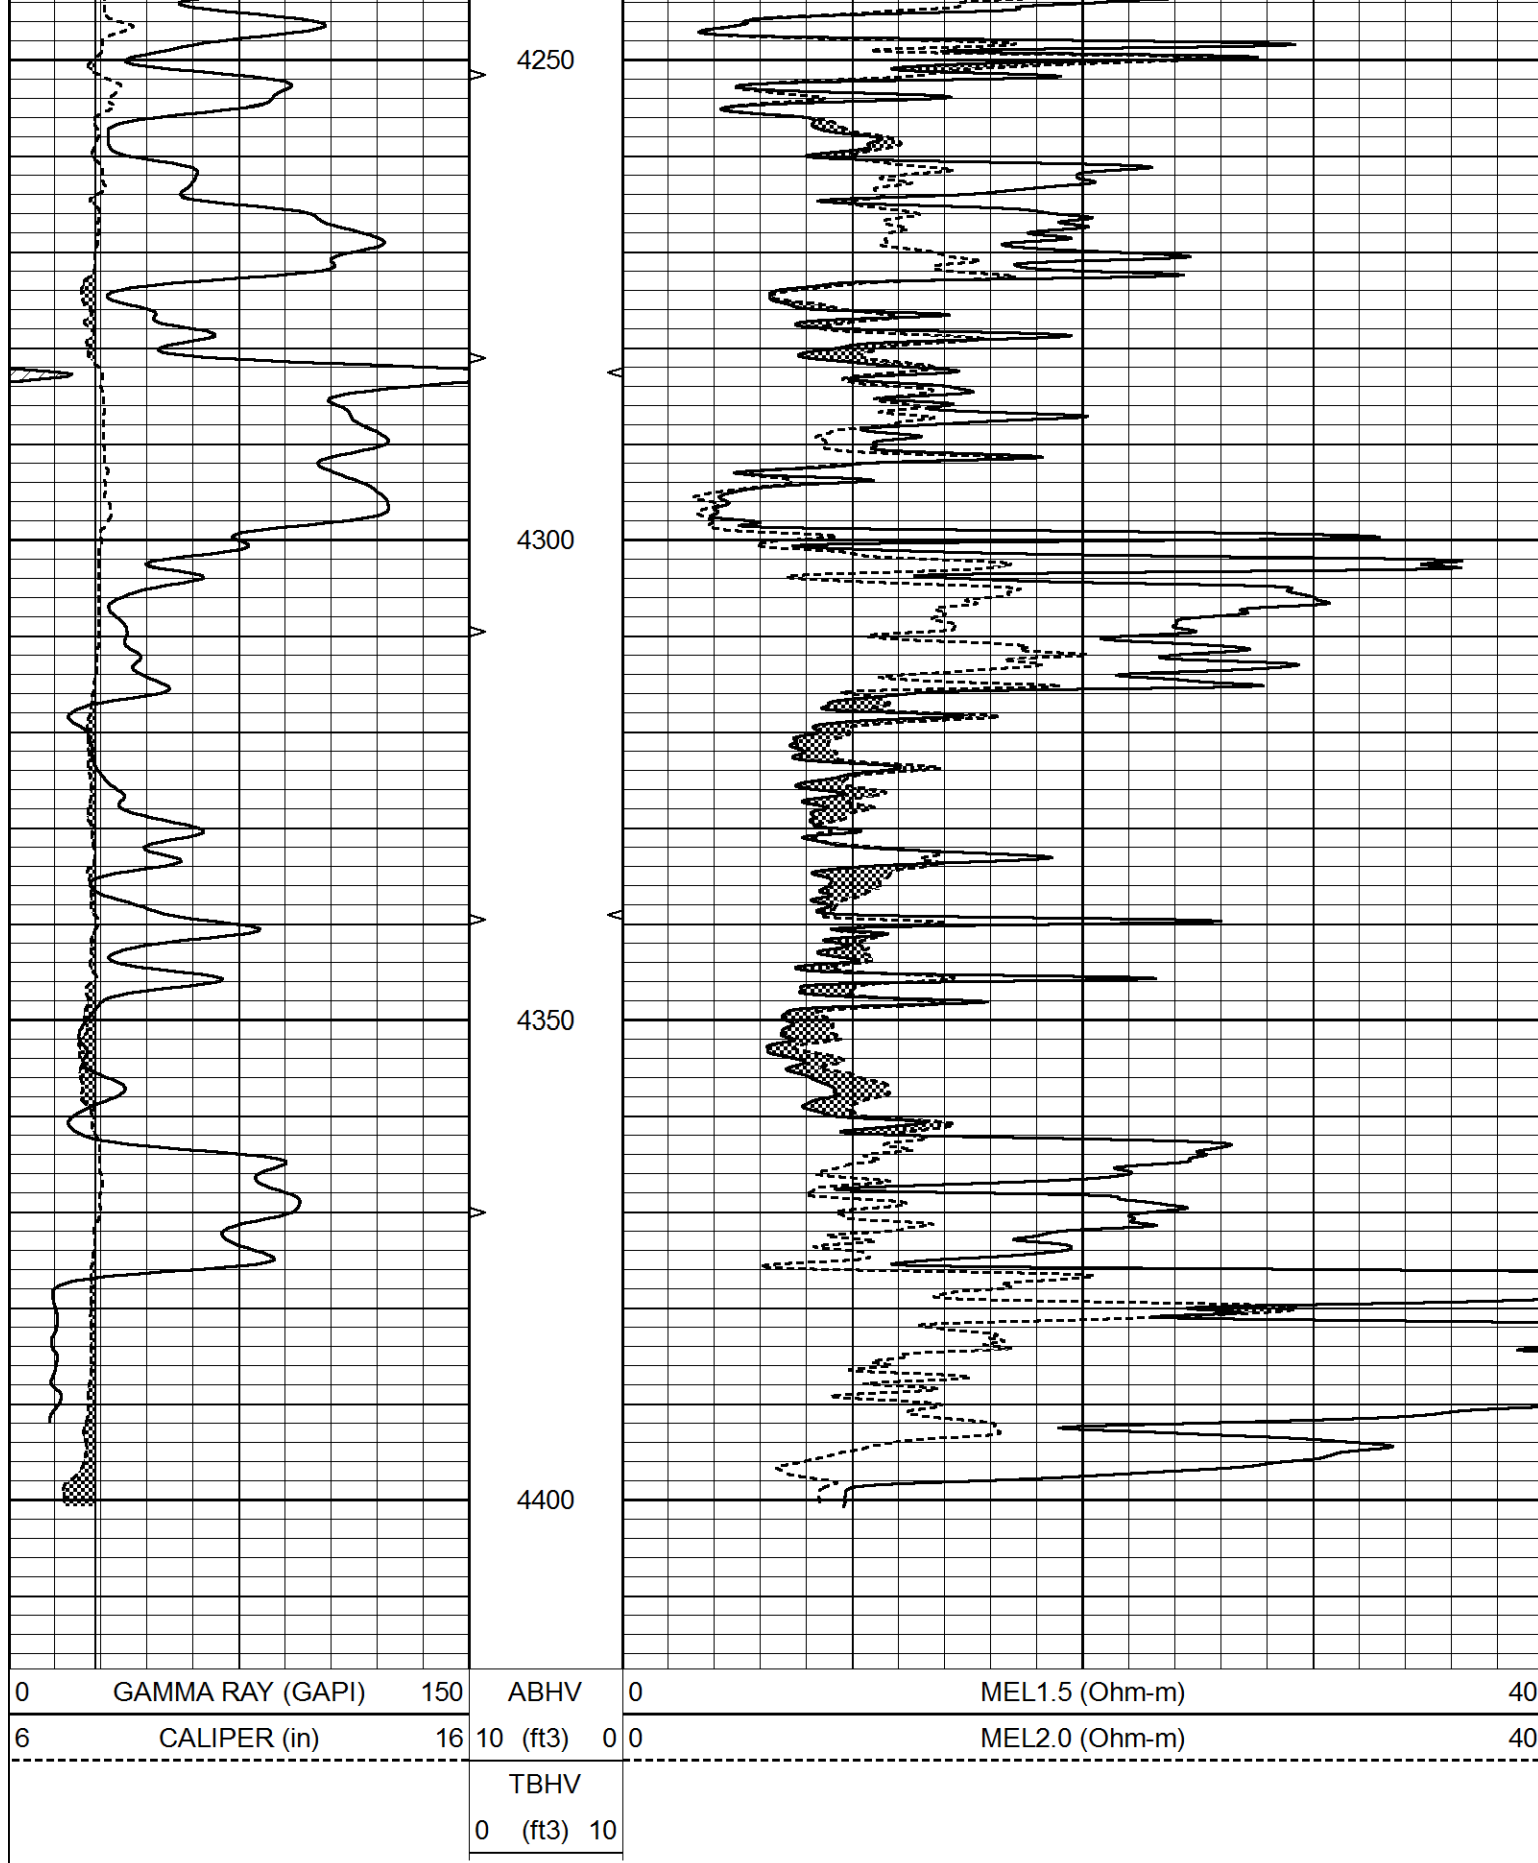

Calibration Report

Database File 5852pe.db
 Dataset Pathname pass6.1
 Dataset Creation Sat Sep 11 19:02:28 2021

Serial Number: 070910 Tool Model: ProbeL Performed: Fri Aug 27 11:31:29 2021																																														
Caliper Calibration:	Gain=7.192 Offset=3.002																																													
References	Low Cal High Cal 8.000 14.000																																													
Readings	0.723 1.557																																													
1.5" Calibration:	Gain=70.000 Offset=-0.567																																													
References	Low Cal High Cal 0.000 20.000																																													
Readings	0.004 1.335																																													
2" Calibration:	Gain=105.000 Offset=-2.400																																													
References	Low Cal High Cal 0.000 20.000																																													
Readings	0.004 1.029																																													
Microlog Calibration Report																																														
Serial-Model: 070910-ProbeL Performed: (Not Performed)																																														
<table><tr><td></td><td colspan="2">Readings</td><td></td><td colspan="2">References</td><td></td><td colspan="2">Results</td></tr><tr><td></td><td>Zero</td><td>Cal</td><td></td><td>Zero</td><td>Cal</td><td></td><td>m</td><td>b</td></tr><tr><td>Normal</td><td>0.0000</td><td>1.0000</td><td>V</td><td>0.0000</td><td>1.0000</td><td>Ohm-m</td><td>1.0000</td><td>0.0000</td></tr><tr><td>Inverse</td><td>0.0000</td><td>1.0000</td><td>V</td><td>0.0000</td><td>1.0000</td><td>Ohm-m</td><td>1.0000</td><td>0.0000</td></tr><tr><td>Caliper</td><td>0.0000</td><td>1.0000</td><td>V</td><td>0.0000</td><td>1.0000</td><td>in</td><td>1.0000</td><td>0.0000</td></tr></table>			Readings			References			Results			Zero	Cal		Zero	Cal		m	b	Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000	Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000	Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000
	Readings			References			Results																																							
	Zero	Cal		Zero	Cal		m	b																																						
Normal	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000																																						
Inverse	0.0000	1.0000	V	0.0000	1.0000	Ohm-m	1.0000	0.0000																																						
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000																																						
Gamma Ray Calibration Report																																														
Serial Number: 070558 Tool Model: Probe1 Performed: Fri Oct 30 21:32:56 2020																																														
Calibrator Value:	1.0 GAPI																																													
Background Reading:	0.0 cps																																													
Calibrator Reading:	1.0 cps																																													
Sensitivity:	0.2700 GAPI/cps																																													