



MICRO LOG

Company ROCKHOUND PETROLEUM,LLC.

Well DUNN #1

Field N/A

County STAFFORD State KANSAS

Location: API # : 15-185-24085-0000
SW/SW/NE/NW
1070' FNL & 1415' FWL

Other Services
CDL/CNL
ML/SON

SEC 8 TWP 23S RGE 13W

Permanent Datum GROUND LEVEL Elevation 1898
Log Measured From KELLY BUSHING 8' A.G.L.
Drilling Measured From KELLY BUSHING

Elevation
K.B. 1906
D.F. 1904
G.L. 1898

Date 8/9/21

Run Number TWO

Depth Driller 3970

Depth Logger 3968

Bottom Logged Interval 3948

Top Log Interval 3000

Casing Driller 8 5/8" @ 485

Casing Logger 485

Bit Size 7 7/8"

Type Fluid in Hole CHEMICAL MUD

Density / Viscosity 9/47

pH / Fluid Loss 9.5/11.6

Source of Sample FLOWLINE

Rm @ Meas. Temp .6@ 70F

Rmf @ Meas. Temp .45@ 70F

Rmc @ Meas. Temp .72 @ 70F

Source of Rmf / Rmc MEASURED

Rm @ BHT .36@ 116F

Time Circulation Stopped 2 HOURS

Time Logger on Bottom 116F

Maximum Recorded Temperature 1523

Equipment Number 1523

Location HAYS, KANSAS

Recorded By GUS PFANENSTIEL

Witnessed By KEATON JONES

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: ST. JOHN NORTH TO 80 RD., WEST 1.5 MILES
SOUTH INTO.






MAIN PASS


Database File	5612ddn.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Mon Aug 09 02:09:51 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

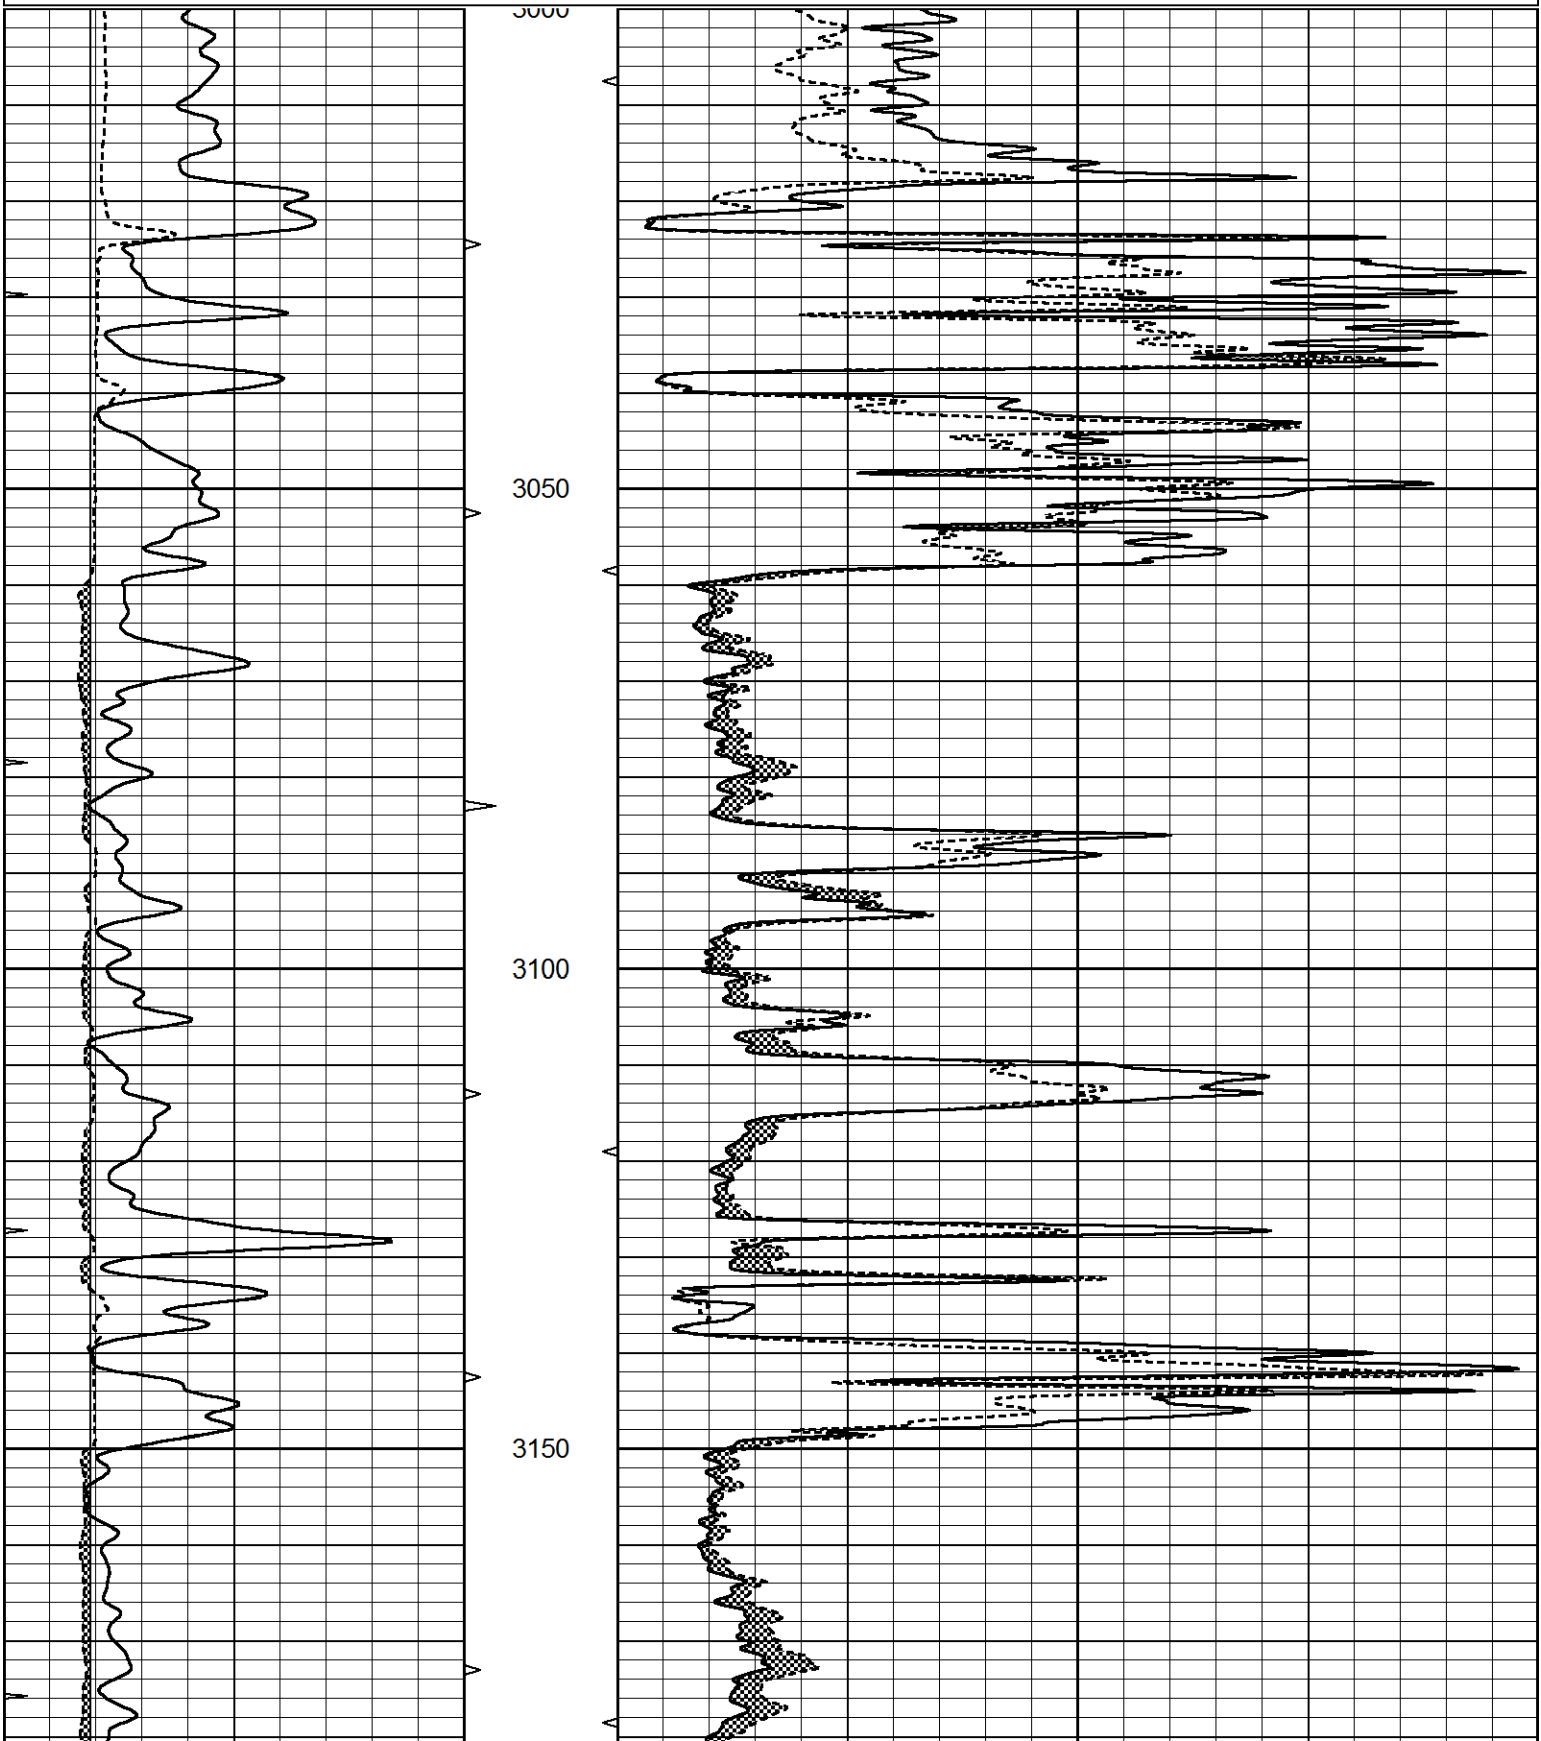

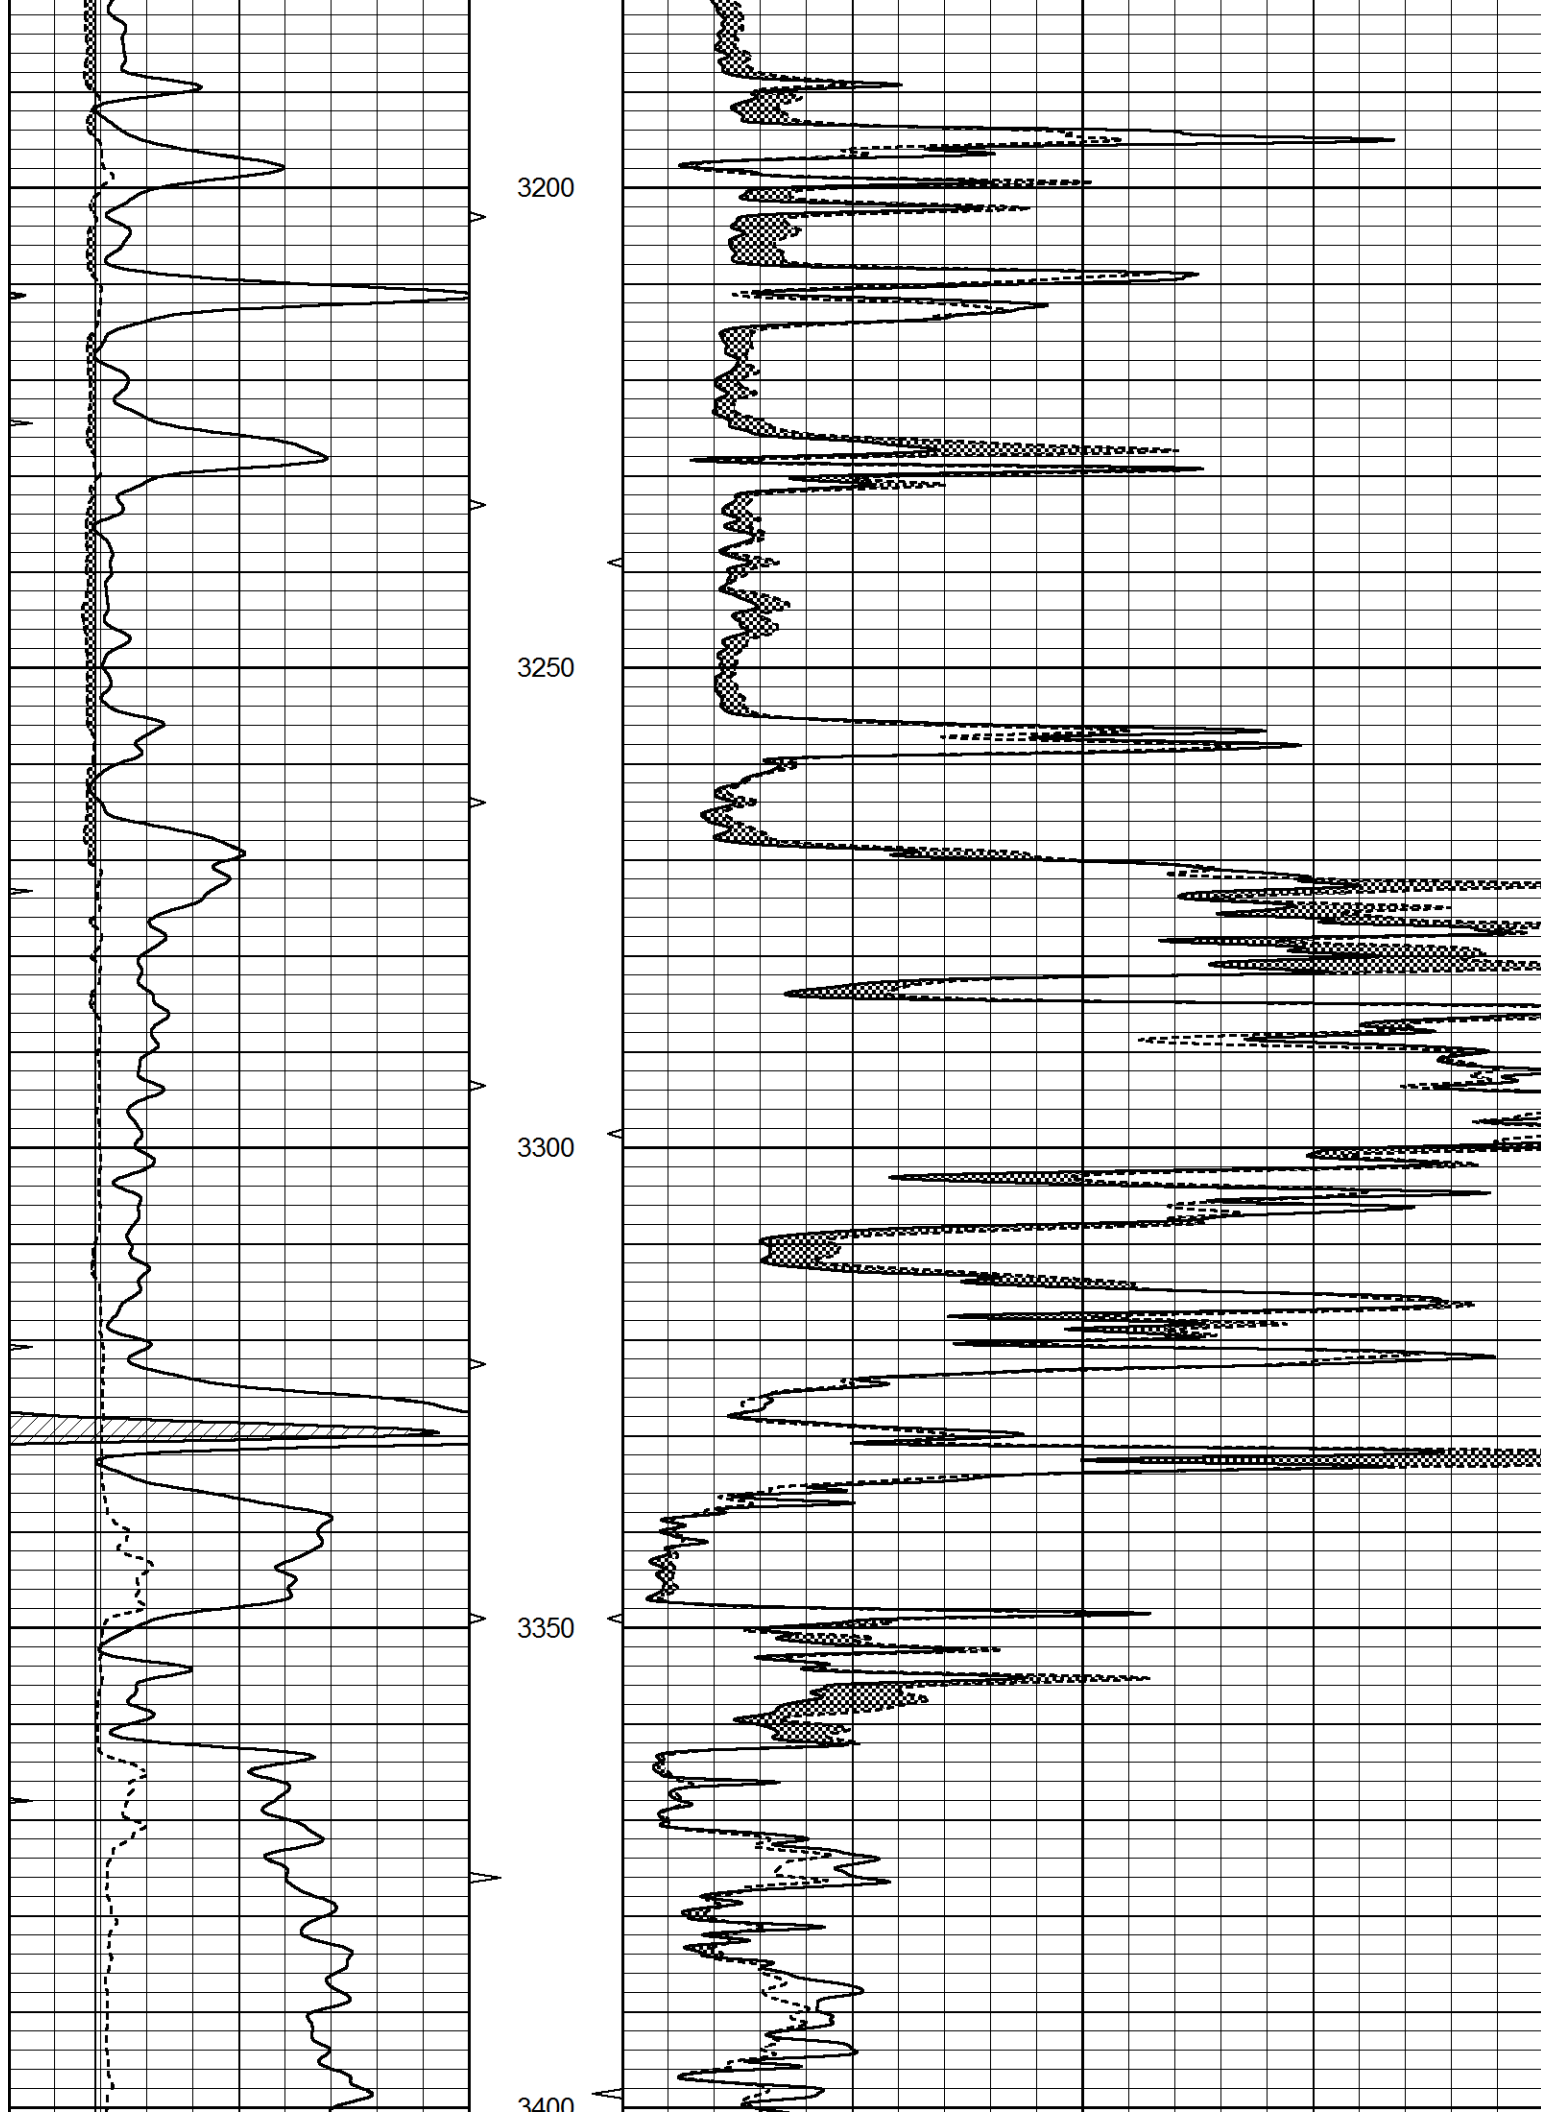

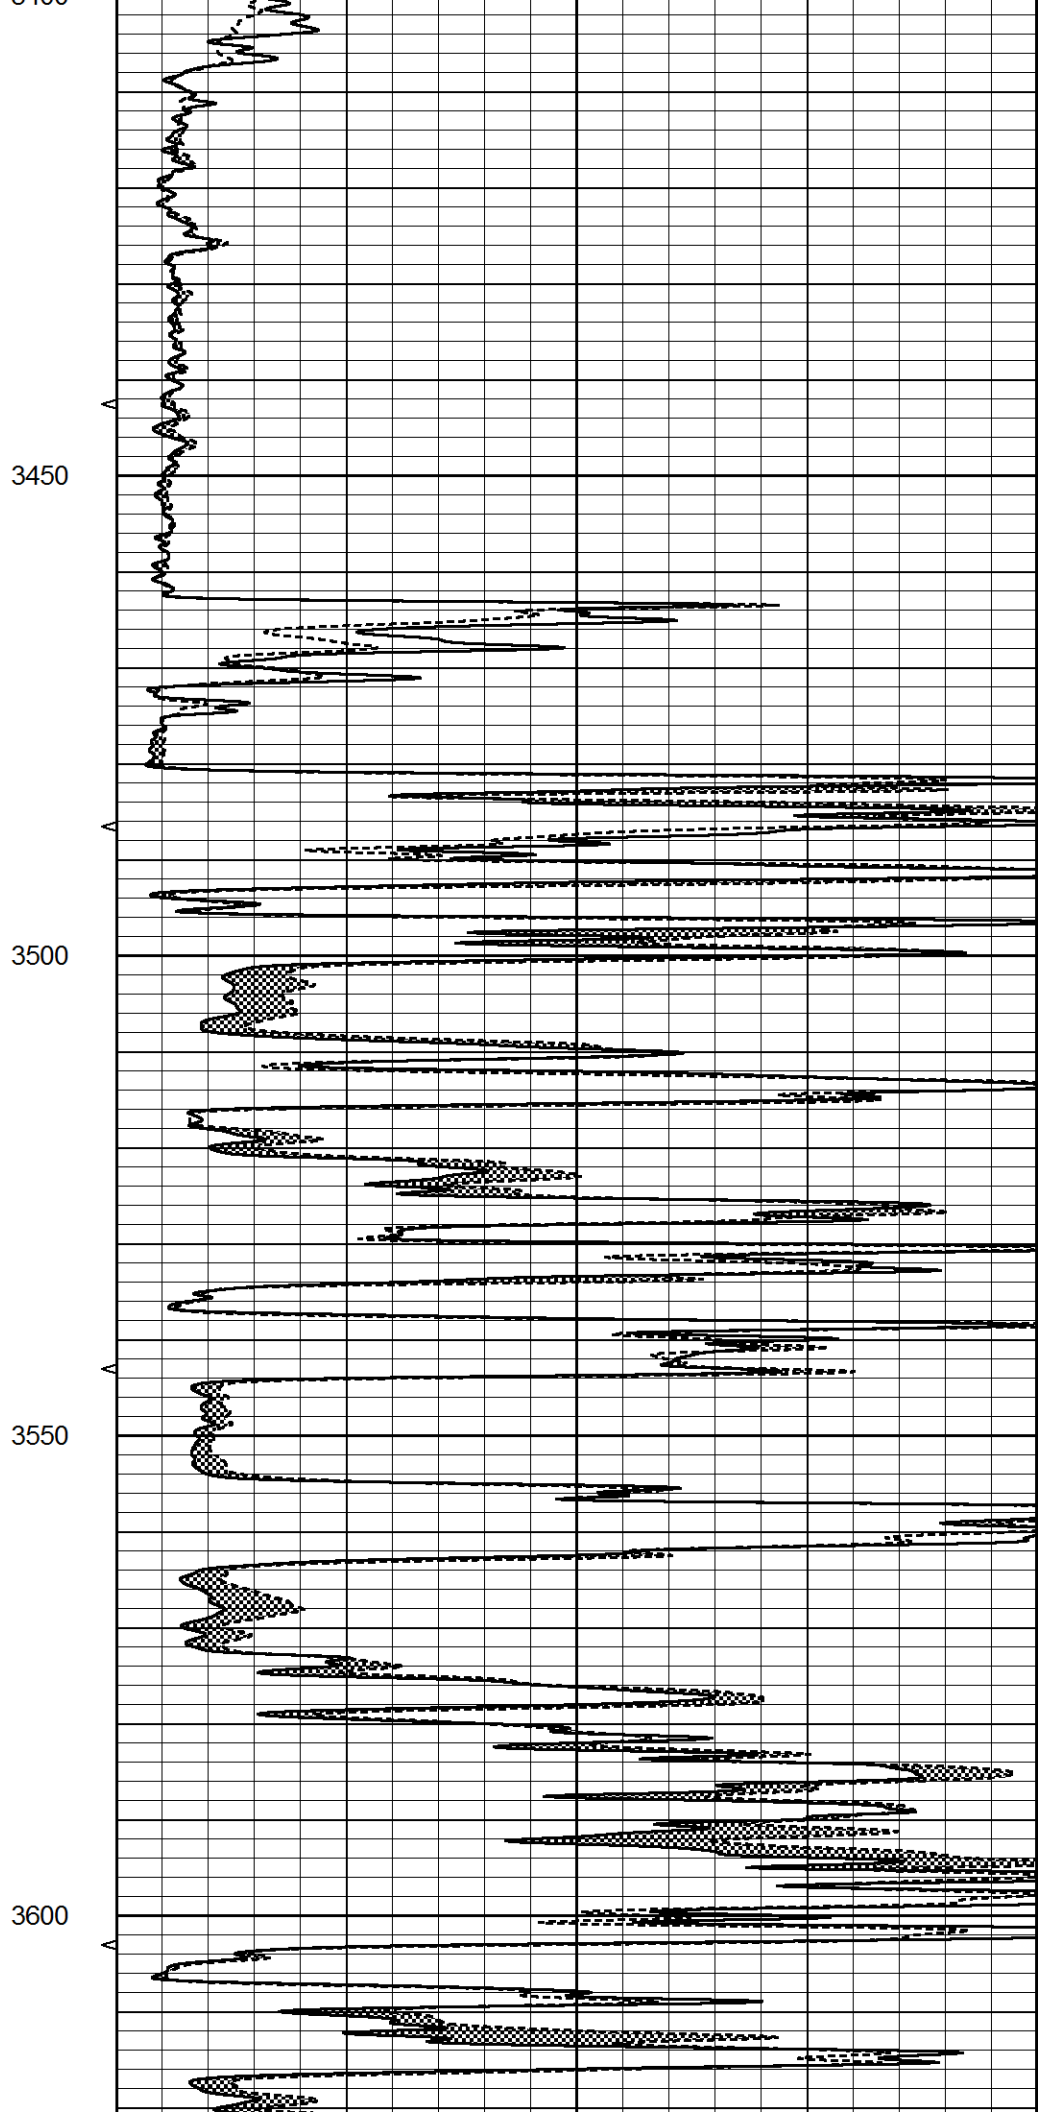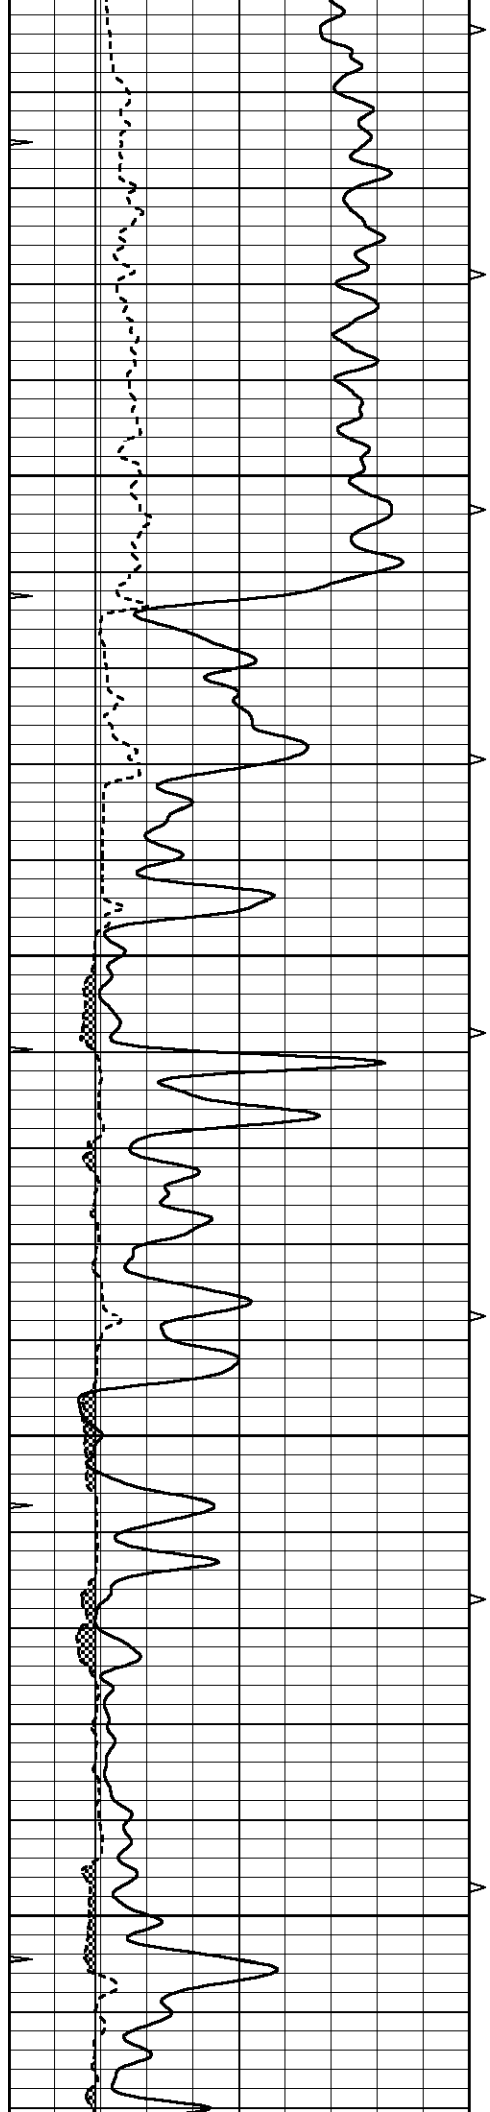

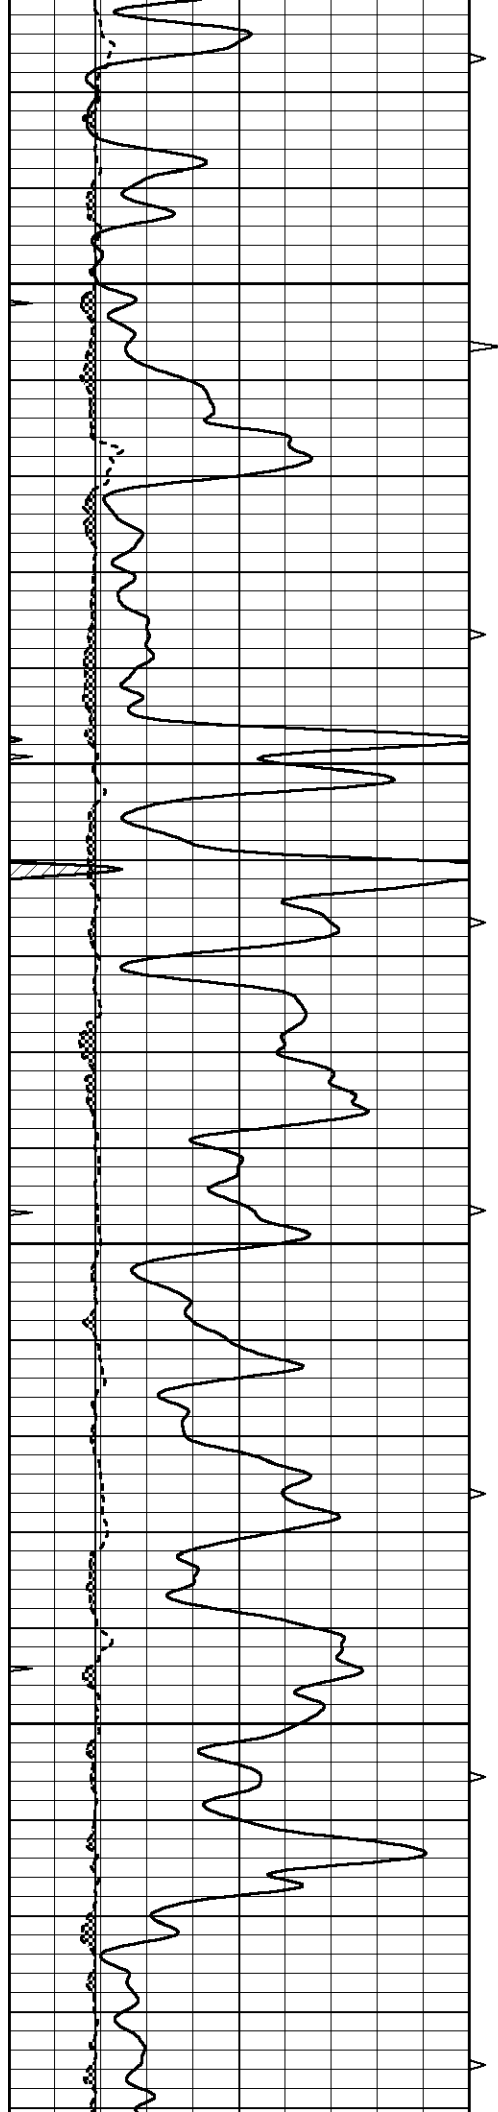



3650

3700

3750

3800

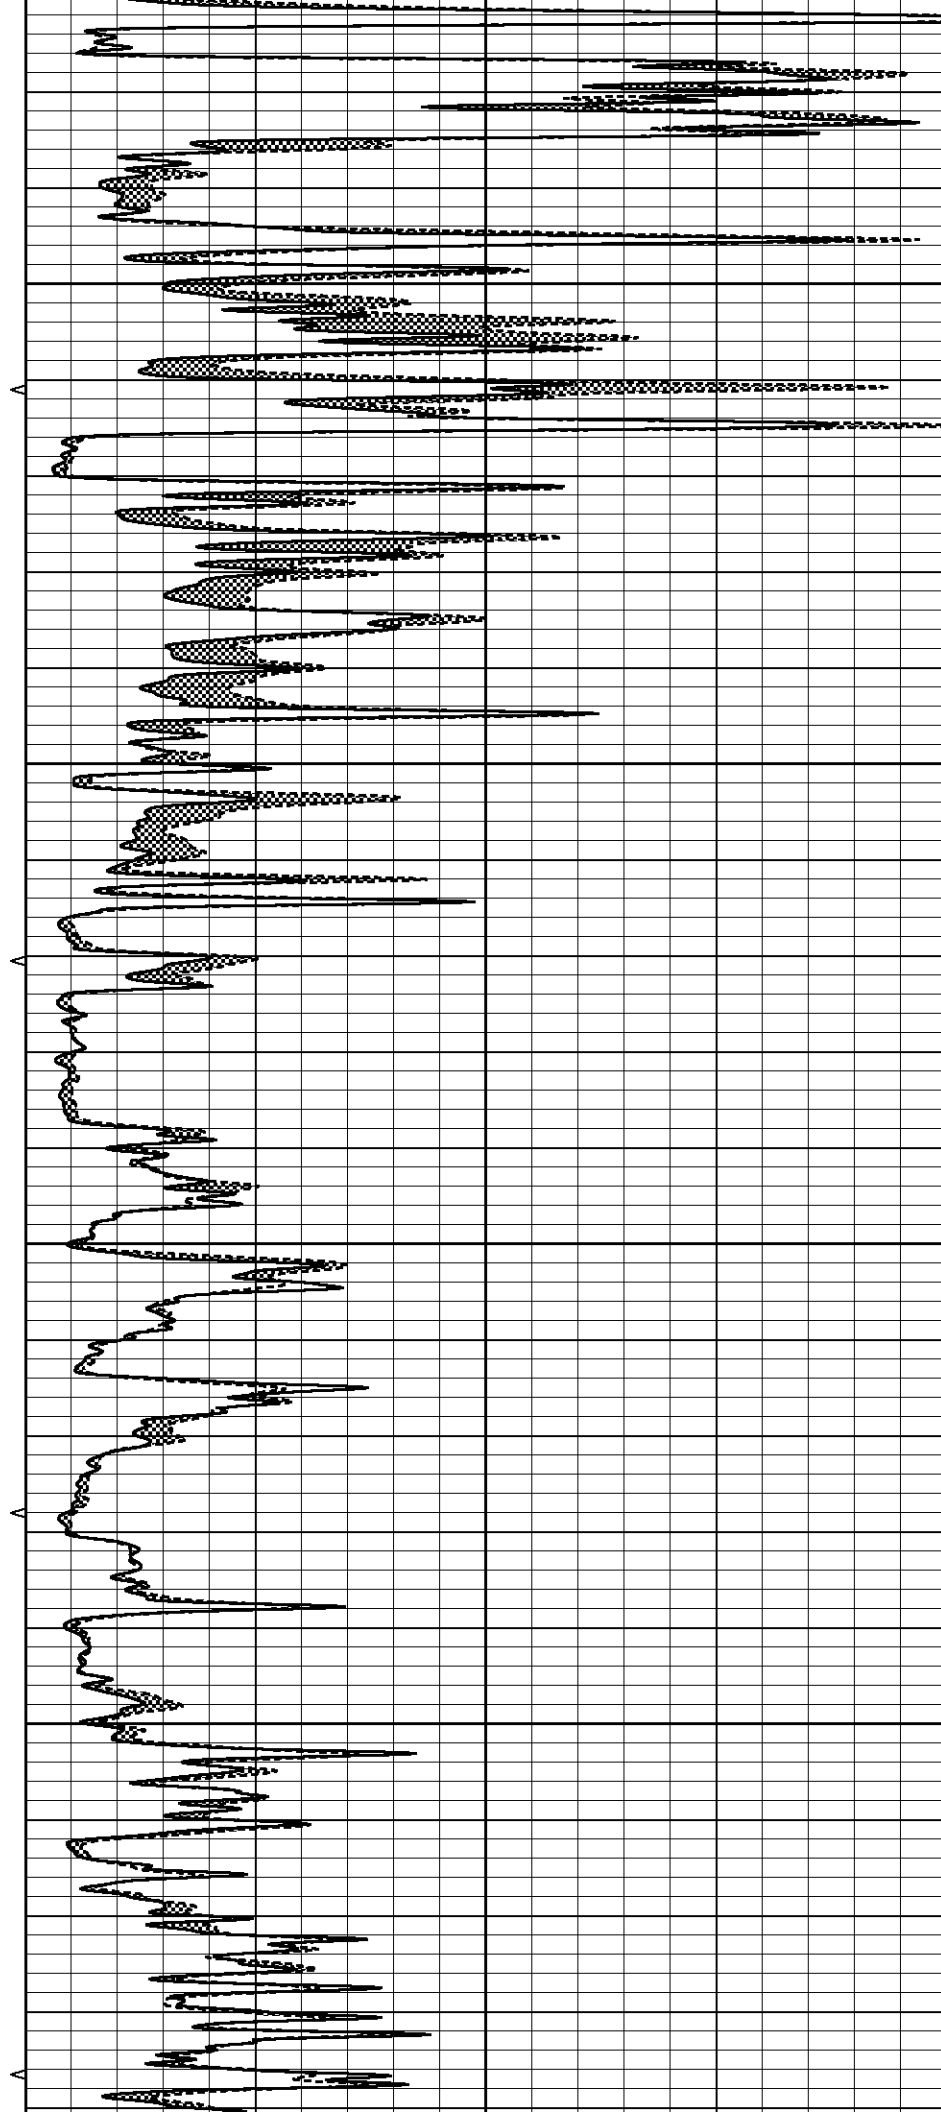


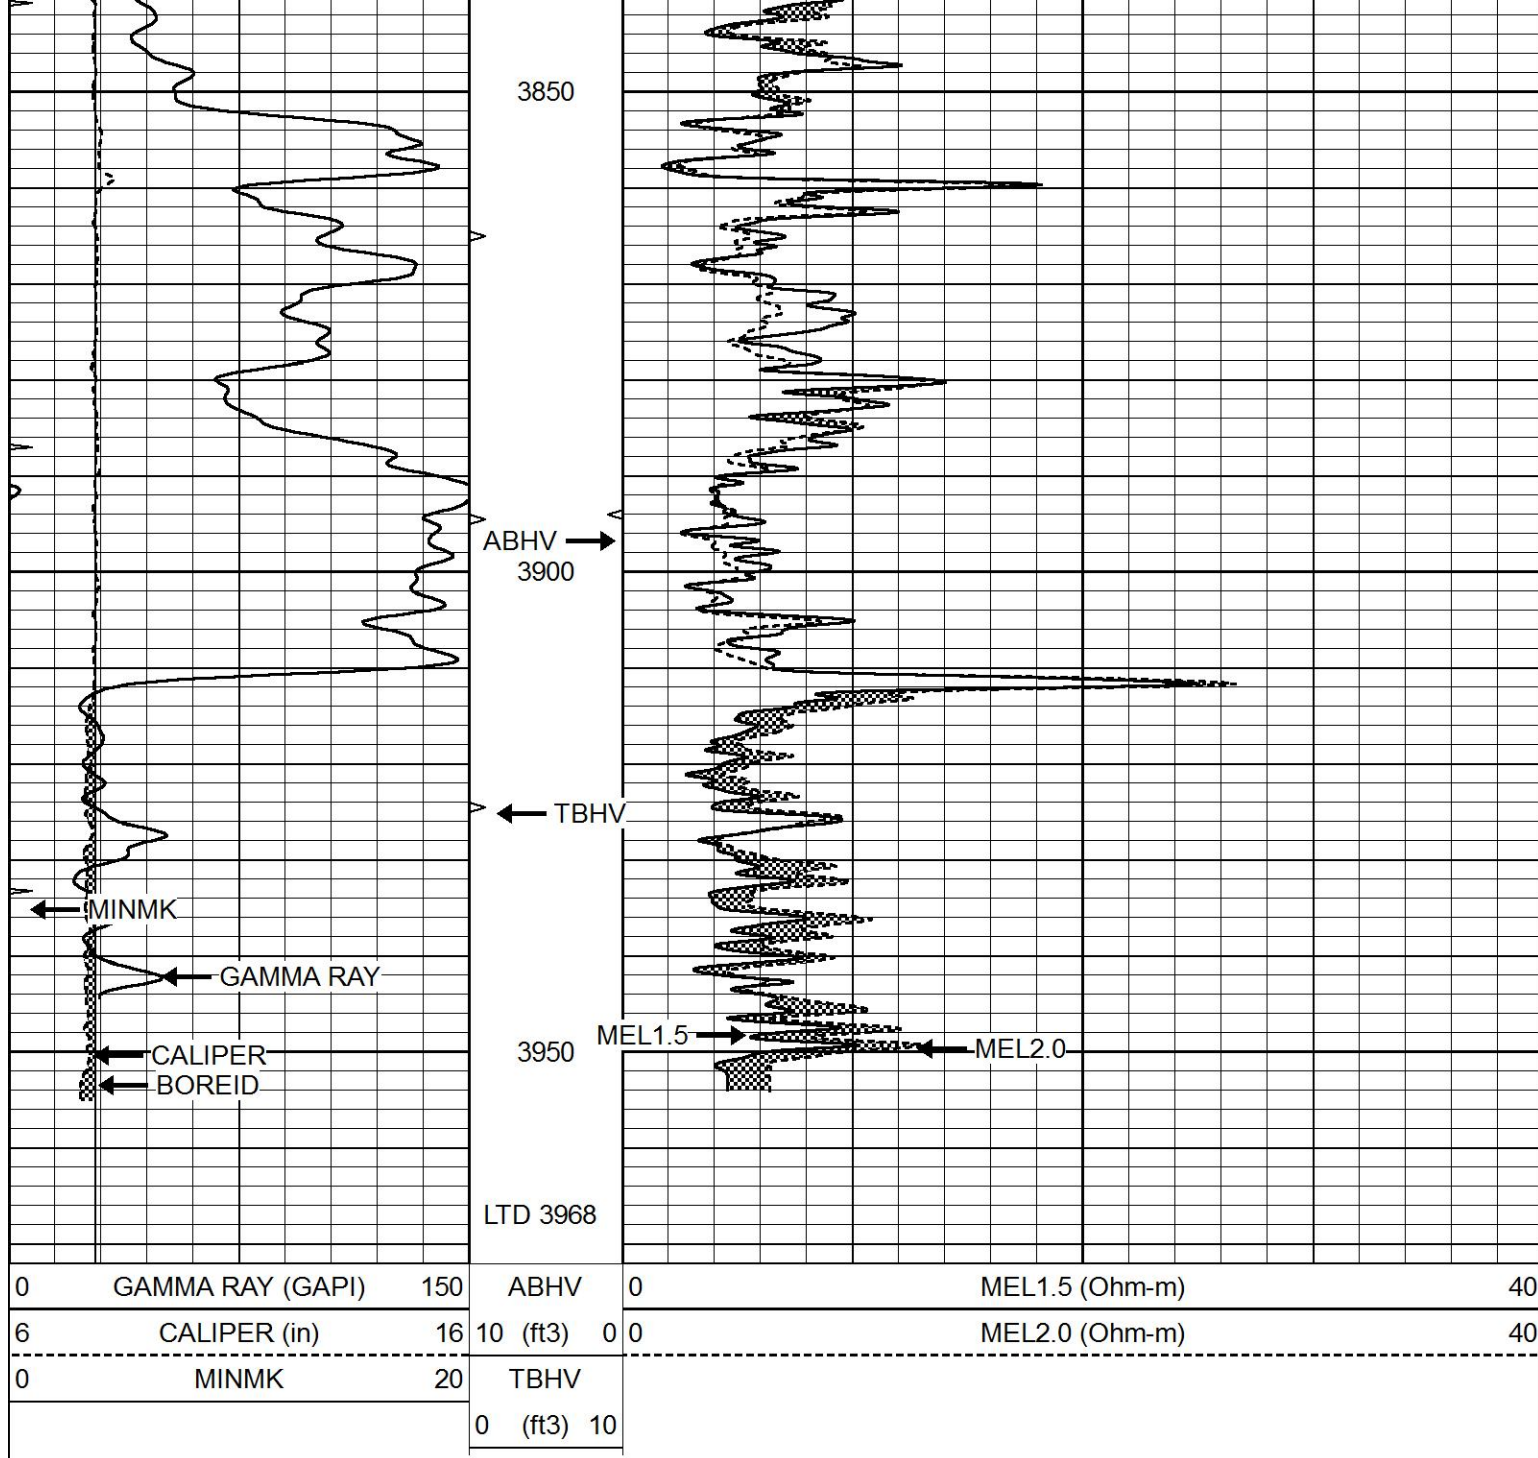

REPEAT SECTION

Database File 5612ddn.db
 Dataset Pathname pass4.1
 Presentation Format _micro
 Dataset Creation Mon Aug 09 02:04:36 2021
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

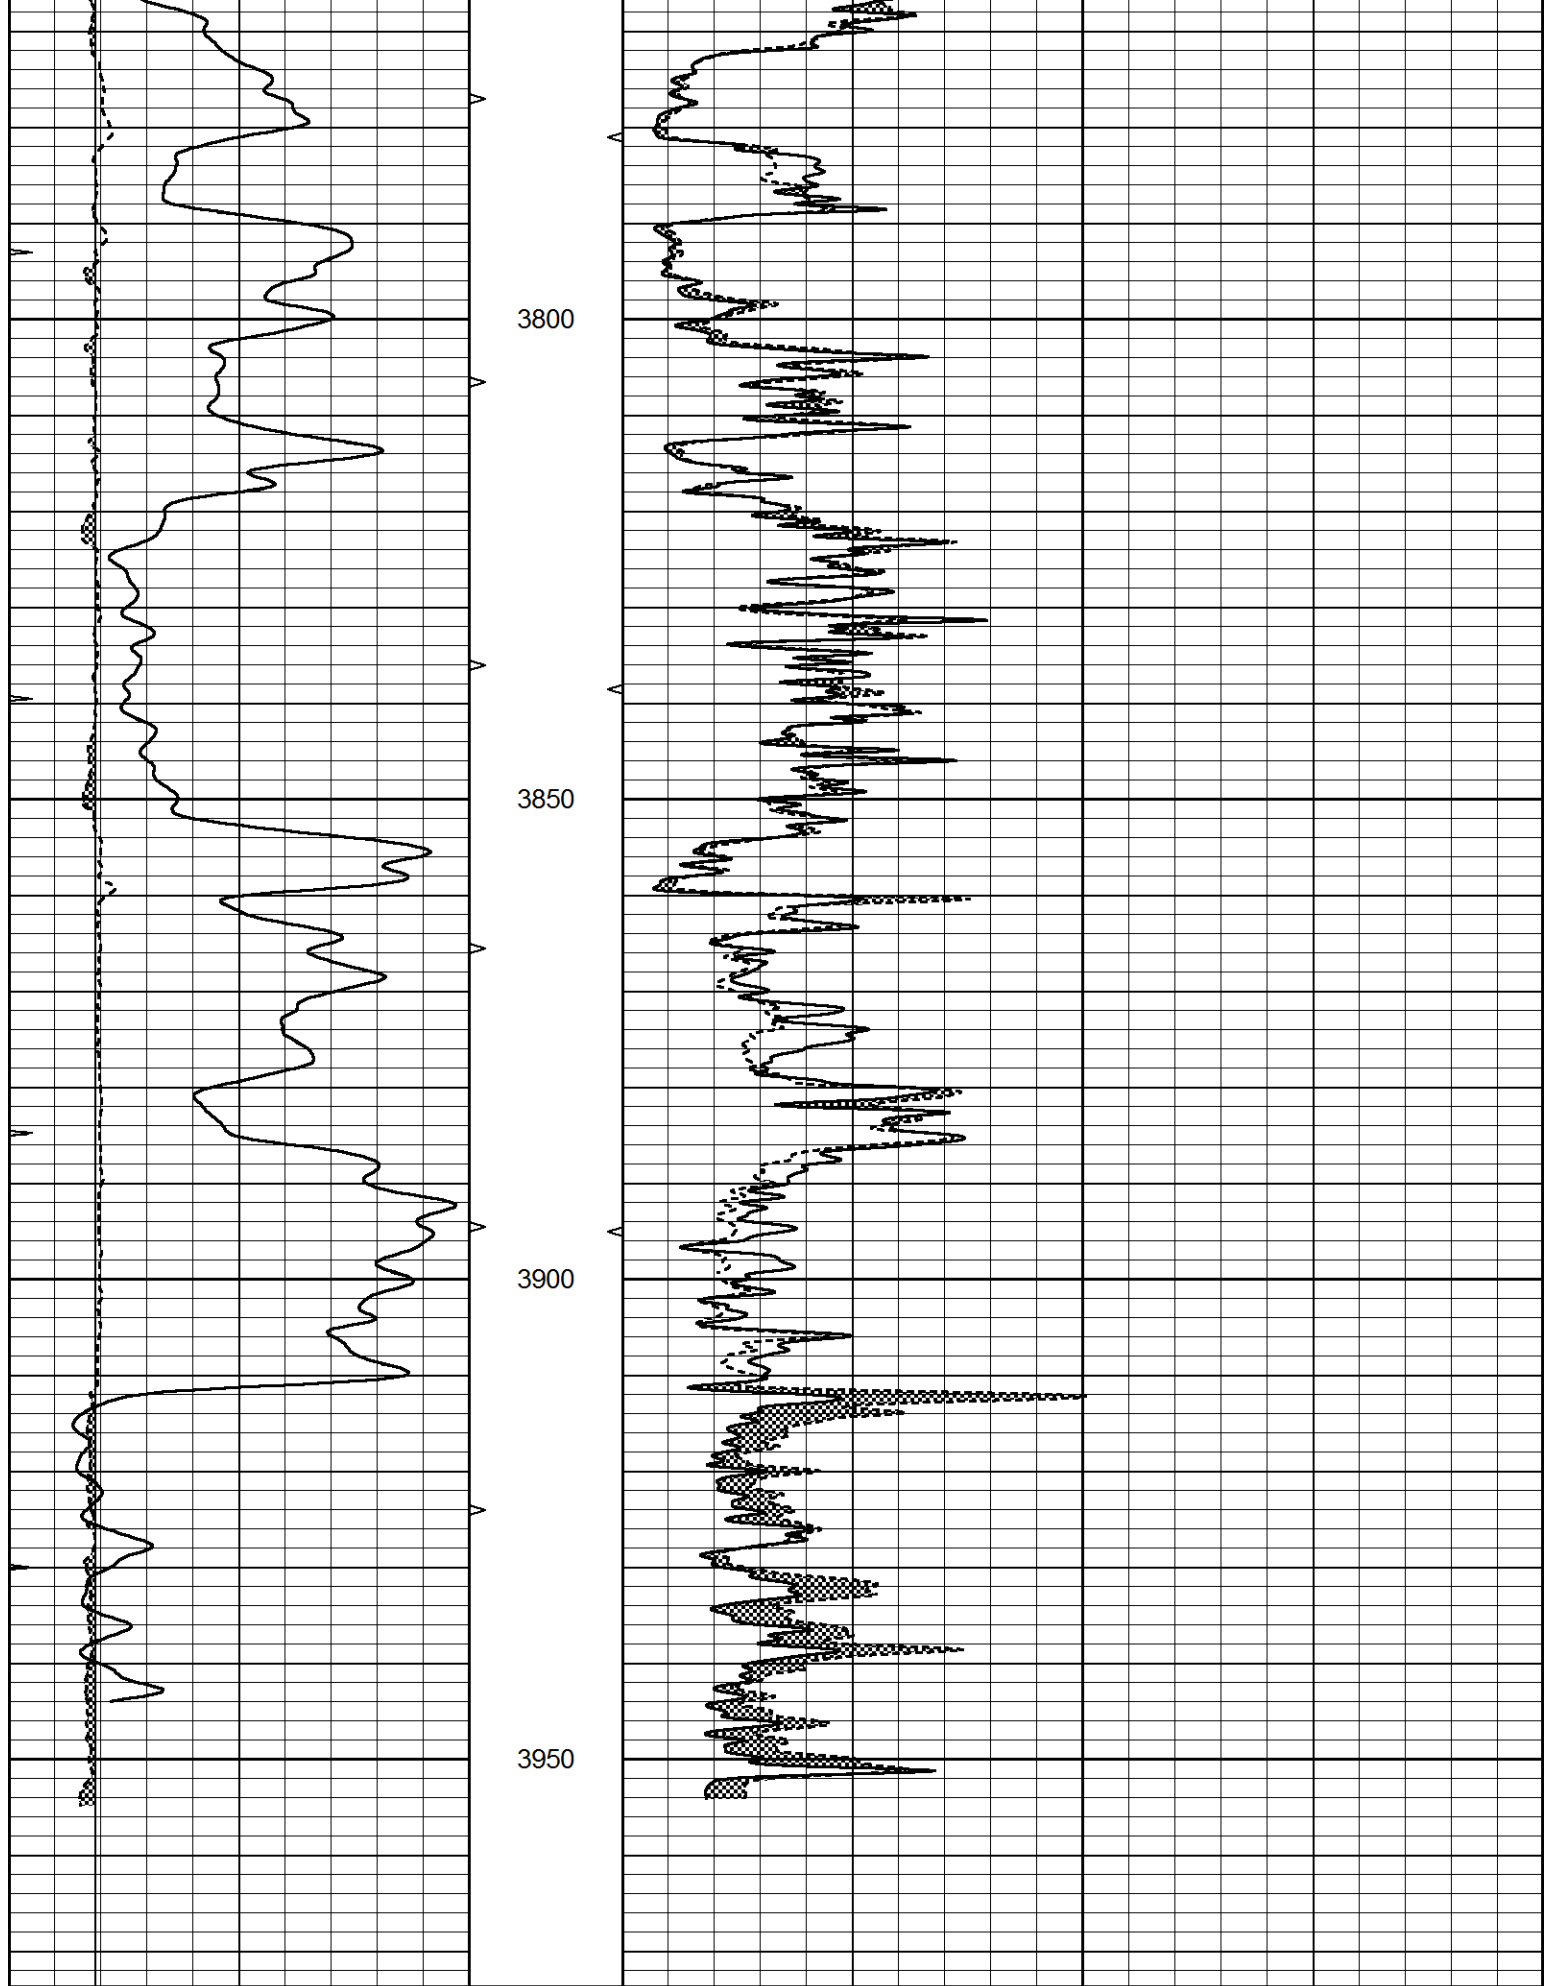

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			

Calibration Report

Database File 5612ddn.db
 Dataset Pathname pass4.1
 Dataset Creation Mon Aug 09 02:04:36 2021

MICRO Calibration Report

Serial Number: Micro1
 Tool Model: ProbeL
 Performed: Thu Aug 05 13:03:33 2021

Caliper Calibration: Gain=2.815 Offset=4.692

	Low Cal	High Cal
References	8.500	13.500
Readings	0.887	2.663

1.5" Calibration: Gain=36.134 Offset=0.000

	Low Cal	High Cal
References	0.000	20.000
Readings	0.004	0.832

2" Calibration: Gain=38.000 Offset=0.200

	Low Cal	High Cal
References	0.000	20.000
Readings	0.022	0.793

Gamma Ray Calibration Report

Serial Number: GR5
 Tool Model: OPEN
 Performed: Thu Jul 30 23:16:16 2020

Calibrator Value: 1.0 GAPI

Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps

Sensitivity: 0.5000 GAPI/cps