



DUAL  
INDUCTION  
LOG

Company MUSTANG ENERGY  
 Well GARY #3  
 Field STAR  
 County ELLIS State KANSAS

Location: API #: 15-051-27007-0000  
 1830' FSL & 1175' FEL  
 SEC 31 TWP 11S RGE 19W  
 Permanent Datum GROUND LEVEL Elevation 2131  
 Log Measured From KELLY BUSHING 7' A.G.L  
 Drilling Measured From KELLY BUSHING  
 Other Services  
 CDL/CNL  
 MEL  
 Elevation  
 K.B. 2138  
 D.F. 2136  
 G.L. 2131

Date	8/1/21
Run Number	ONE
Depth Driller	3780
Depth Logger	3780
Bottom Logged Interval	3778
Top Log Interval	00
Casing Driller	8 5/8" @ 214'
Casing Logger	214
Bit Size	7 7/8
Type Fluid in Hole	CHEMICAL MUD
Density / Viscosity	9.3/51
pH / Fluid Loss	9.5/8.8
Source of Sample	FLOWLINE
Rm @ Meas. Temp	.65 @ 80F
Rmf @ Meas. Temp	.48 @ 80F
Rmc @ Meas. Temp	.78 @ 80F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	.45 @ 114F
Time Circulation Stopped	2 HOURS
Time Logger on Bottom	////
Maximum Recorded Temperature	114F
Equipment Number	3802
Location	HAYS, KANSAS
Recorded By	JASON CAPPELLUCCI
Witnessed By	CAMERON BRIN

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. ( 785 ) 628-6395  
 DIRECTIONS  
 I 70 & YOCEMENTO - NORTH TO HOMESTEAD RD. - 2 WEST - 1/4 NORTH - WEST INTO




MAIN SECTION



Database File 5636ddn.db  
 Dataset Pathname pass3.3  
 Presentation Format \_dil2  
 Dataset Creation Sun Aug 01 03:05:42 2021  
 Charted by Depth in Feet scaled 1:600



0	Gamma Ray (GAPI)	150
-100	SP (mV)	100



1000	CILD (mmho/m)	0
0	RLL3 (Ohm-m)	50
0	Deep Induction (Ohm-m)	50
50	RILD X10 (Ohm-m)	500
50	RLL3 X10 (Ohm-m)	500


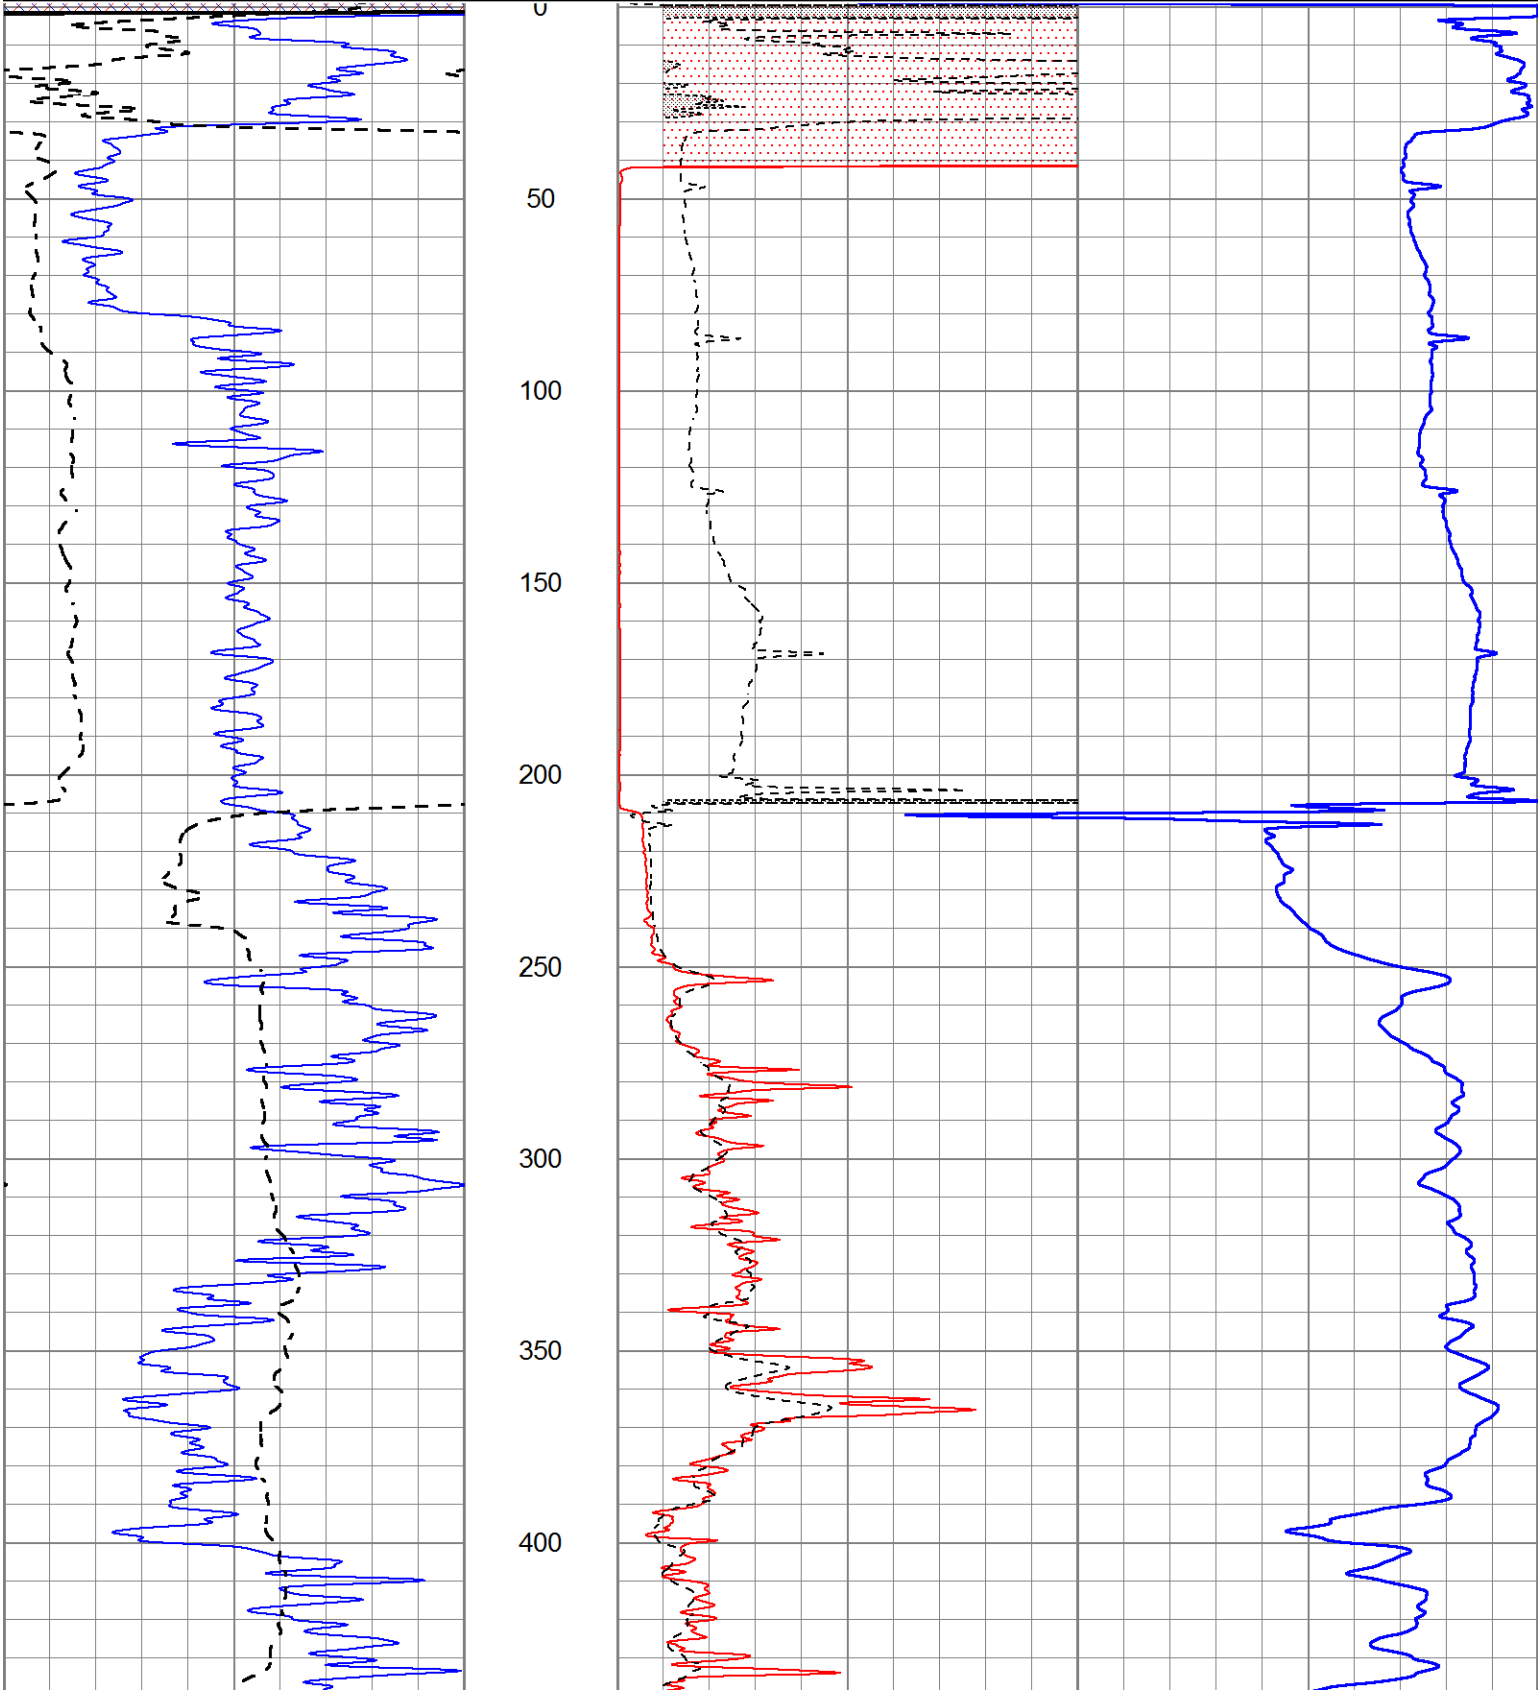




450  
500  
550  
600  
650  
700  
750  
800  
850  
900  
950


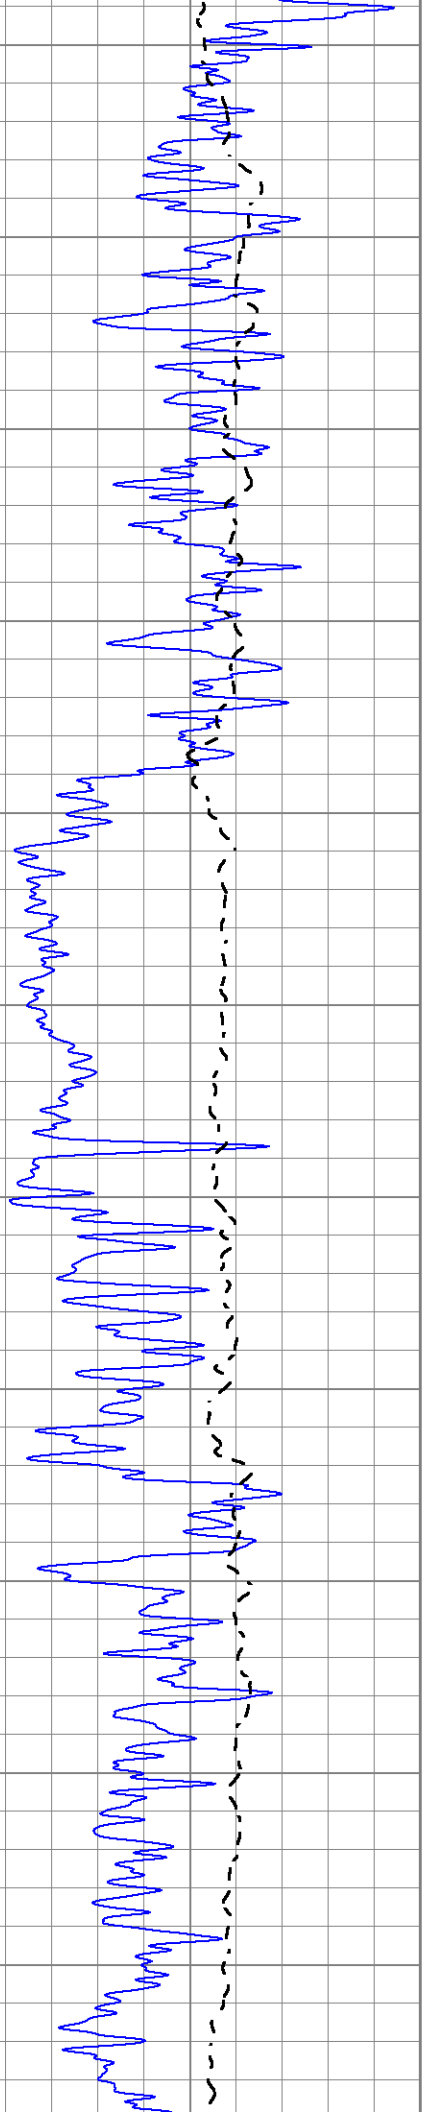
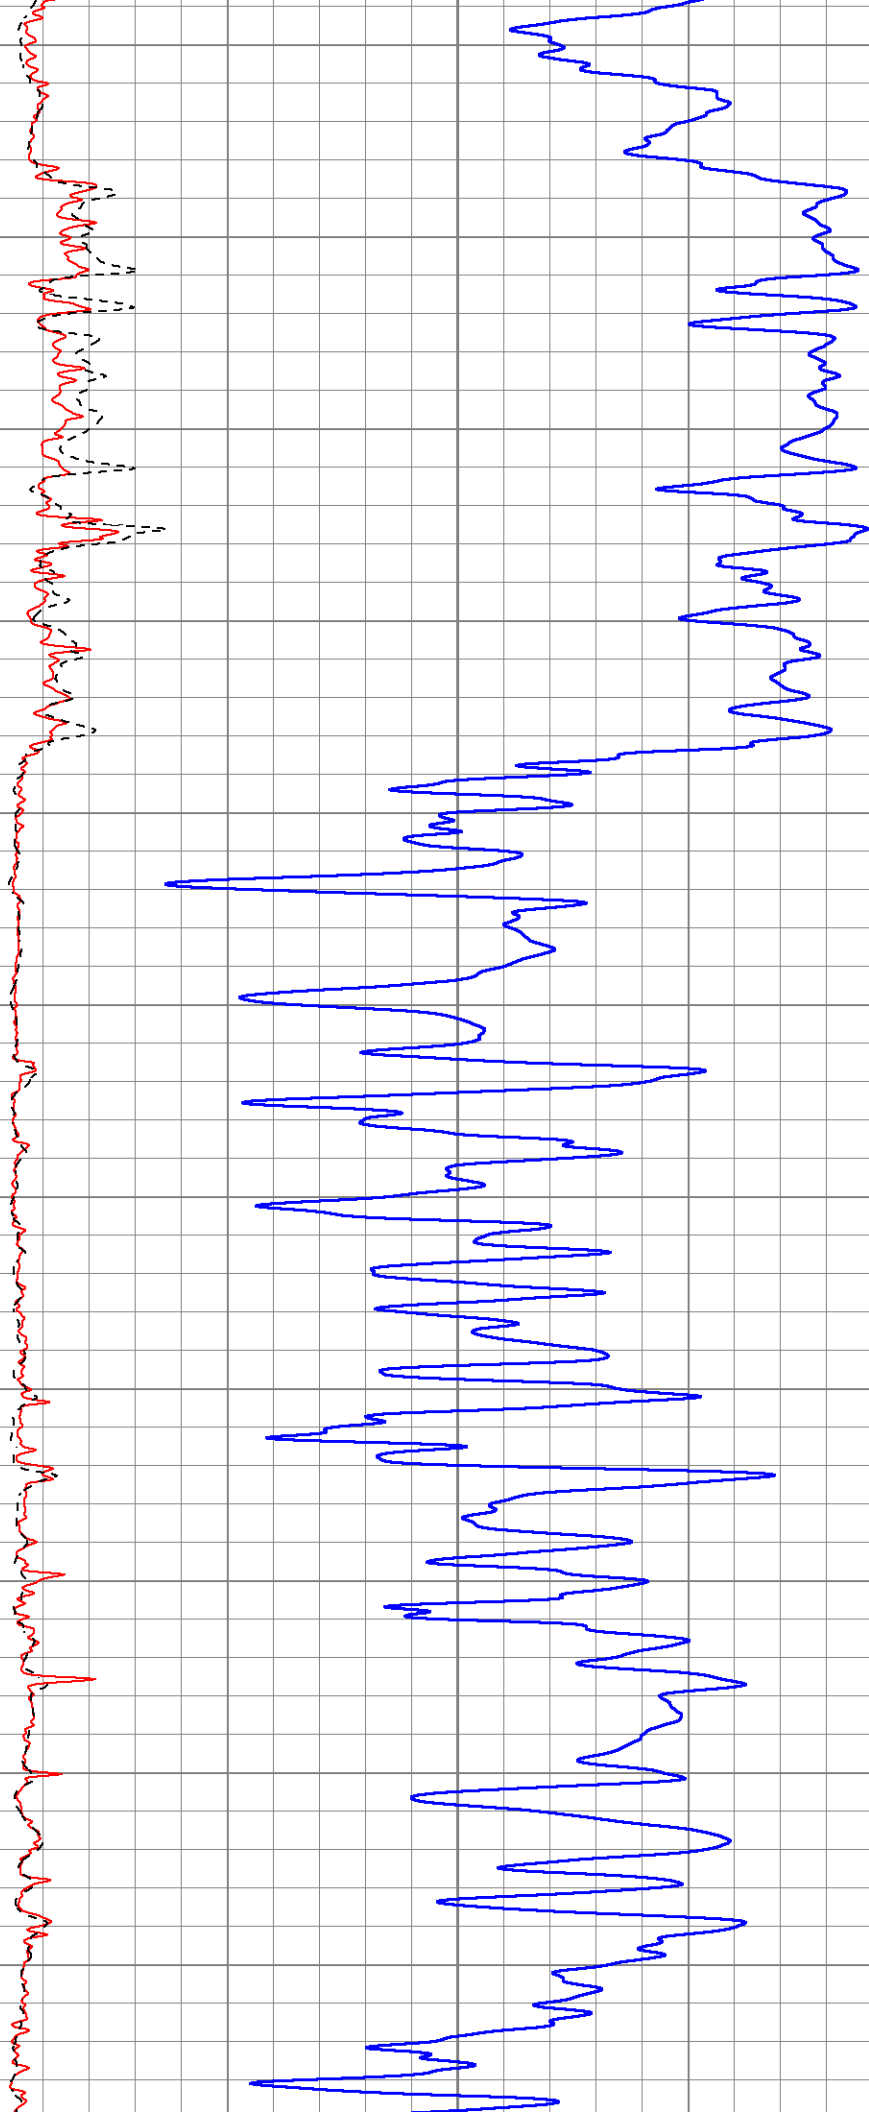


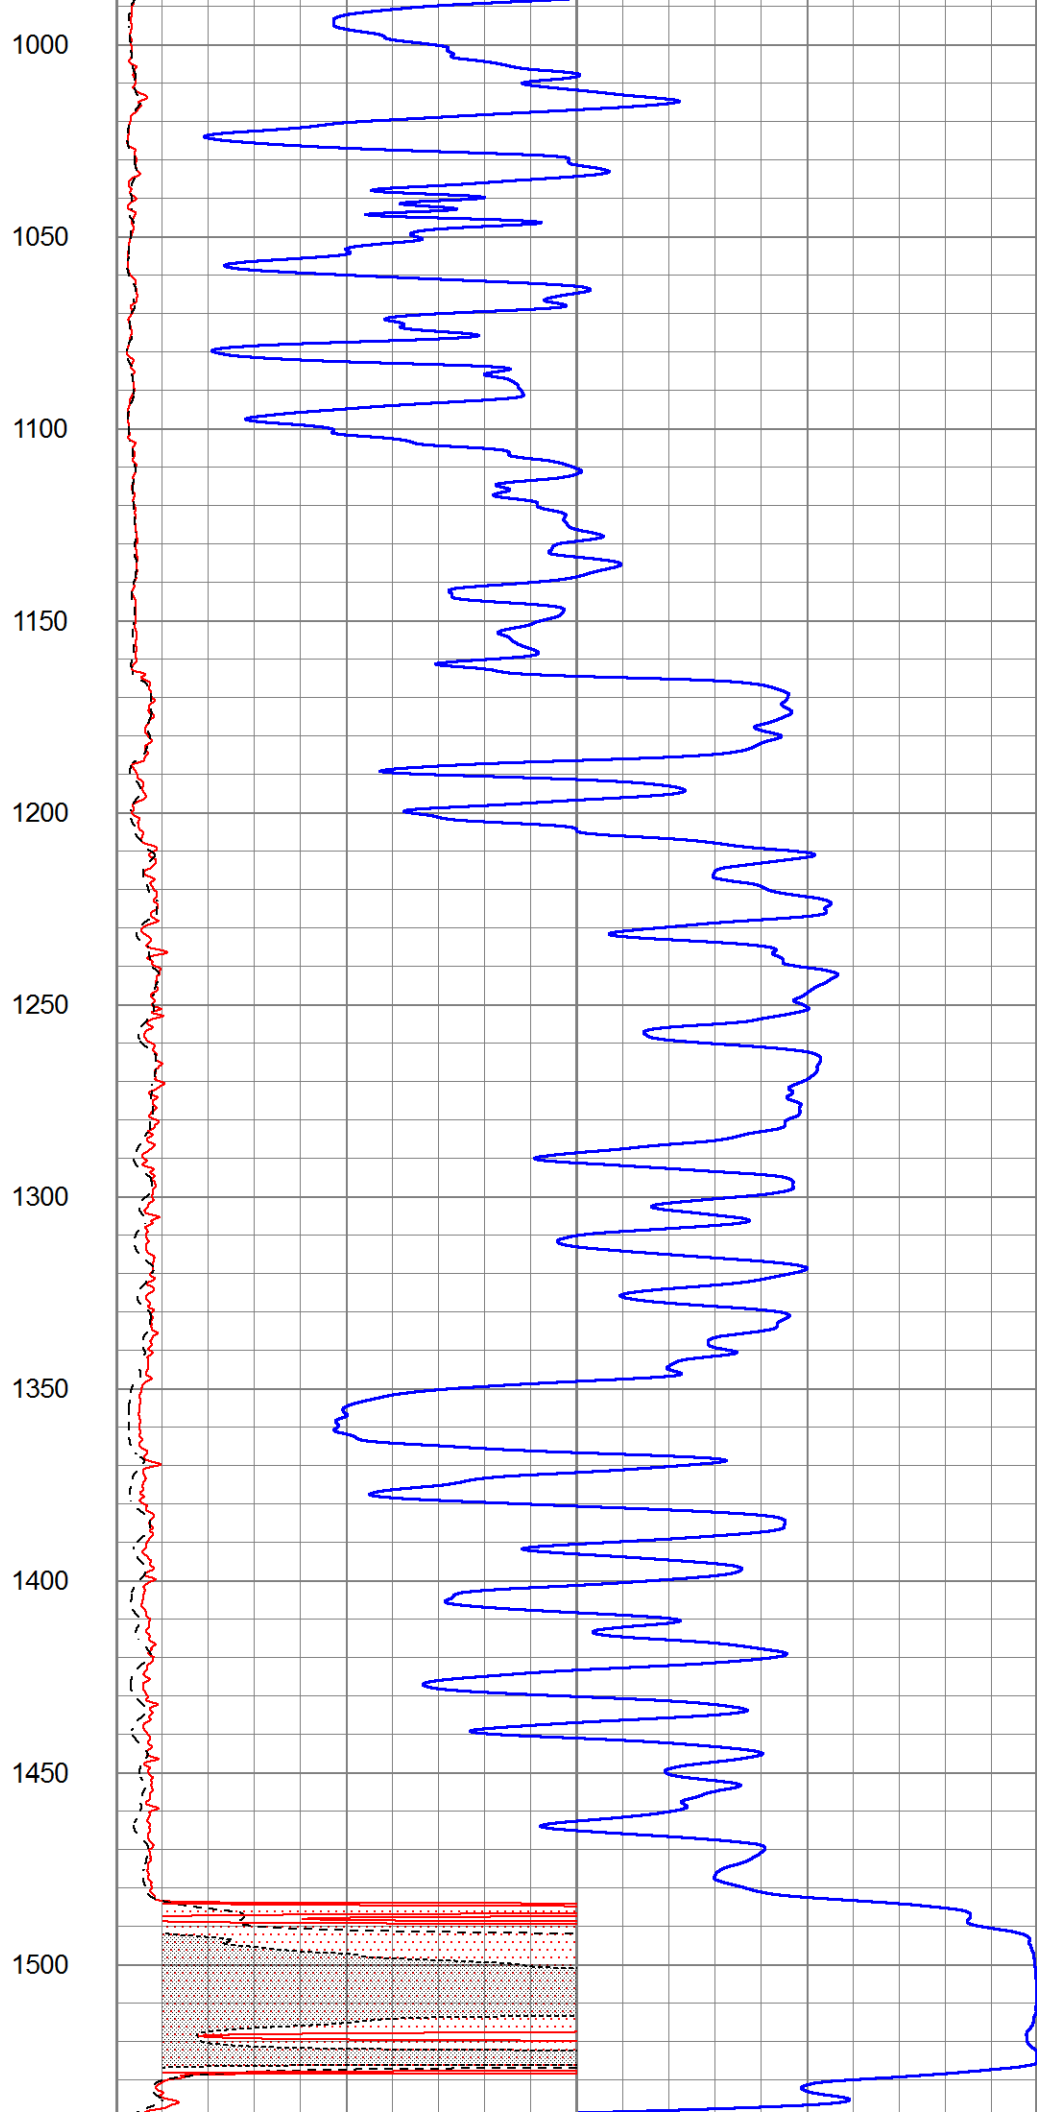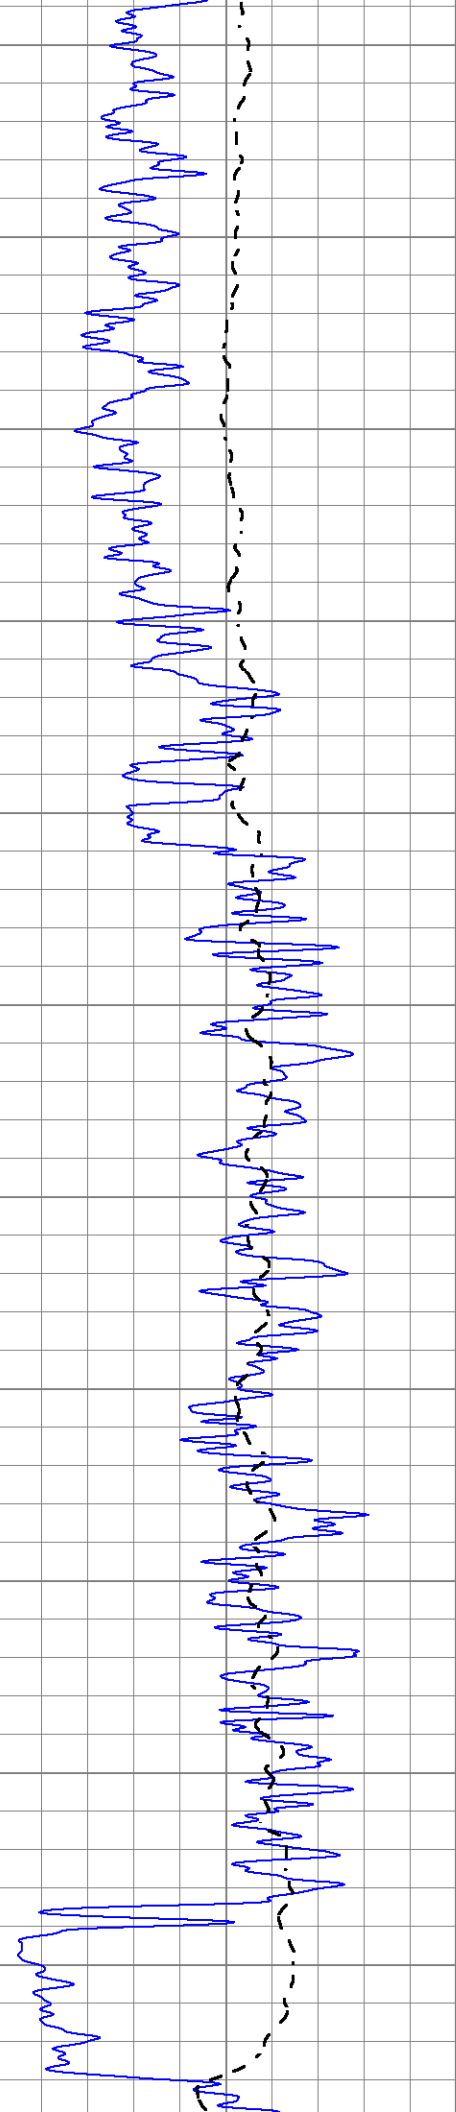


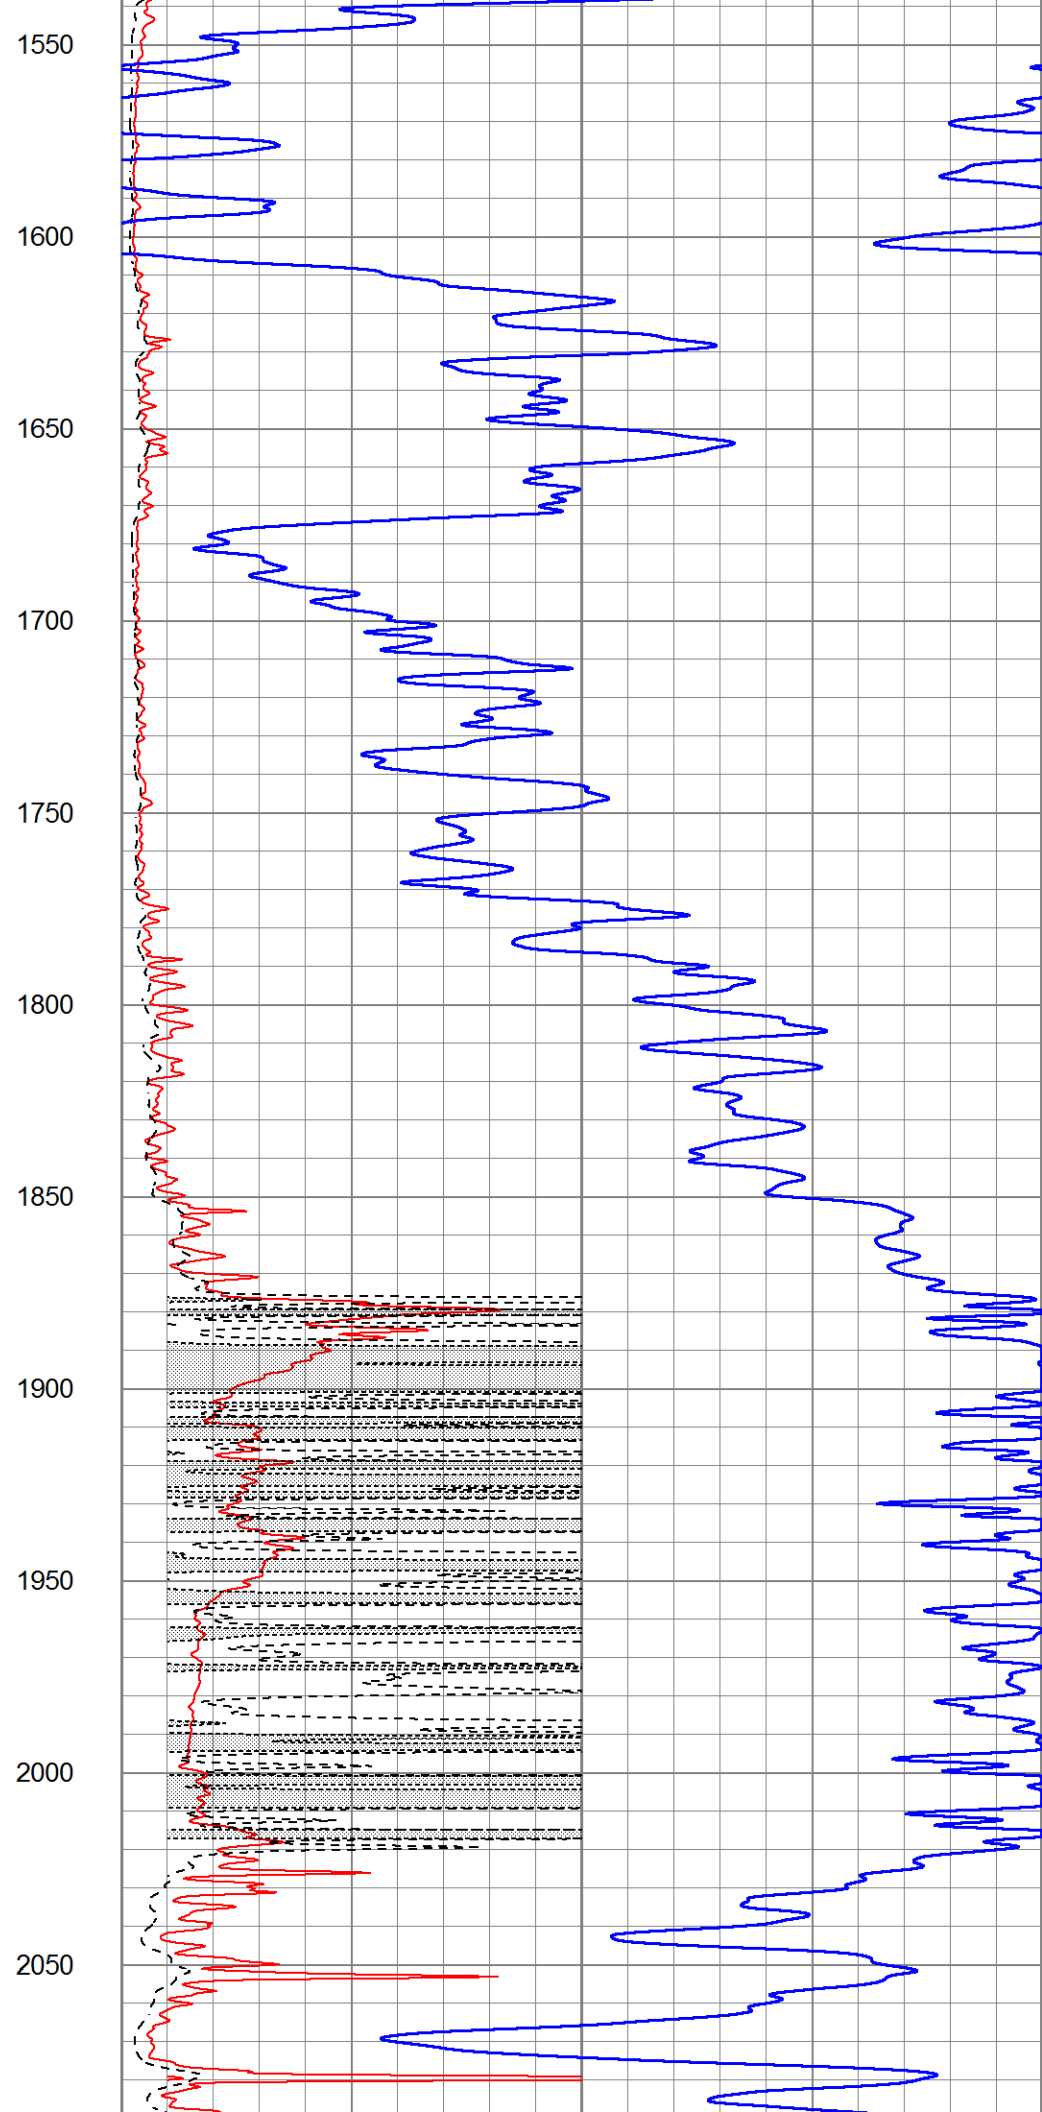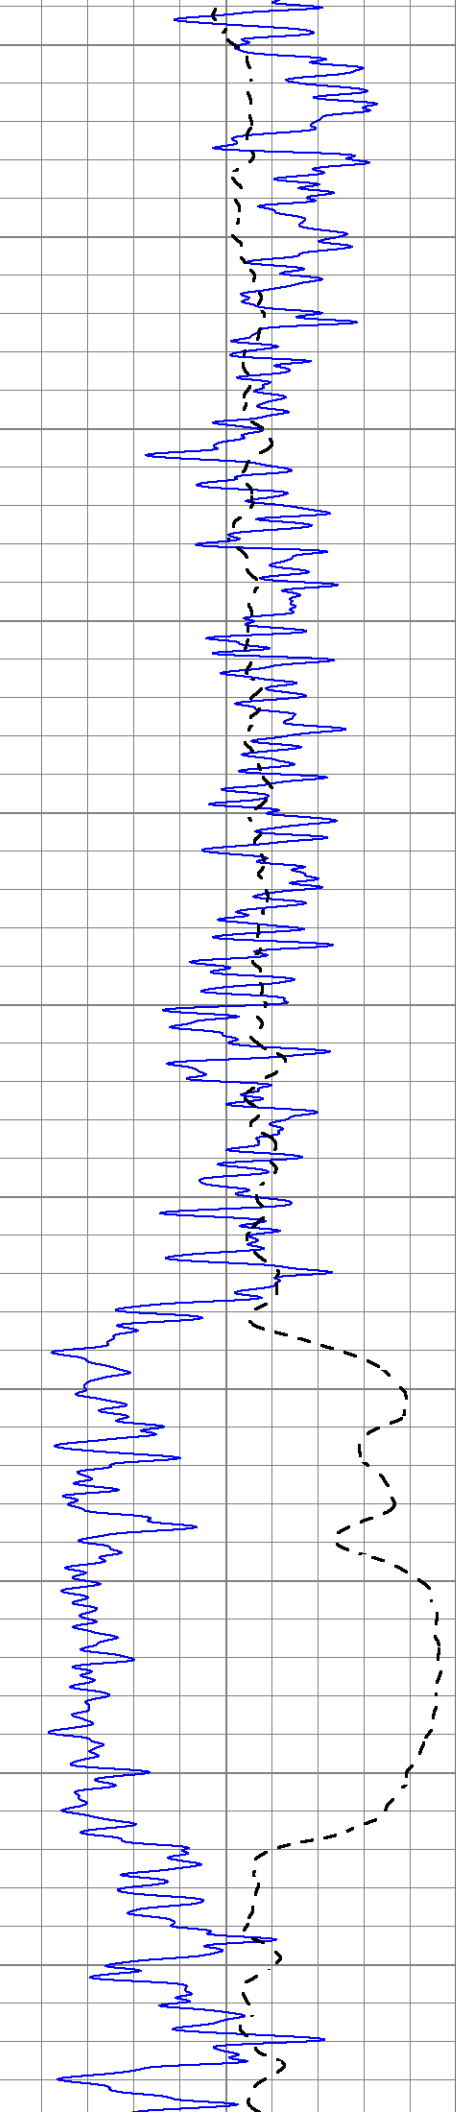

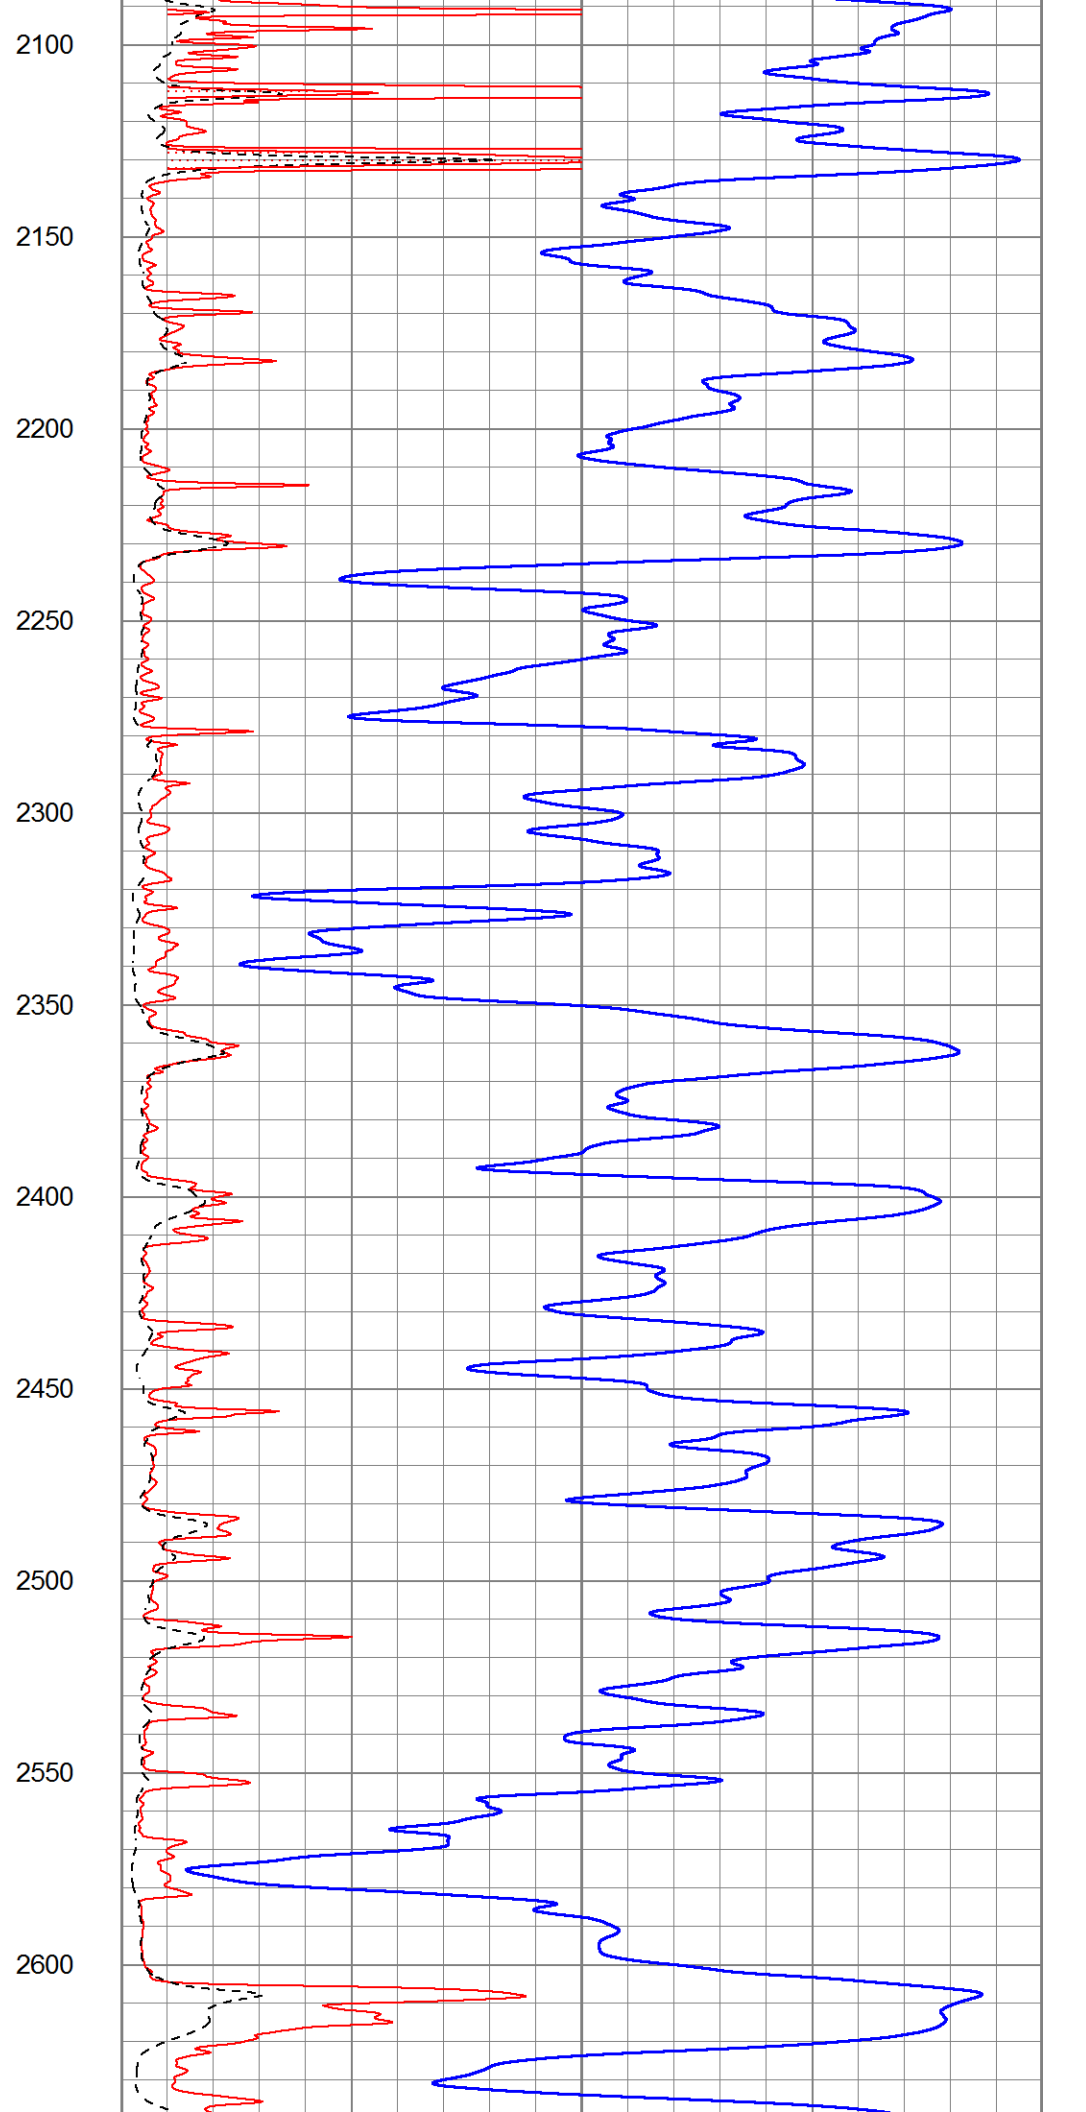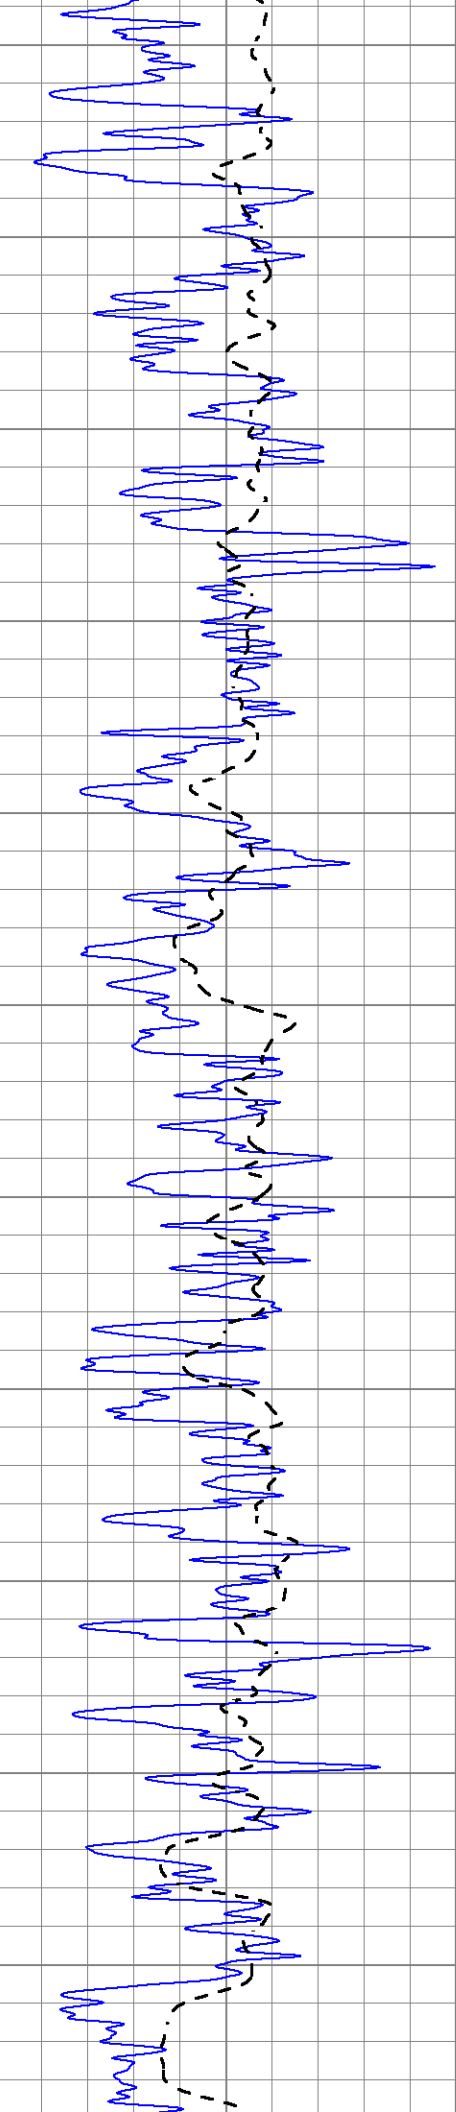

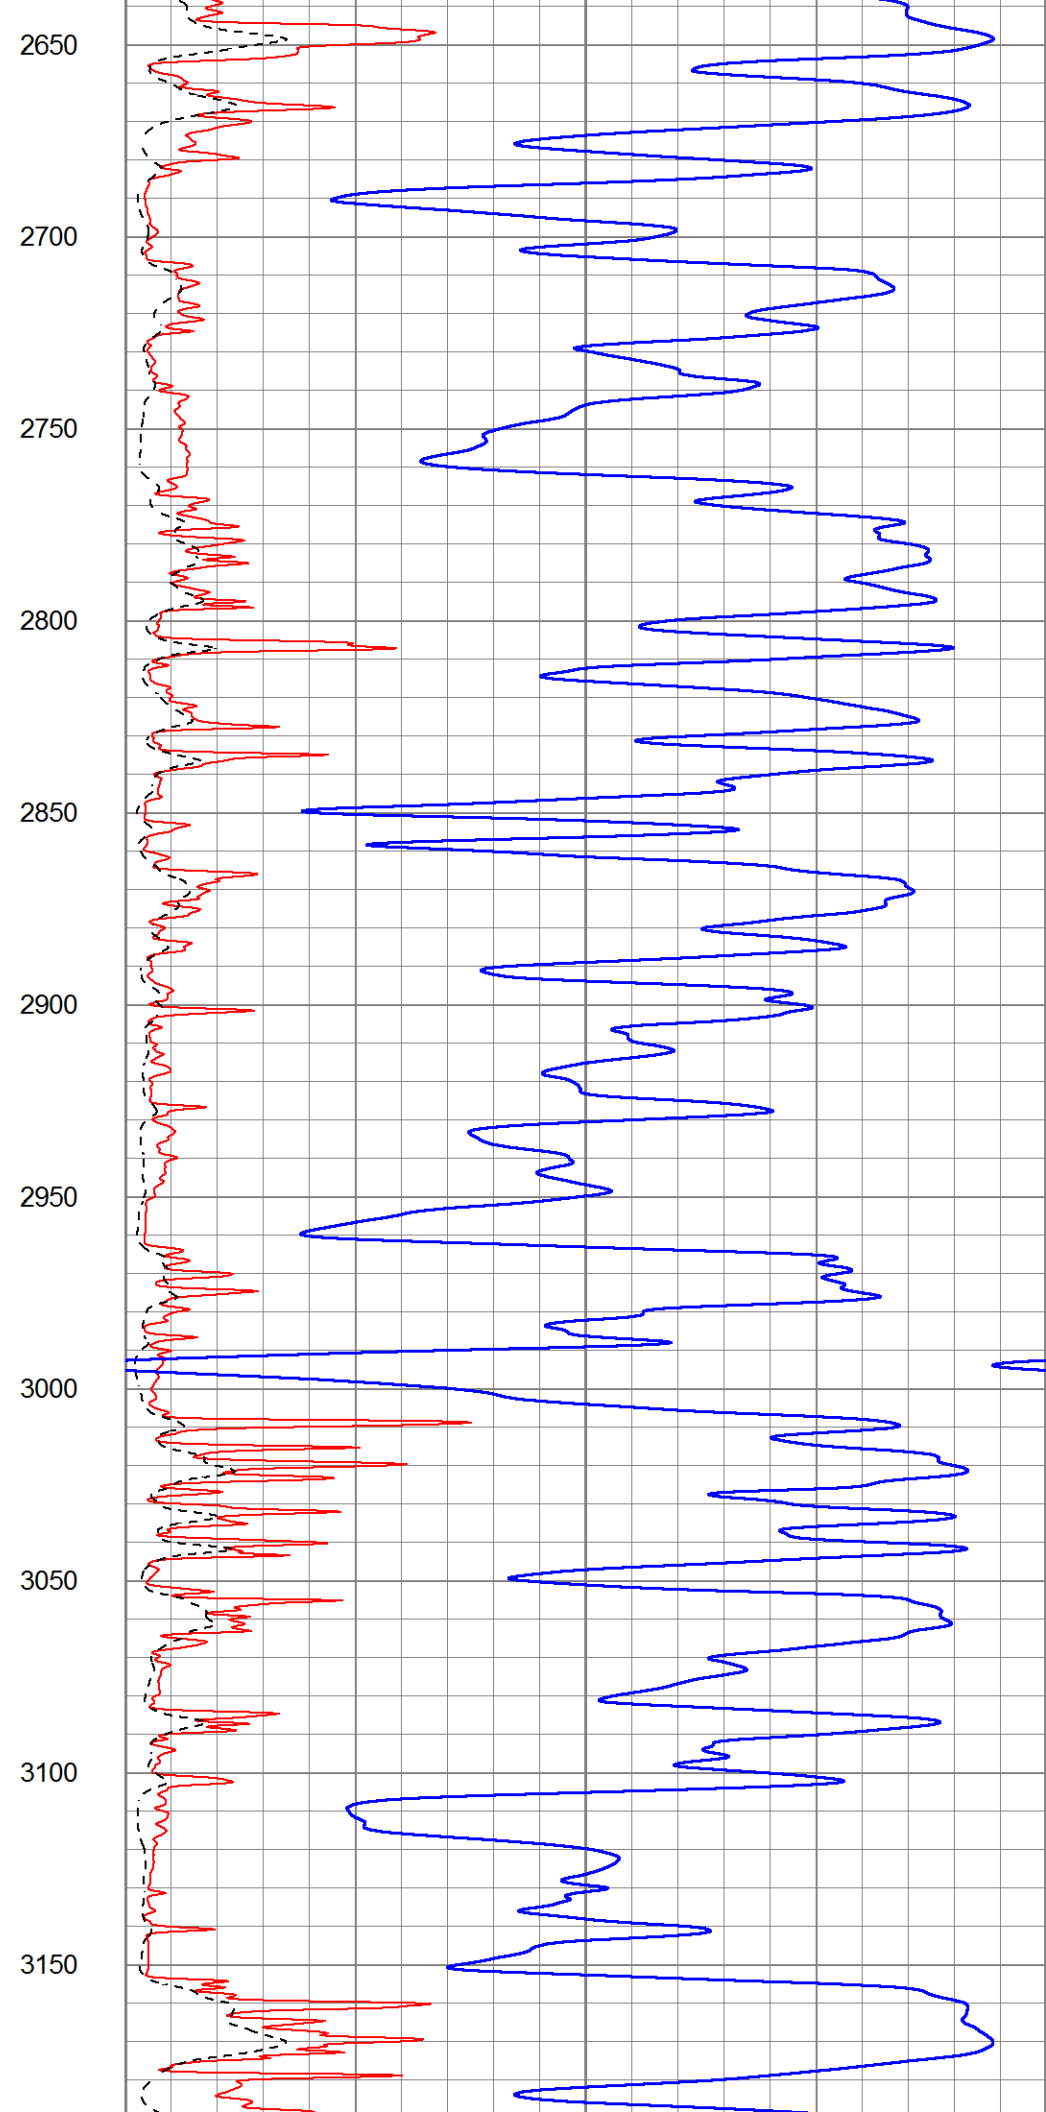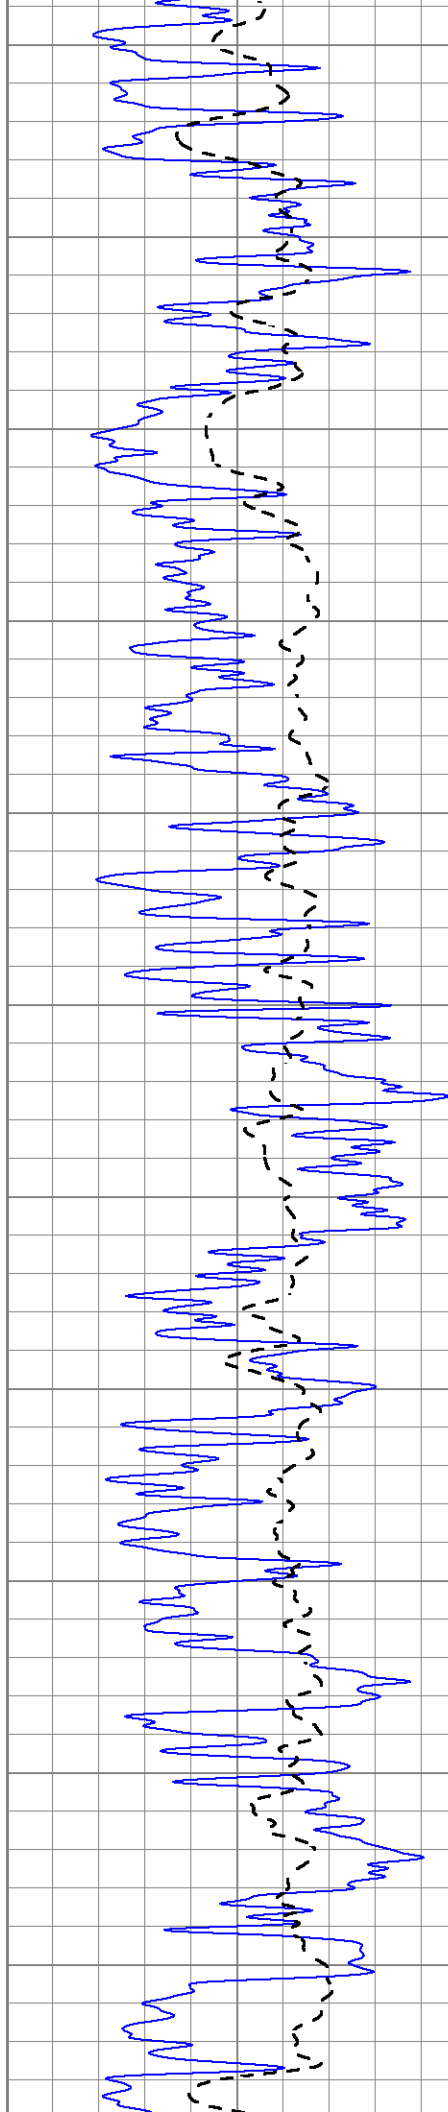

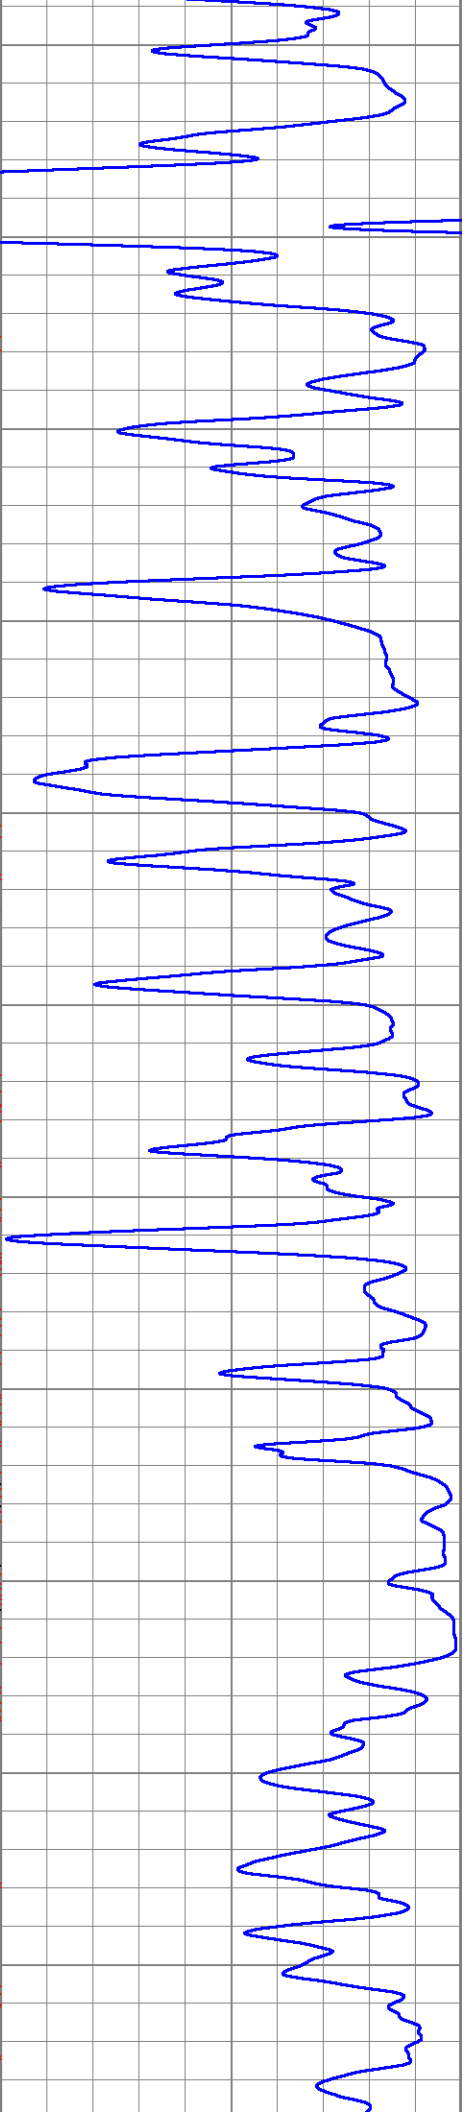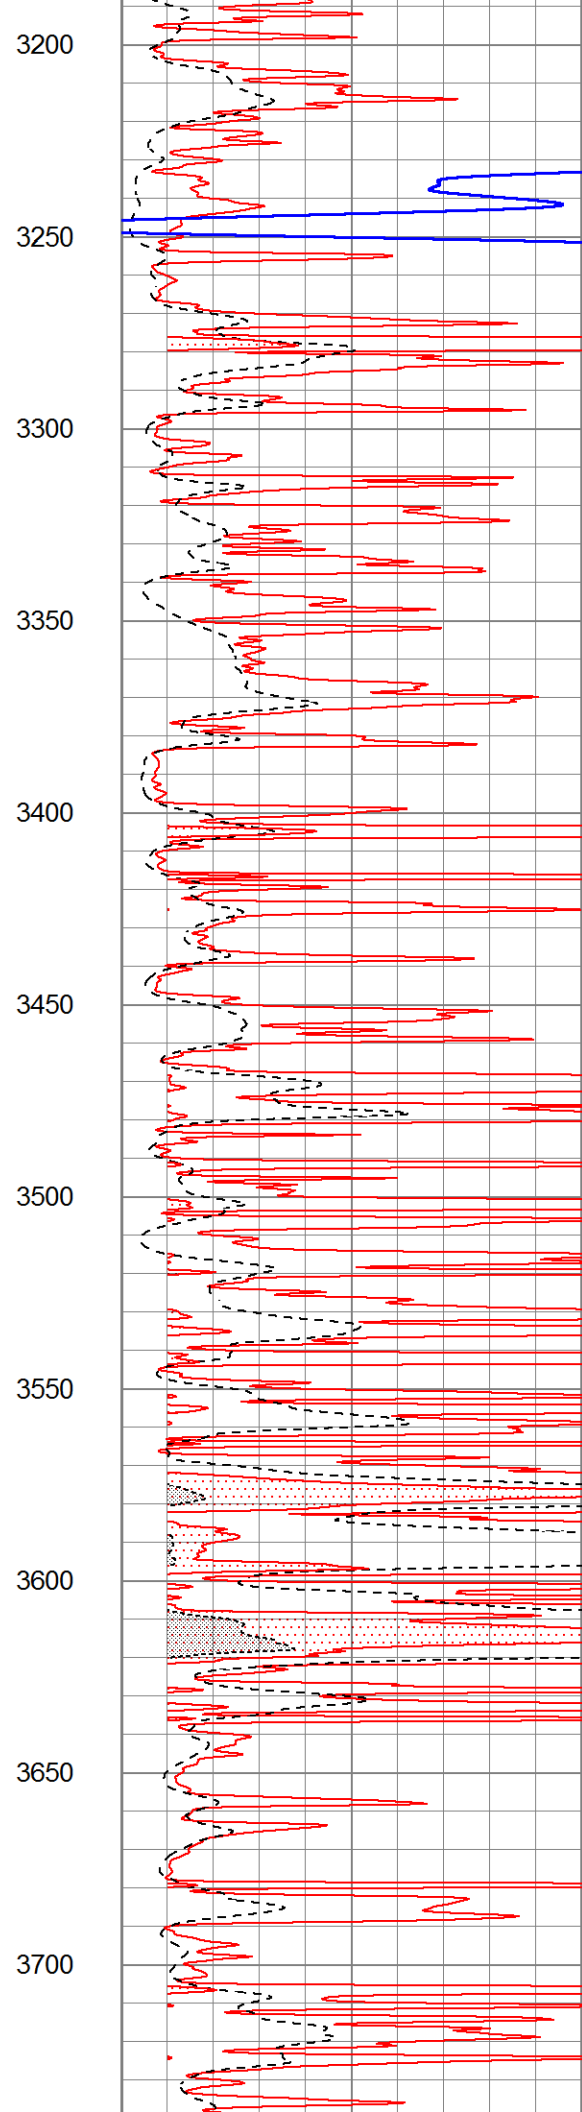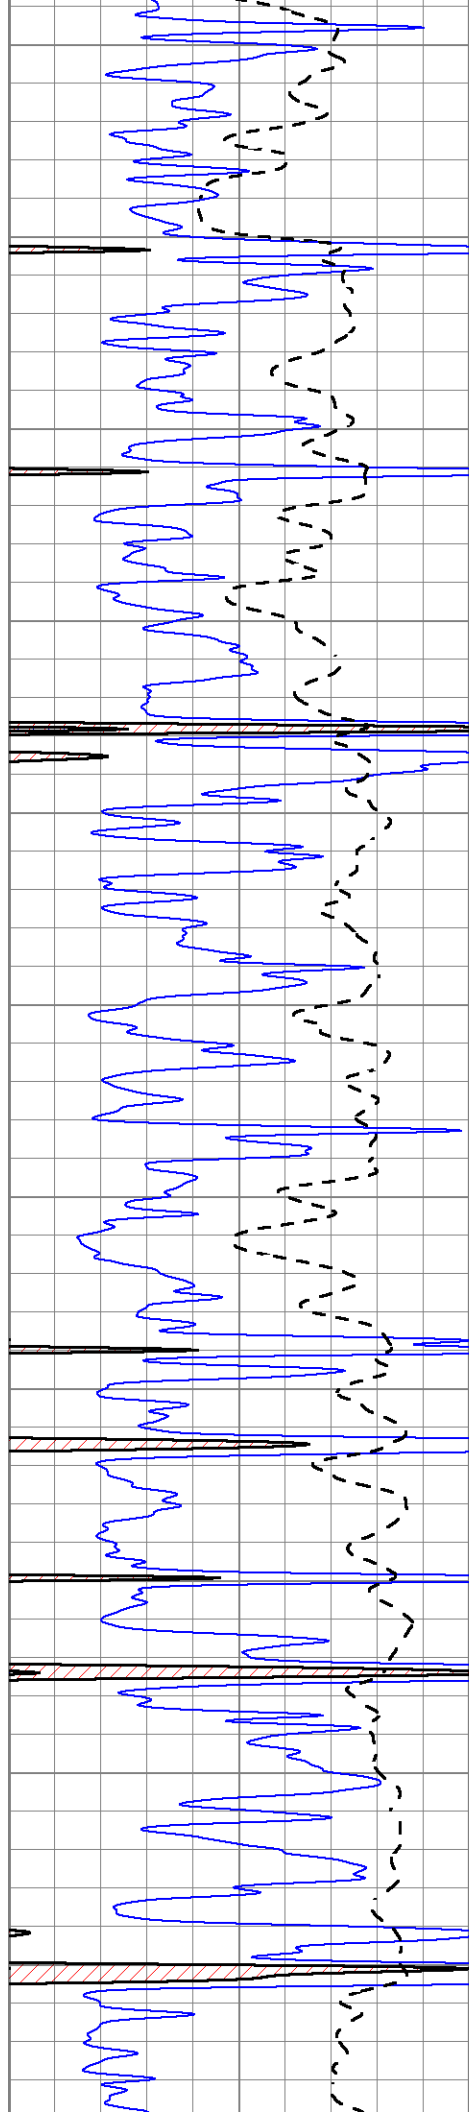


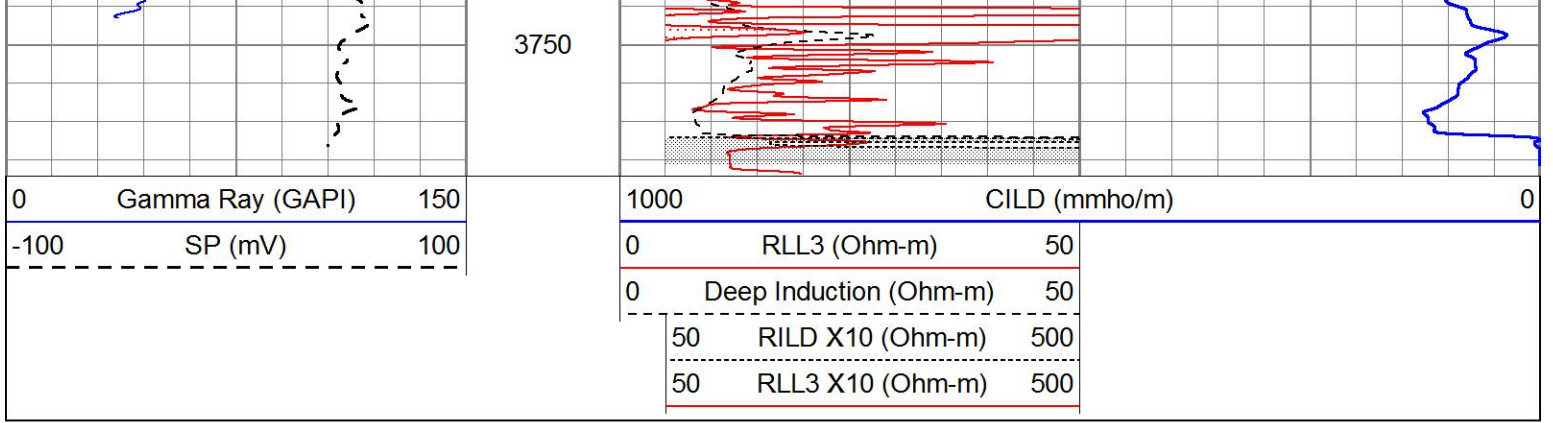

# ANHYDRITE

Database File 5636ddn.db  
 Dataset Pathname pass3.2  
 Presentation Format \_dil  
 Dataset Creation Sun Aug 01 02:42:46 2021  
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

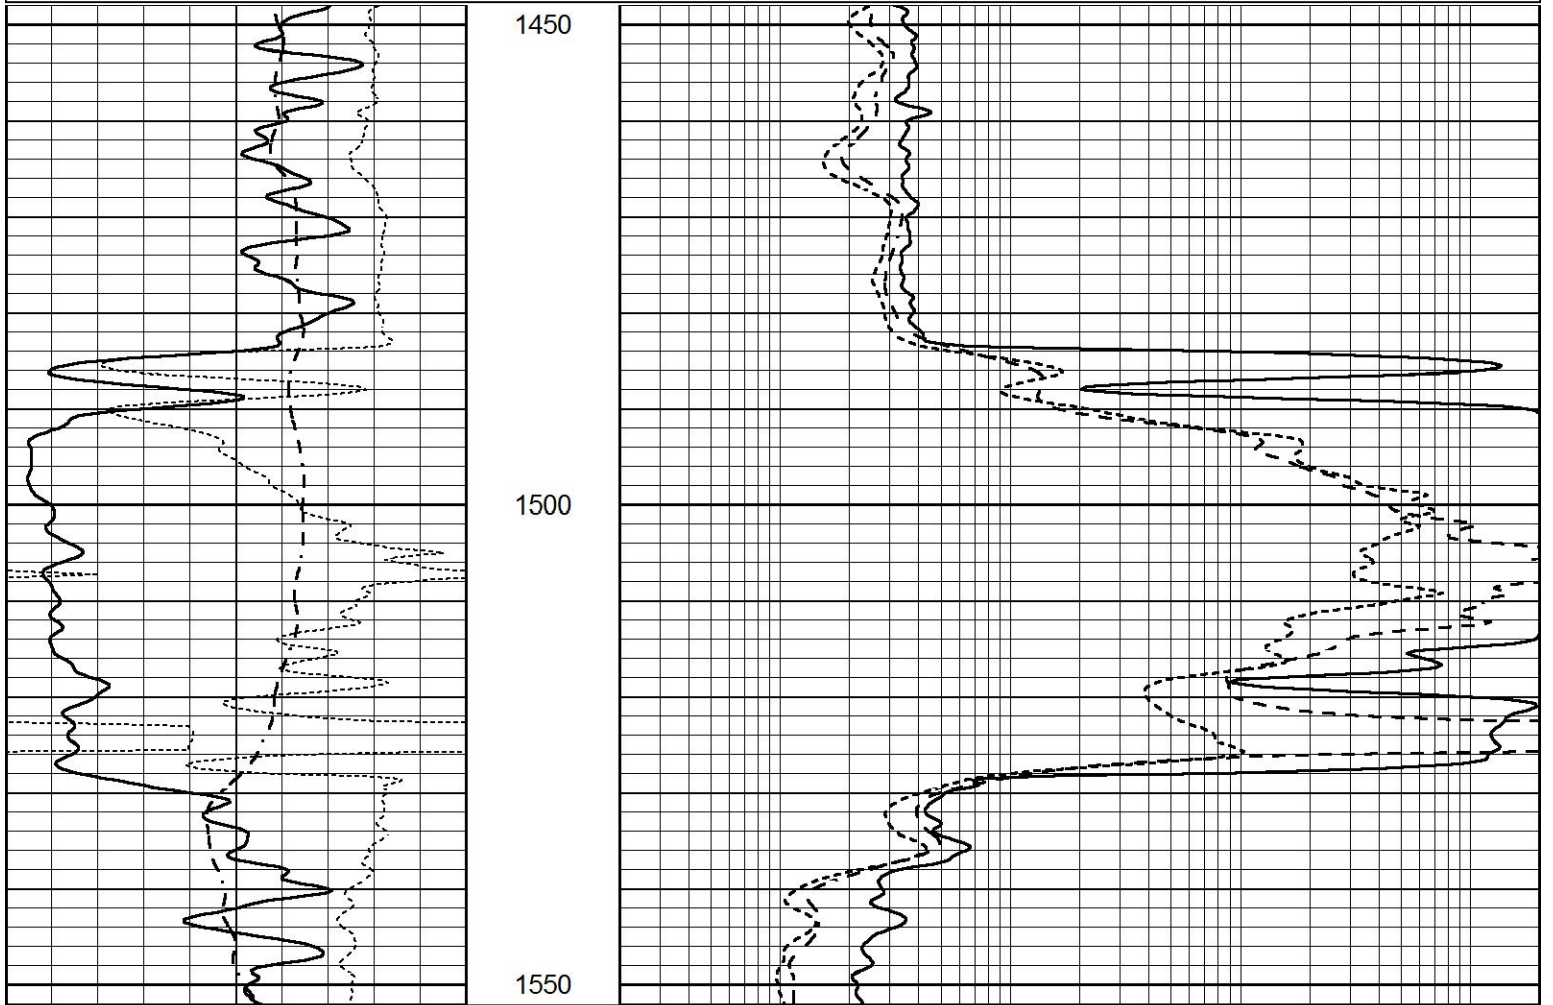

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000






# MAIN SECTION

Database File 5636ddn.db  
 Dataset Pathname pass3.1  
 Presentation Format \_dil  
 Dataset Creation Sun Aug 01 02:28:27 2021  
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150
-100	SP (mV)	100
-250	Rxo/Rt	50

0.2	SHALLOW GUARD (Ohm-m)	2000
0.2	MEDIUM INDUCTION (Ohm-m)	2000
0.2	DEEP INDUCTION (Ohm-m)	2000

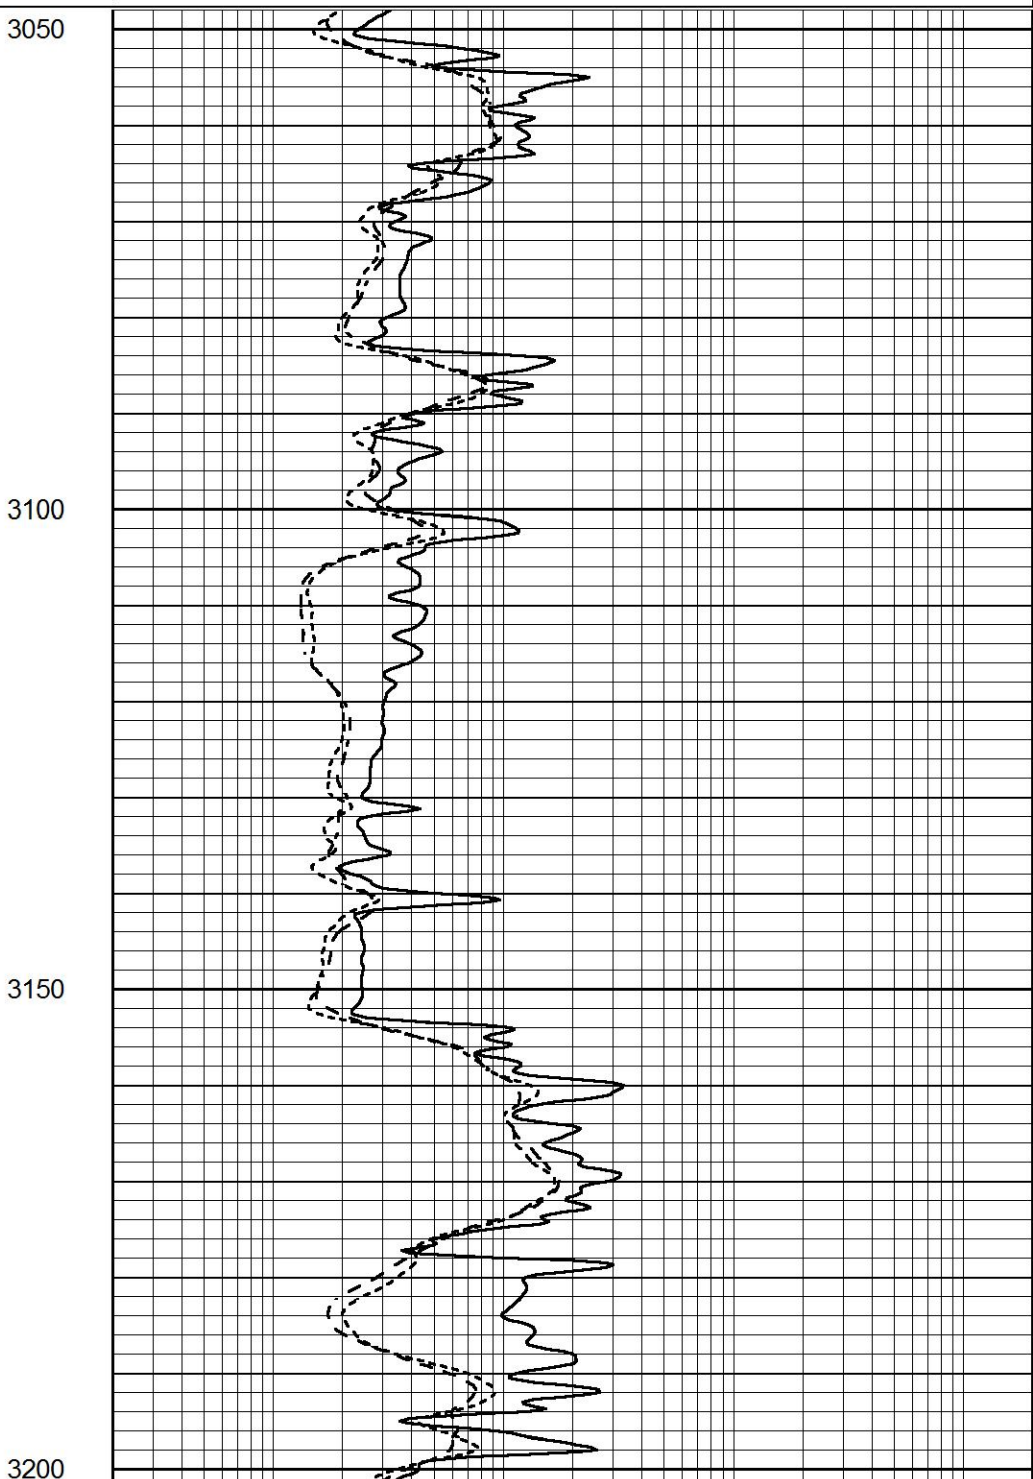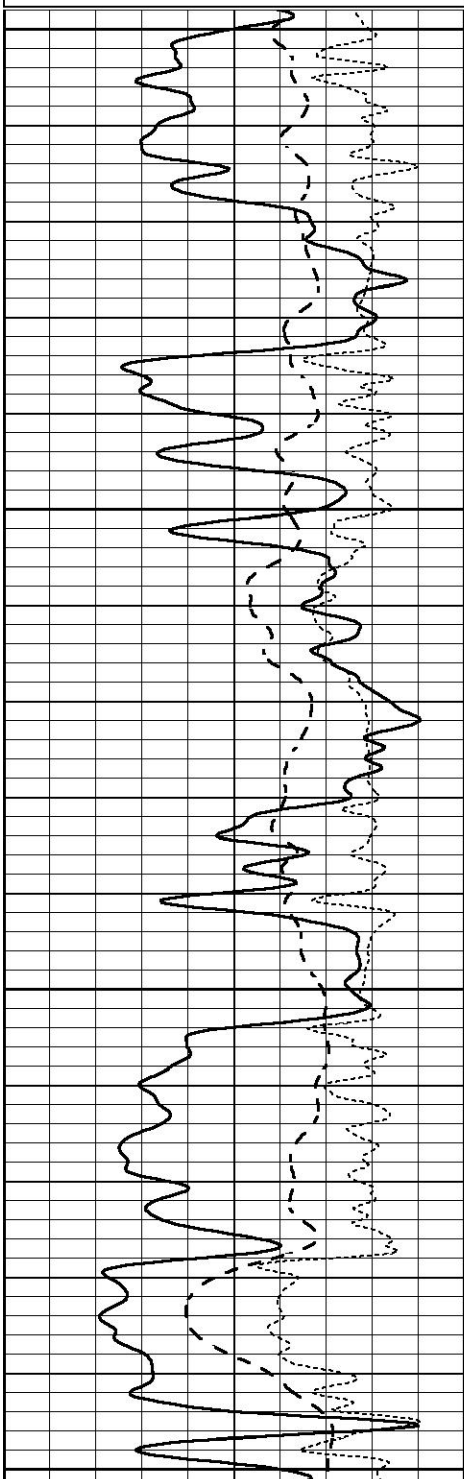

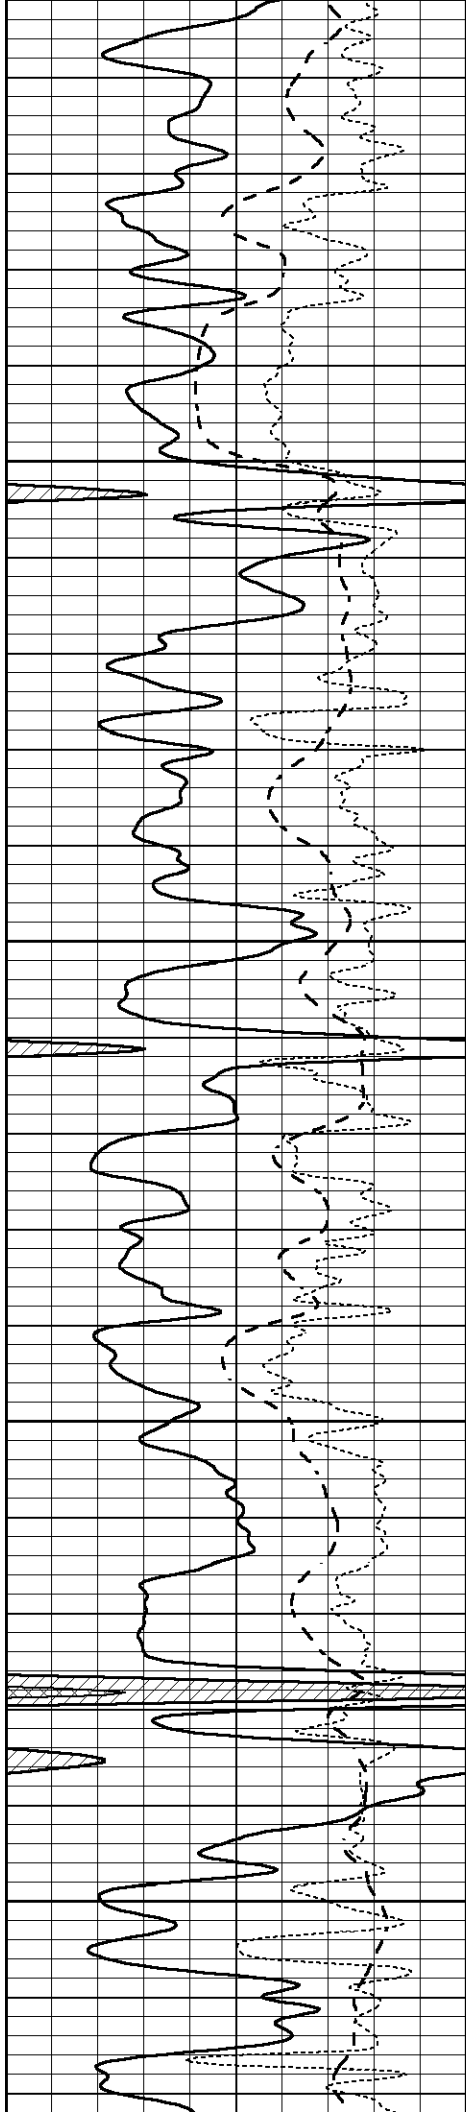



3250

3300

3350

3400

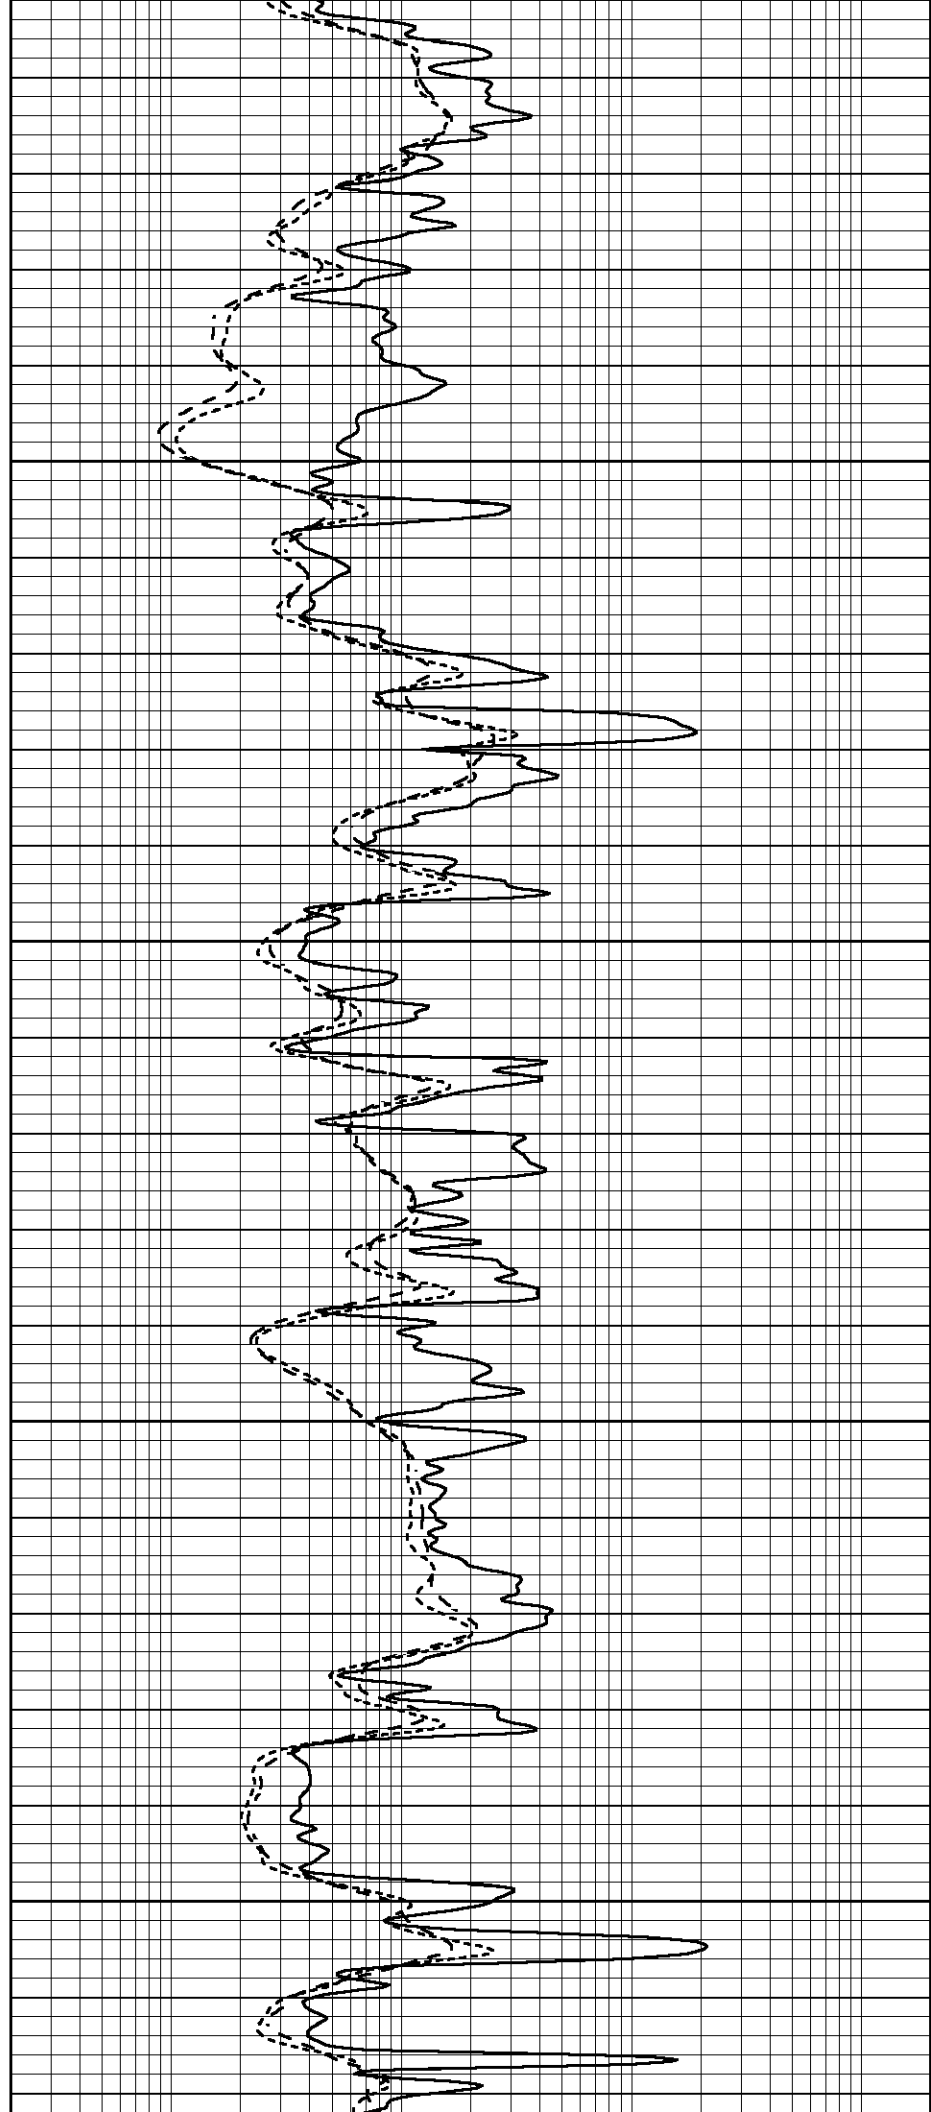

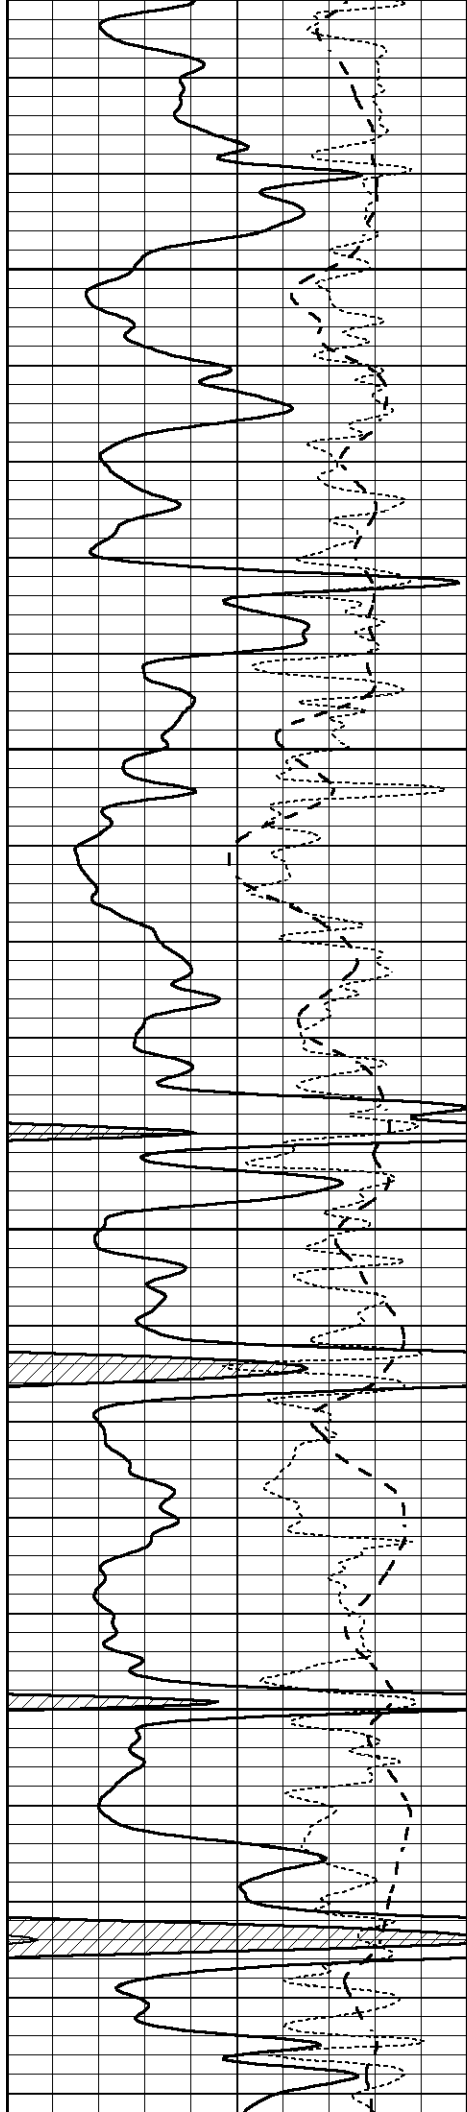



3450

3500

3550

3600

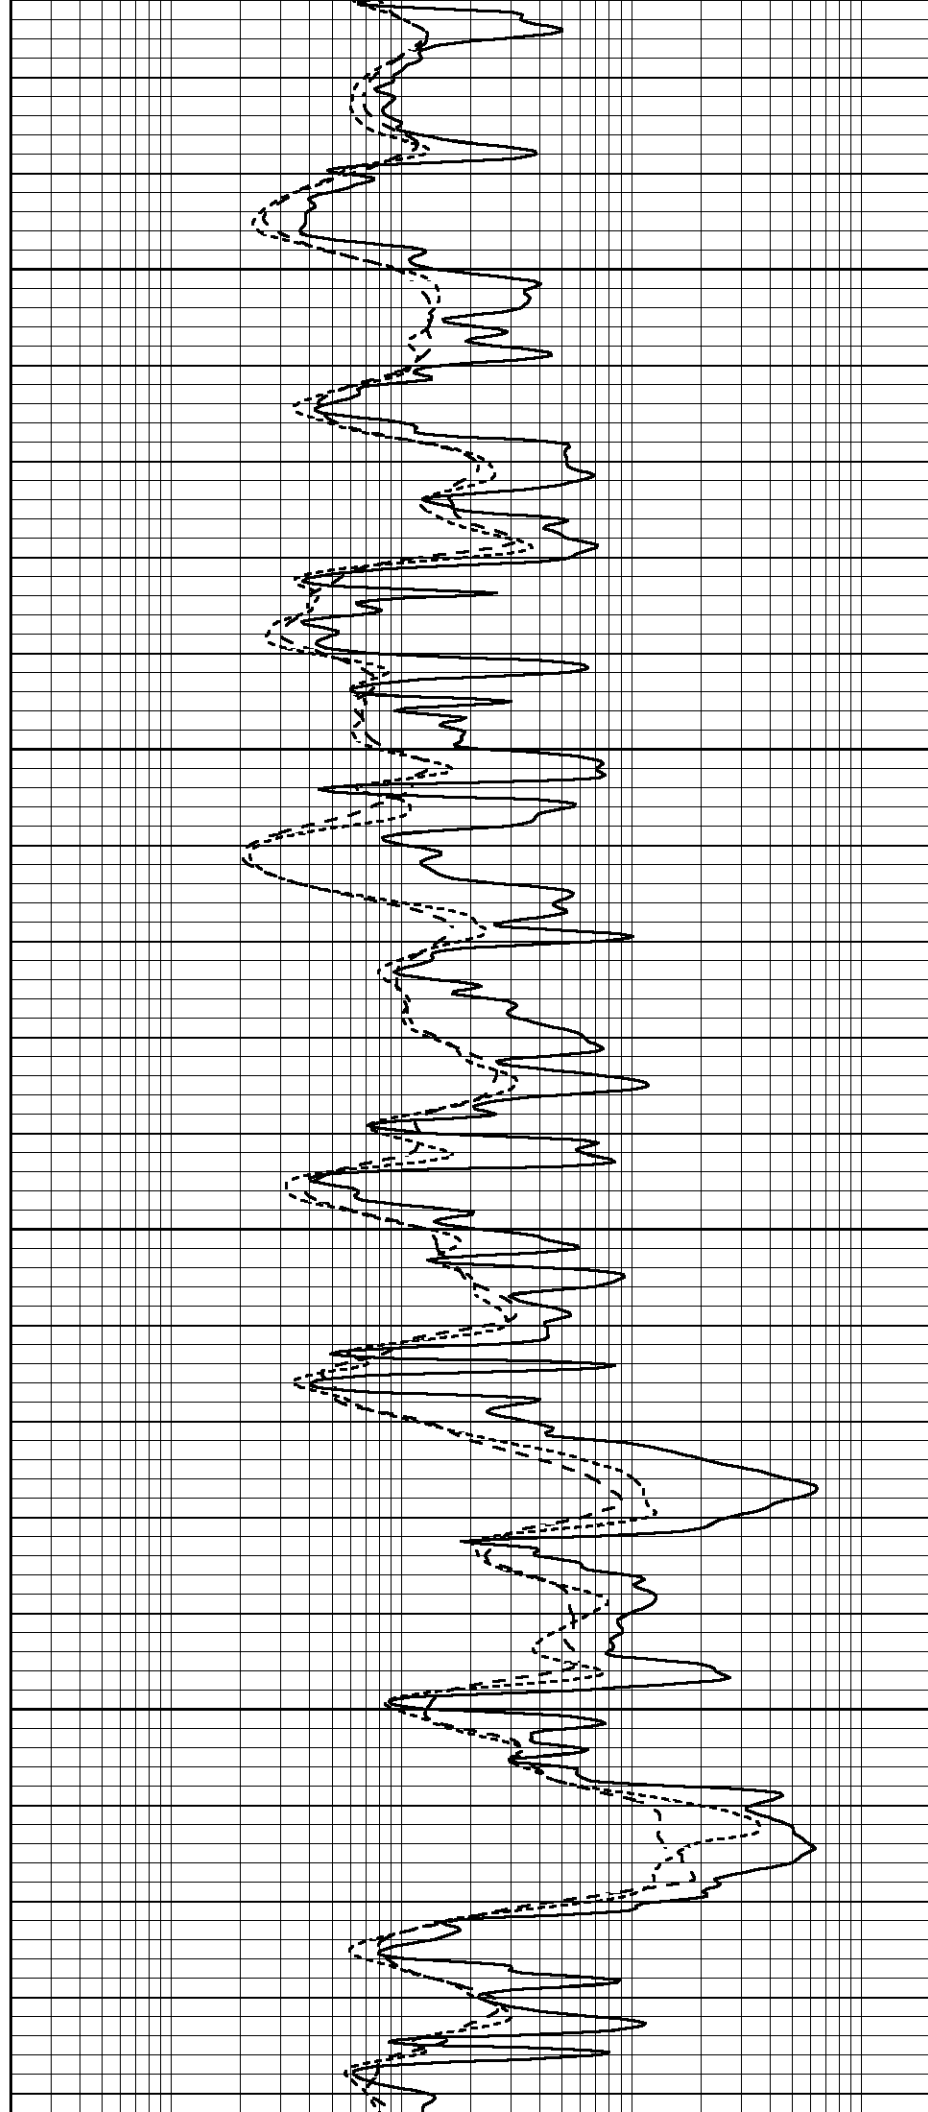


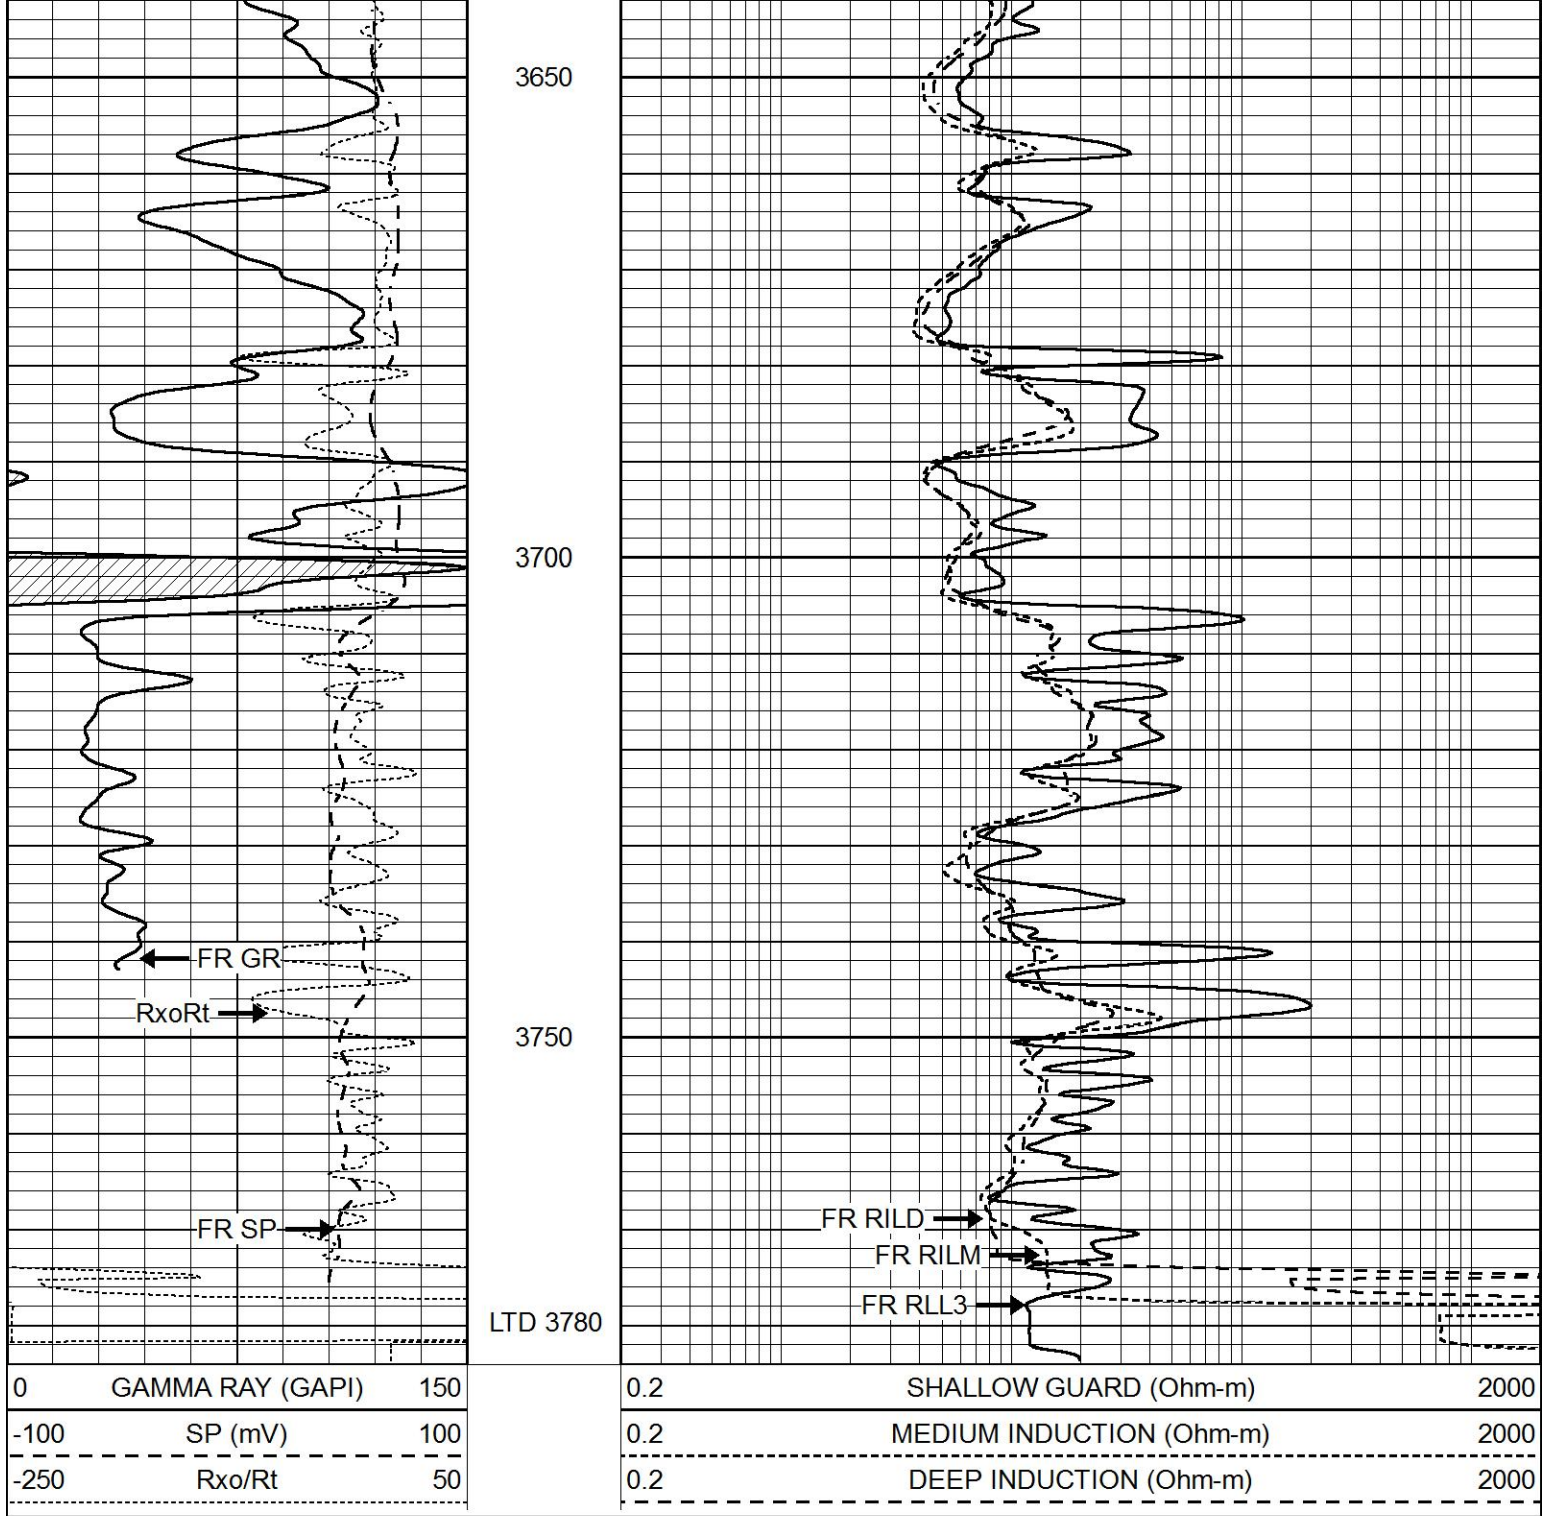

# REPEAT SECTION

Database File 5636ddn.db  
 Dataset Pathname pass2.2  
 Presentation Format \_dil  
 Dataset Creation Sun Aug 01 02:16:23 2021  
 Charted by Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	0.2	SHALLOW GUARD (Ohm-m)	2000
-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

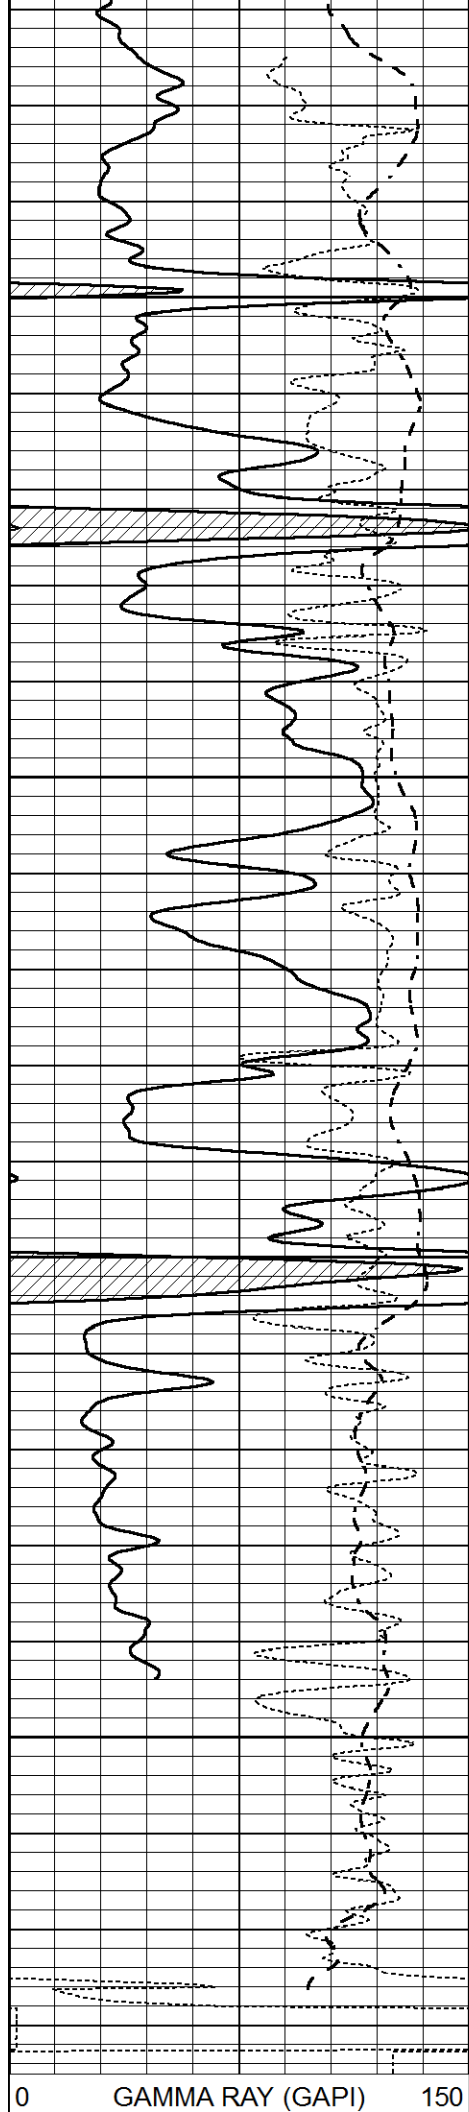


3600

3650

3700

3750

0 GAMMA RAY (GAPI) 150

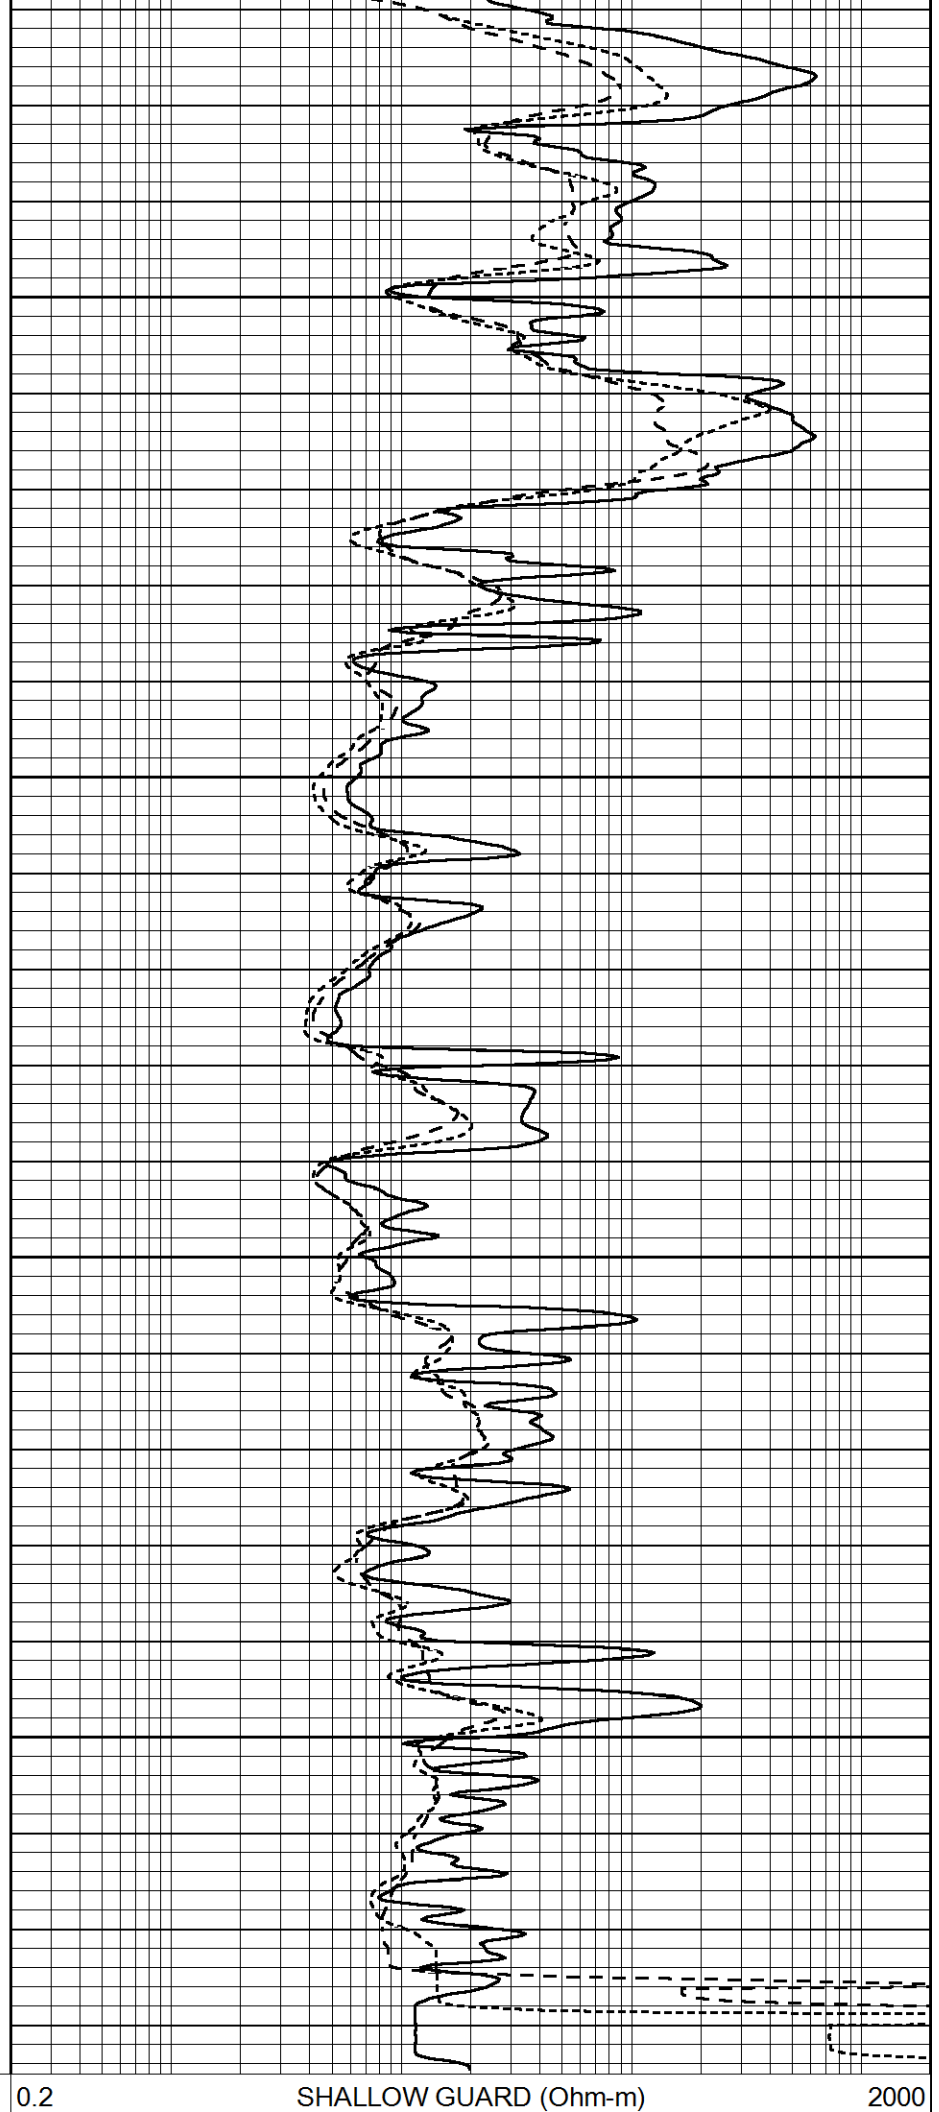

0.2 SHALLOW GUARD (Ohm-m) 2000

-100	SP (mV)	100	0.2	MEDIUM INDUCTION (Ohm-m)	2000
-250	Rxo/Rt	50	0.2	DEEP INDUCTION (Ohm-m)	2000

### Calibration Report

Database File 5636ddn.db  
Dataset Pathname pass2.2  
Dataset Creation Sun Aug 01 02:16:23 2021

### Dual Induction Calibration Report

Serial-Model: FW1410-55-Probe  
Surface Cal Performed: Tue Feb 19 11:44:18 2019  
Downhole Cal Performed: Tue Feb 19 11:44:24 2019  
After Survey Verification Performed: Tue Feb 19 11:44:27 2019

#### Surface Calibration

Loop:	Readings			References			Results	
	Air	Loop	V	Air	Loop	mmho/m	m	b
Deep	0.011	0.656	V	1.000	400.000	mmho/m	618.595	-5.524
Medium	-0.000	0.731	V	1.000	464.000	mmho/m	632.856	1.197
Internal:	Zero	Cal	V	Zero	Cal	mmho/m	m	b
Deep	0.007	0.649	V	0.000	400.000	mmho/m	623.784	-4.595
Medium	0.004	0.743	V	0.000	464.000	mmho/m	627.284	-2.251

#### Downhole Calibration

	Readings			References			Results	
	Zero	Cal	mmho/m	Zero	Cal	mmho/m	m'	b'
Deep	-0.824	395.917	mmho/m	-0.976	397.550	mmho/m	1.004	-0.149
Medium	3.565	471.327	mmho/m	3.468	471.590	mmho/m	1.001	-0.099
LL3		7.503	V		1500.000	Ohm-m		
		0.001	V		20.000	Ohm-m		
		-7.481	V		3745.000	mmho-m		

#### After Survey Verification

	Readings			Targets			Results	
	Zero	Cal	mmho/m	Zero	Cal	mmho/m	m'	b'
Deep	0.000	0.000	mmho/m	-0.824	395.917	mmho/m	1.000	0.000
Medium	0.000	0.000	mmho/m	3.565	471.327	mmho/m	1.000	0.000
LL3		0.000	Ohm-m		1500.000	Ohm-m		
		0.000	Ohm-m		20.000	Ohm-m		
		0.000	mmho-m		3745.000	mmho-m		

### Litho Density Calibration Report

Serial: 140703  
Model: V4\_10P  
Source Number: 74GBq-19

#### Master Calibration

Performed: Wed Dec 02 12:04:44 2020

	Background	Aluminum	Magnesium	
Window 1	595.38	5386.50	23898.92	cps
Window 2	52.78	1248.21	5993.75	cps
Window 4	251.36	1200.30	5155.55	cps
Window 5	545.15	9066.30	17240.12	cps
Window 6	43.35	1491.73	2929.24	cps
Window 8	258.76	2917.82	5450.26	cps

Window 5                      2.6020                      1.6830                      g/cc  
 Pe                                -                                3.0000                      2.5070                      b/e

LS Alpha:                      : -1.8726                      SS Alpha:                      : -0.7656                      LS CPE:                      : 1.0742  
 LS Beta:                      : 127345.0723                      SS Beta:                      : 20293.3834                      SS CPE:                      : 1.5427

Before Survey Background Counts Verification                      Performed: Wed Dec 31 18:00:00 1969

Window 1                      0.00                      cps  
 Window 2                      0.00                      cps  
 Window 4                      0.00                      cps  
  
 Window 5                      0.00                      cps  
 Window 6                      0.00                      cps  
 Window 8                      0.00                      cps

After Survey Background Counts Verification                      Performed: Wed Dec 31 18:00:00 1969

Window 1                      0.00                      cps  
 Window 2                      0.00                      cps  
 Window 4                      0.00                      cps  
  
 Window 5                      0.00                      cps  
 Window 6                      0.00                      cps  
 Window 8                      0.00                      cps

Lithodensity Caliper Calibration                      Performed: Wed Dec 02 12:04:44 2020

Results		Readings		References (in)		Gain	Offset
Low	High	Low	High	Low	High		
8005.3	11087.2	8.0	14.0	0.0	-7.5		

Before Survey Caliper Verification                      Performed:

Reference	Reading
_____	_____
Caliper (in)	

After Survey Caliper Verification                      Performed:

Reference	Reading
_____	_____
Caliper (in)	

Compensated Neutron Calibration Report

Serial Number:                      080621PMC  
 Tool Model:                      NABORS

PRE-SURVEY VERIFICATION

Detector	Readings	Measured	Target
Short Space	cps		
Long Space	cps	pu	pu

POST-SURVEY VERIFICATION

Detector	Readings	Measured	Target
----------	----------	----------	--------

Short Space  
Long Space

cps  
cps

pu

pu

Gamma Ray Calibration Report

Serial Number:	7	
Tool Model:	Probe1	
Performed:	Tue Jan 19 17:50:08 2021	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.5300	GAPI/cps