



MICRO LOG

Company	RL INVESTMENT, LLC.	Location:	API # : 15-179-21471-0000	Other Services CDL/CNL/DIL
Well	PRATT "A" #5-35	SEC 35	TWP 8S	RGE 29W
Field	HOXIE WEST	Permanent Datum	GROUND LEVEL	Elevation
County	SHERIDAN	Log Measured From	KELLY BUSHING 7' A.G.L.	K.B. 2824
State	KANSAS	Drilling Measured From	KELLY BUSHING	D.F. 2822
				G.L. 2817
Date	04/20/21	Run Number	TWO	
Depth Driller	4406	Depth Logger	4406	
Bottom Logged Interval	4404	Top Log Interval	3400	
Casing Driller	8 5/8" @ 262	Casing Logger	262	
Bit Size	7 7/8"	Type Fluid in Hole	CHEMICAL MUD	
Density / Viscosity	9.3/65	pH / Fluid Loss	8.1/11.0	
Source of Sample	FLOWLINE	Rm @ Meas. Temp	1.3 @ 65F	
Rmf @ Meas. Temp	.98 @ 65F	Rmc @ Meas. Temp	1.56 @ 65F	
Source of Rmf / Rmc	MEASURED	Rm @ BHT	.70 @ 120F	
Time Circulation Stopped	2 HOURS	Time Logger on Bottom	////	
Maximum Recorded Temperature	120F	Equipment Number	1523	
Location	HAYS, KANSAS	Recorded By	GUS PFANENSTIEL	
Witnessed By	CLAYTON ERICKSON			

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE, HAYS, KS. (785) 628-6395


DIRECTIONS: HOXIE 3 S TO 30 RD., 5 W TO 50 RD.,
1/2 S, E INTO.





MAIN PASS

Database File	5430ddn.db
Dataset Pathname	pass5.1
Presentation Format	_micro
Dataset Creation	Tue Apr 20 06:30:01 2021
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

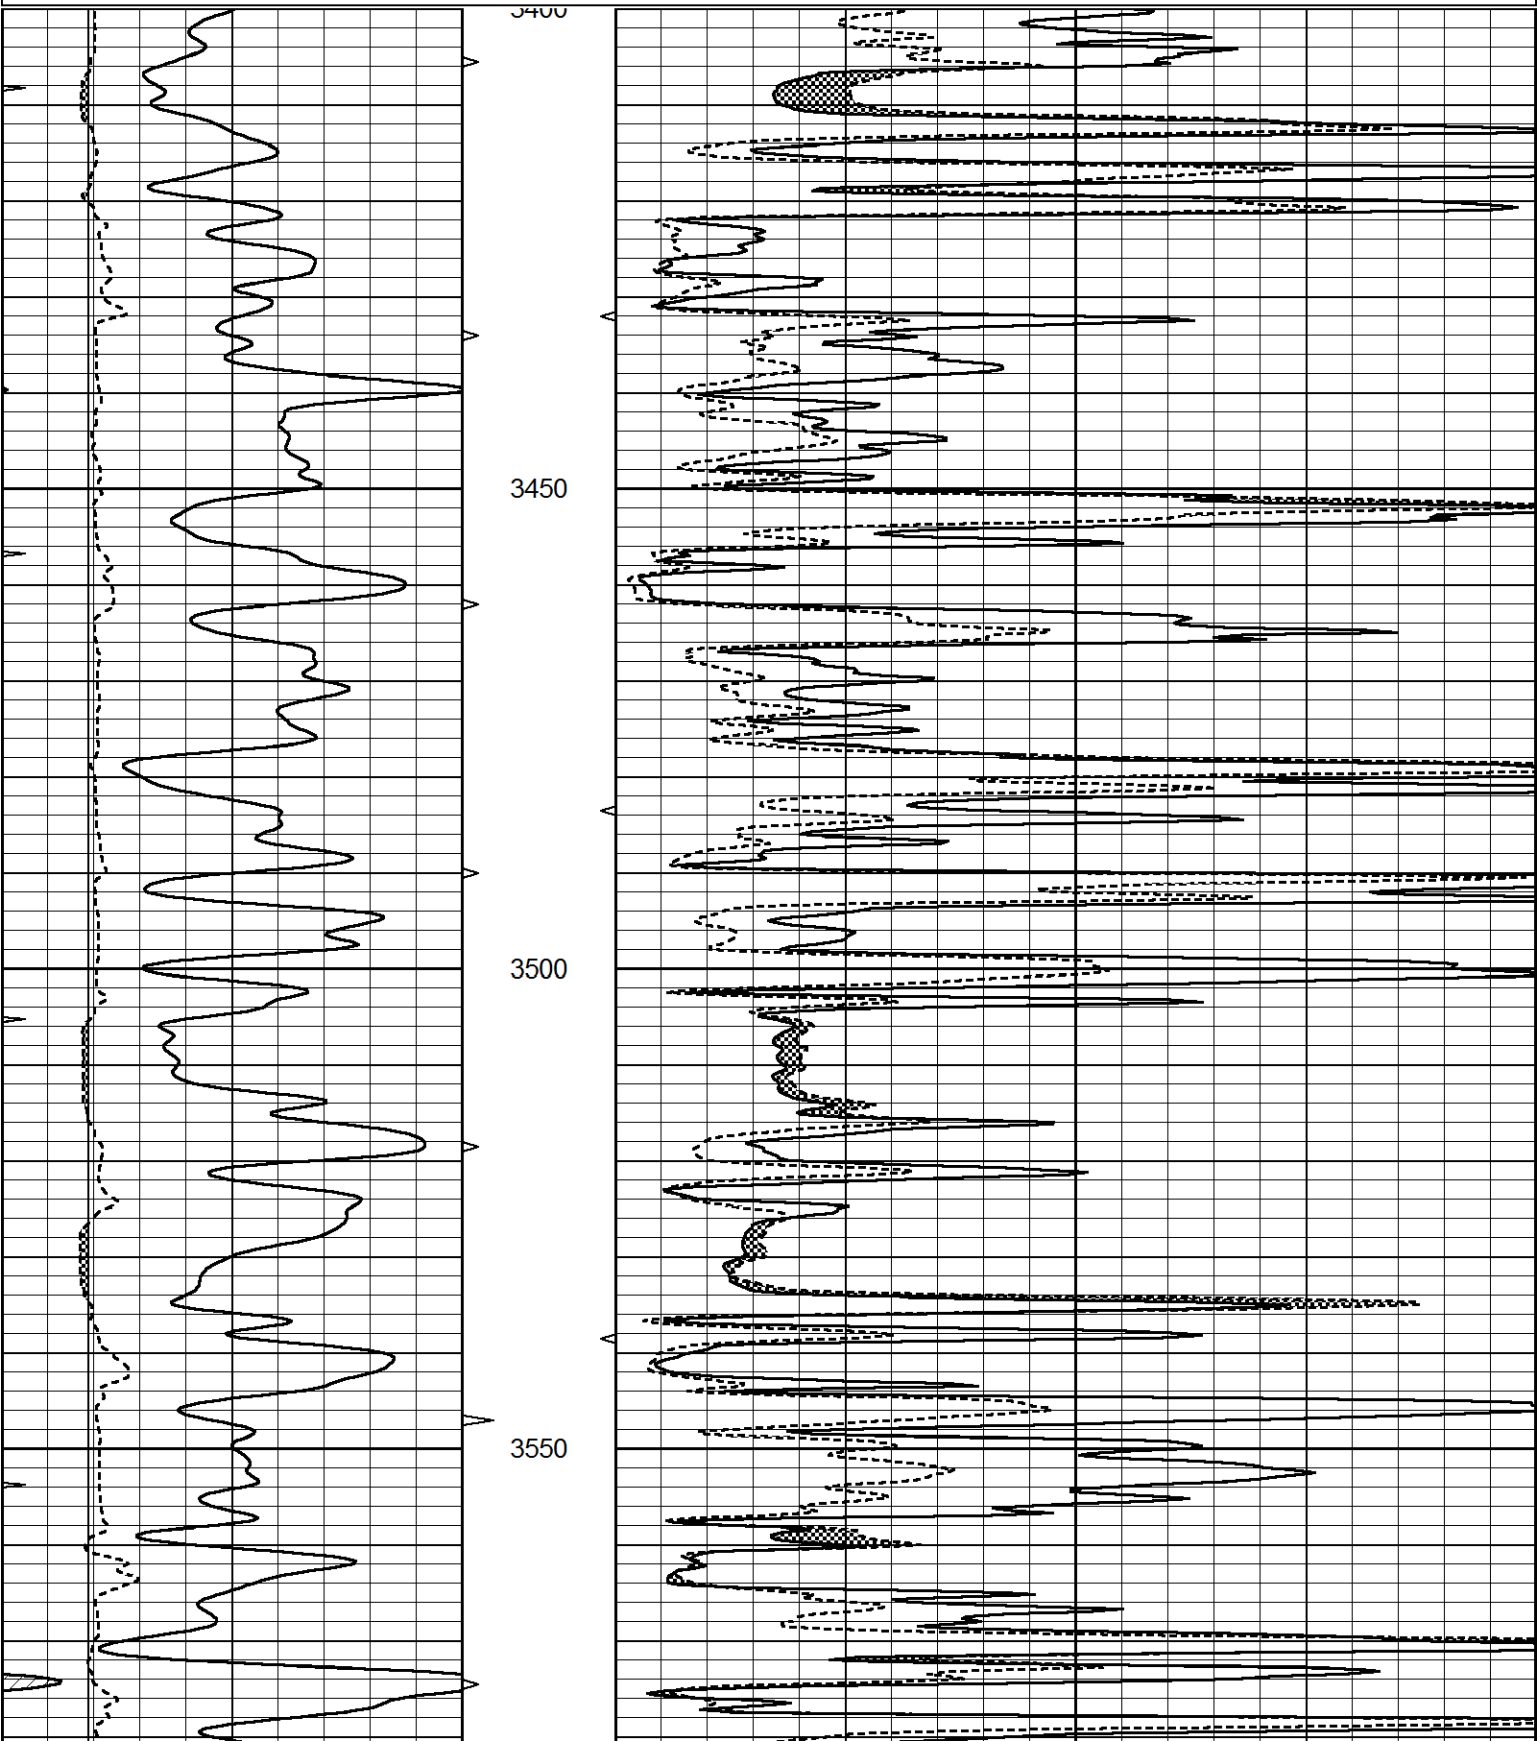

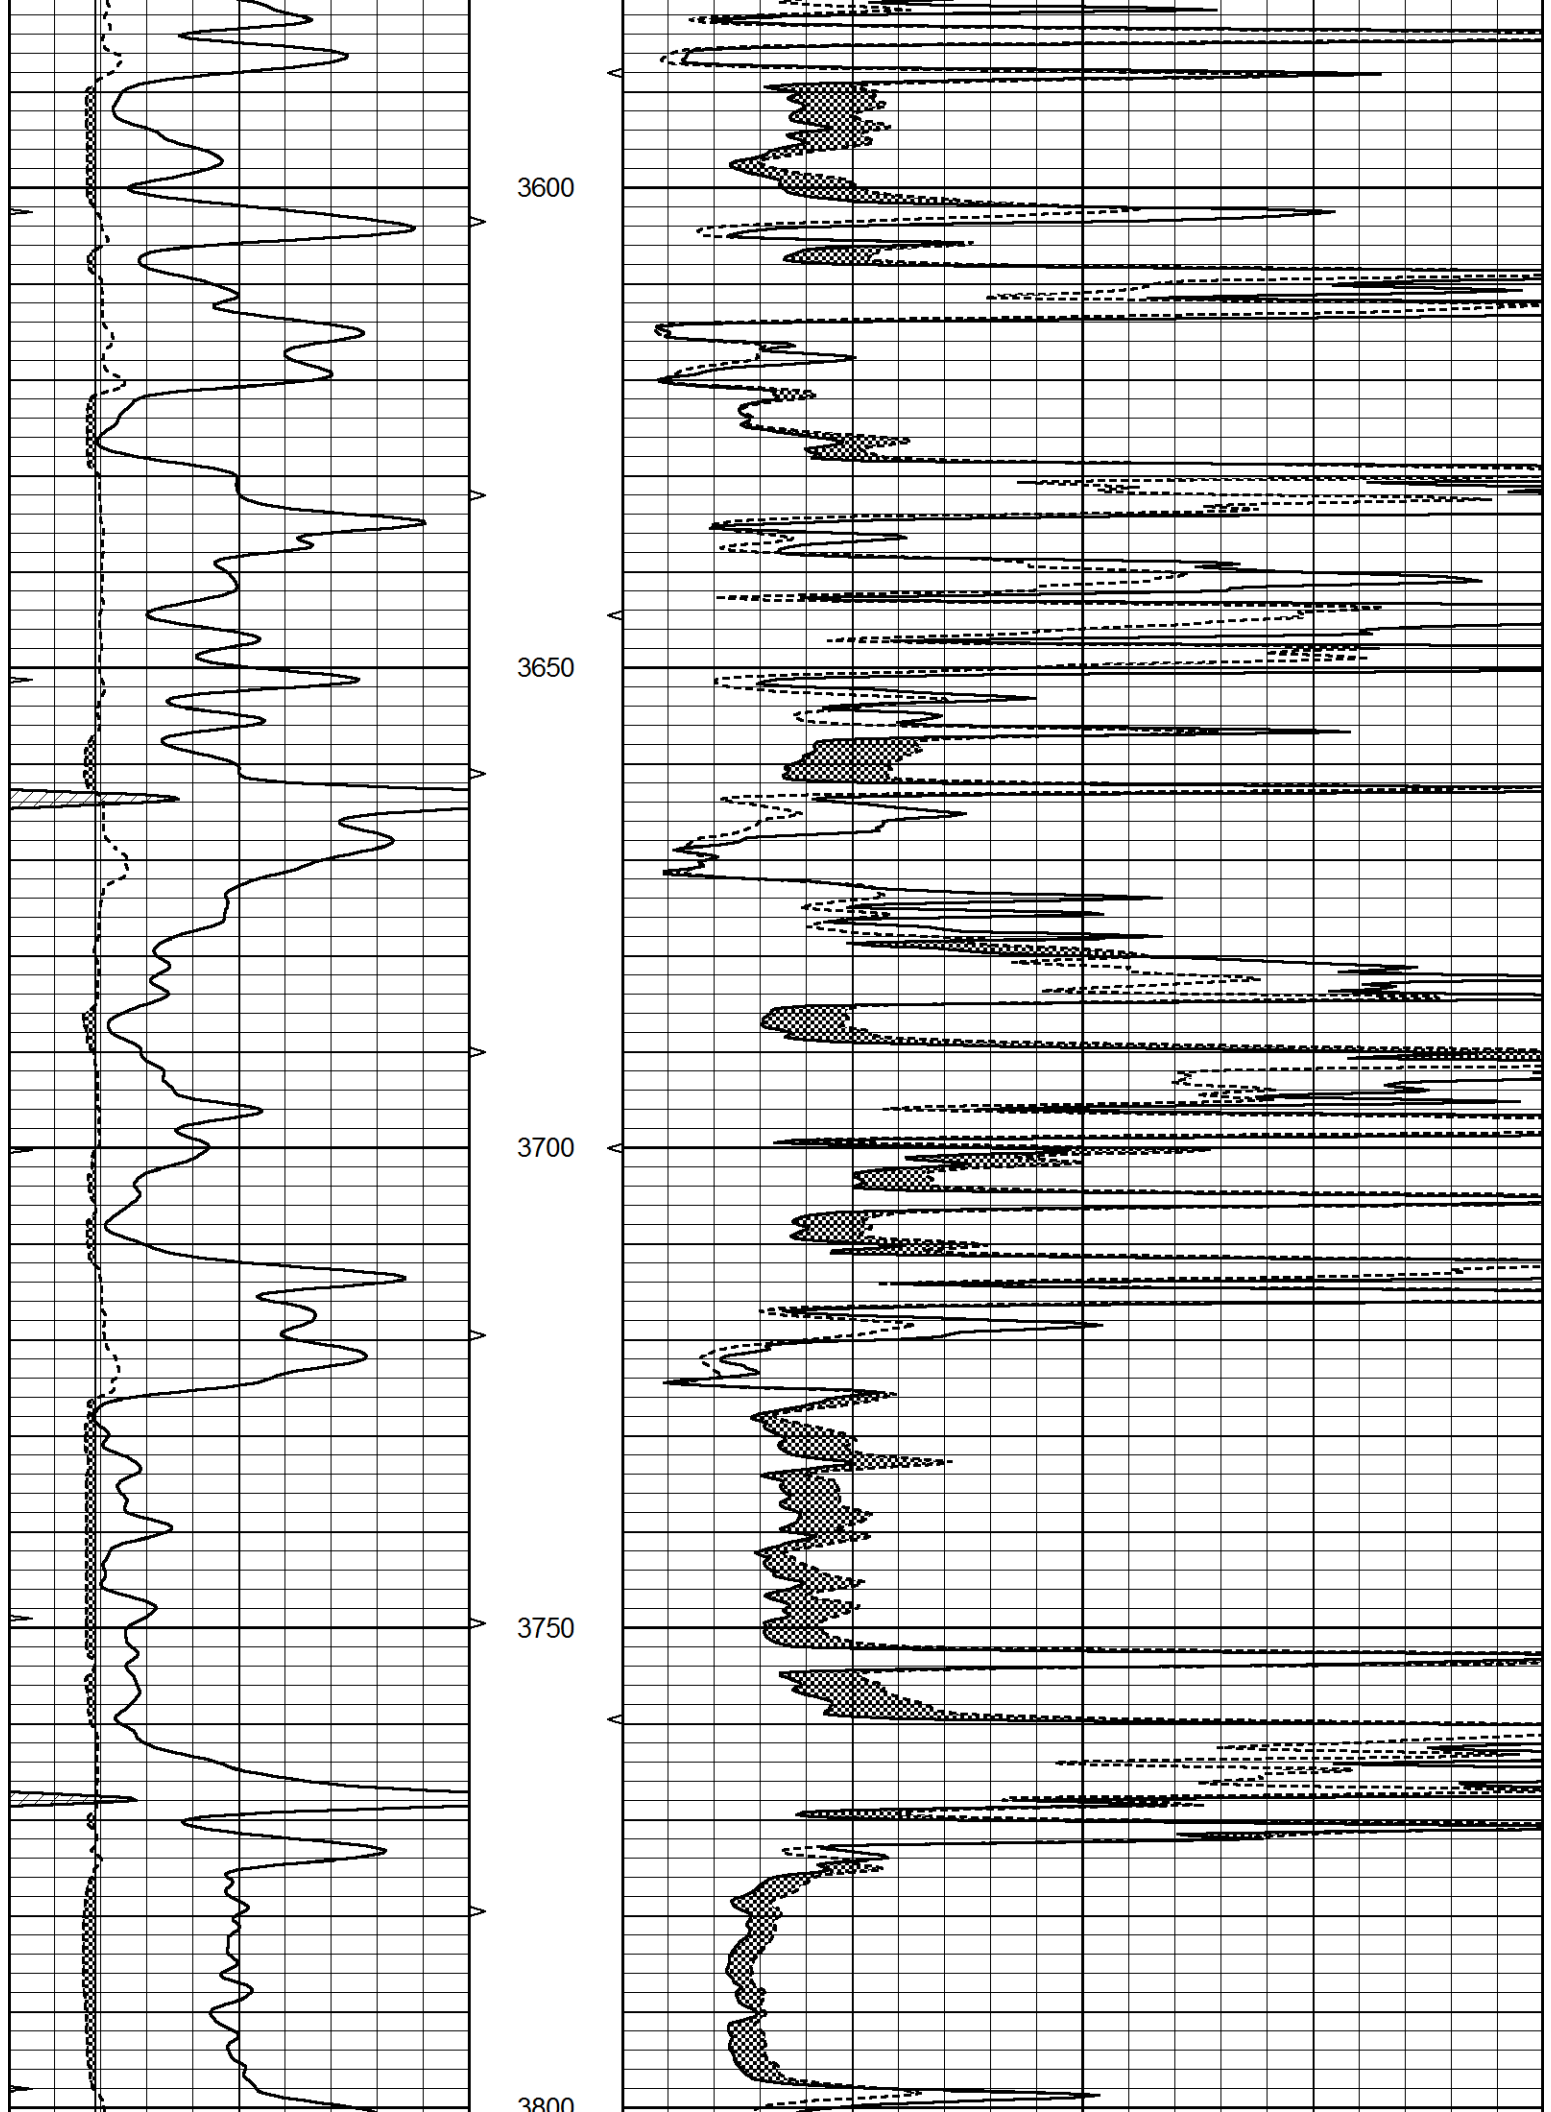

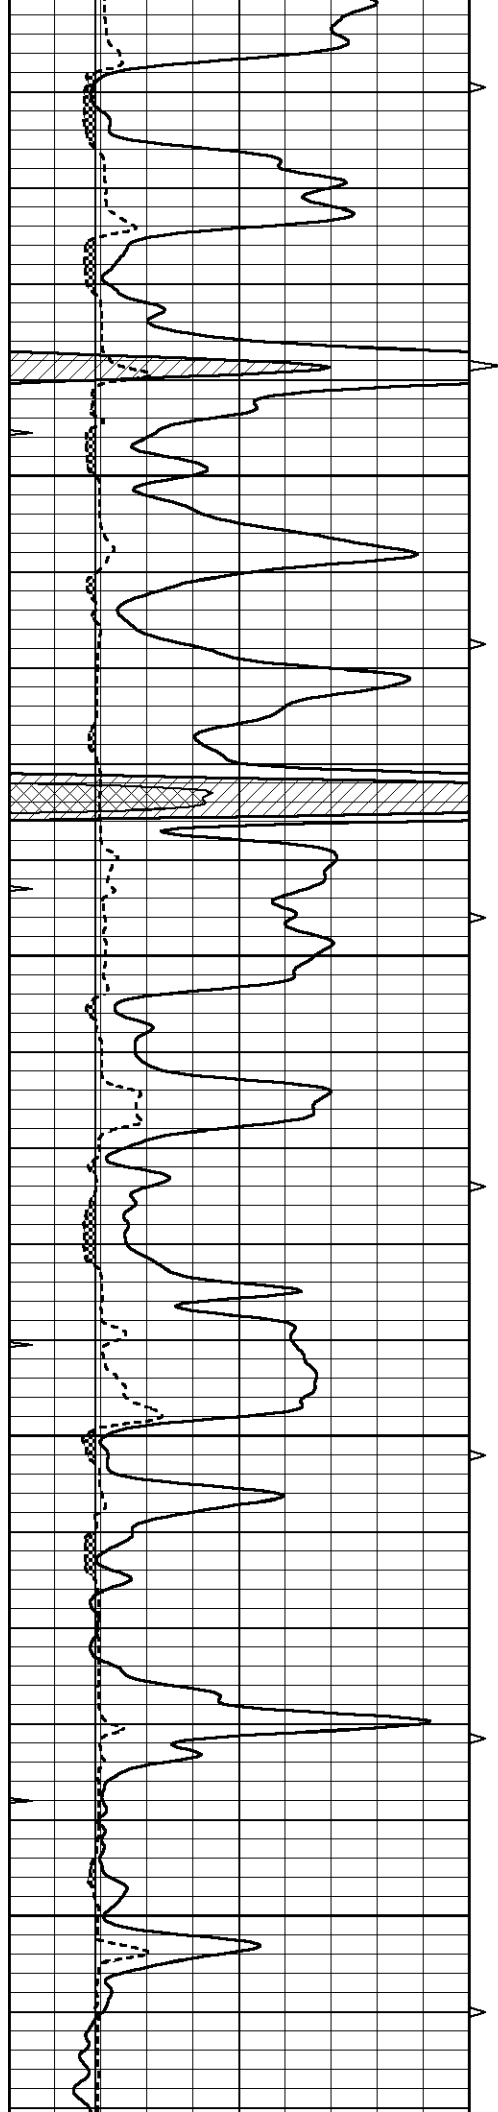


3800


3850

3900

3950

4000

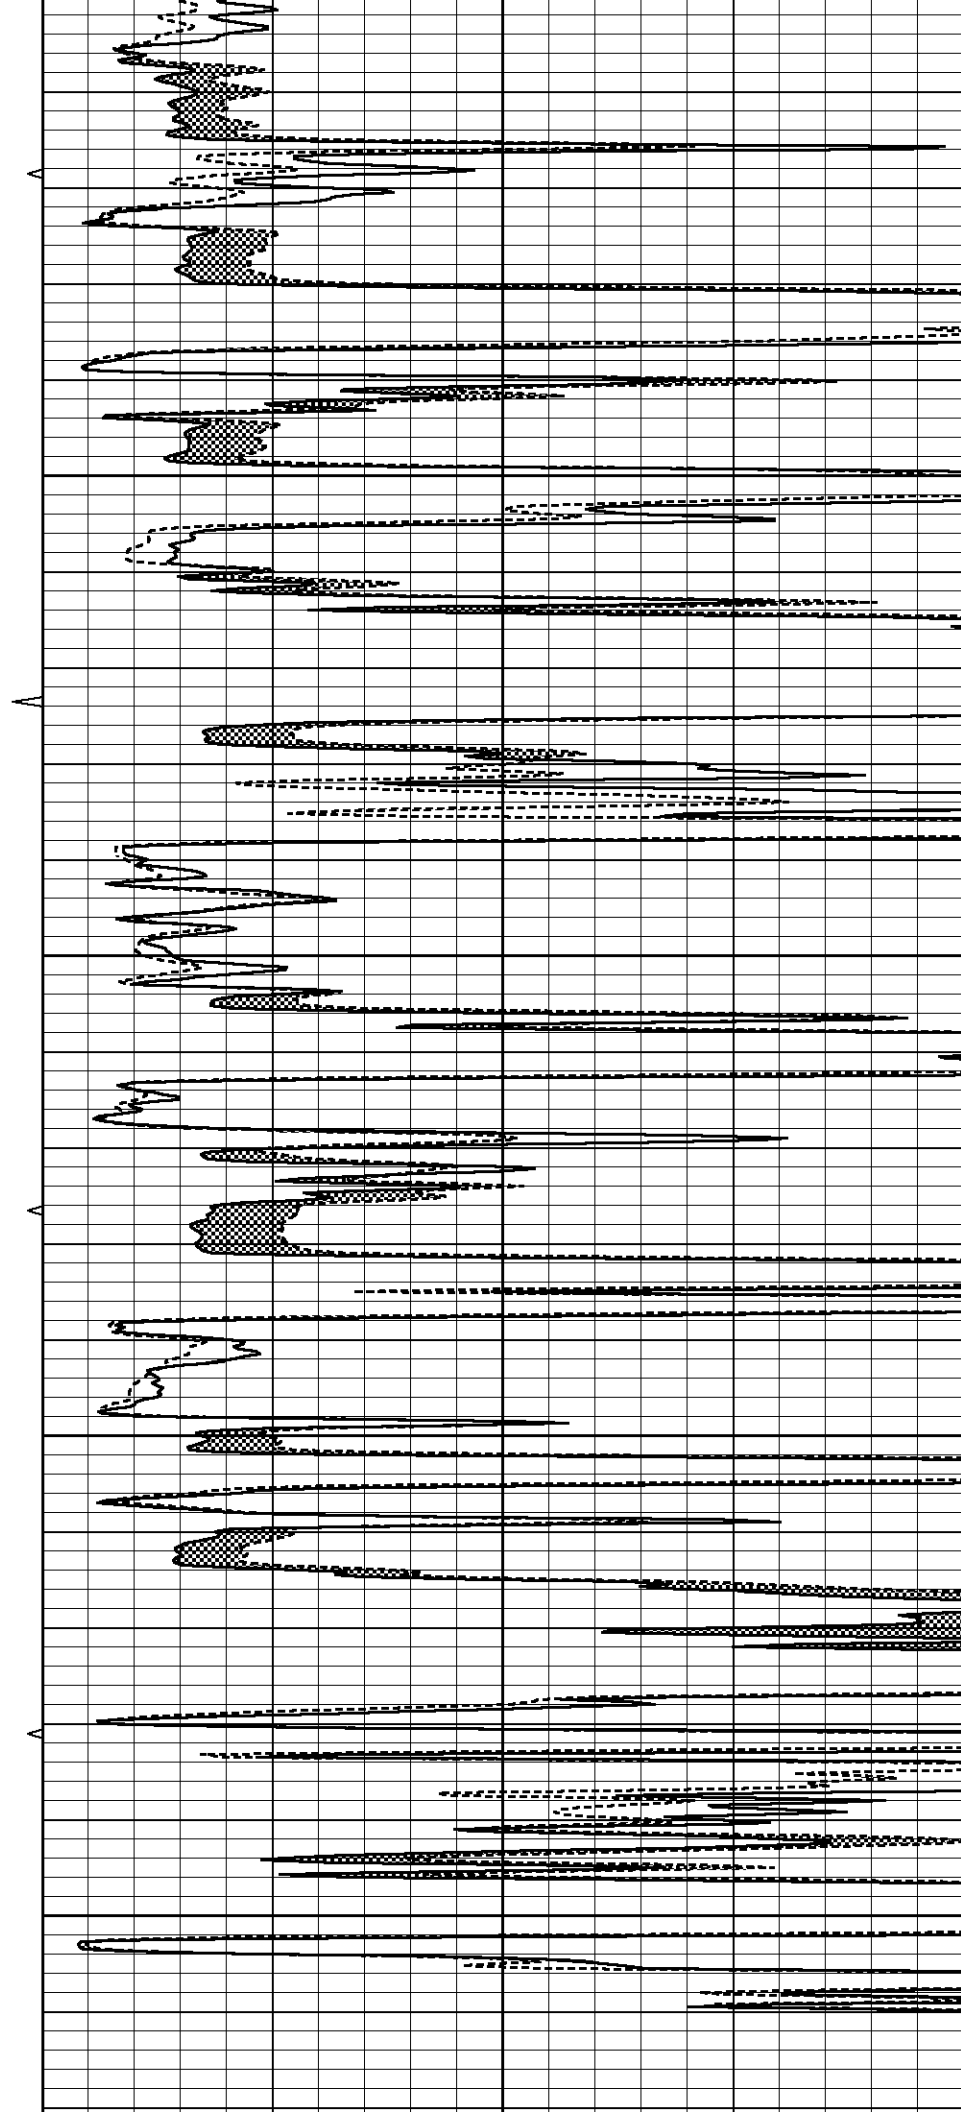

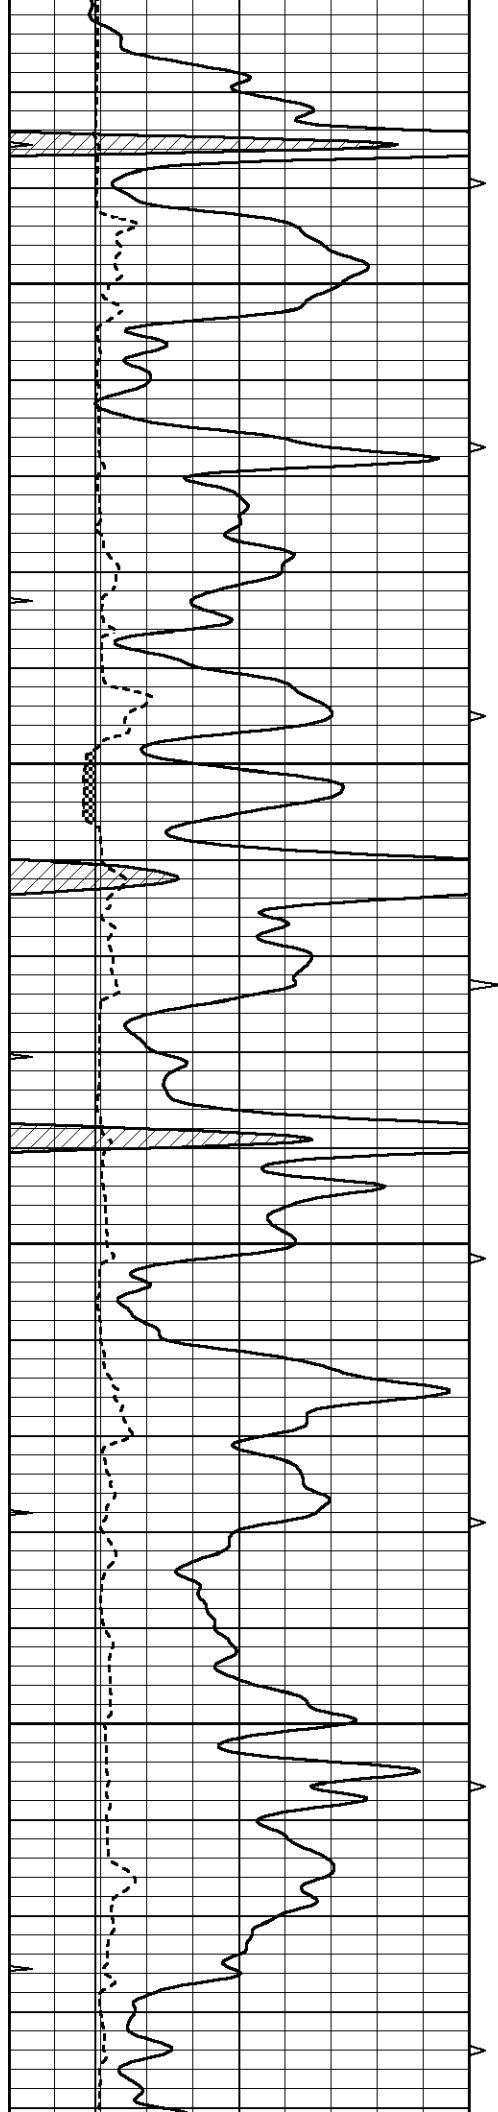



4050

4100

4150


4200


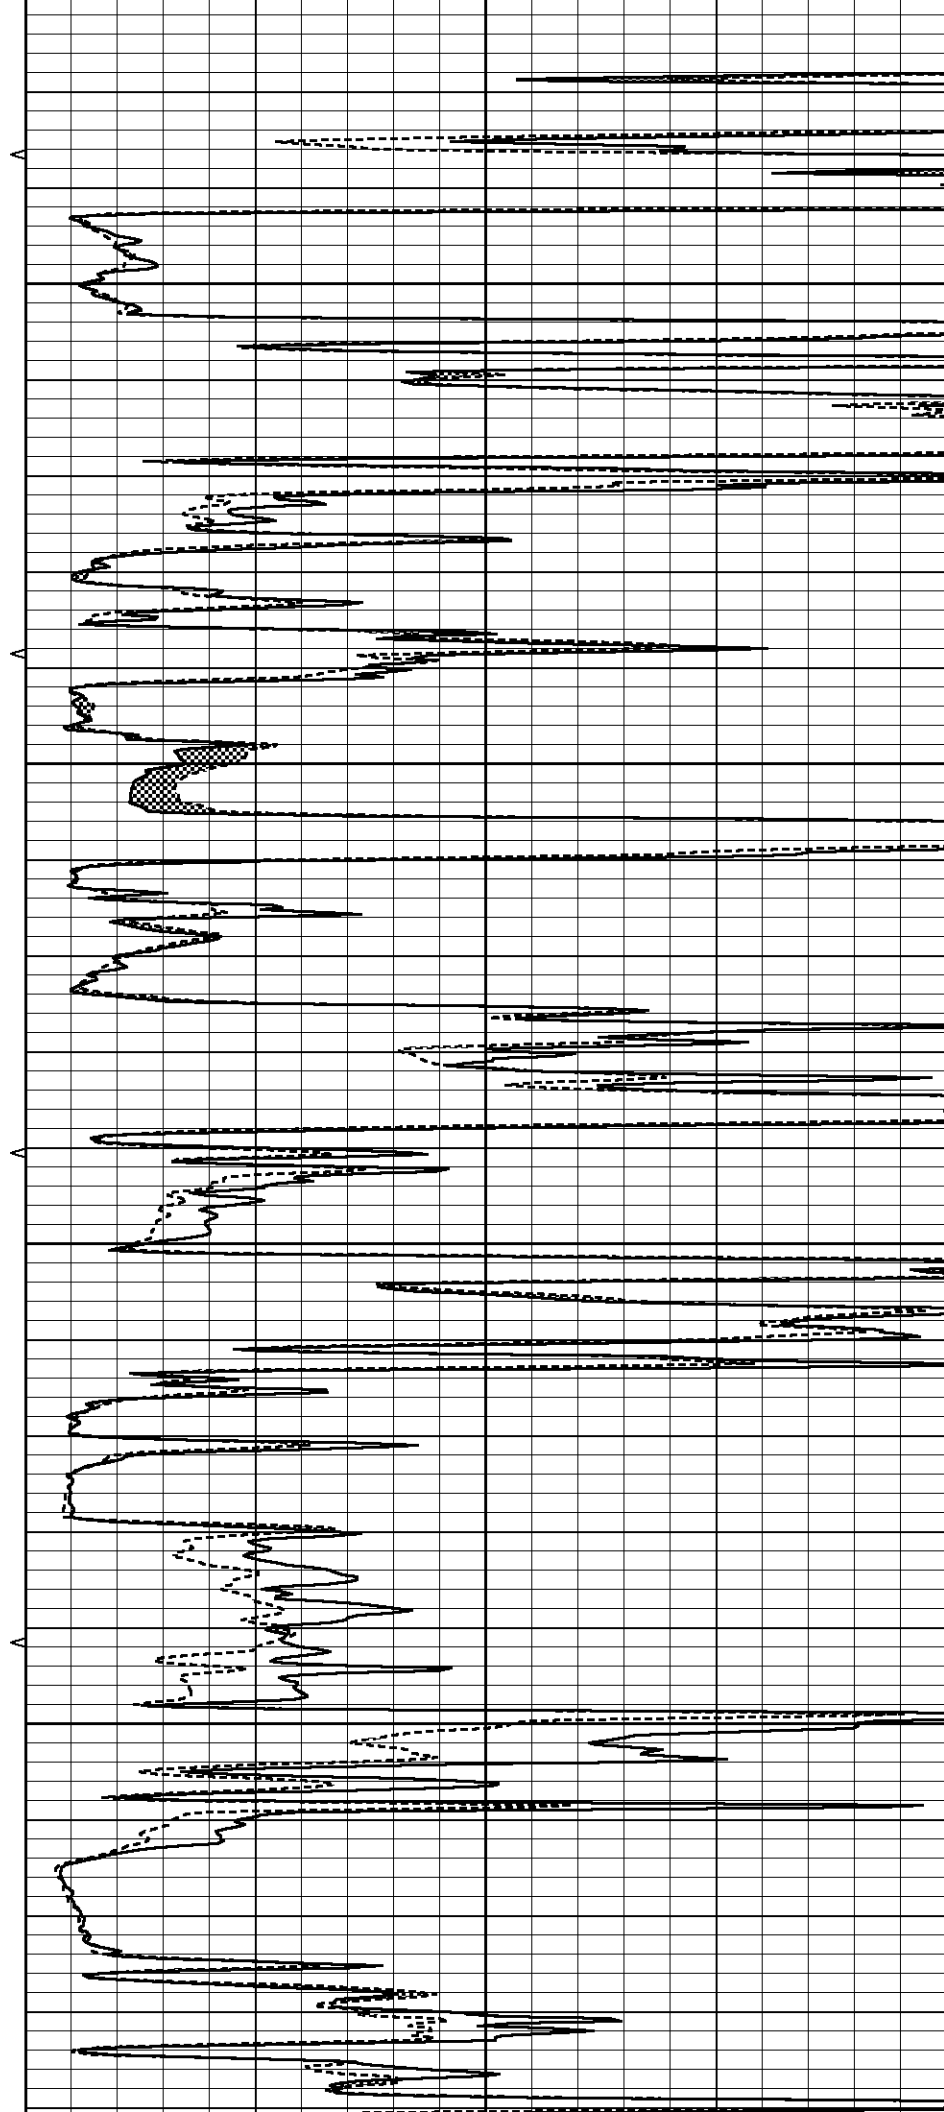


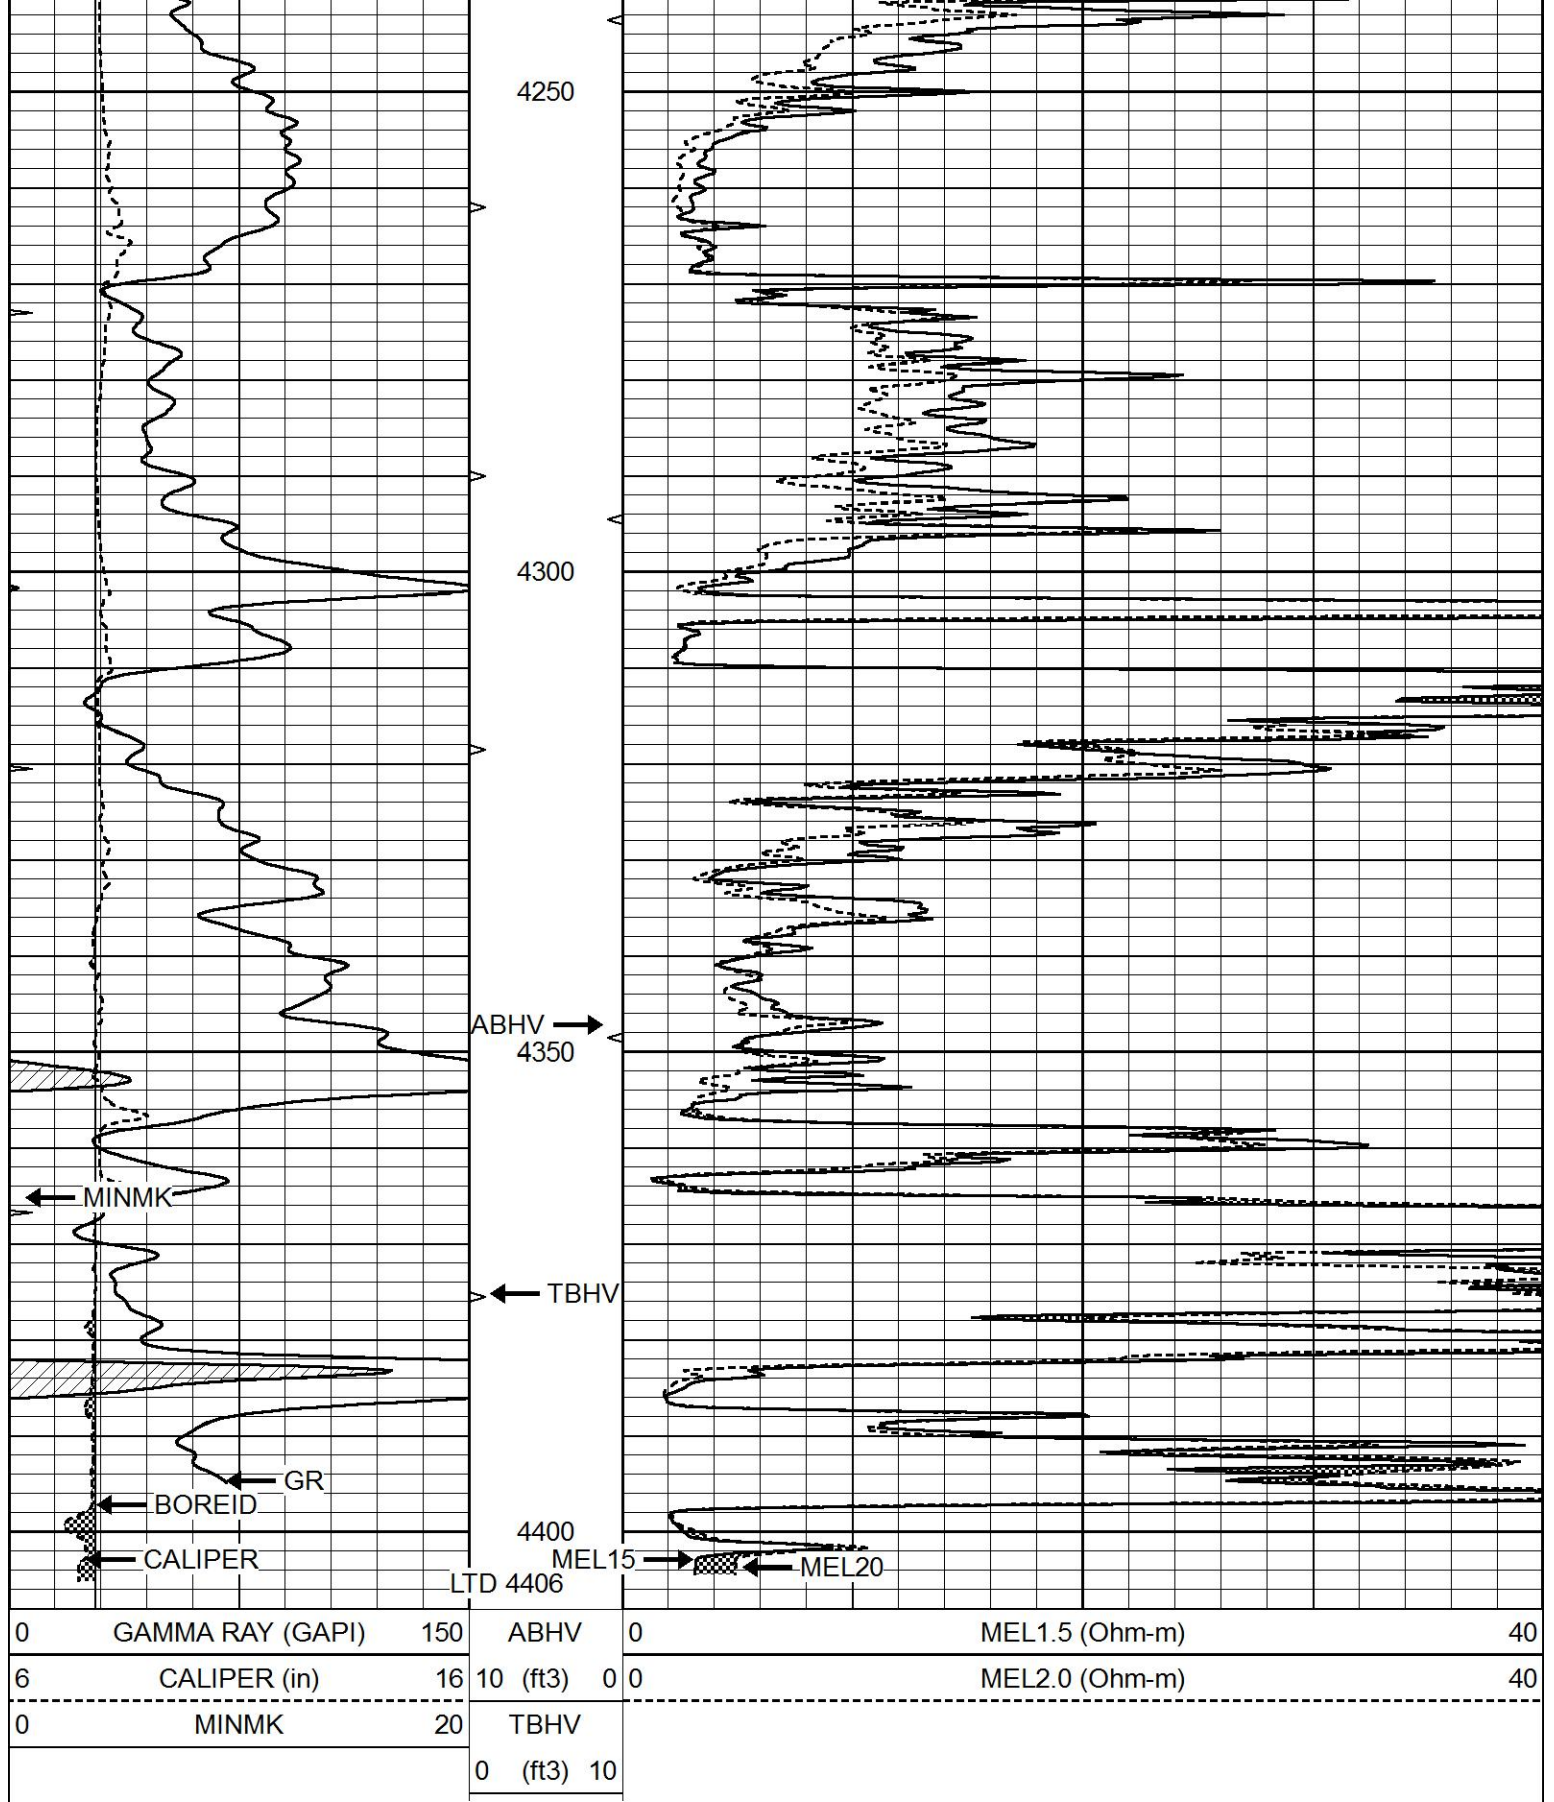

REPEAT SECTION

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

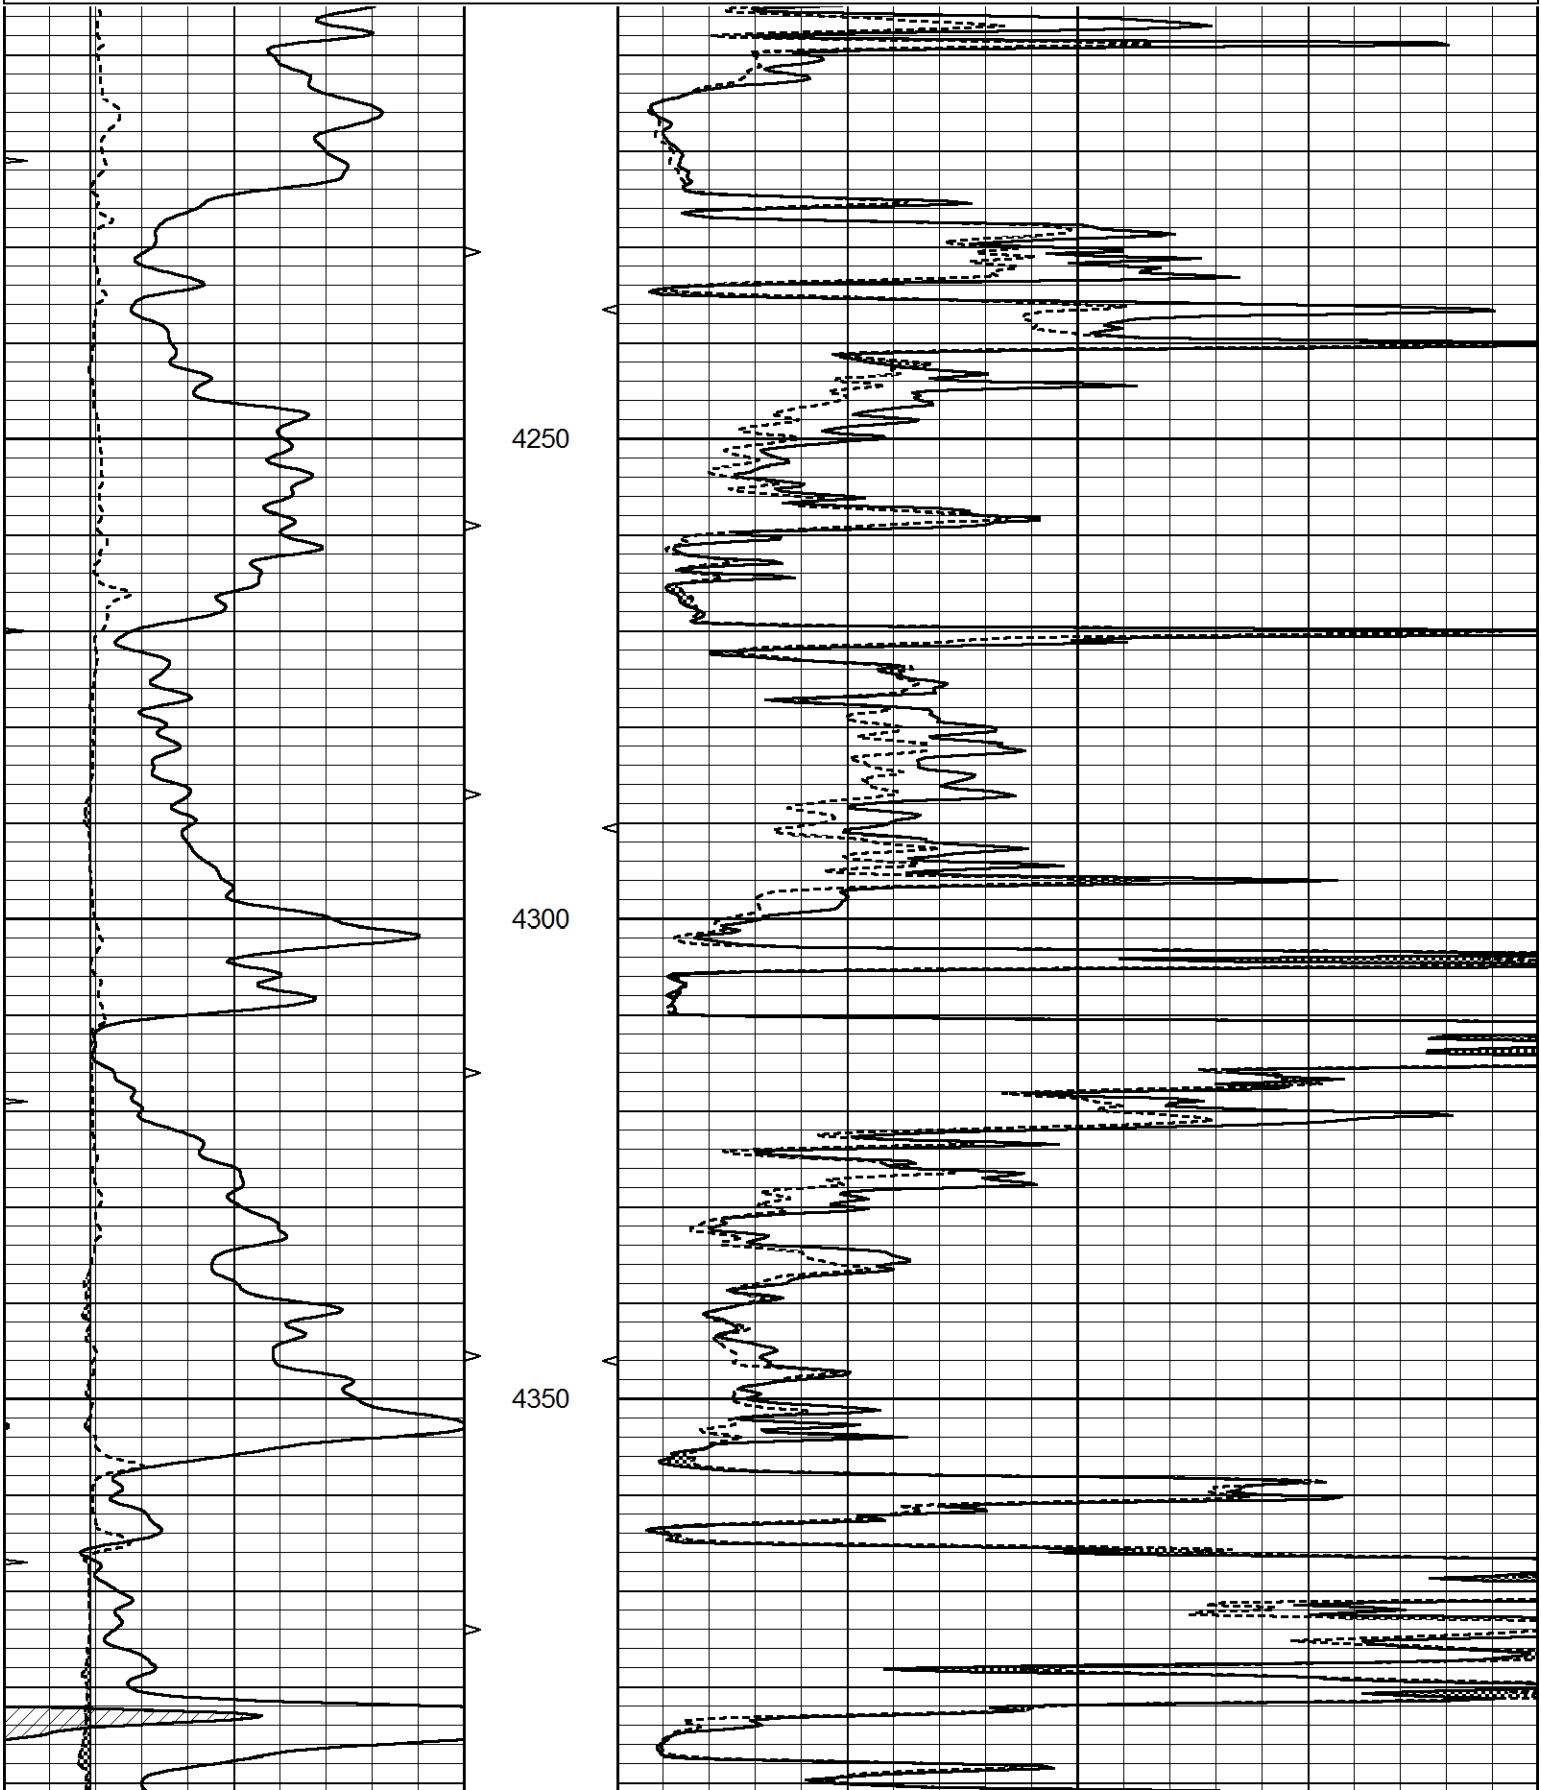

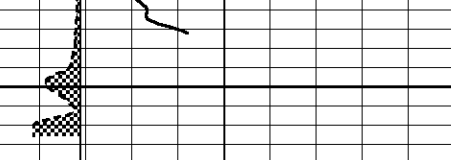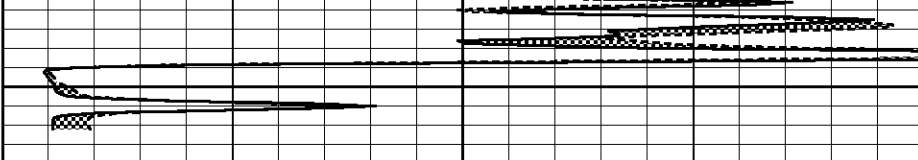			4400				
0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m) 40		
6	CALIPER (in)	16	10 (ft3) 0	0	MEL2.0 (Ohm-m) 40		
-----			-----				
0	MINMK	20	TBHV				
			0 (ft3) 10				

Calibration Report			
Database File	5430ddn.db		
Dataset Pathname	pass4.1		
Dataset Creation	Tue Apr 20 06:14:01 2021		
MICRO Calibration Report			
Serial Number:	Micro1		
Tool Model:	ProbeL		
Performed:	Sat Apr 10 18:53:52 2021		
Caliper Calibration:	Gain=2.815	Offset=4.502	
References	Low Cal	High Cal	
Readings	8.500	13.500	
	0.887	2.663	
1.5" Calibration:	Gain=36.134	Offset=-1.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.004	0.832	
2" Calibration:	Gain=38.000	Offset=-0.800	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.022	0.793	
Gamma Ray Calibration Report			
Serial Number:	GR5		
Tool Model:	OPEN		
Performed:	Thu Jul 30 23:16:16 2020		
Calibrator Value:	1.0	GAPI	
Background Reading:	0.0	cps	
Calibrator Reading:	1.0	cps	
Sensitivity:	1.2000	GAPI/cps	