



MICRO LOG

Company ANCHOR BAY PETROLEUM, LLC.		Company ANCHOR BAY PETROLEUM, LLC.	
Well	HENMAN #2	Well HENMAN #2	
Field	PLEASANT	Field PLEASANT	
County	ELLIS	County ELLIS	
State	KANSAS	State KANSAS	
Location:		API #: 15-051-27088-0000	
Permanent Datum		GROUND LEVEL Elevation 2258	
Log Measured From		KELLY BUSHING 8' A.G.L	
Drilling Measured From		KELLY BUSHING	
SEC 34 TWP 13S RGE 20W		Other Services CDL/CNL DIL	
Elevation		K.B. 2266 D.F. 2264 G.L. 2258	
Date	6/15/23		
Run Number	TWO		
Depth Driller	3950		
Depth Logger	3950		
Bottom Logged Interval	3948		
Top Log Interval	2500		
Casing Driller	8 5/8" @ 223		
Casing Logger	223		
Bit Size	7 7/8		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 8,000 PPM	
Density / Viscosity	9.2/53		
pH / Fluid Loss	10.5/6.0		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.600 @ 76F		
Rmt @ Meas. Temp	.450 @ 76F		
Rmc @ Meas. Temp	.720 @ 76F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.393 @ 116F		
Time Circulation Stopped	4 HOURS		
Time Logger on Bottom	11:00 A.M.		
Maximum Recorded Temperature	116F		
Equipment Number	8916		
Location	HAYS, KANSAS		
Recorded By	COLE ROBEN		
Witnessed By	ED GLASSMAN		

<<< Fold Here >>>


All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

Comments

THANK YOU FOR USING ELI WIRELINE SERVICES, HAYS, KS. (785) 628-6395

DIRECTIONS:


FROM HAYS, KANSAS GO WEST ON HIGHWAY 40 TO 140TH AVENUE, SOUTH TO AIRBASE ROAD, WEST 3/4 MILE, SOUTH INTO

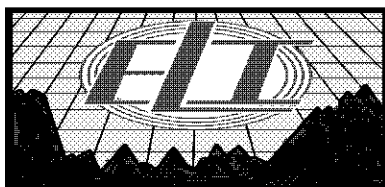


MAIN SECTION

Database File	7595ddn.db
Dataset Pathname	pass6.7
Presentation Format	_micro
Dataset Creation	Thu Jun 15 11:48:56 2023
Charted by	Depth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3)	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3)	10		

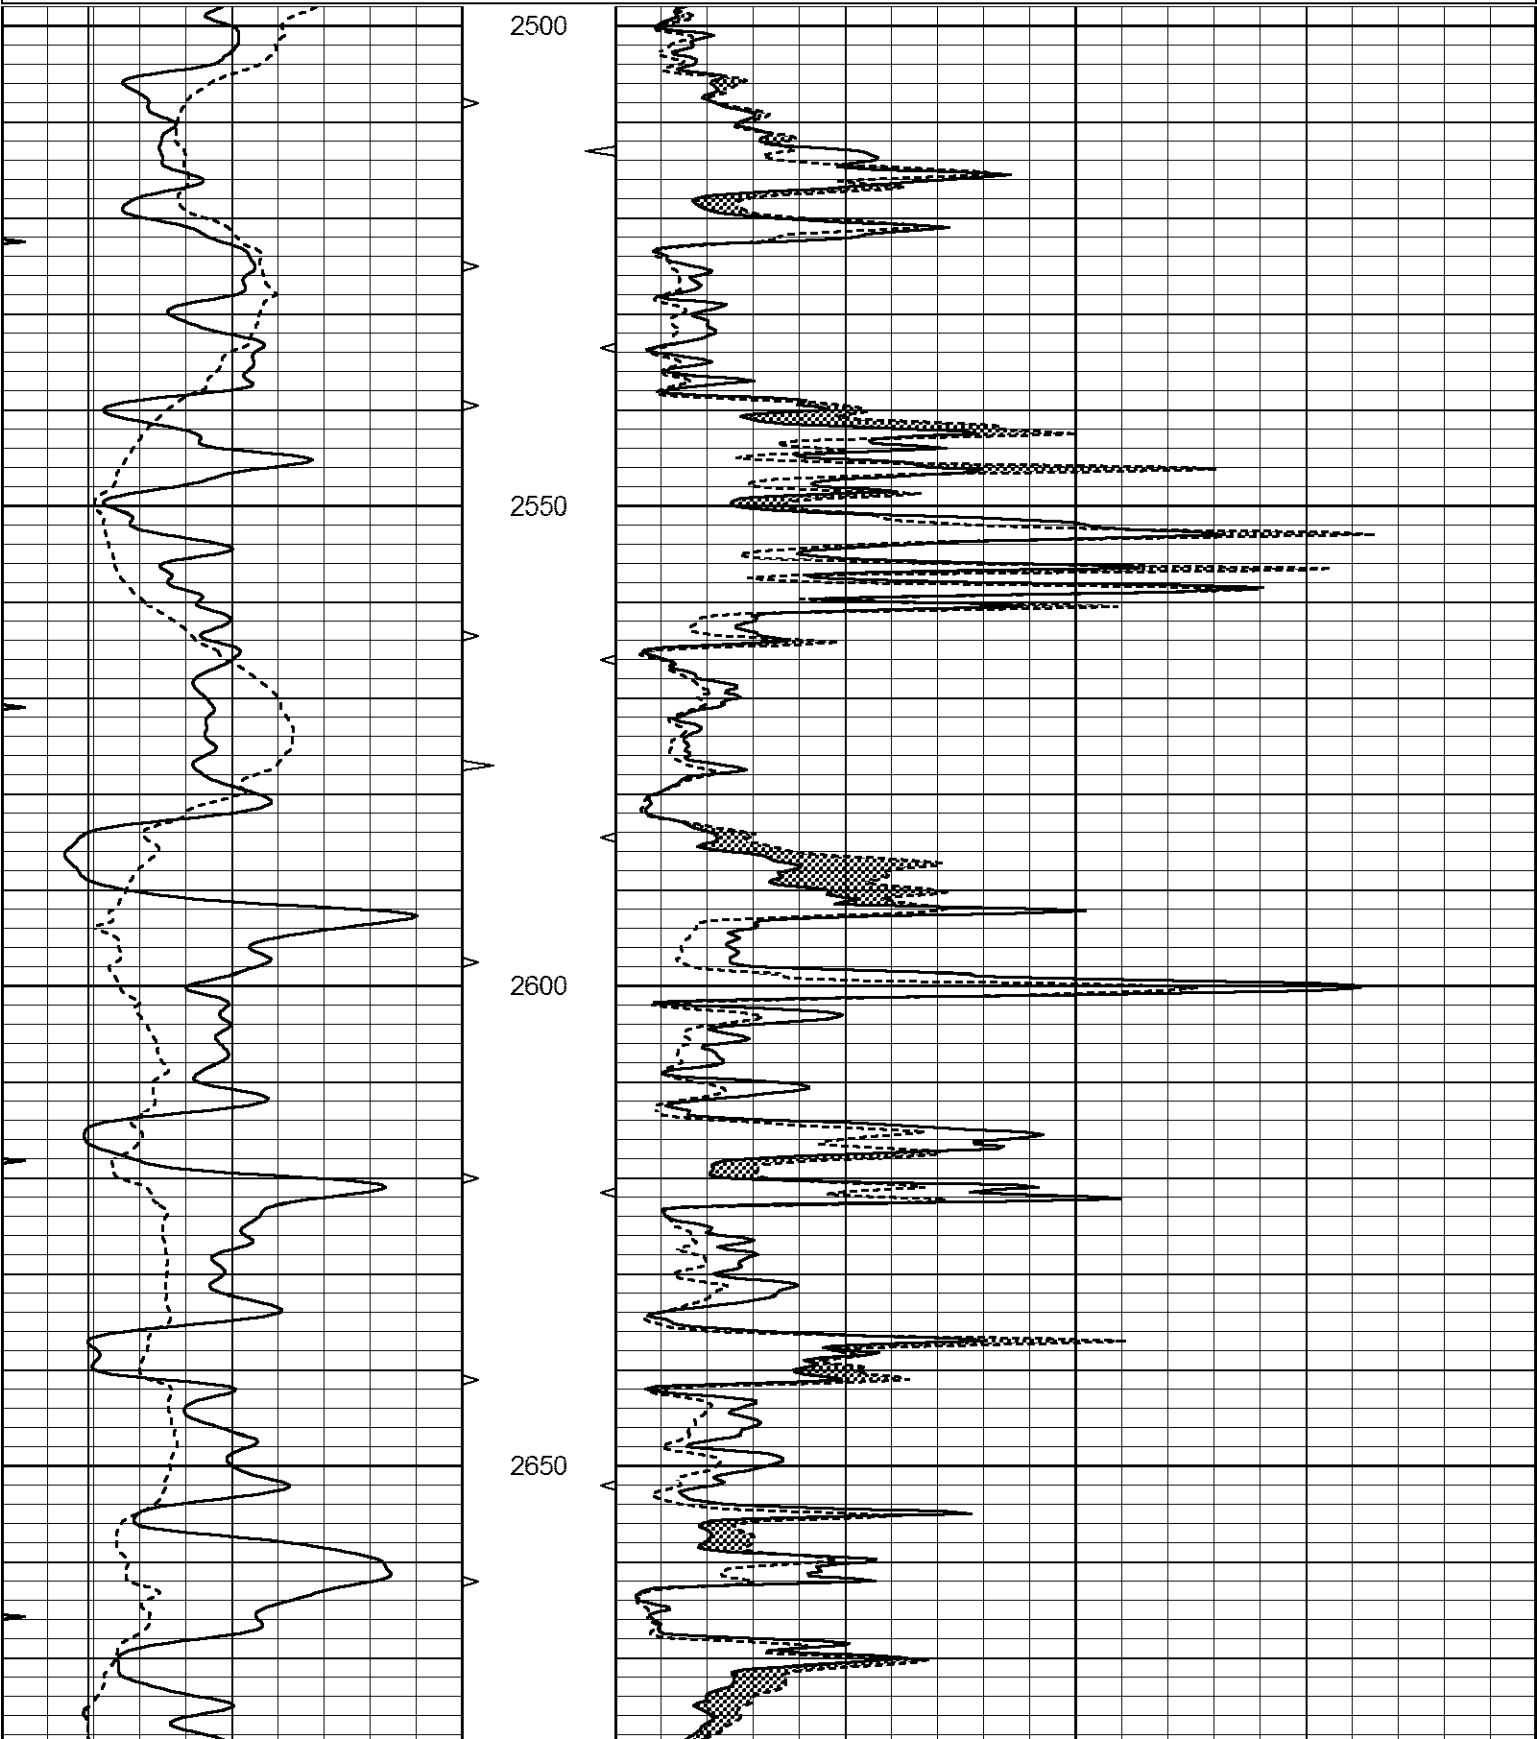

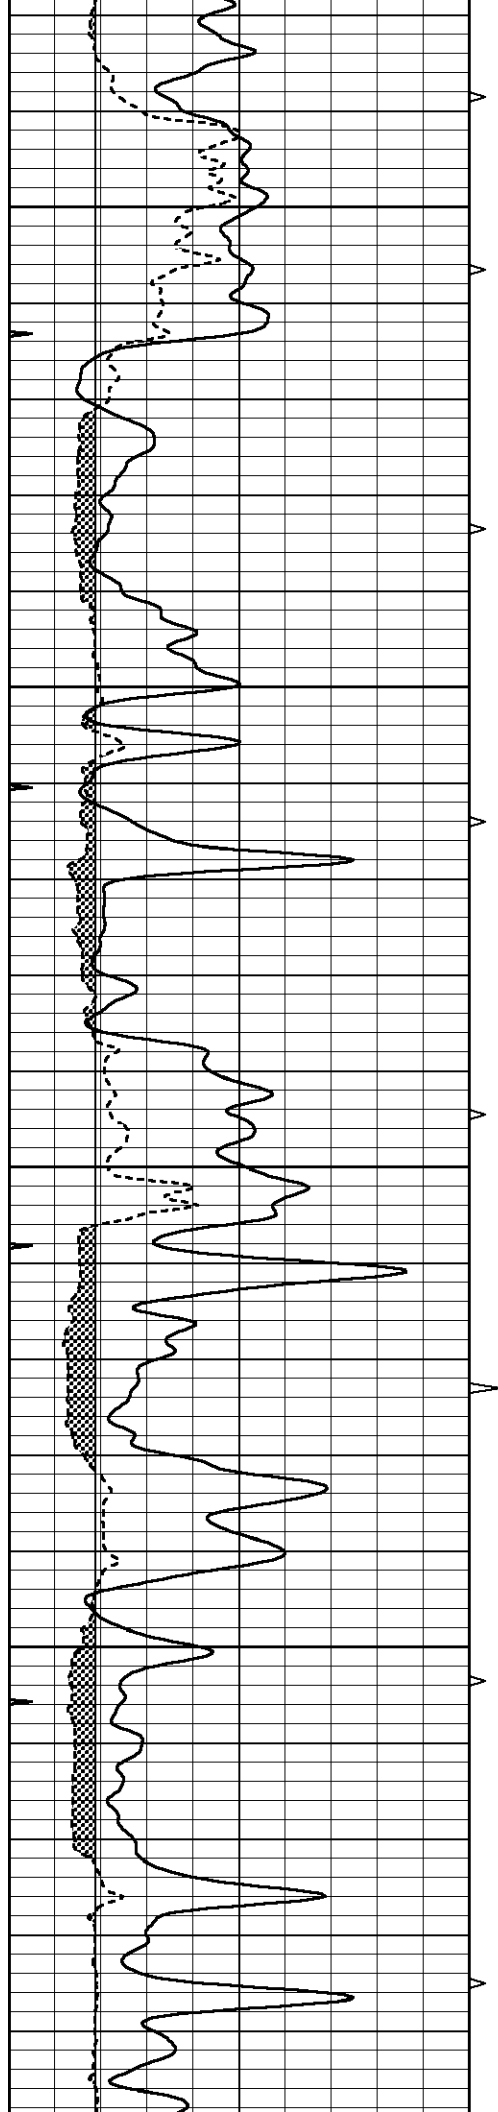




2700


2750


2800

2850

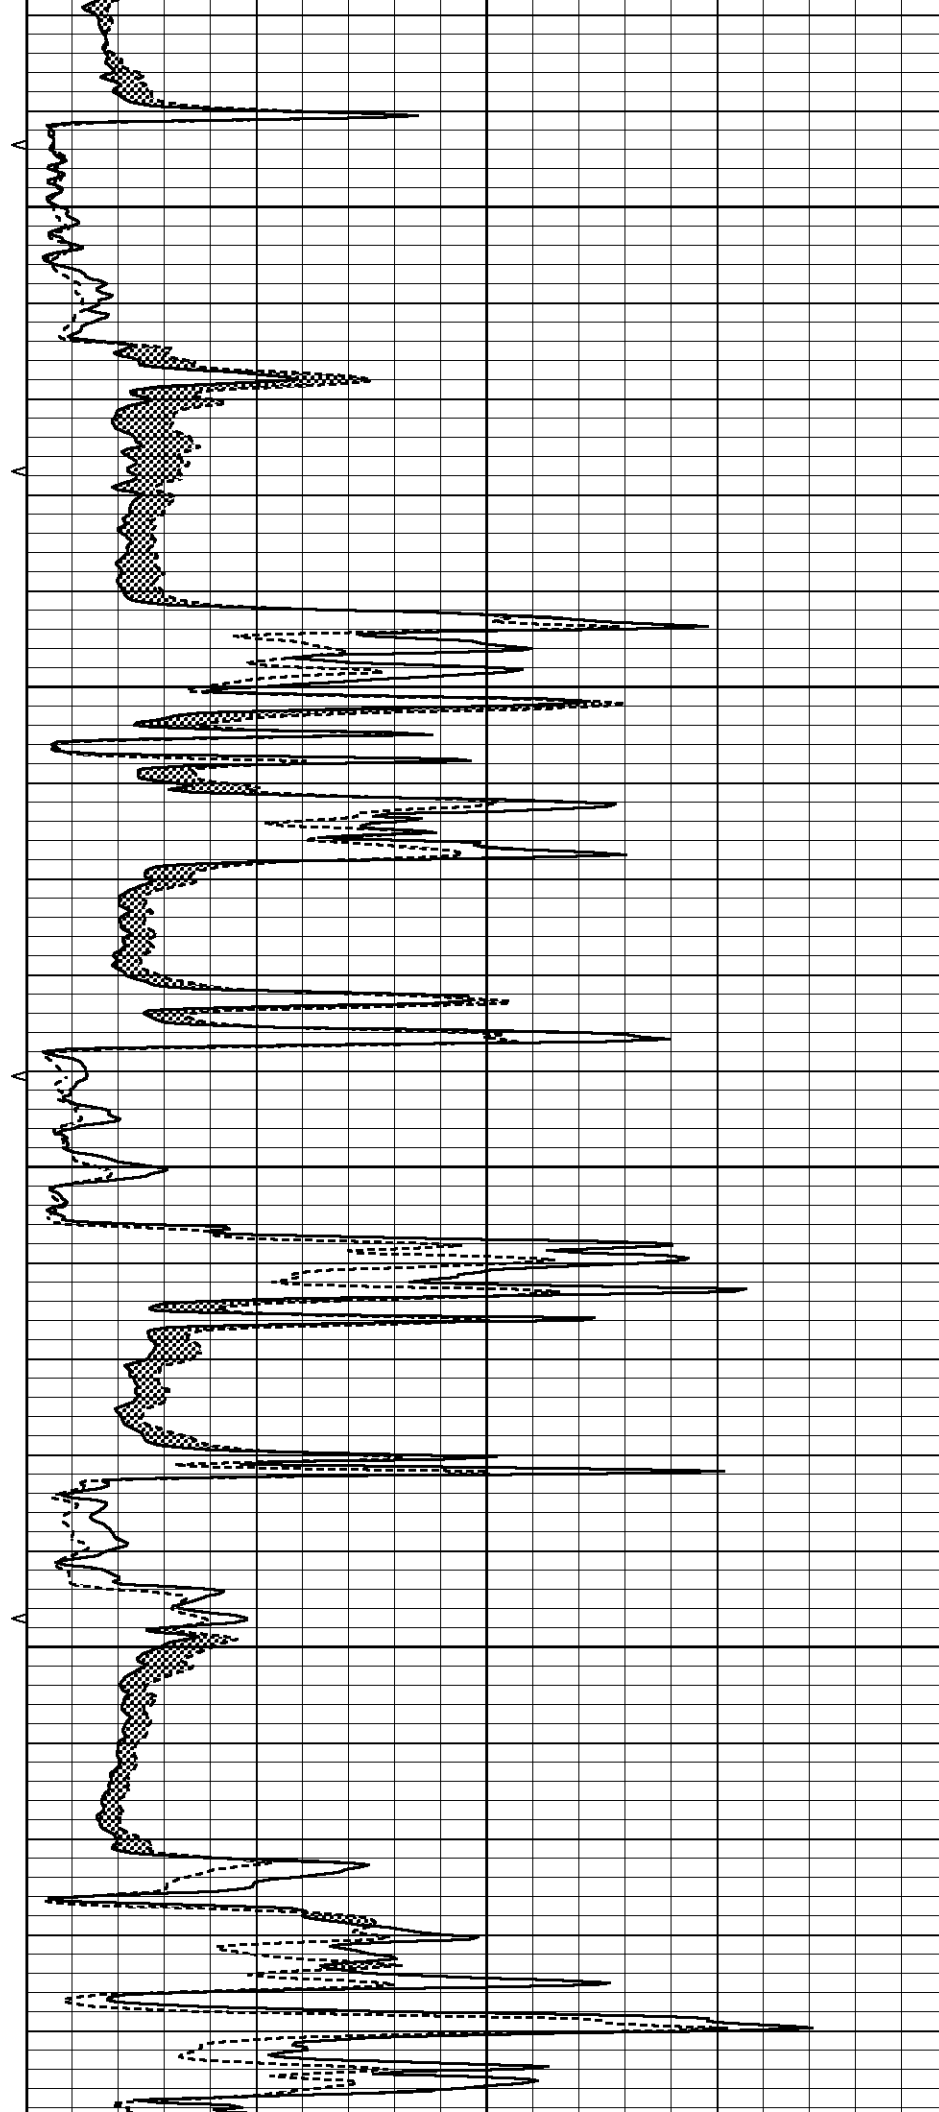

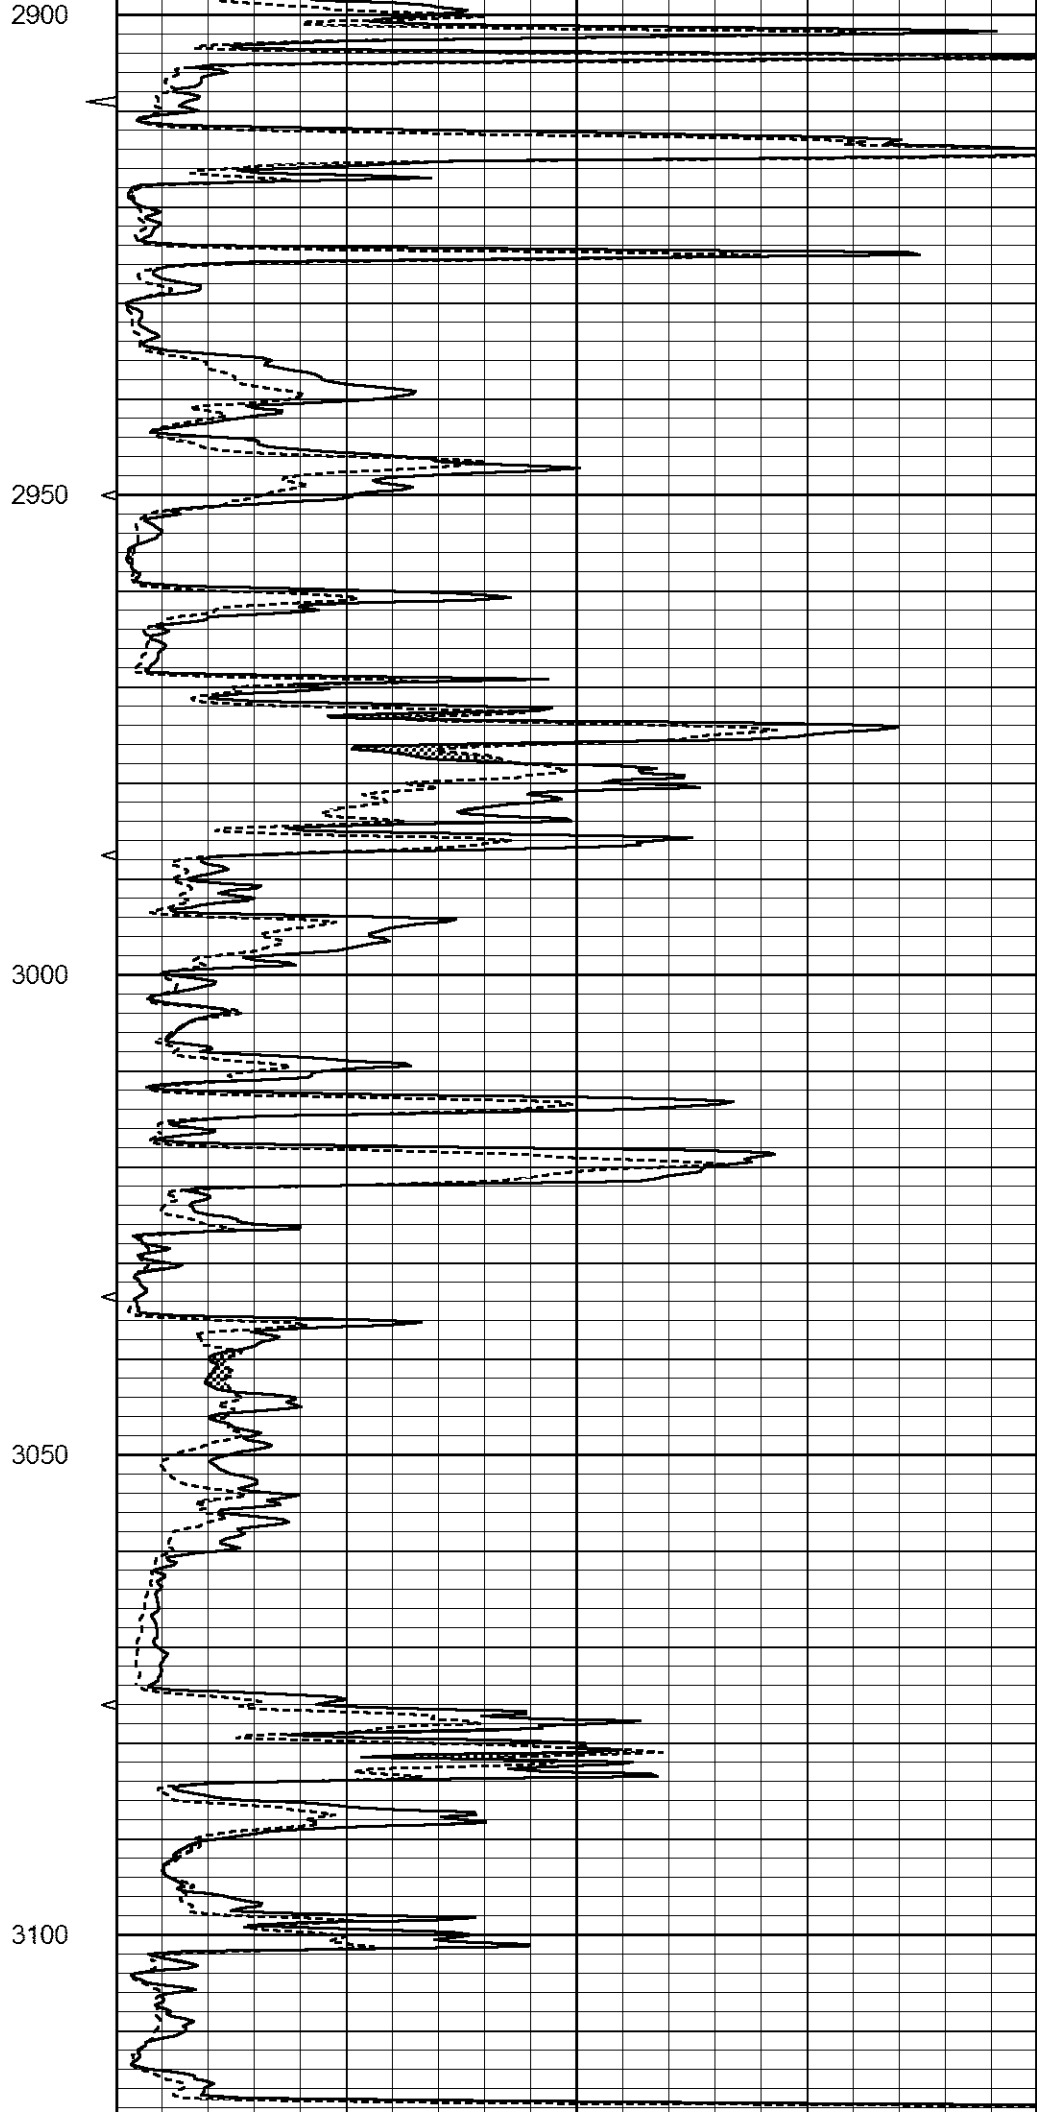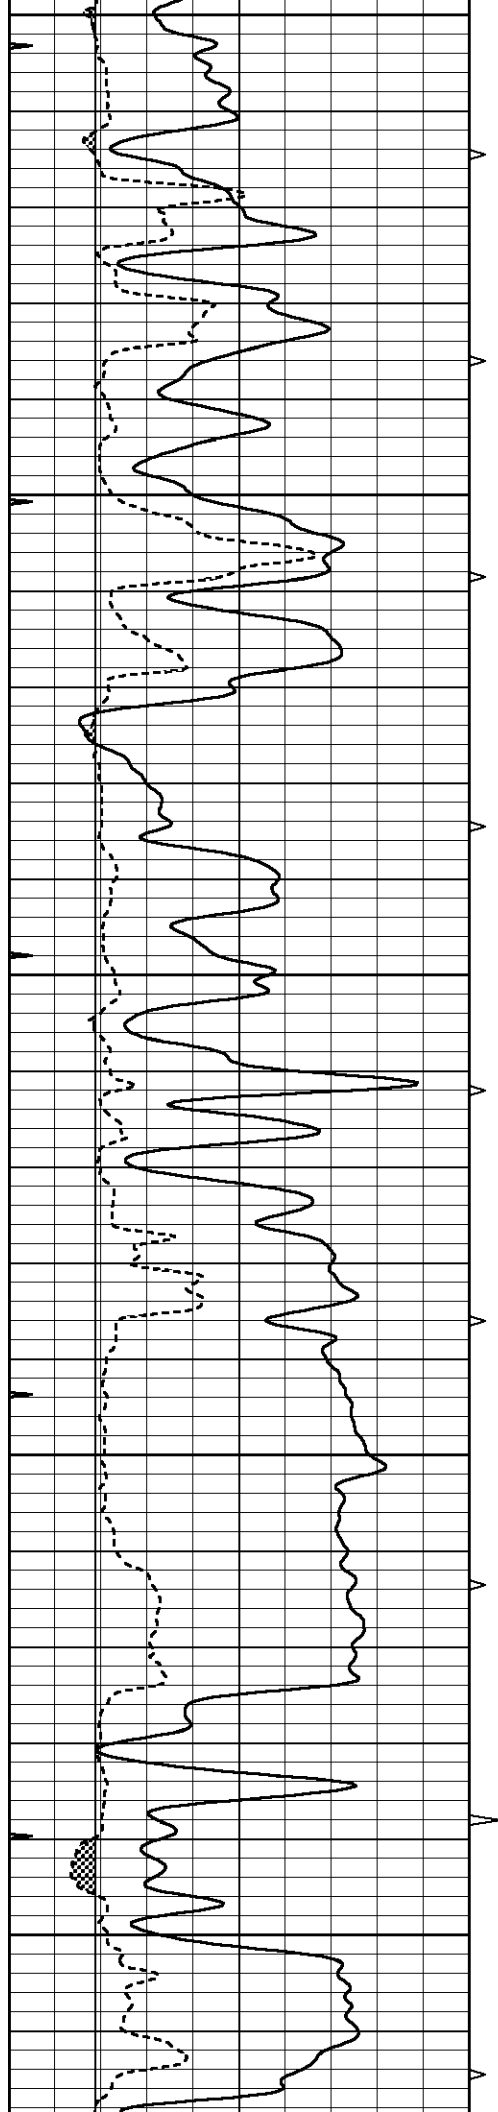

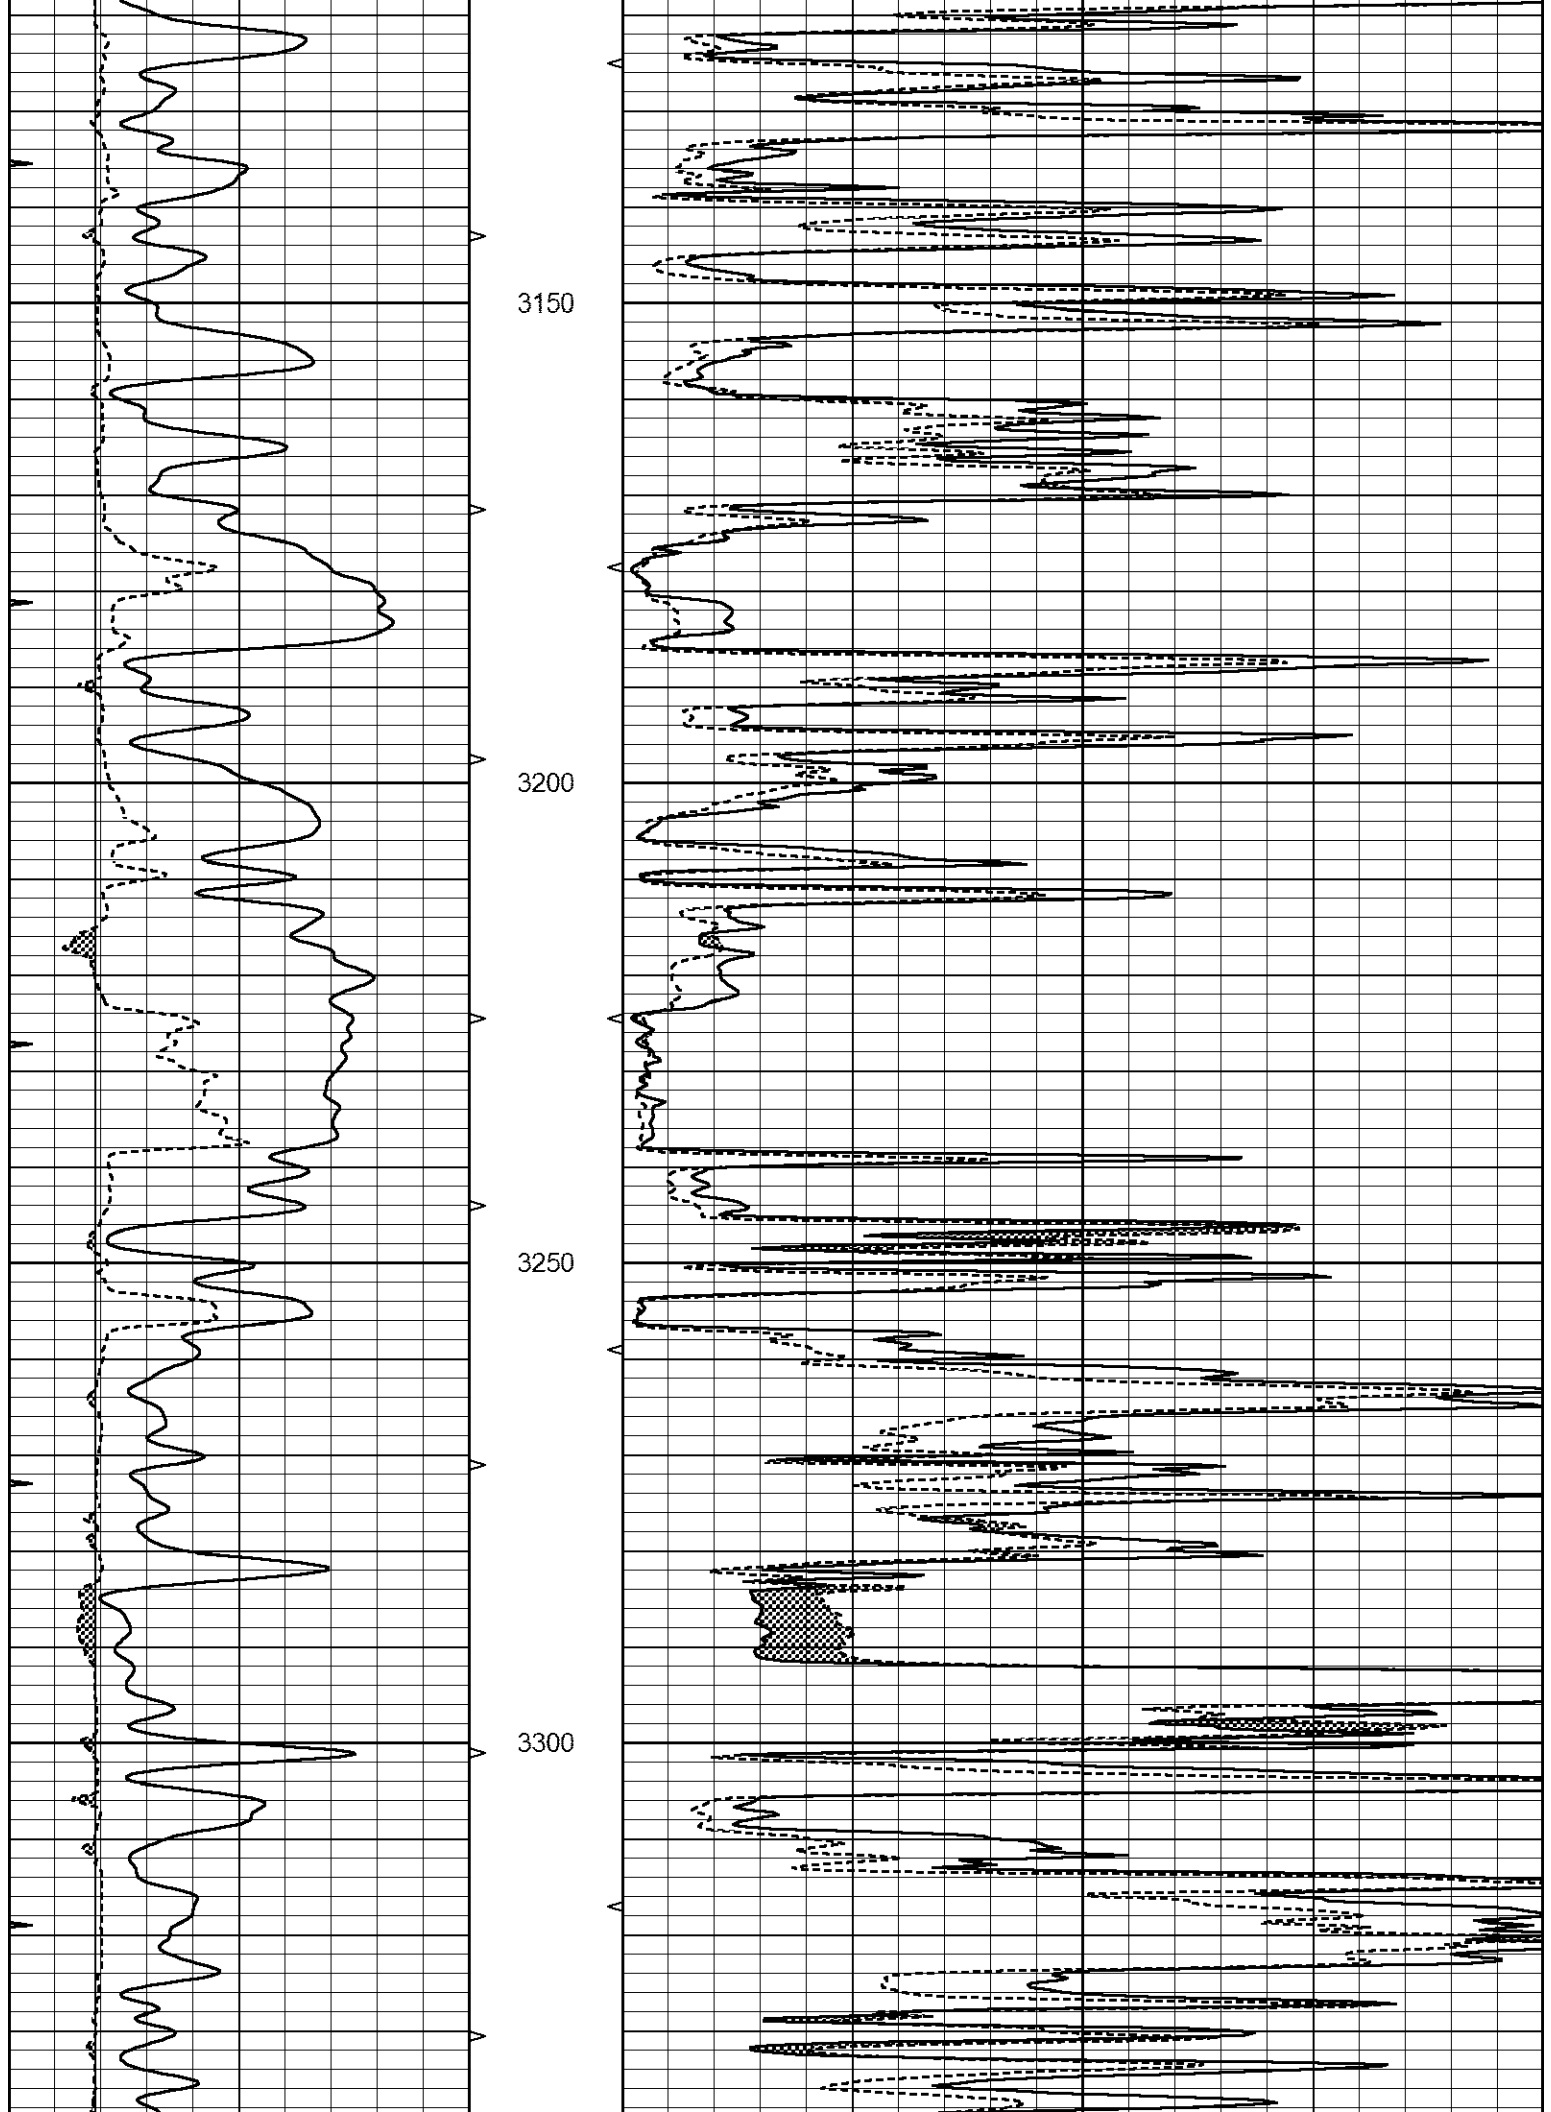

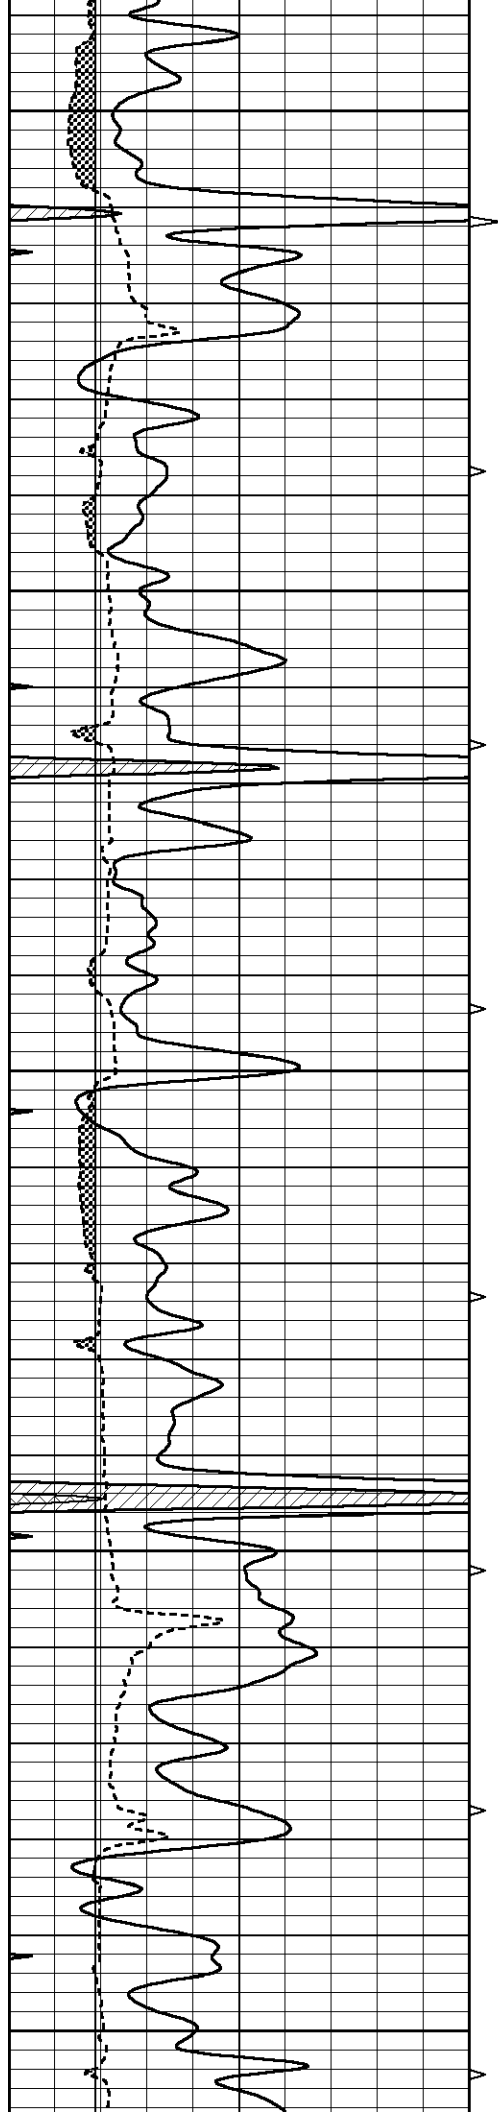


3350


3400

3450

3500

3550

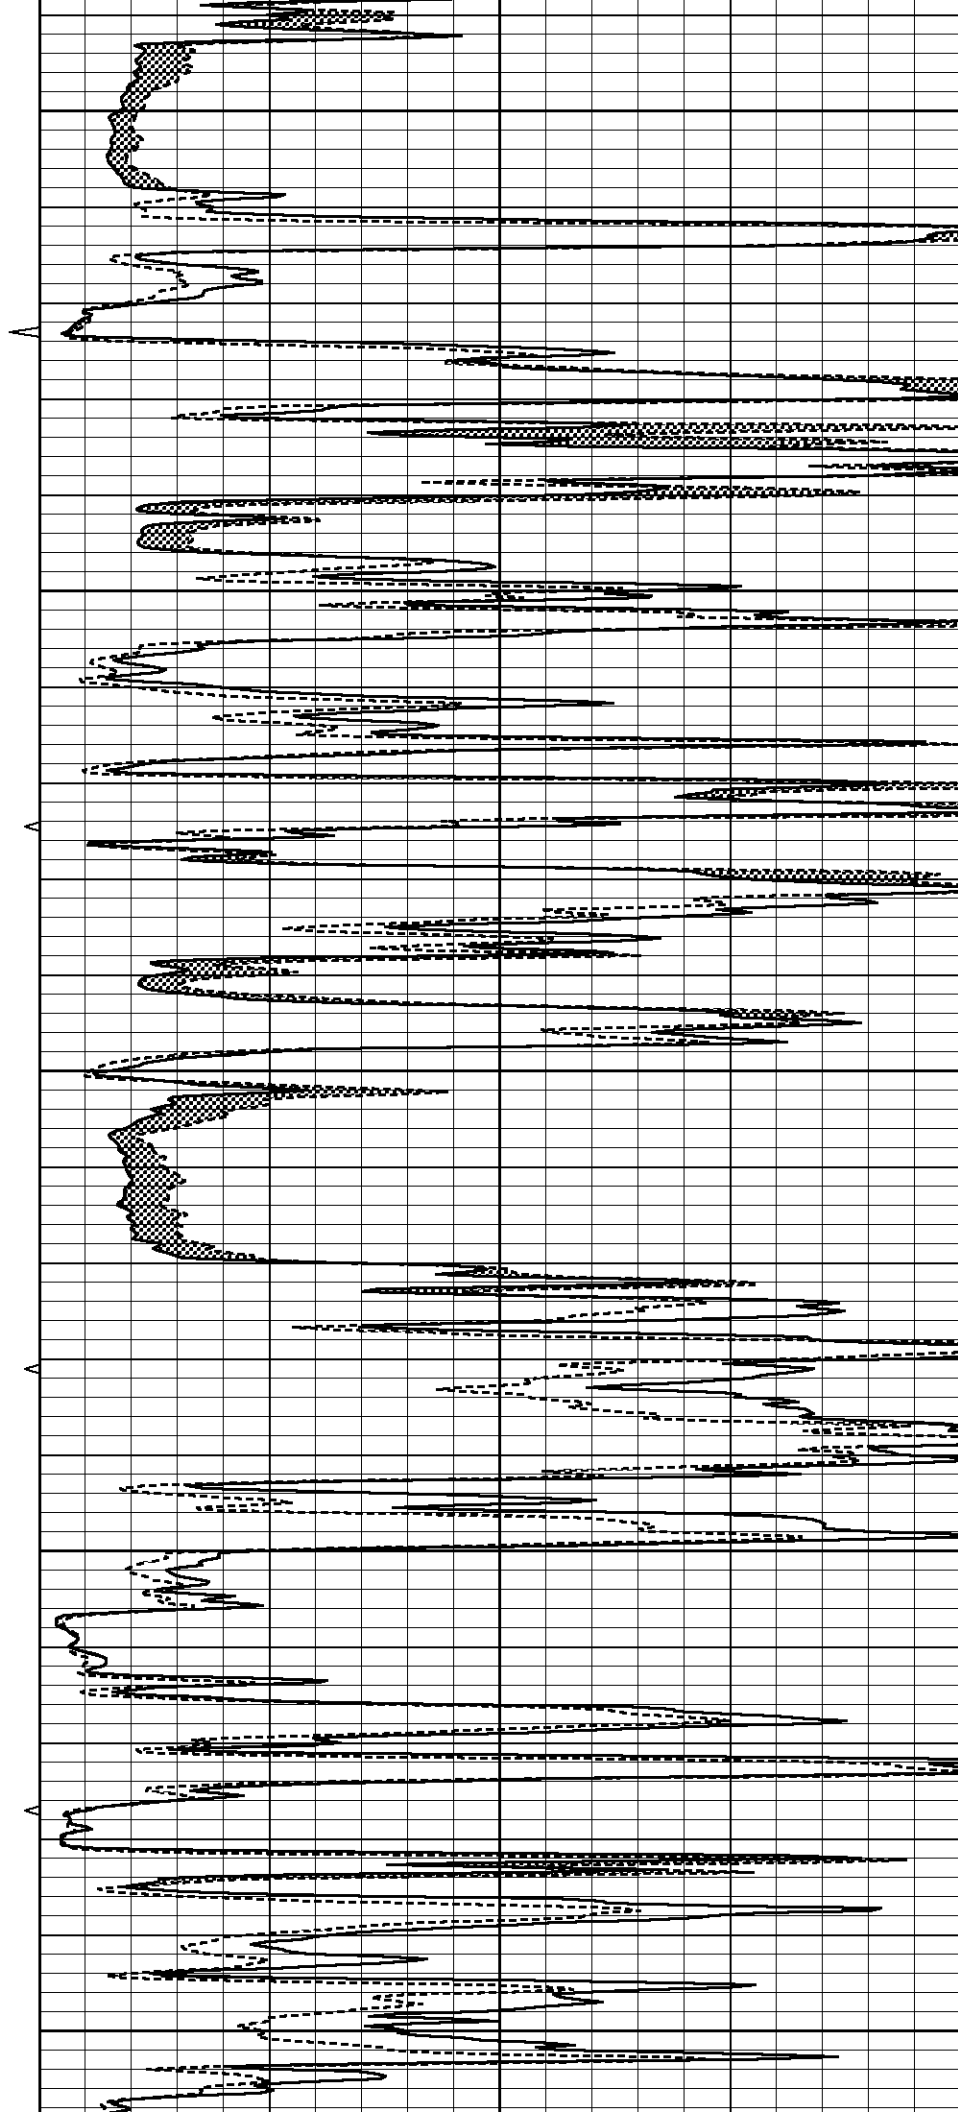

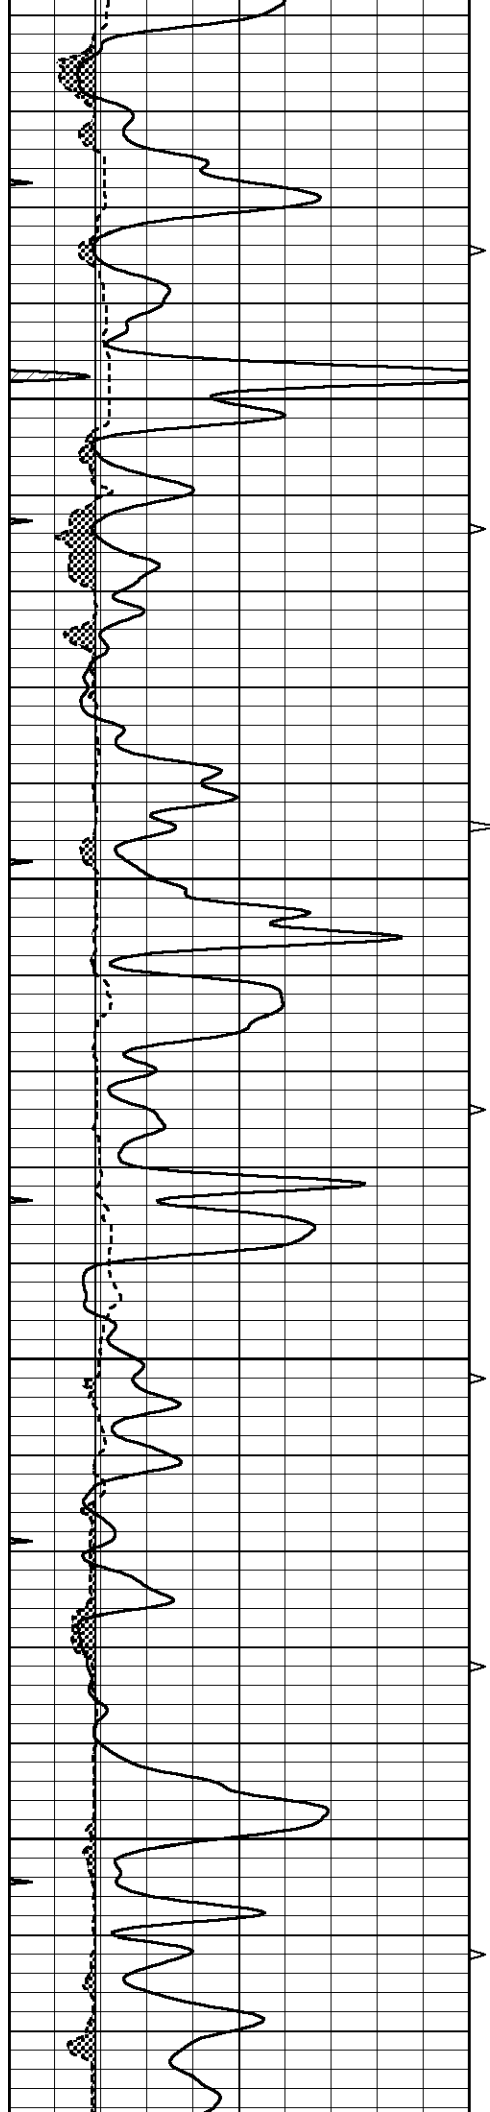




3600

3650

3700

3750

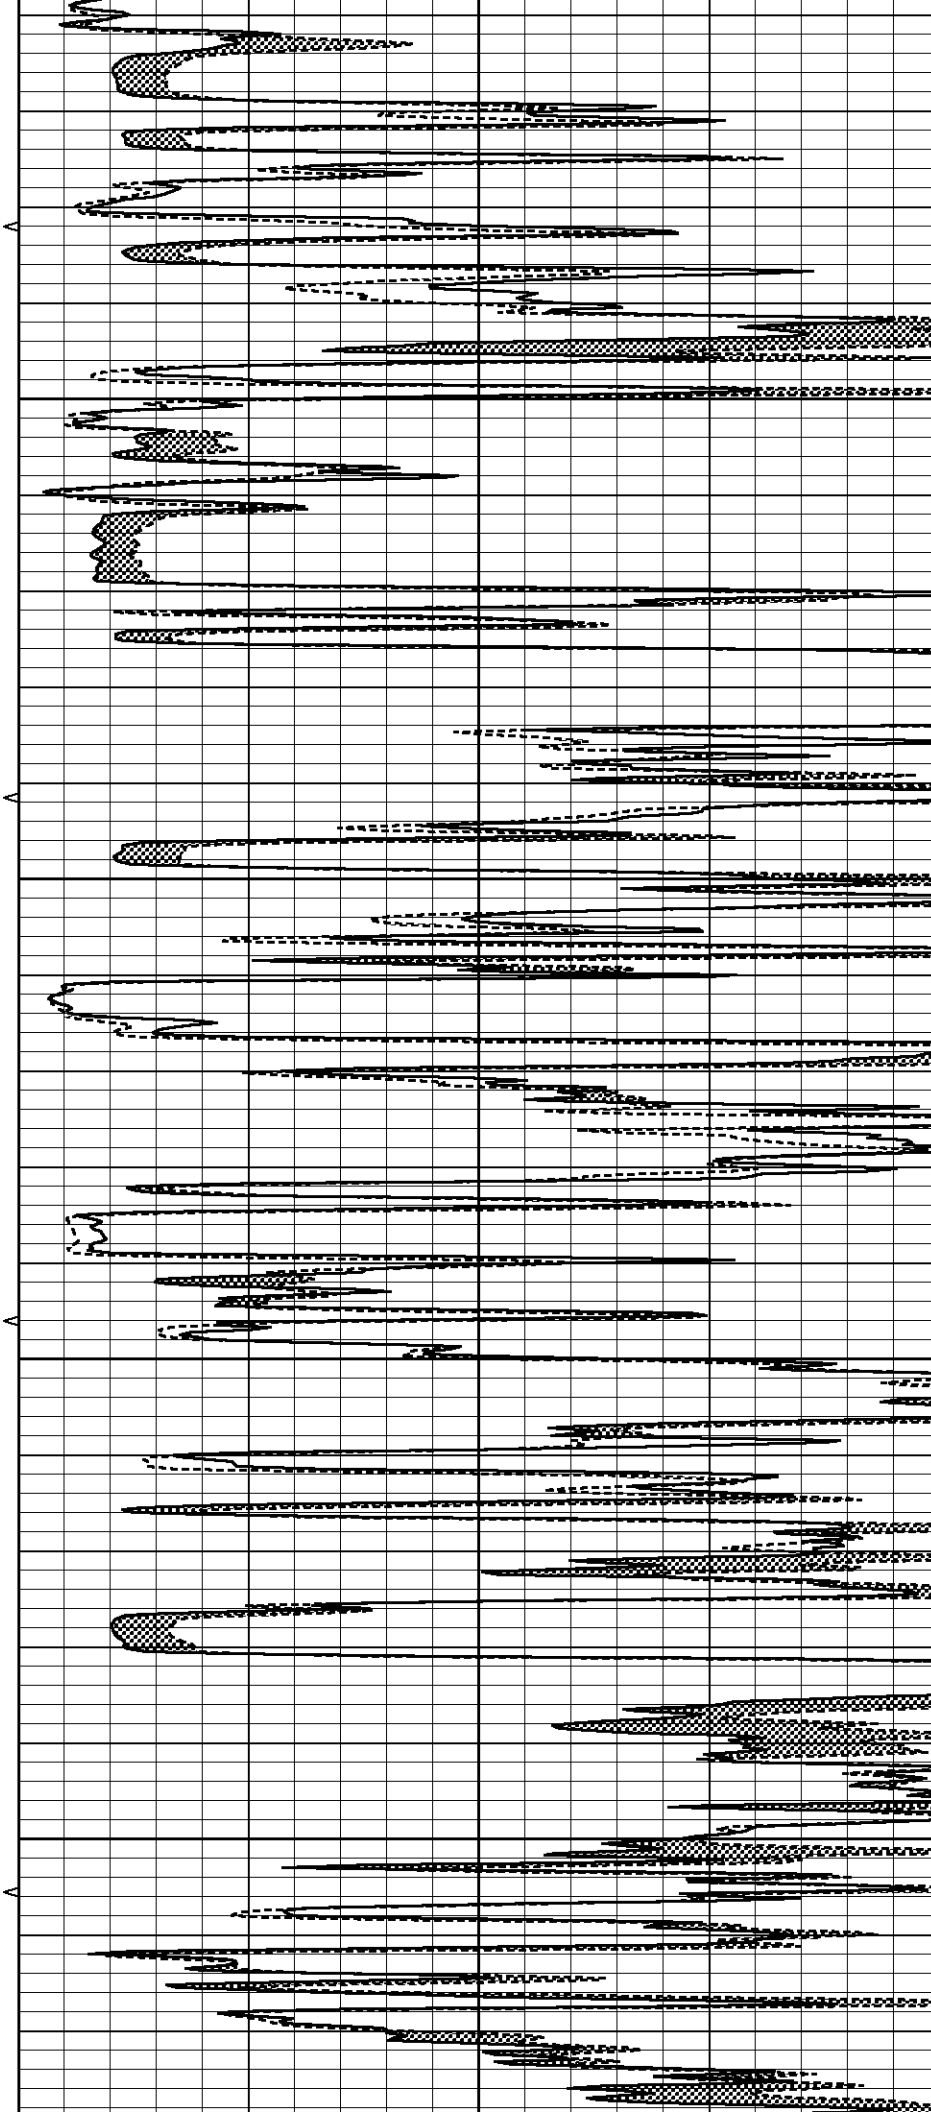

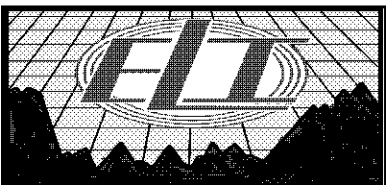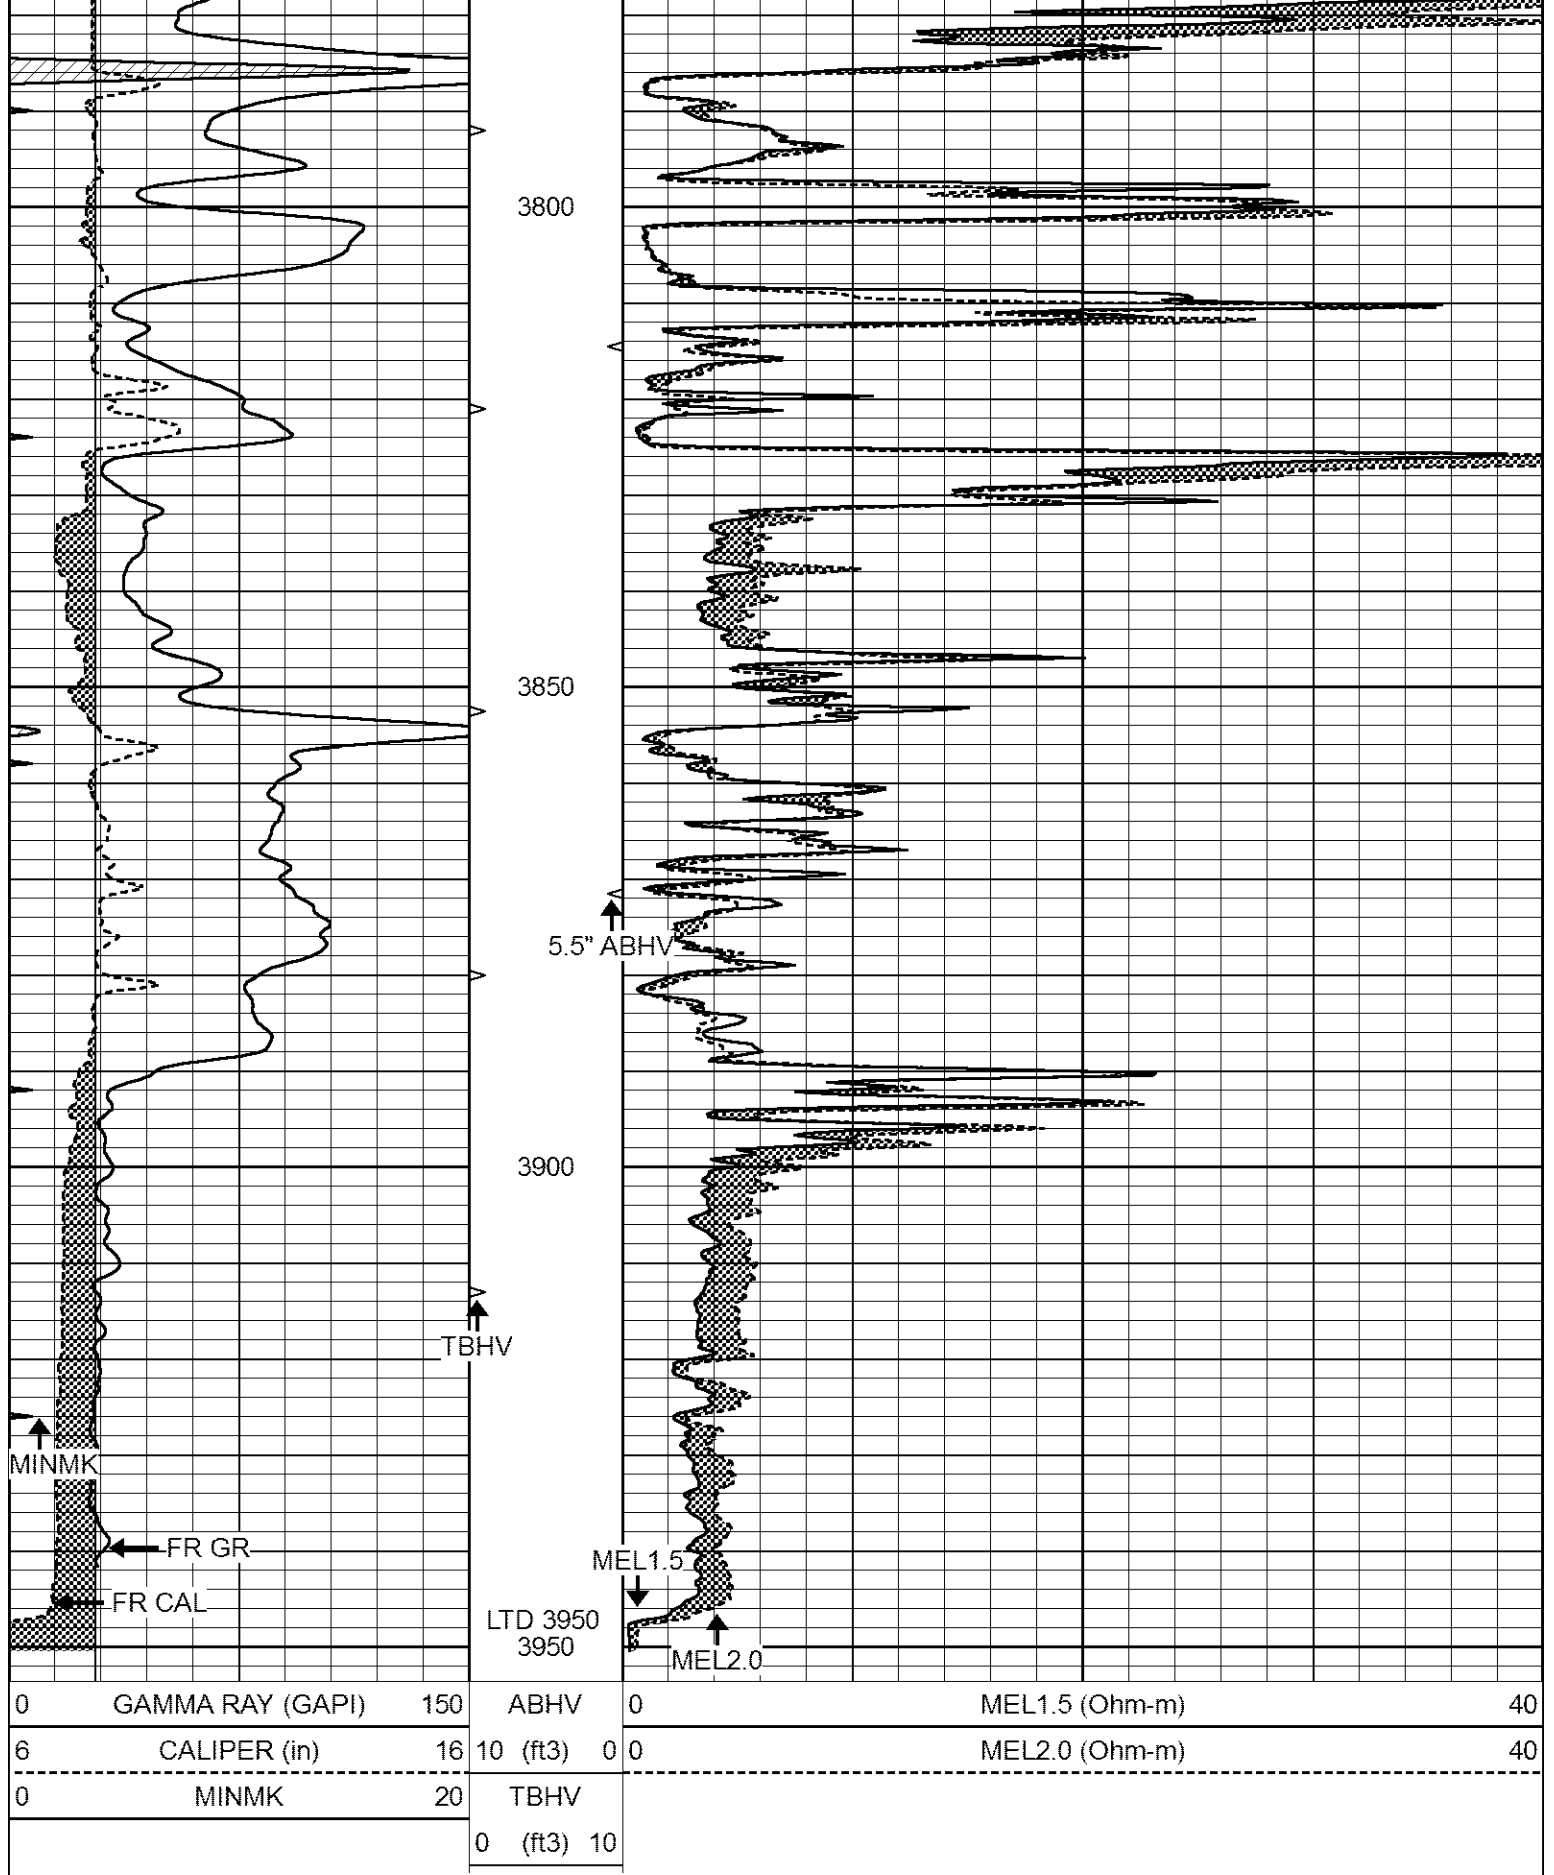

REPEAT SECTION

Database File7595ddn.db


Dataset Pathnamepass5.3


Presentation Format_micro

Dataset CreationThu Jun 15 11:35:21 2023

Charted byDepth in Feet scaled 1:240

0	GAMMA RAY (GAPI)	150	ABHV	0	MEL1.5 (Ohm-m)	40
6	CALIPER (in)	16	10 (ft3) 0 0	0	MEL2.0 (Ohm-m)	40
0	MINMK	20	TBHV			
			0 (ft3) 10			

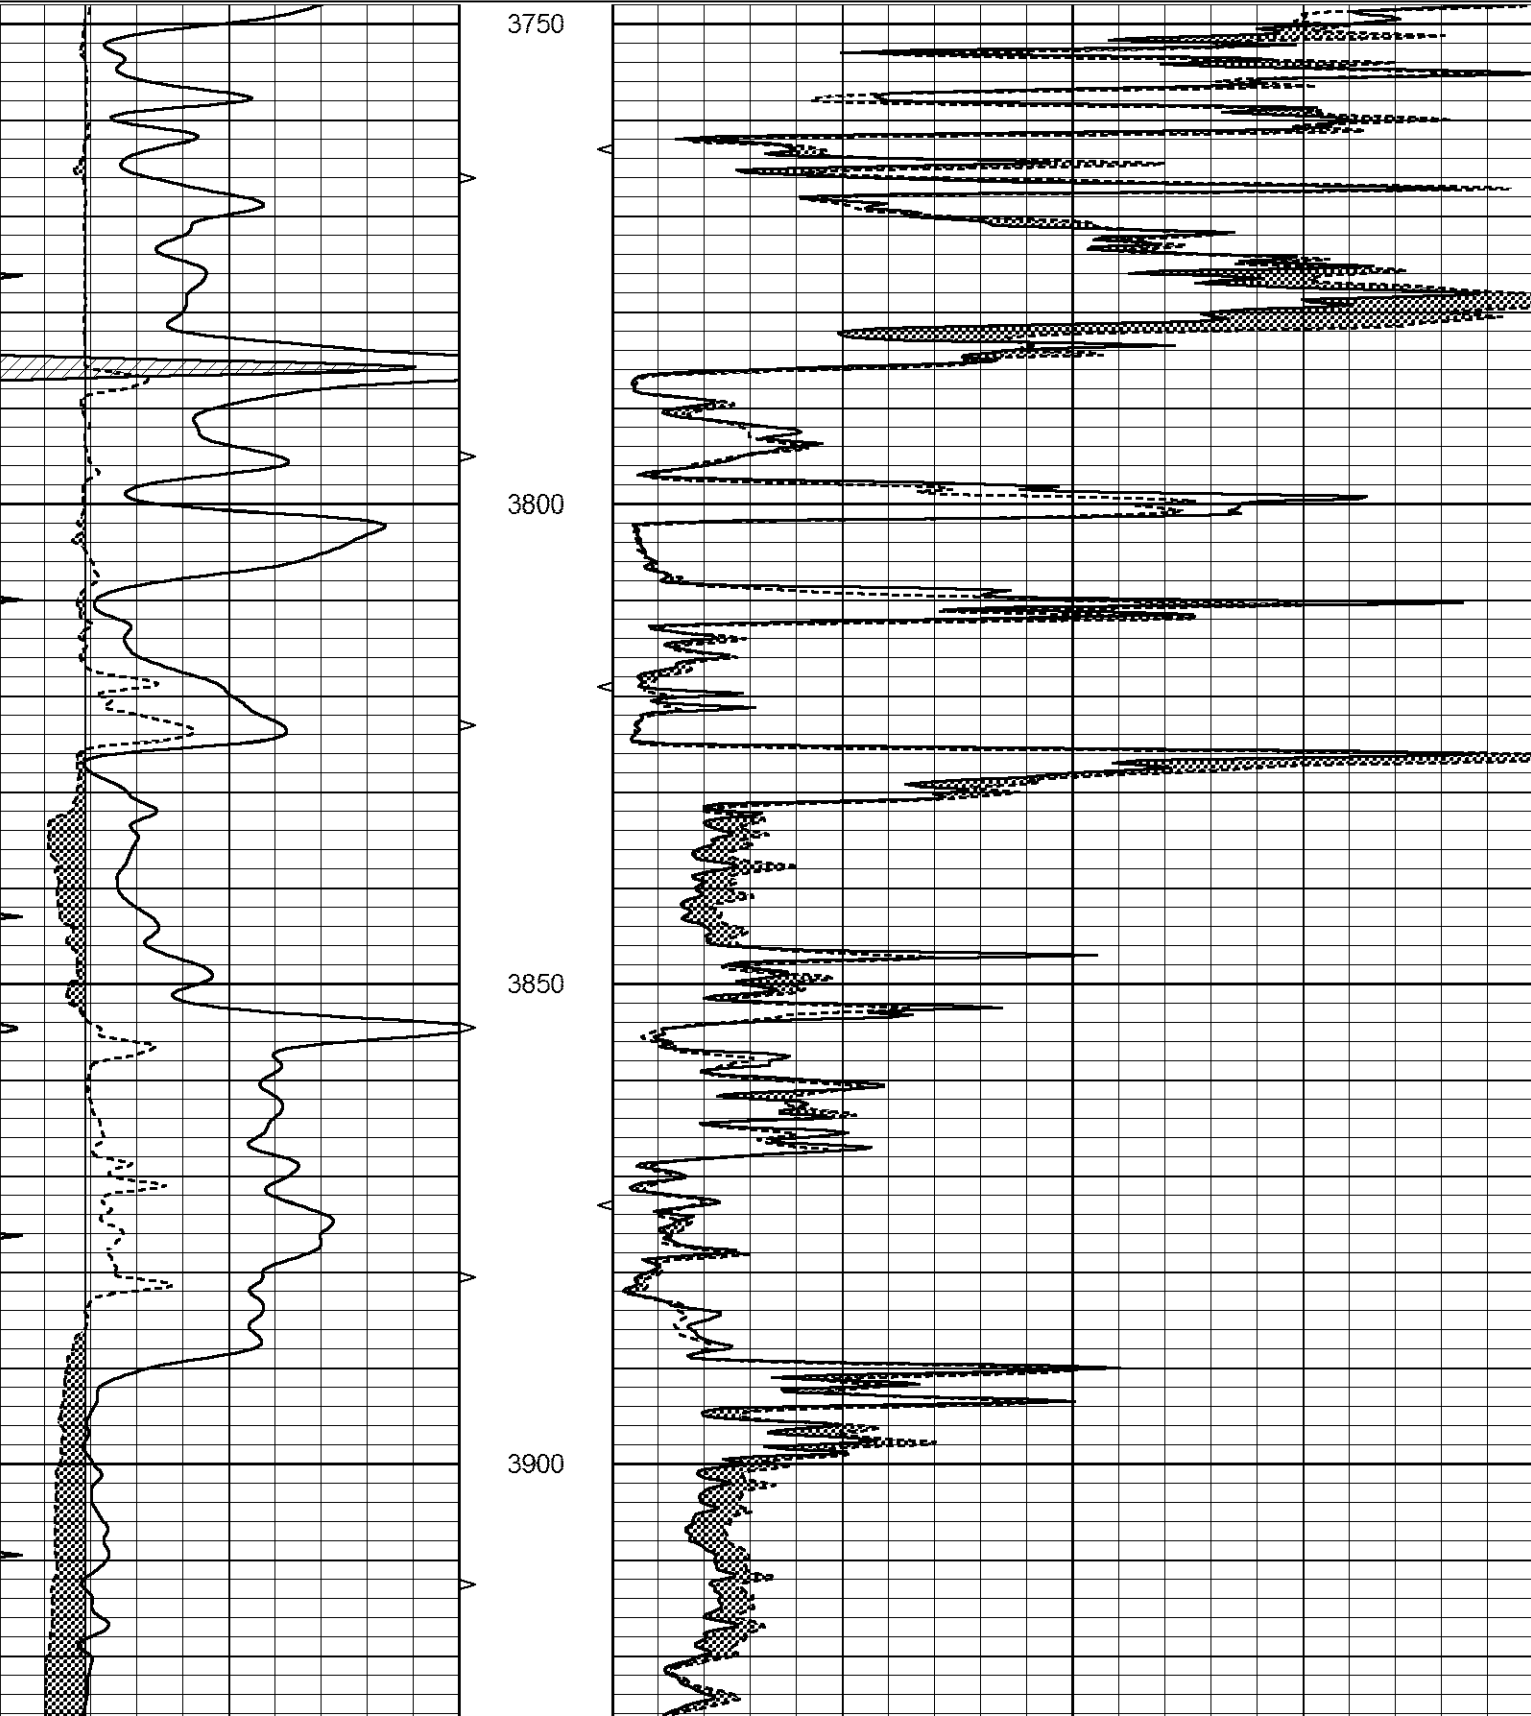

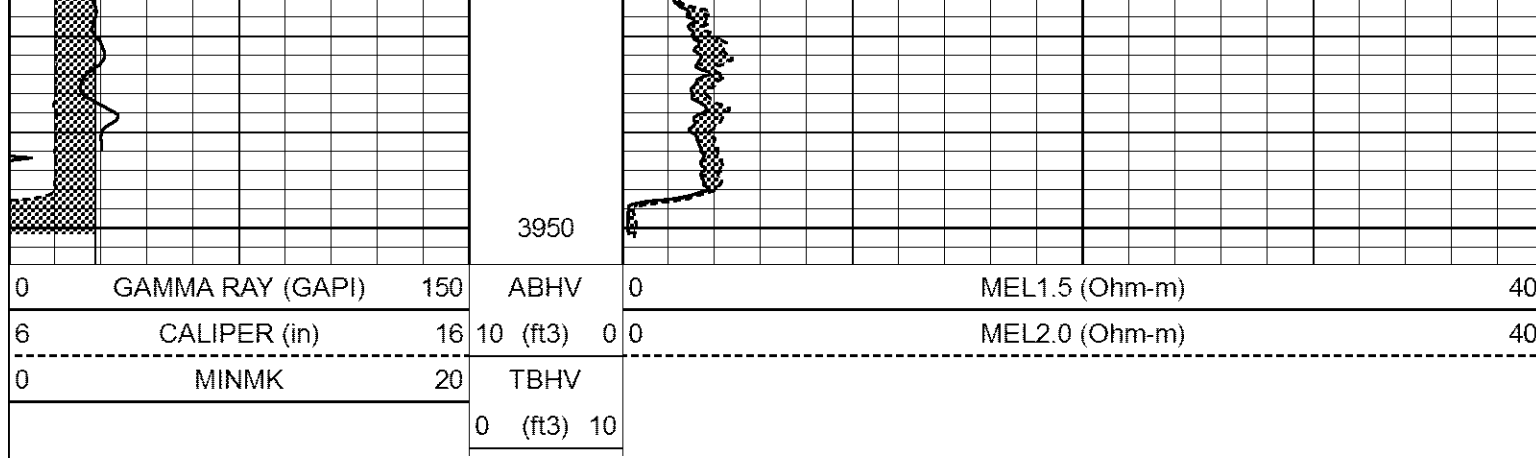

Calibration Report	
Database File	7595ddn.db
Dataset Pathname	pass6.7
Dataset Creation	Thu Jun 15 11:48:56 2023

MICRO_USR Calibration Report

Serial Number:	070911
Tool Model:	ProbeL
Performed:	Fri Jun 02 17:39:09 2023

Caliper Calibration:	Gain=4.500	Offset=0.000
References	Low Cal 8.000	High Cal 14.000
Readings	1.451	3.049

1.5" Calibration:	Gain=30.000	Offset=-0.500
References	Low Cal 0.000	High Cal 20.000
Readings	0.004	0.843

2" Calibration:	Gain=37.000	Offset=-0.700
References	Low Cal 0.000	High Cal 20.000
Readings	0.021	0.810

Microlog Calibration Report

Serial-Model:	070911-ProbeL
Performed:	Sat May 14 04:48:25 2022

	Readings			References			Results	
	Zero	Cal		Zero	Cal		m	b
Normal	0.0002	0.4836	V	0.0000	10.0000	Ohm-m	20.6908	-0.0051
Inverse	0.0018	0.6297	V	0.0000	10.0000	Ohm-m	15.9263	-0.0282
Caliper	0.0000	1.0000	V	0.0000	1.0000	in	1.0000	0.0000

Gamma Ray Calibration Report

Serial Number:	070558	
Tool Model:	Probe1	
Performed:	Fri Mar 31 09:04:23 2023	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps

Calibrator Reading: 1.0 cps

Sensitivity: 0.2700 GAPI/cps