


15-163-19269-00-00

DISTRICT CONSERVATION AGENT'S REPORT

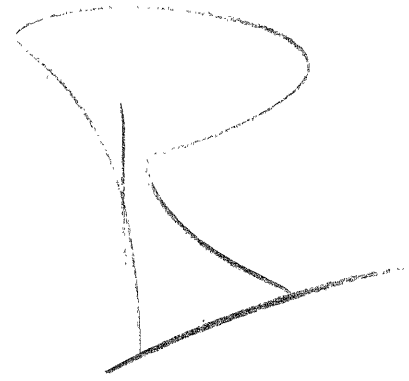

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 4-16-50

LOCATION NW SW NW

SEC. 15 TWP. 9 RGE. 17

Dry Hole X Abandoned Oil Well \_\_\_\_\_ Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease Carmichael

Operator Raymond & Lebow Address Wichita

Field \_\_\_\_\_ County Rooks

Total Depth 3519 Feet.

(Describe briefly the manner in which the well was plugged)

8 5/8" at 158' circulated with cement, 5 1/2" at 3518'  
with 100 sax cement behind.

Filled with chat to 3325', run 5 sax cement with dump  
bailer, pumped in 140 sax mud, 4 bales Palcoseal, 50 sax  
hulls, pulled 900' 5 1/2", set wood plug 155', rock bridge  
and 15 sax cement, heavy mud to 35', set rock bridge and  
10 sax cement.

RECEIVED

6/11/50  
JUN 11 1950

*Raymond Lebow*  
STATE CORPORATION  
COMMISSION  
District Conservation Agent

Date 5-31-50

**PLUGGING**  
FILE SEC 15 TWP 9 R 17  
BOOK PAGE 4 LINE 16