

MICRO LOG

Company	DOWNING - NELSON OIL CO. INC.		
Well	LYNN PELTON #2-30		
Field	UNNAMED		
County	PAWNEE	State	KANSAS
Location:	API # : 15-145-21890-0000		Other Services CDL/CNL DIL
2247' FSL & 1356' FEL SE/4		Elevation	
SEC 30 TWP 20S RGE 20W		K.B. 2180 D.F. 2178 G.L. 2172	
Permanent Datum	GROUND LEVEL	Elevation	2172
Log Measured From	KELLY BUSHING 8' A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	8/5/23		
Run Number	THREE		
Depth Driller	4347		
Depth Logger	4344		
Bottom Logged Interval	4338		
Top Log Interval	2150		
Casing Driller	8 5/8"@1191'		
Casing Logger	1190		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 10,000 PPM	
Density / Viscosity	8.8/47		
pH / Fluid Loss	10.0/14.4		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.260@79F		
Rmf @ Meas. Temp	.195@79F		
Rmc @ Meas. Temp	.312@79F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.173@119F		
Time Circulation Stopped	10.5 HOURS		
Time Logger on Bottom	4:00 A.M.		
Maximum Recorded Temperature	119F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	MARC DOWNING		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-145-21890-0000

Comments


THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS
ALEXANDER, KS.,(HWY 96 & RD. 120) 12 1/4S. TO "RD. V", 1W, TO "370TH AVE.", 1/2S., W. INTO





MAIN SECTION


Database File	7314ddn.db
Dataset Pathname	pass8.2
Presentation Format	micro
Dataset Creation	Sat Aug 05 05:40:53 2023
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

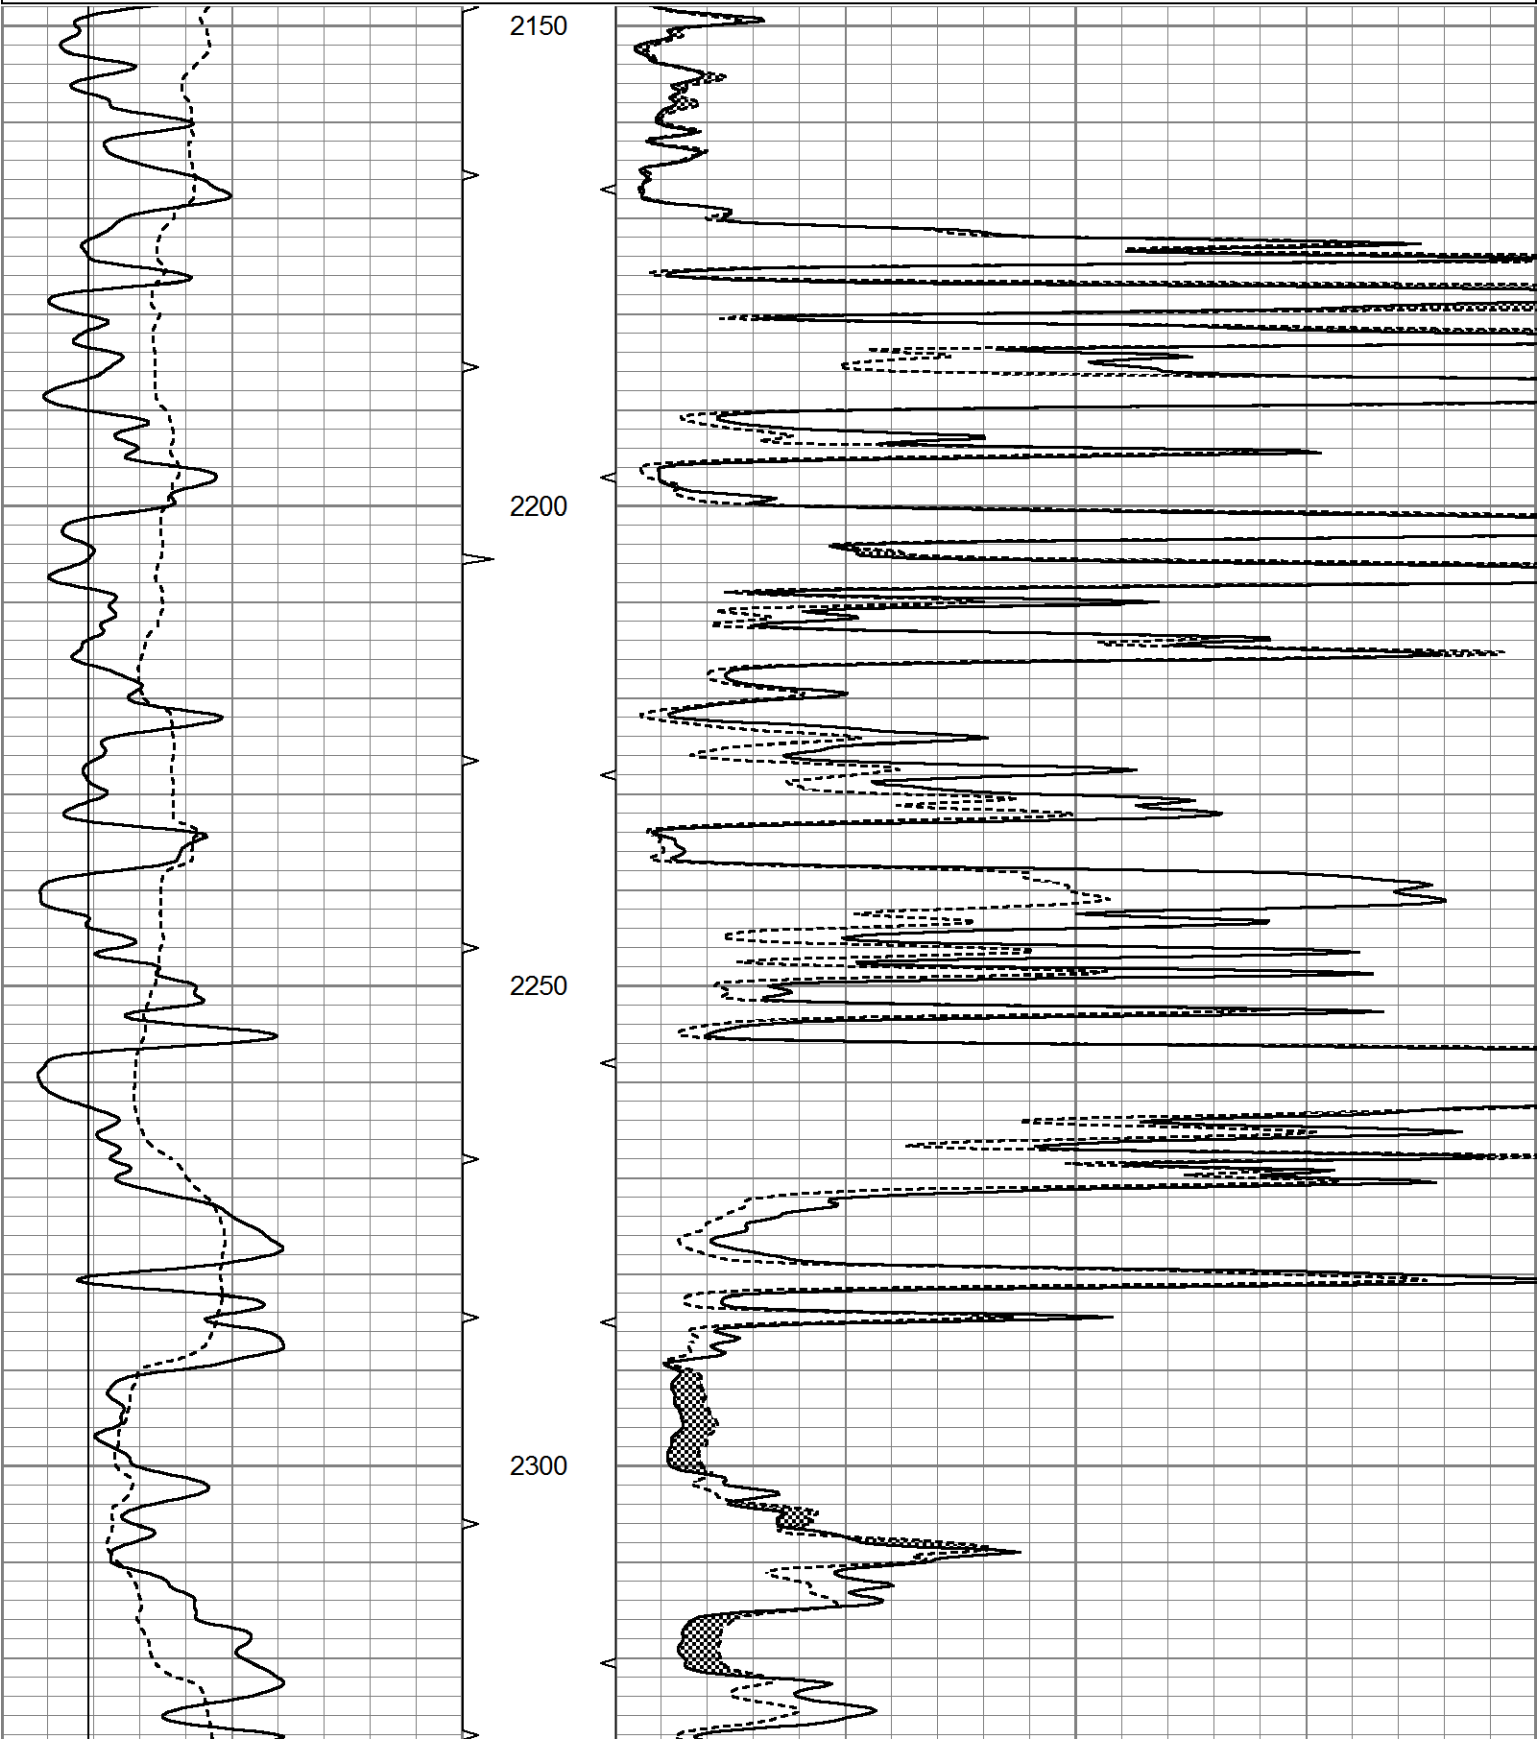

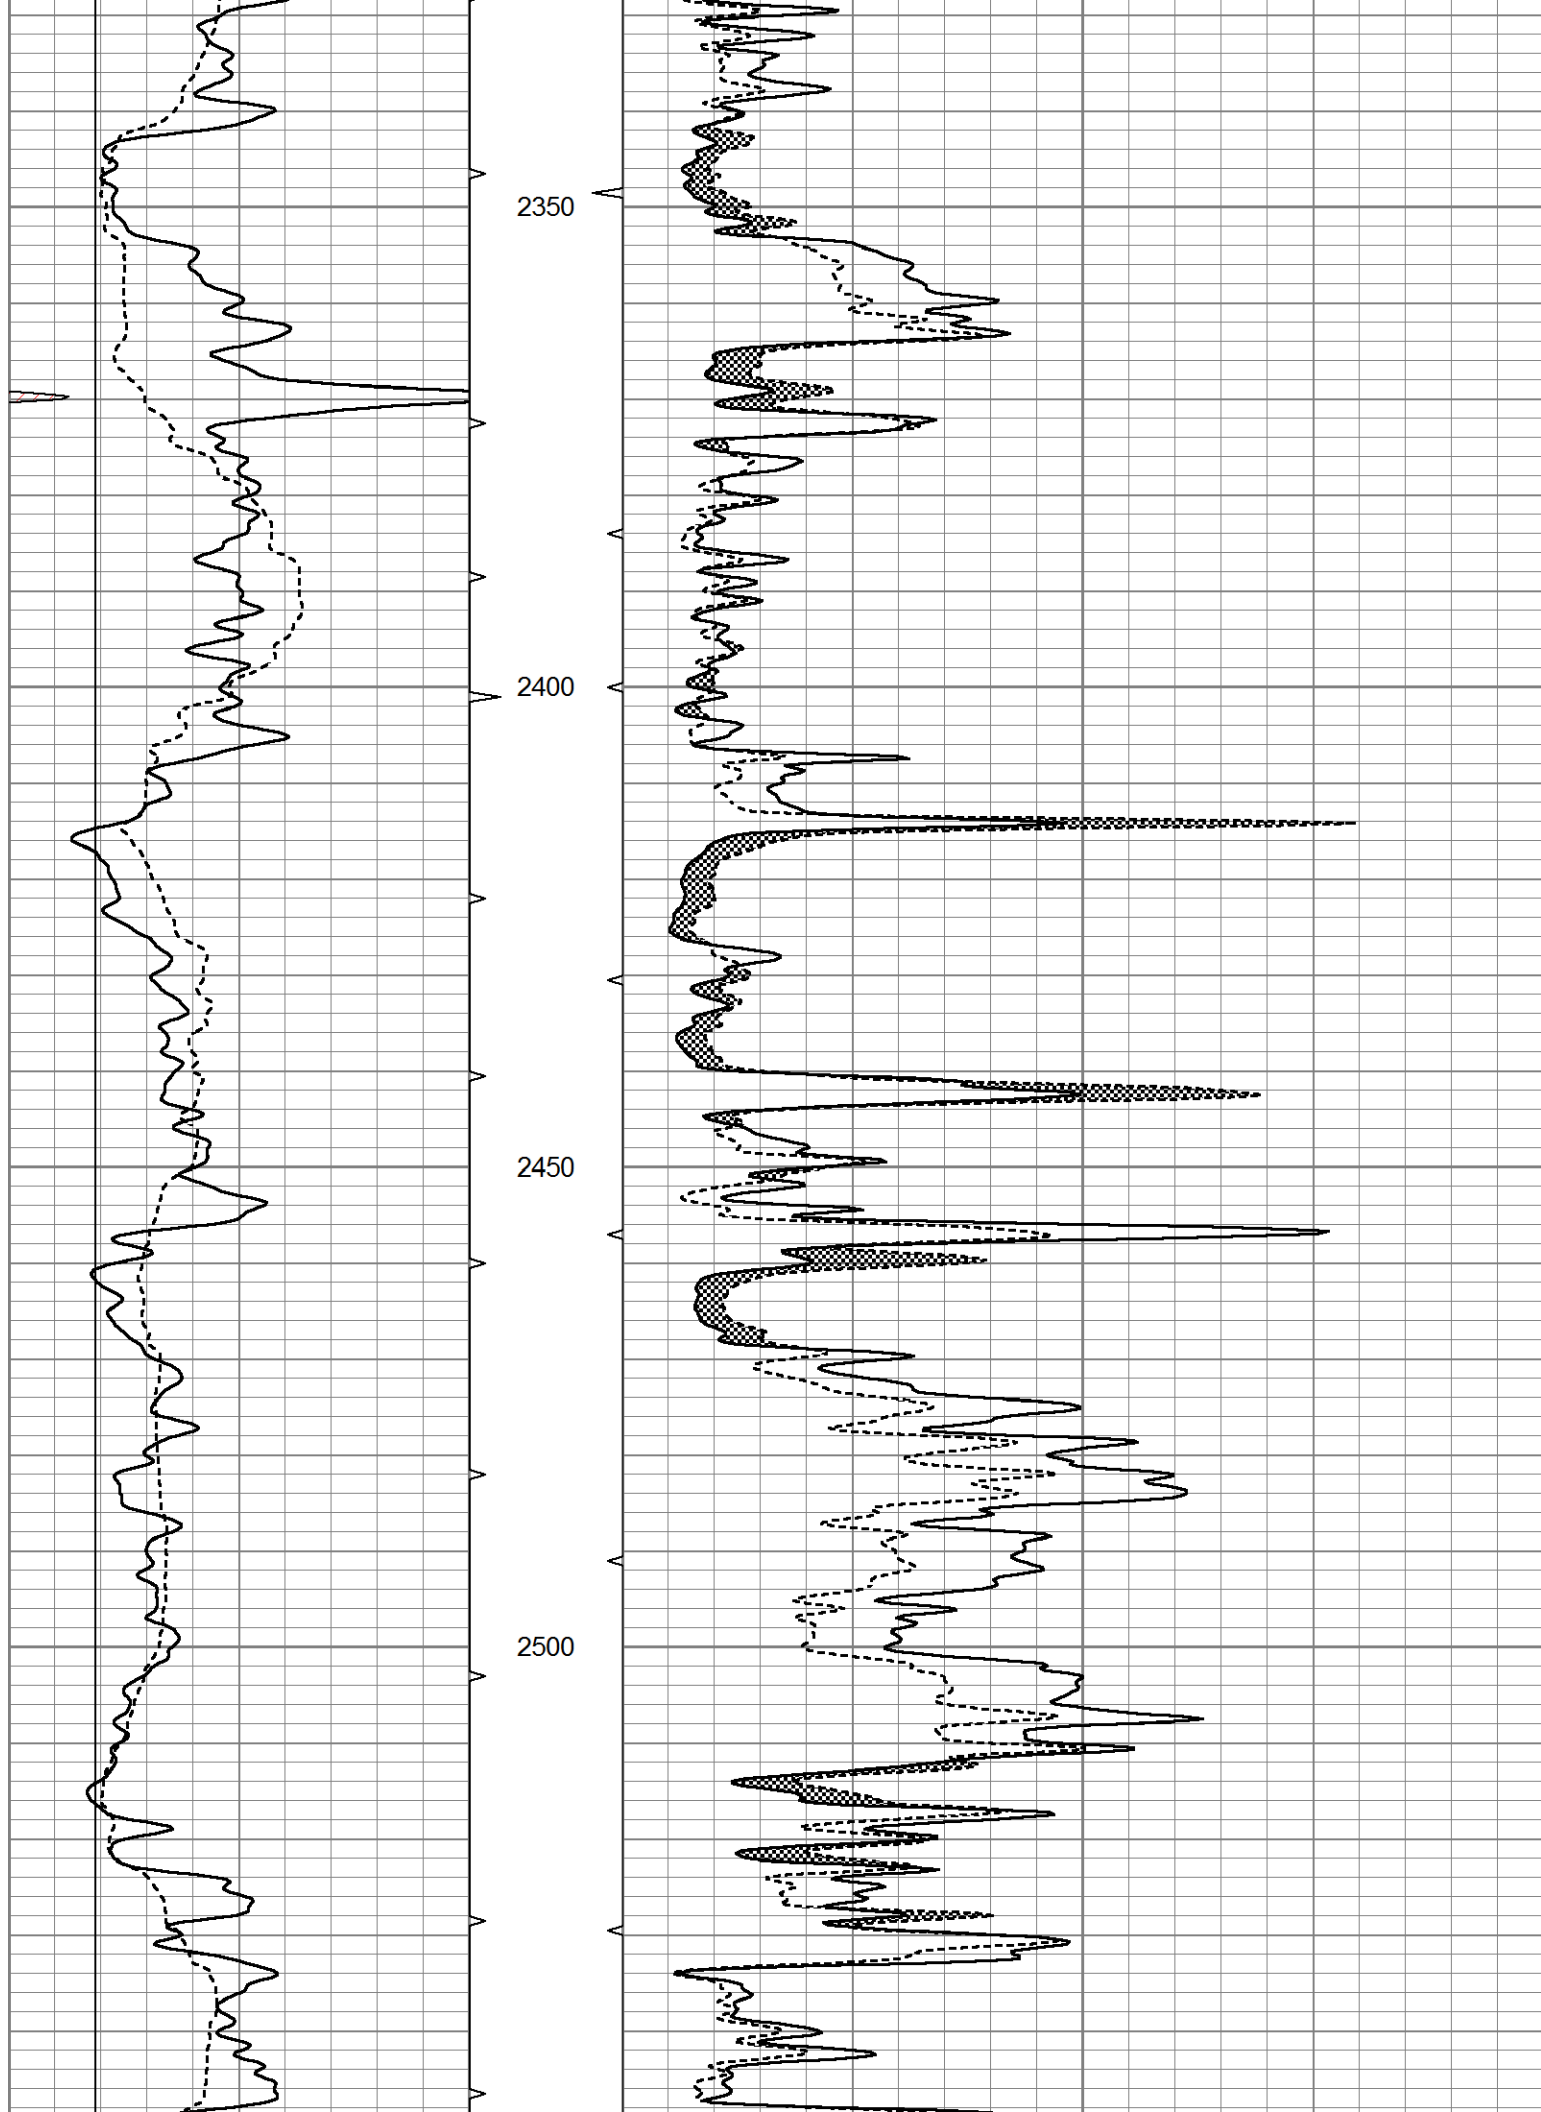

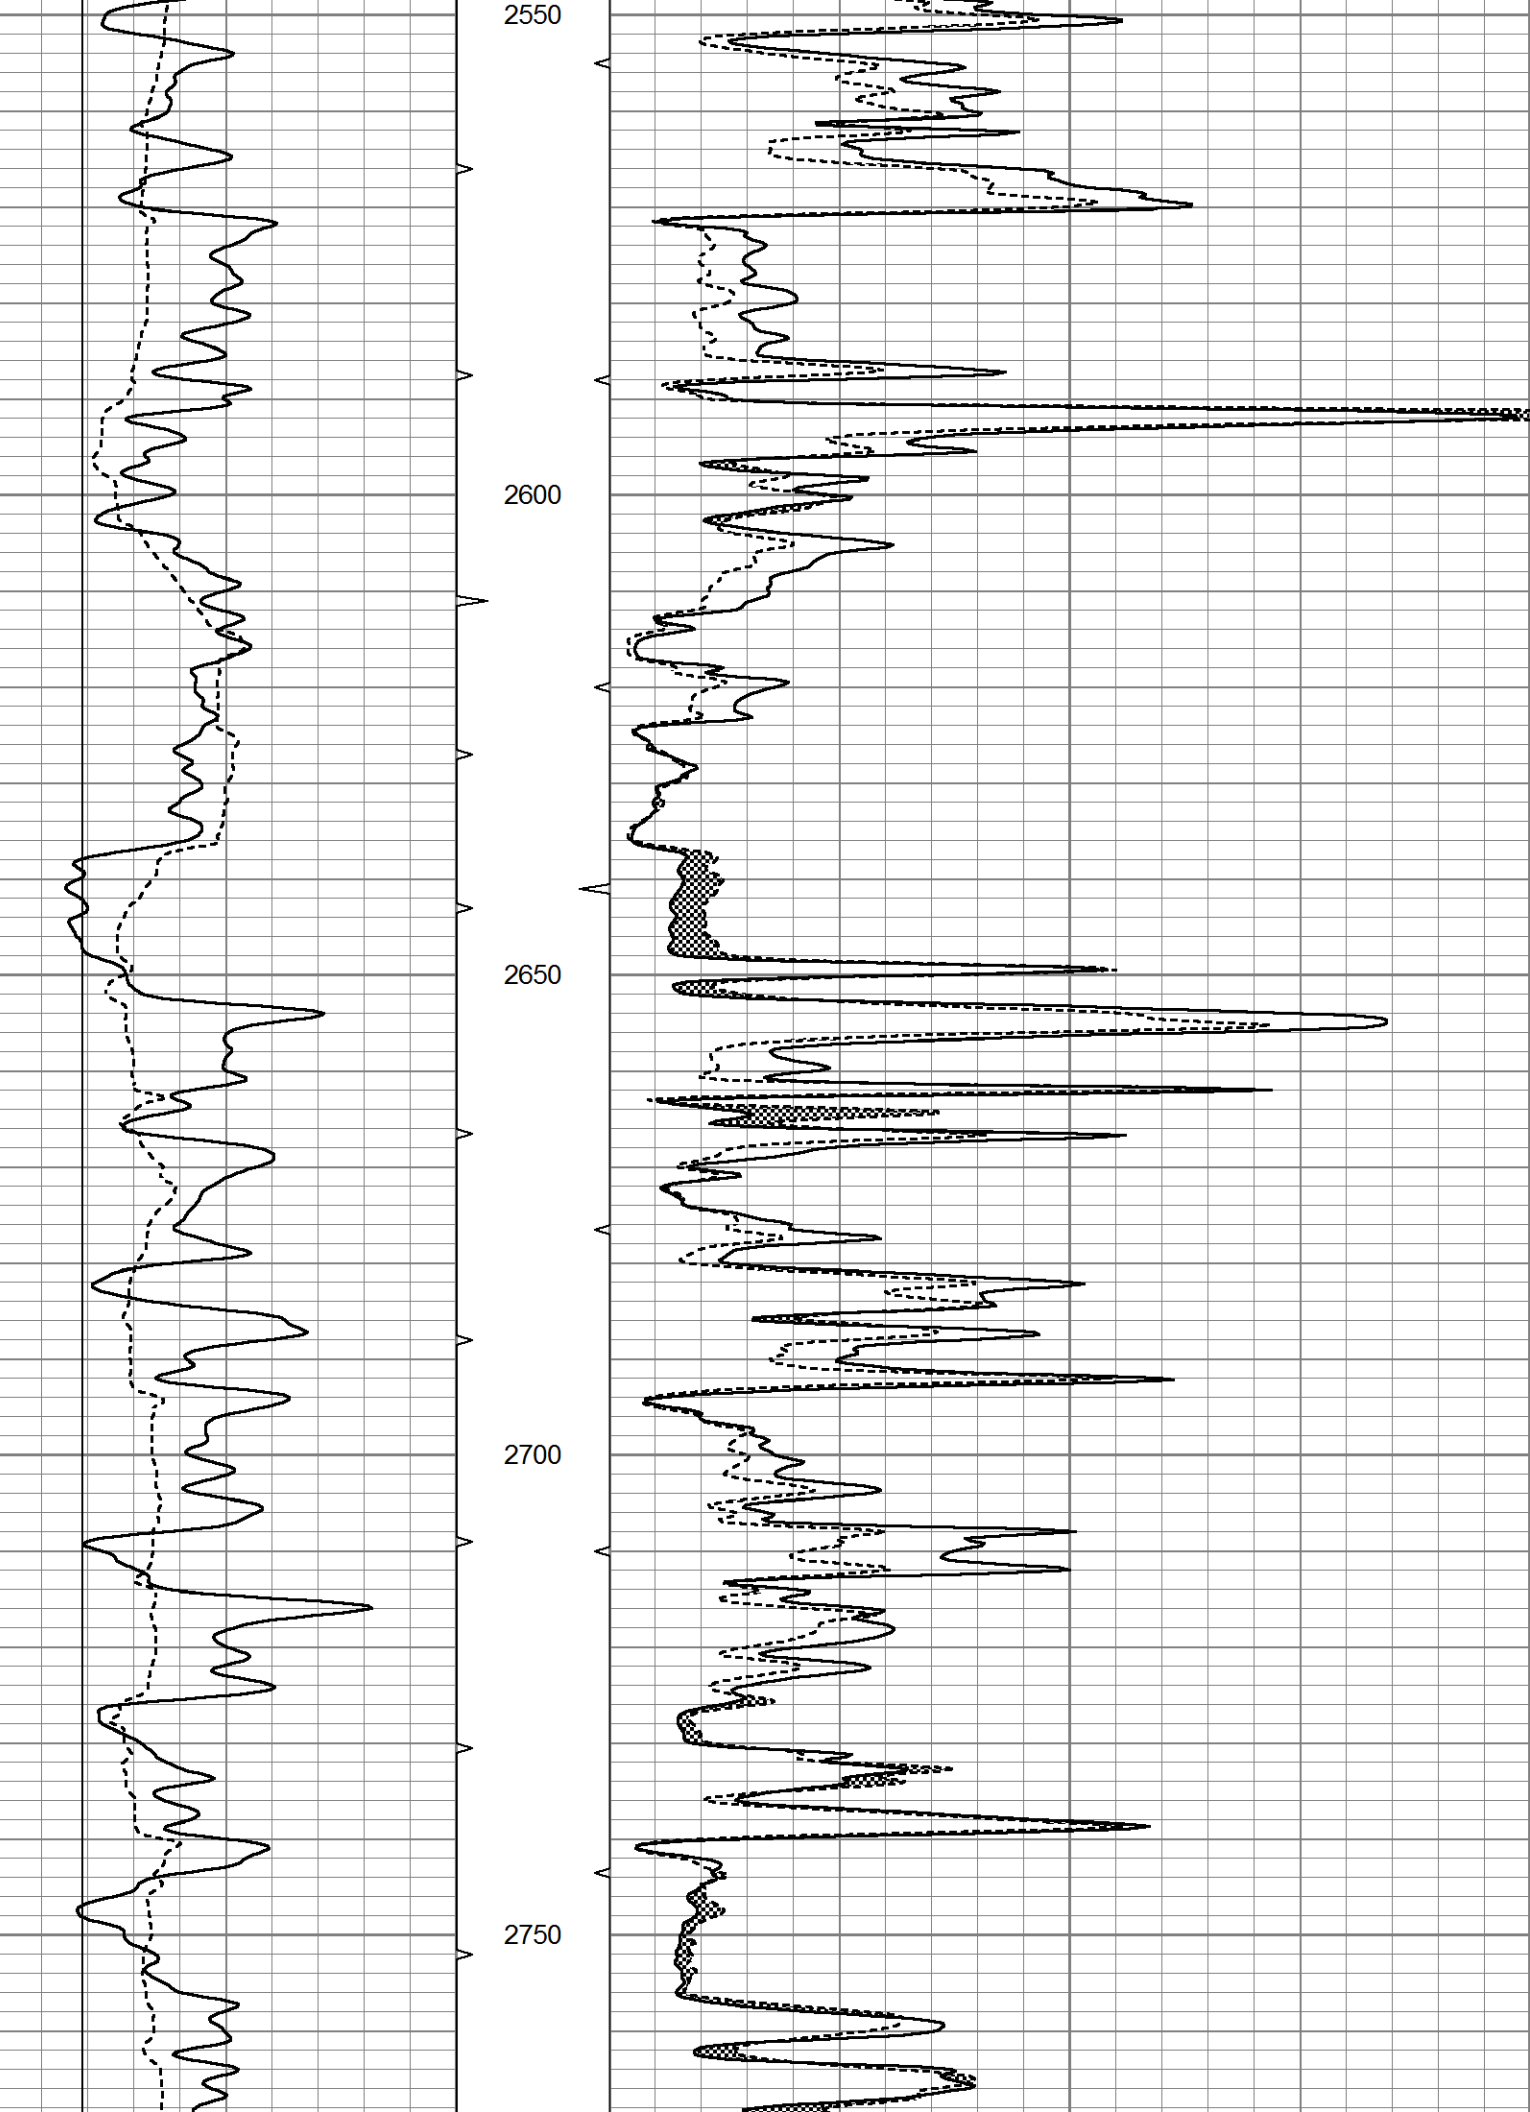

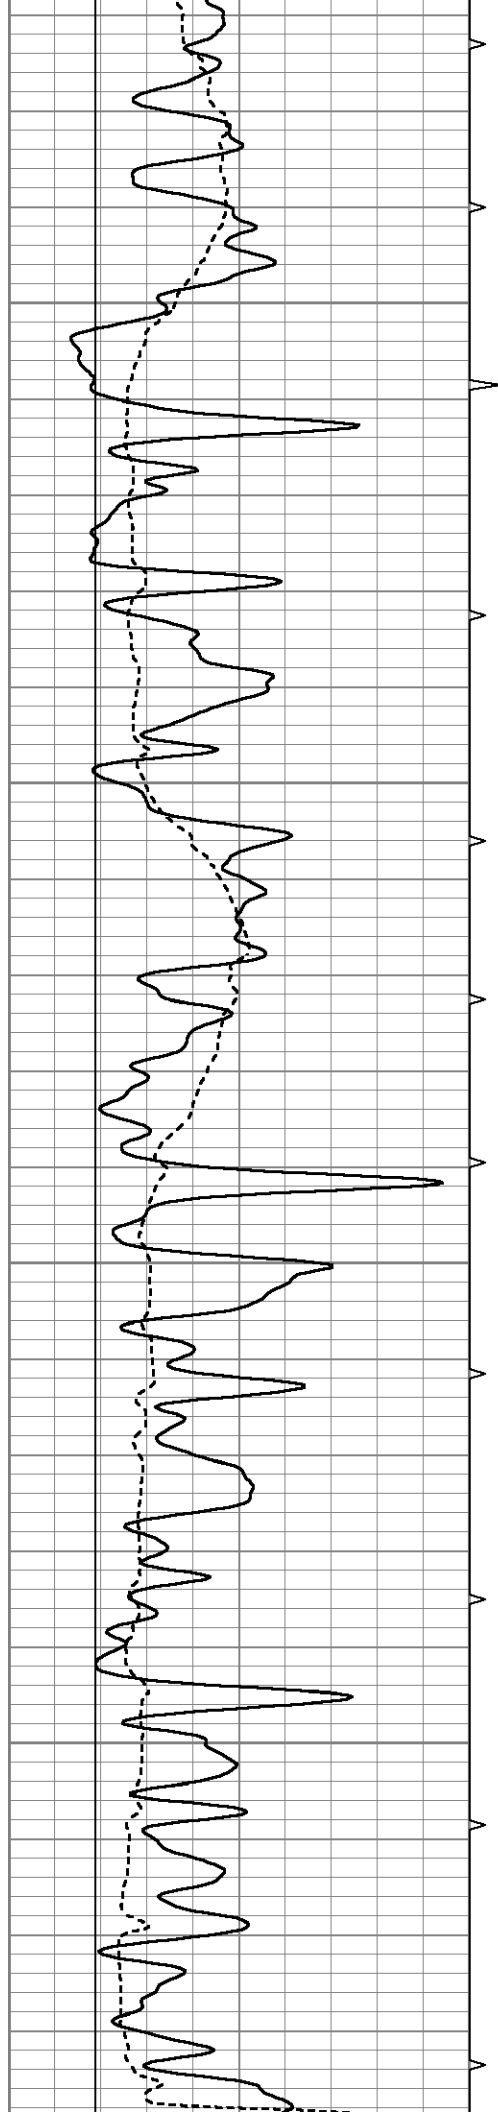



2800


2850


2900


2950

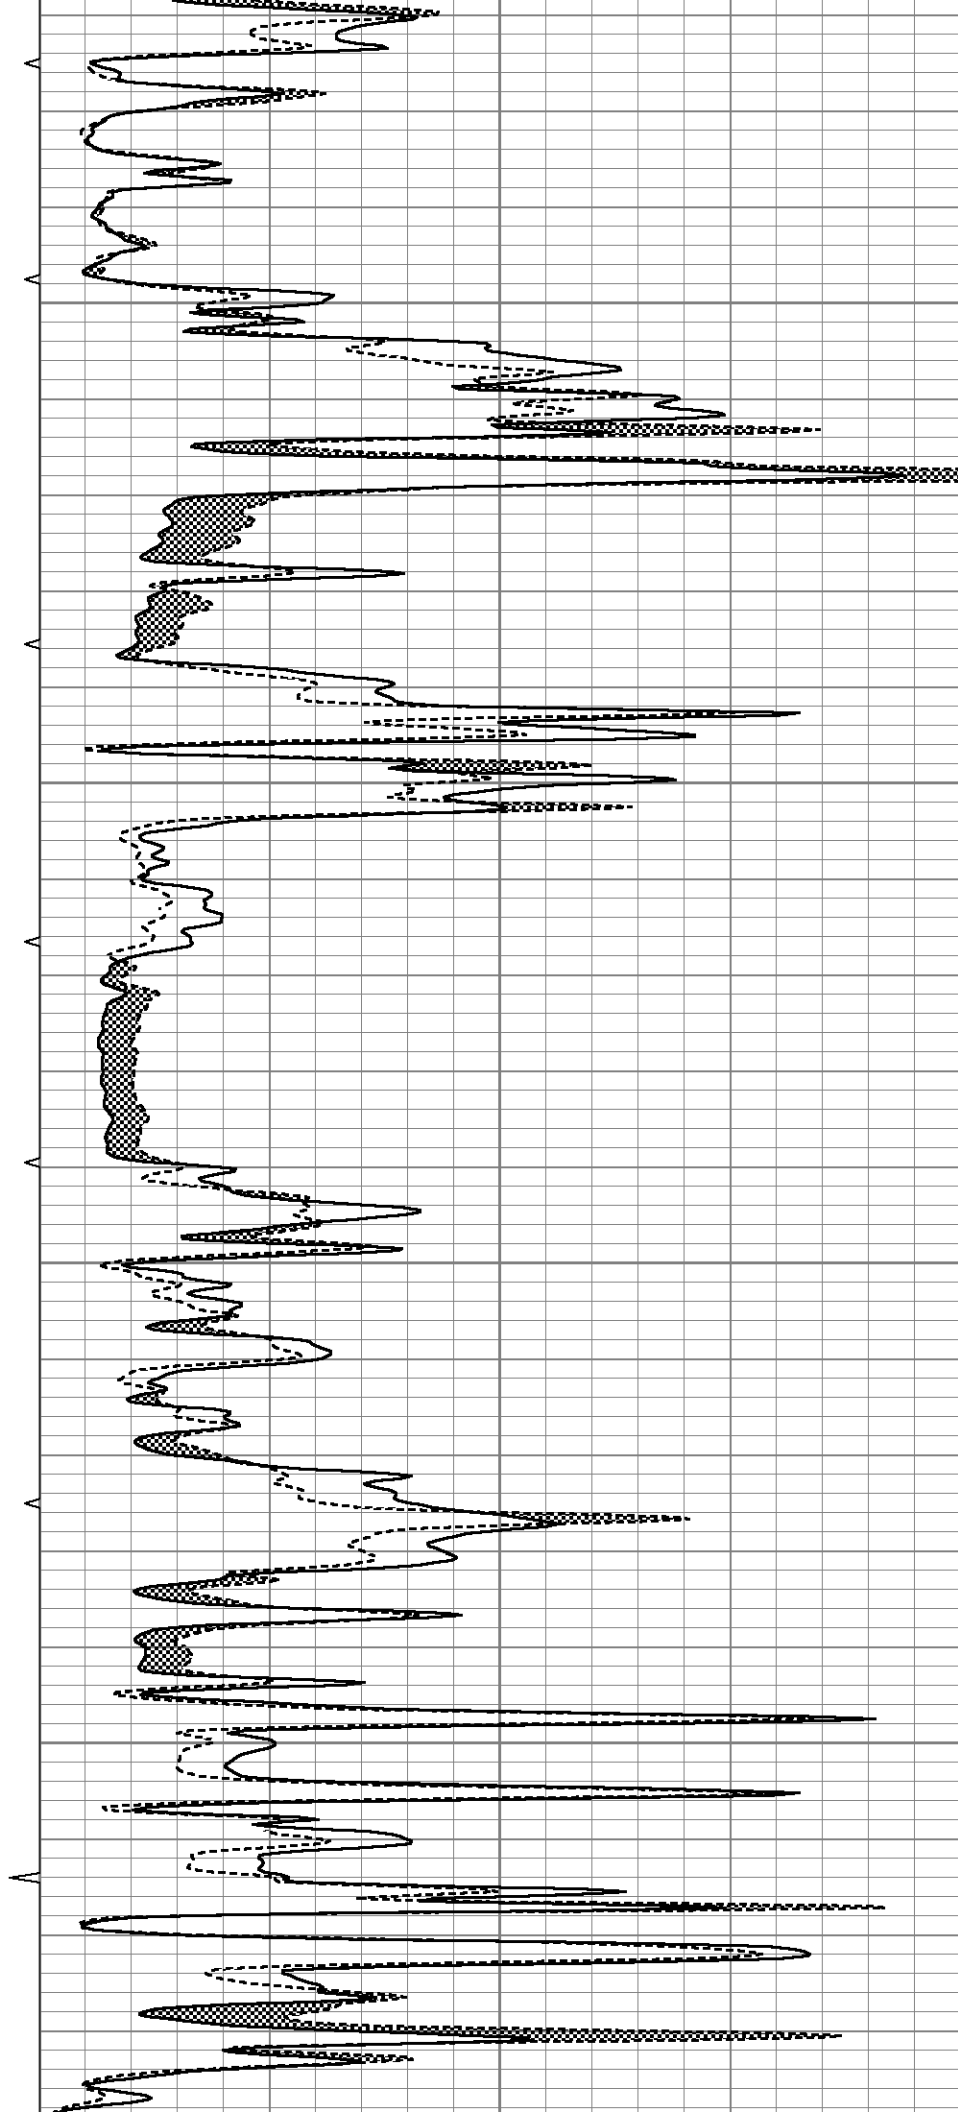

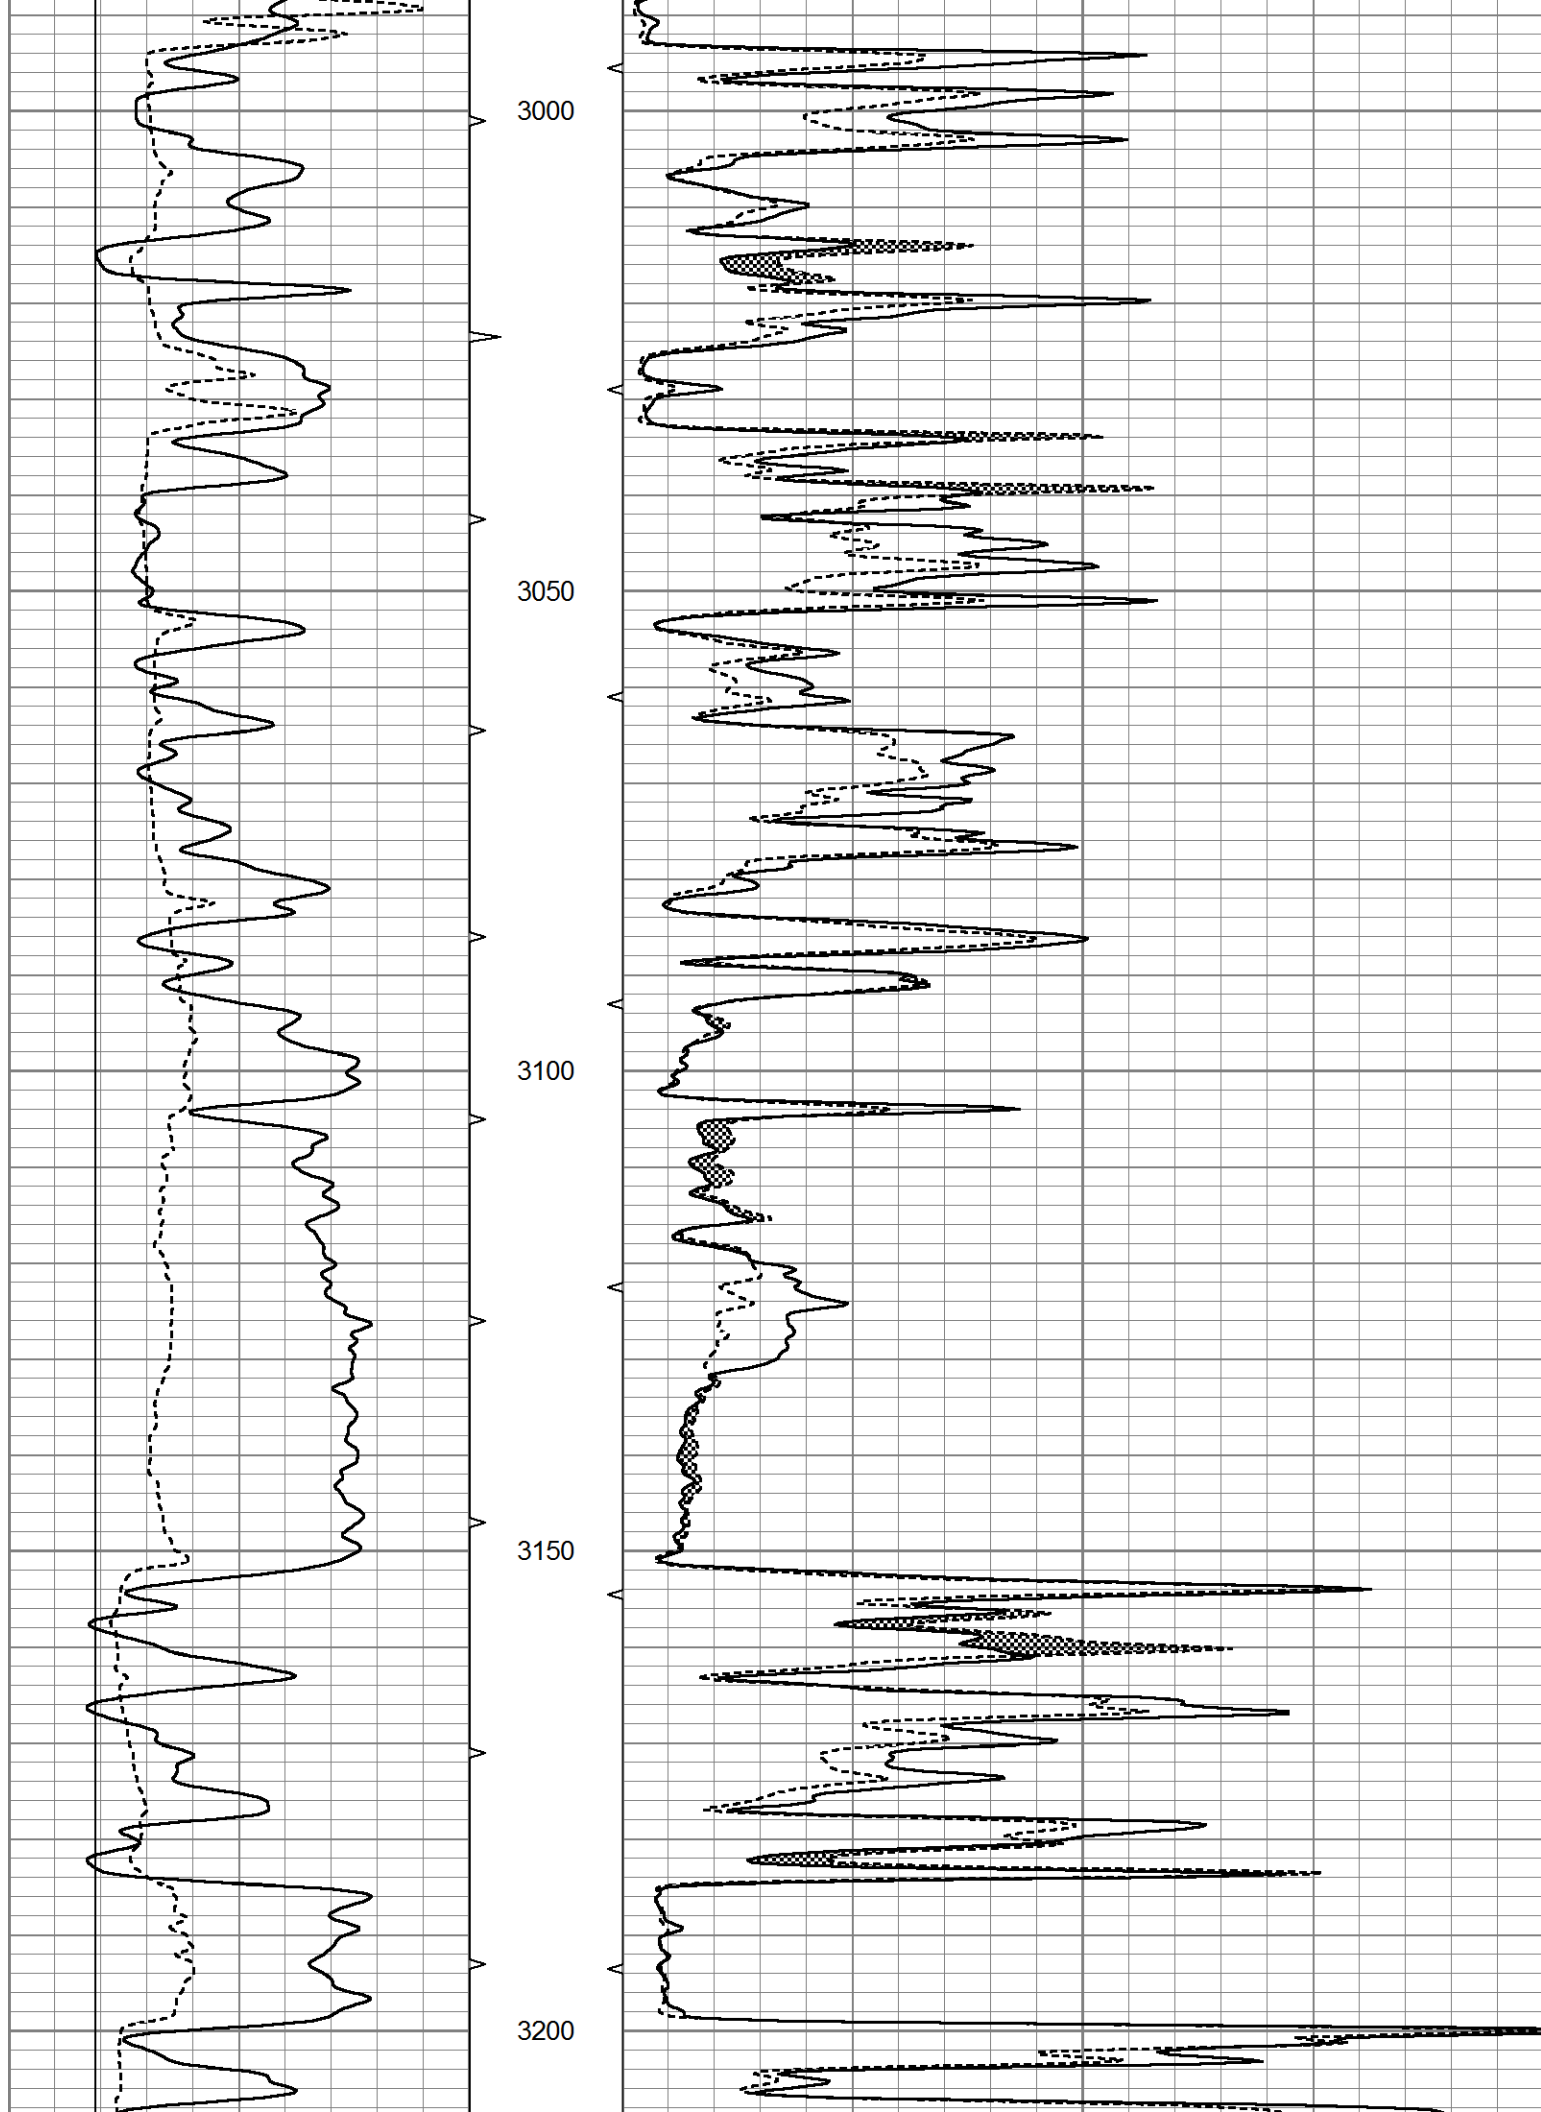

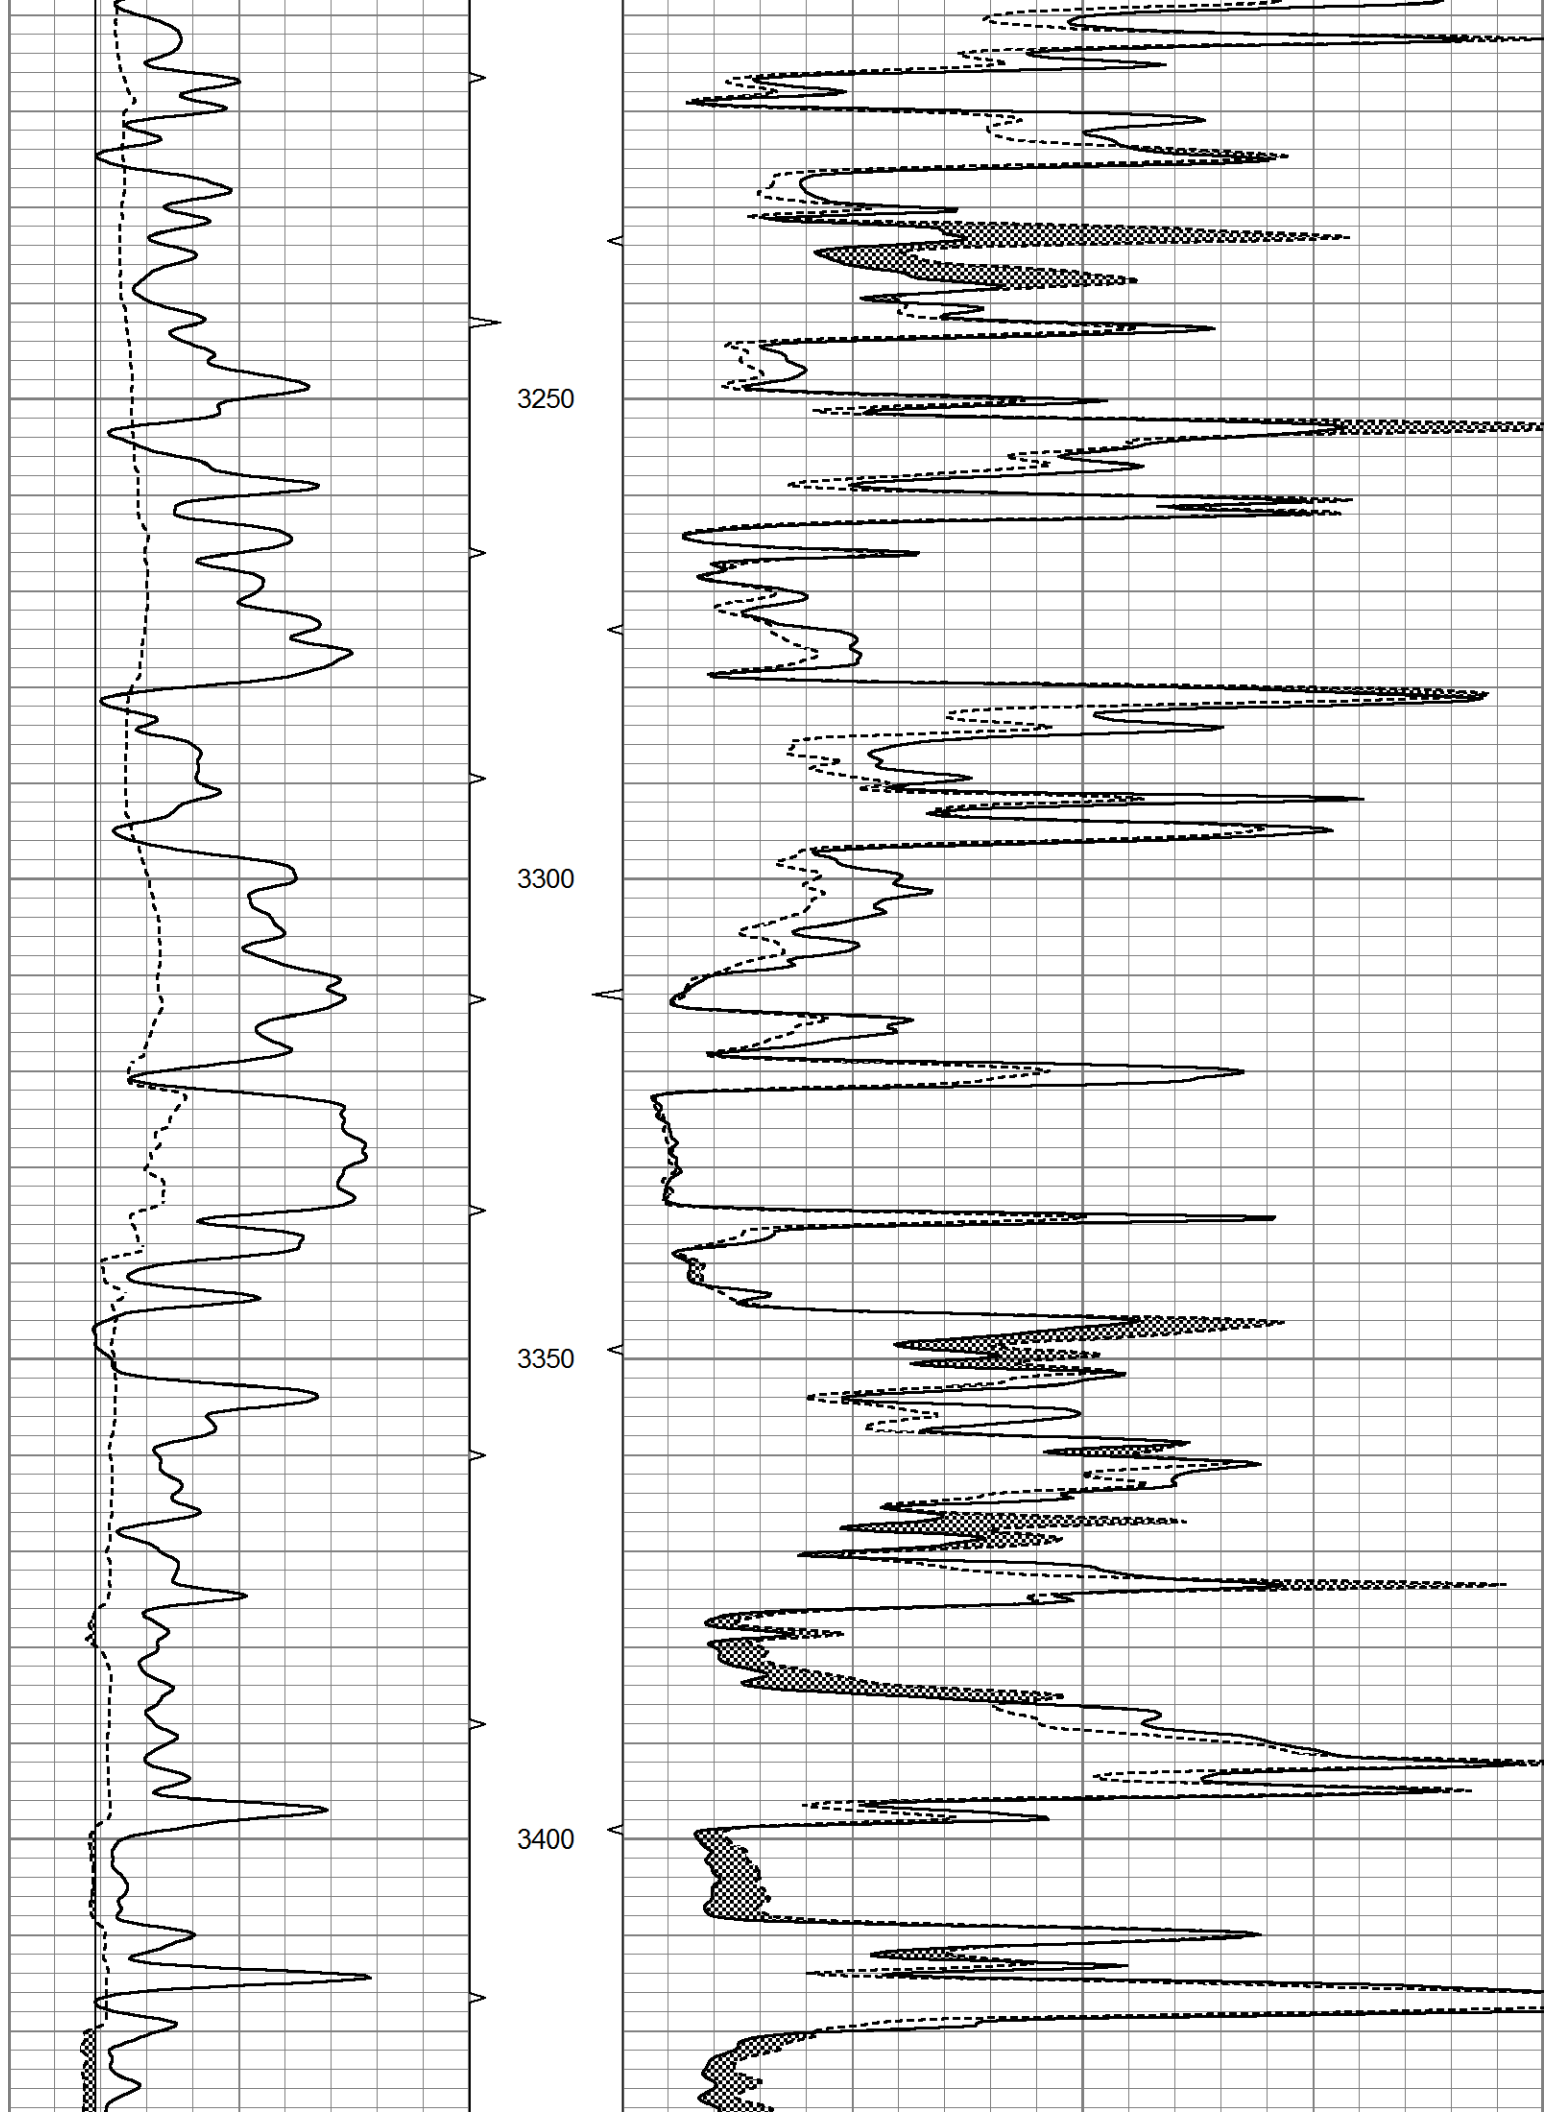

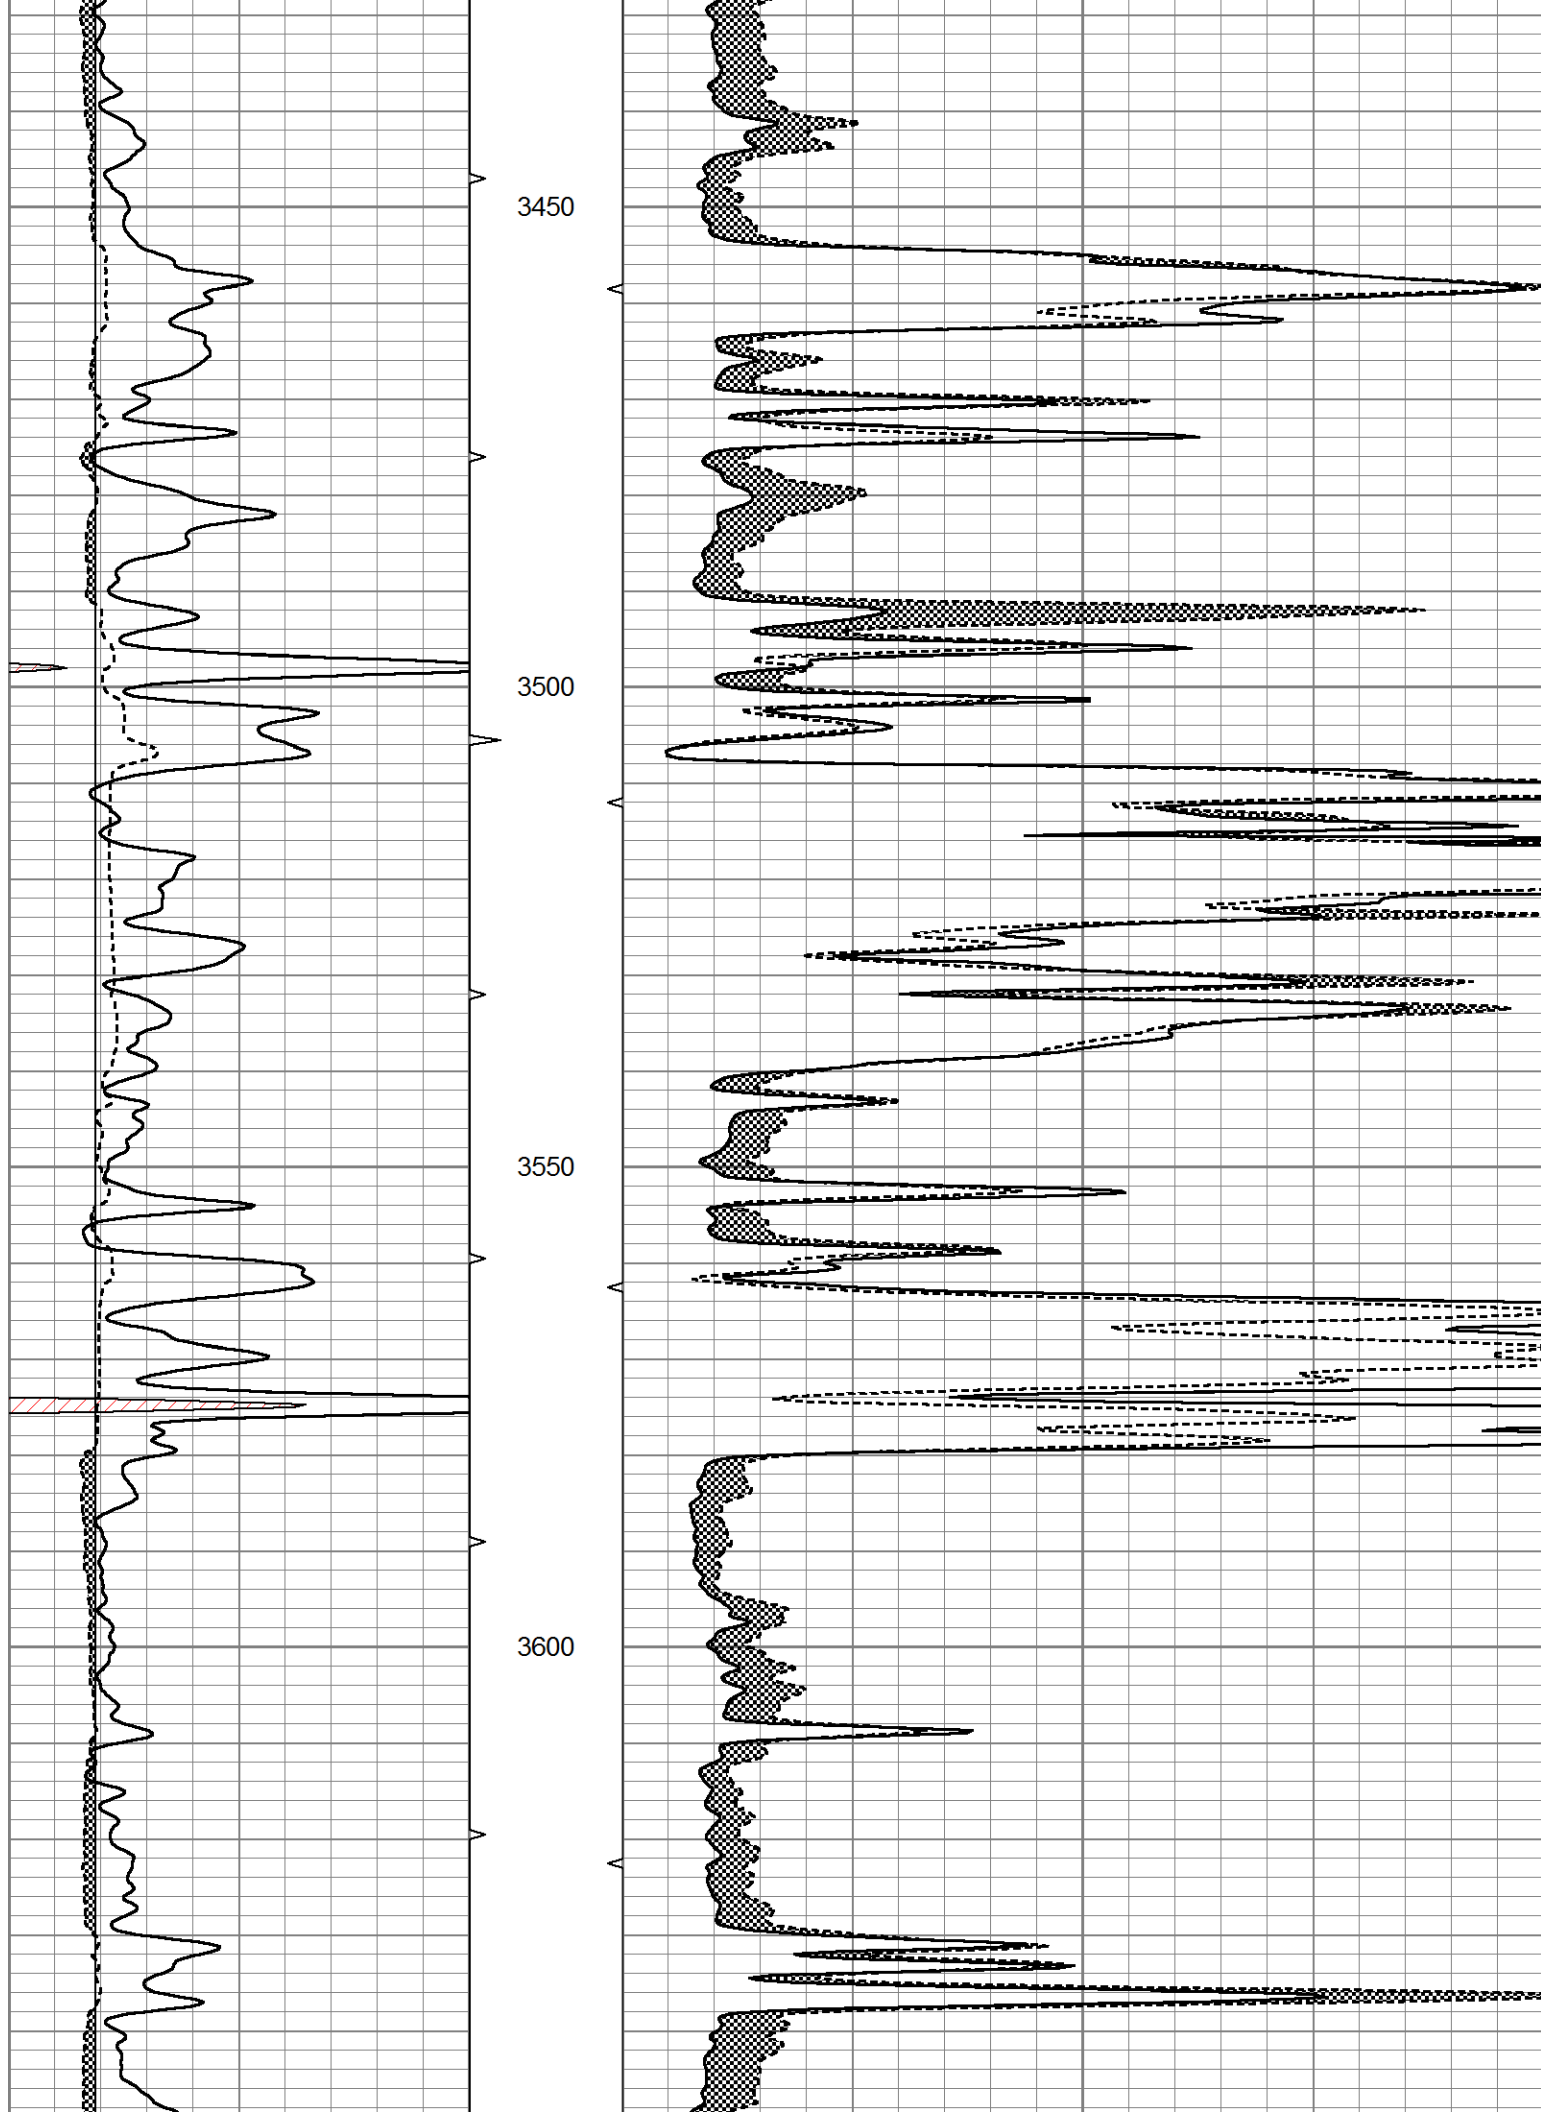

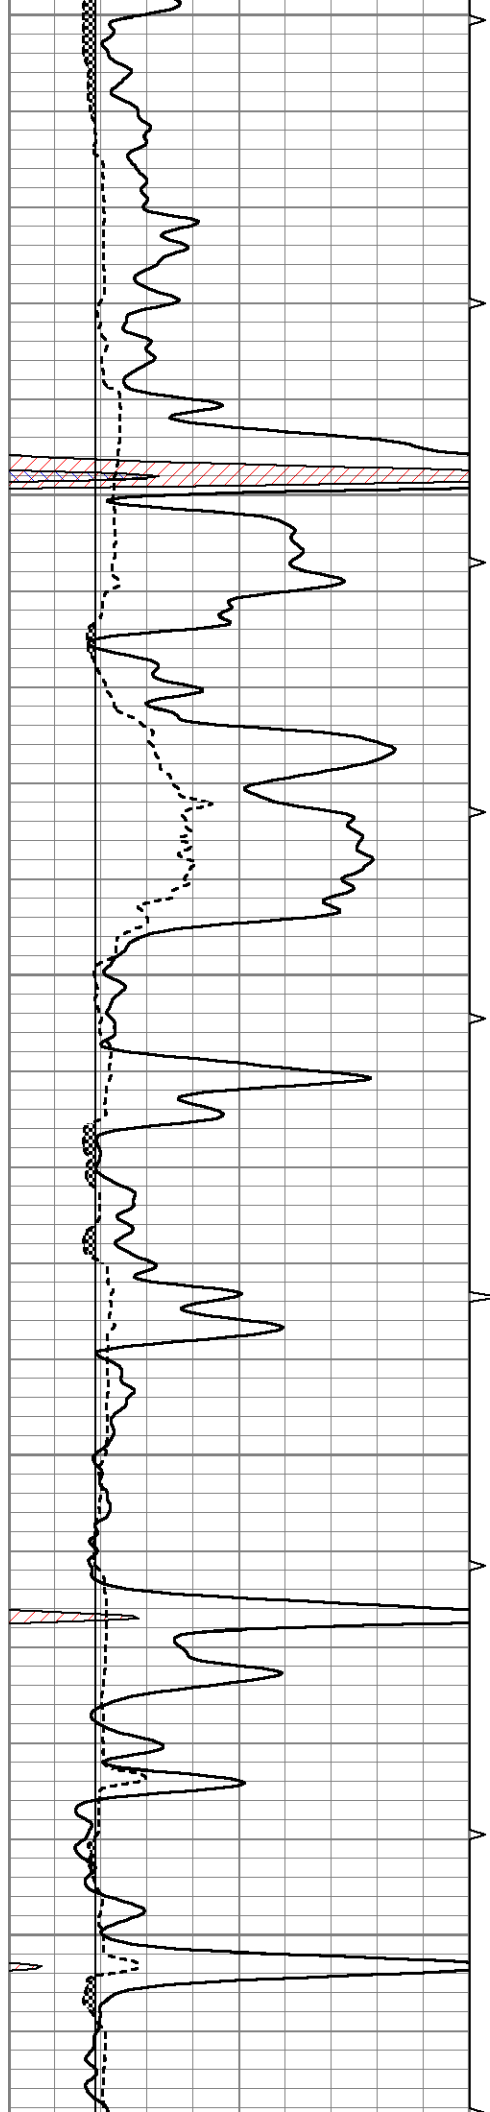


3650


3700


3750


3800

3850

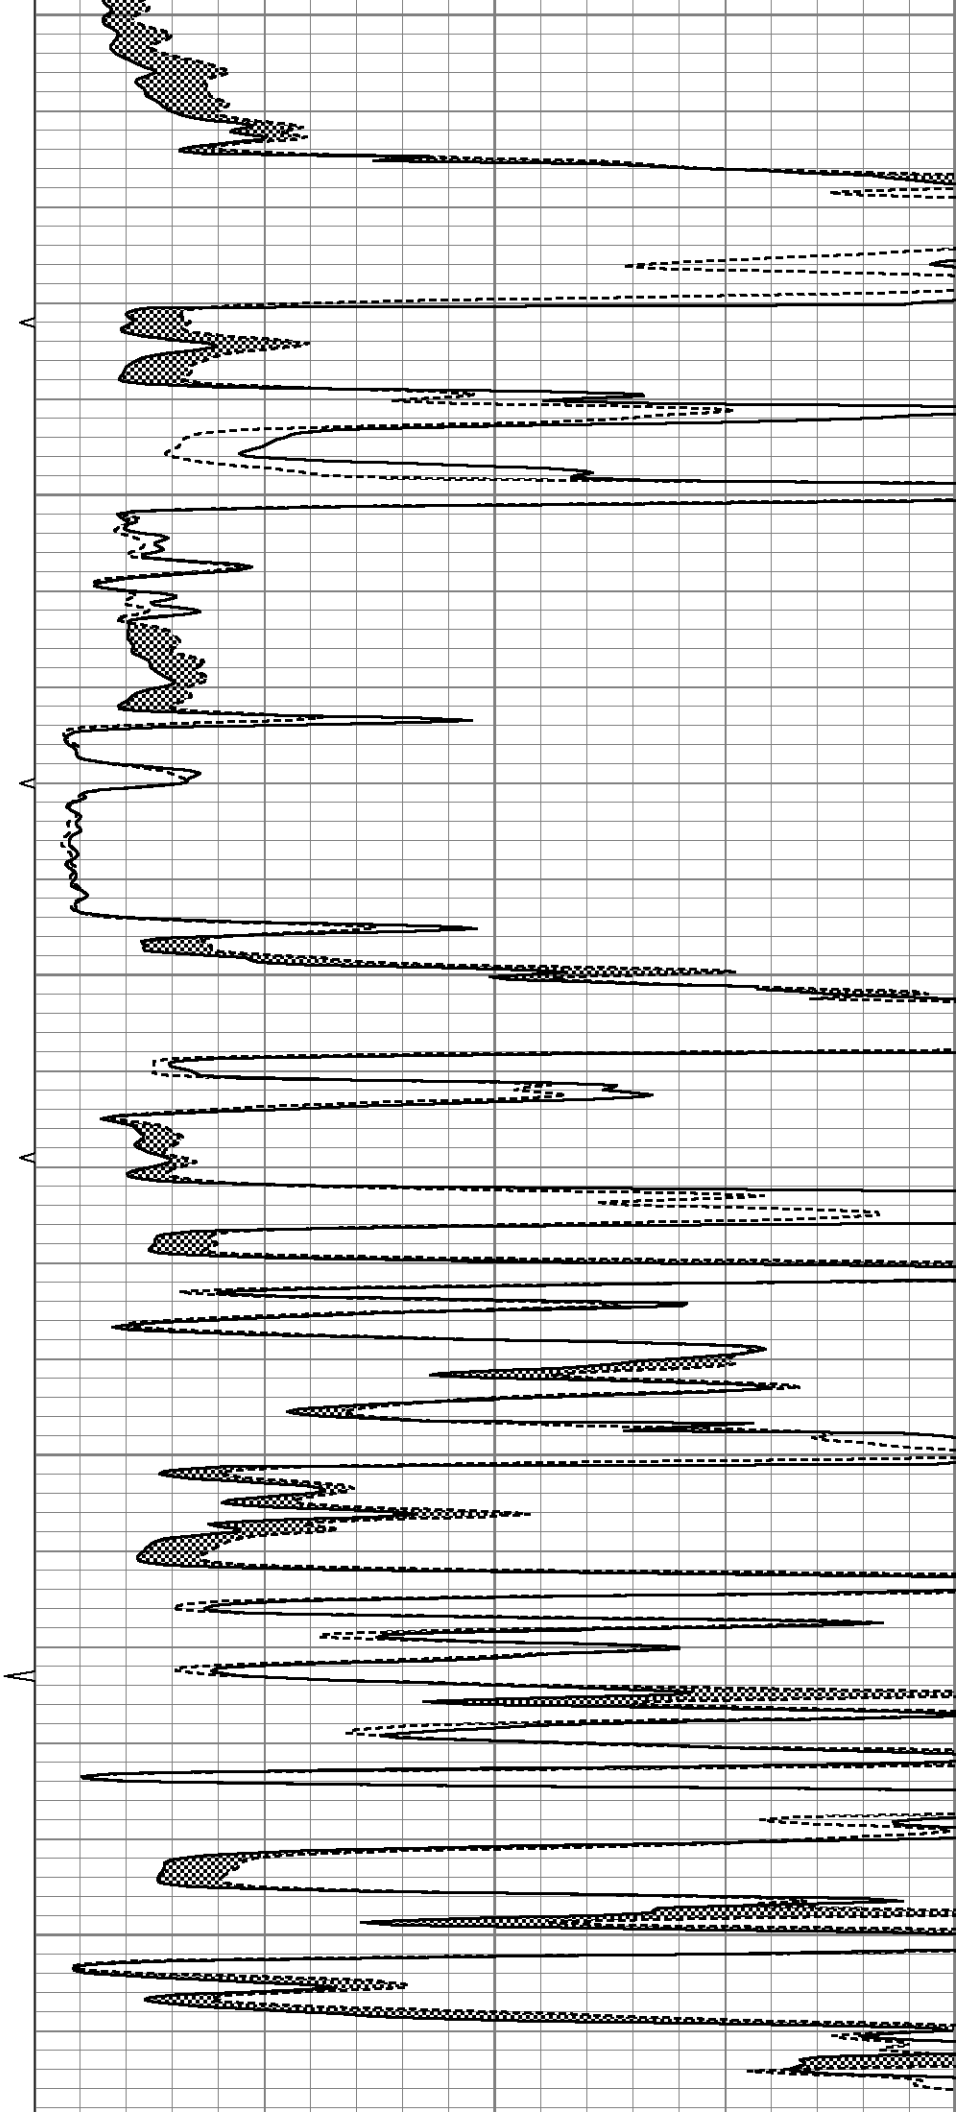


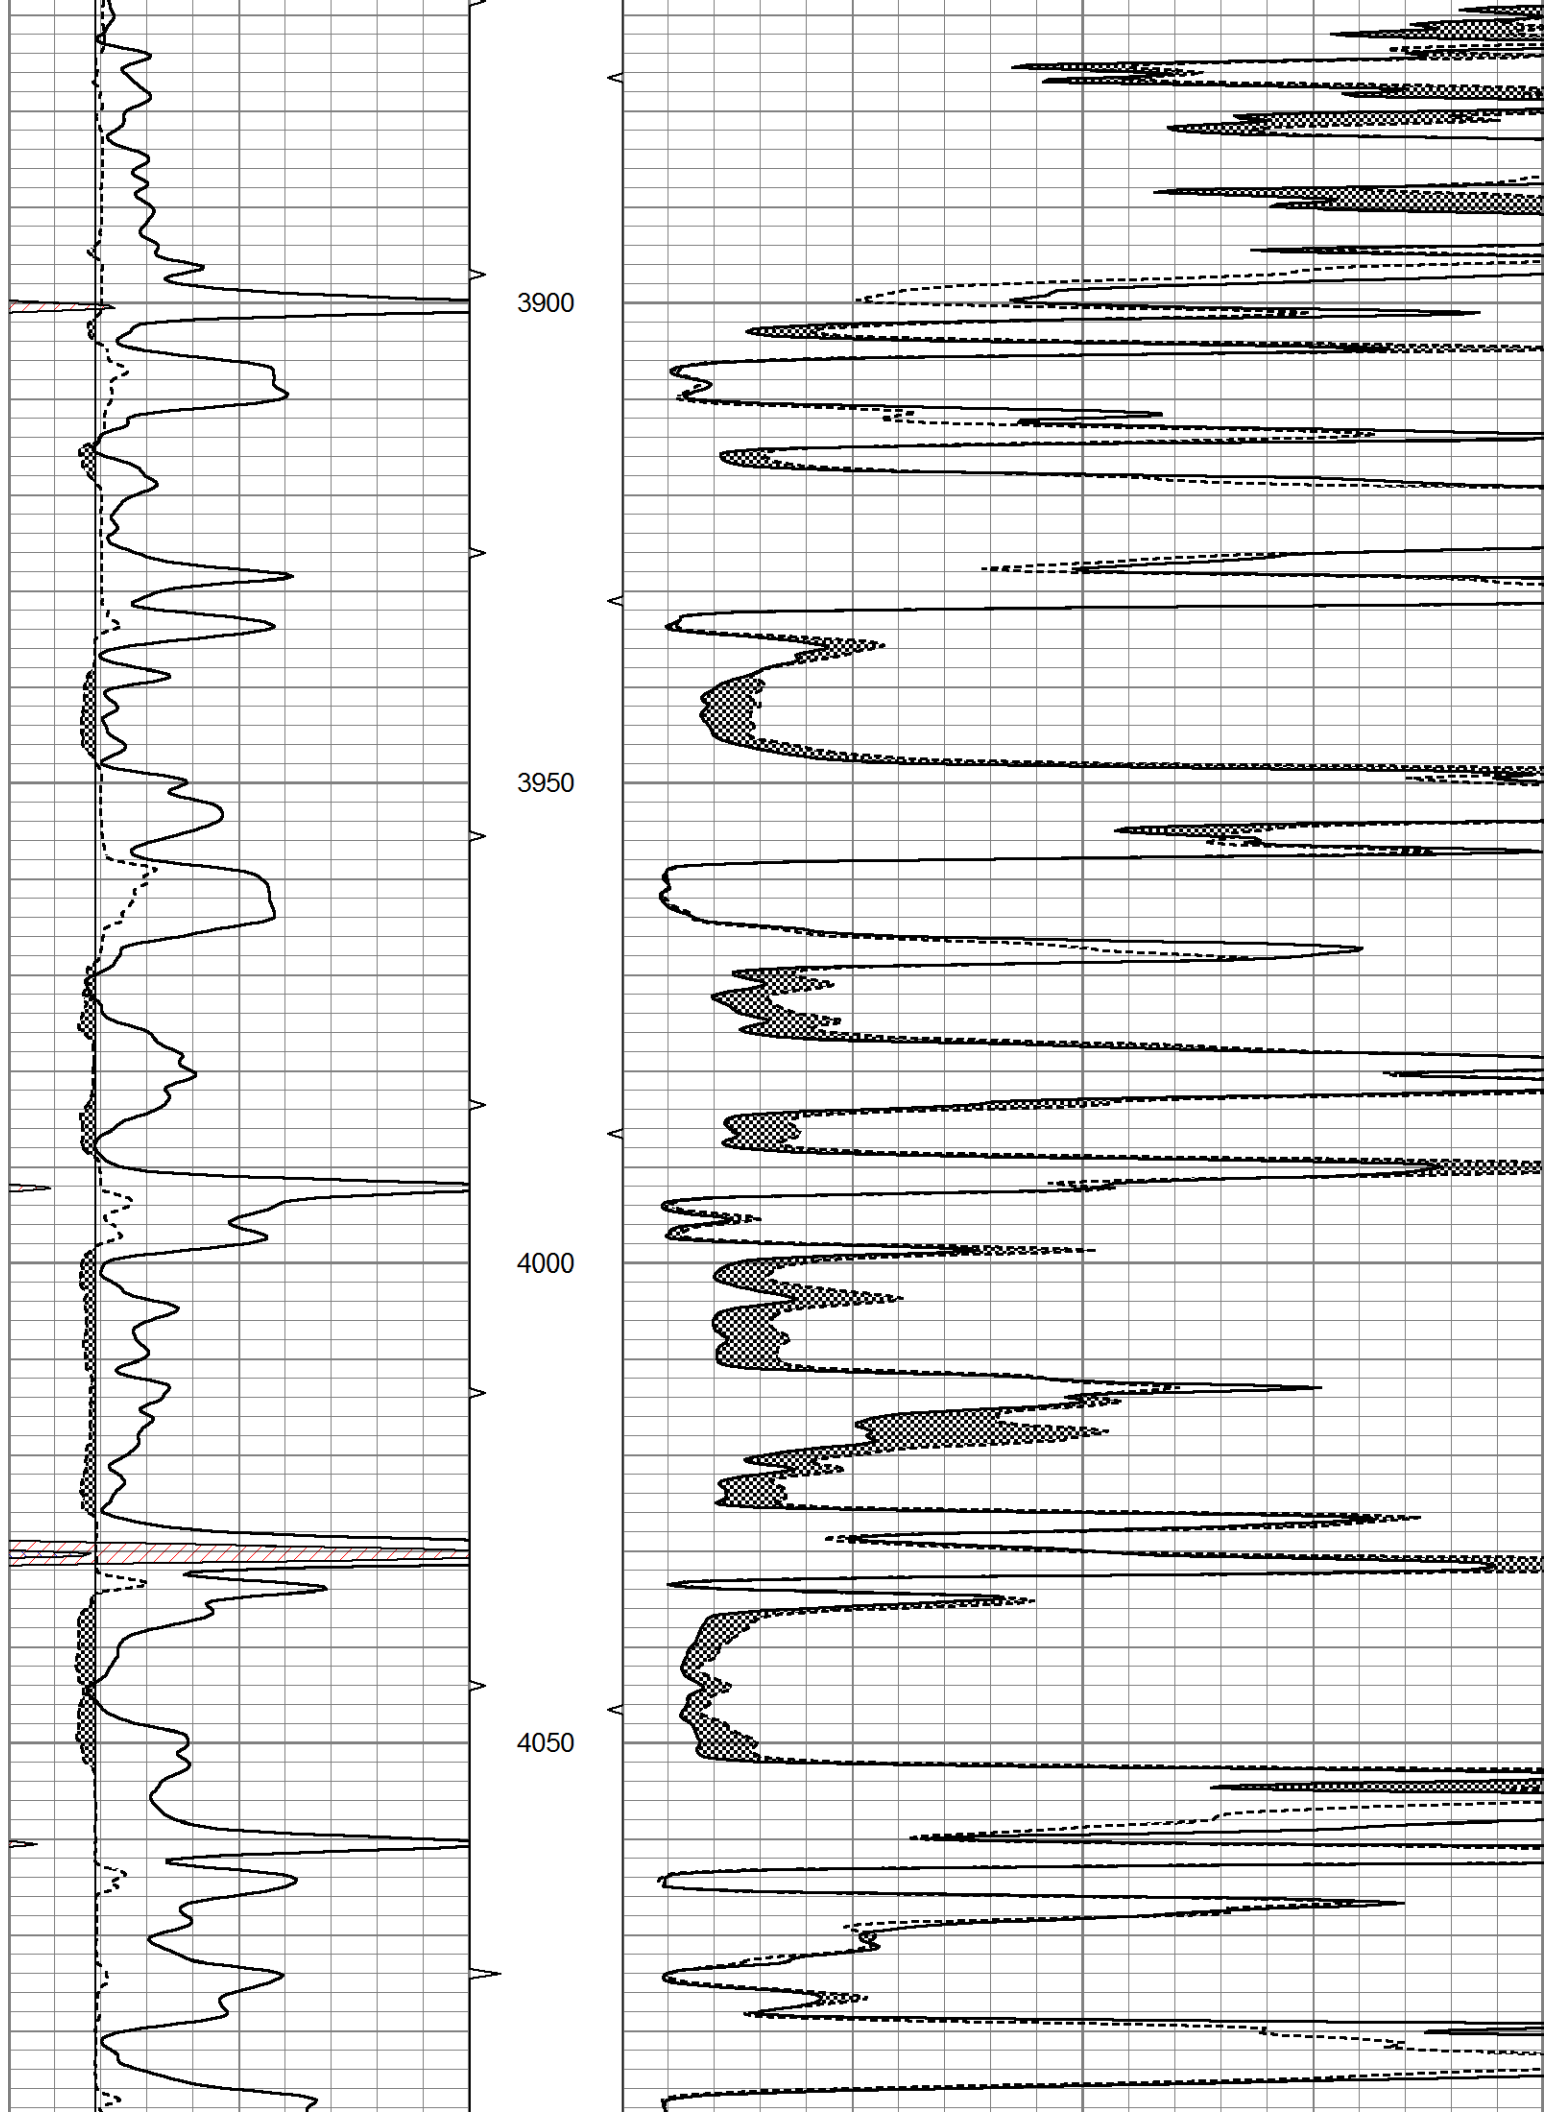


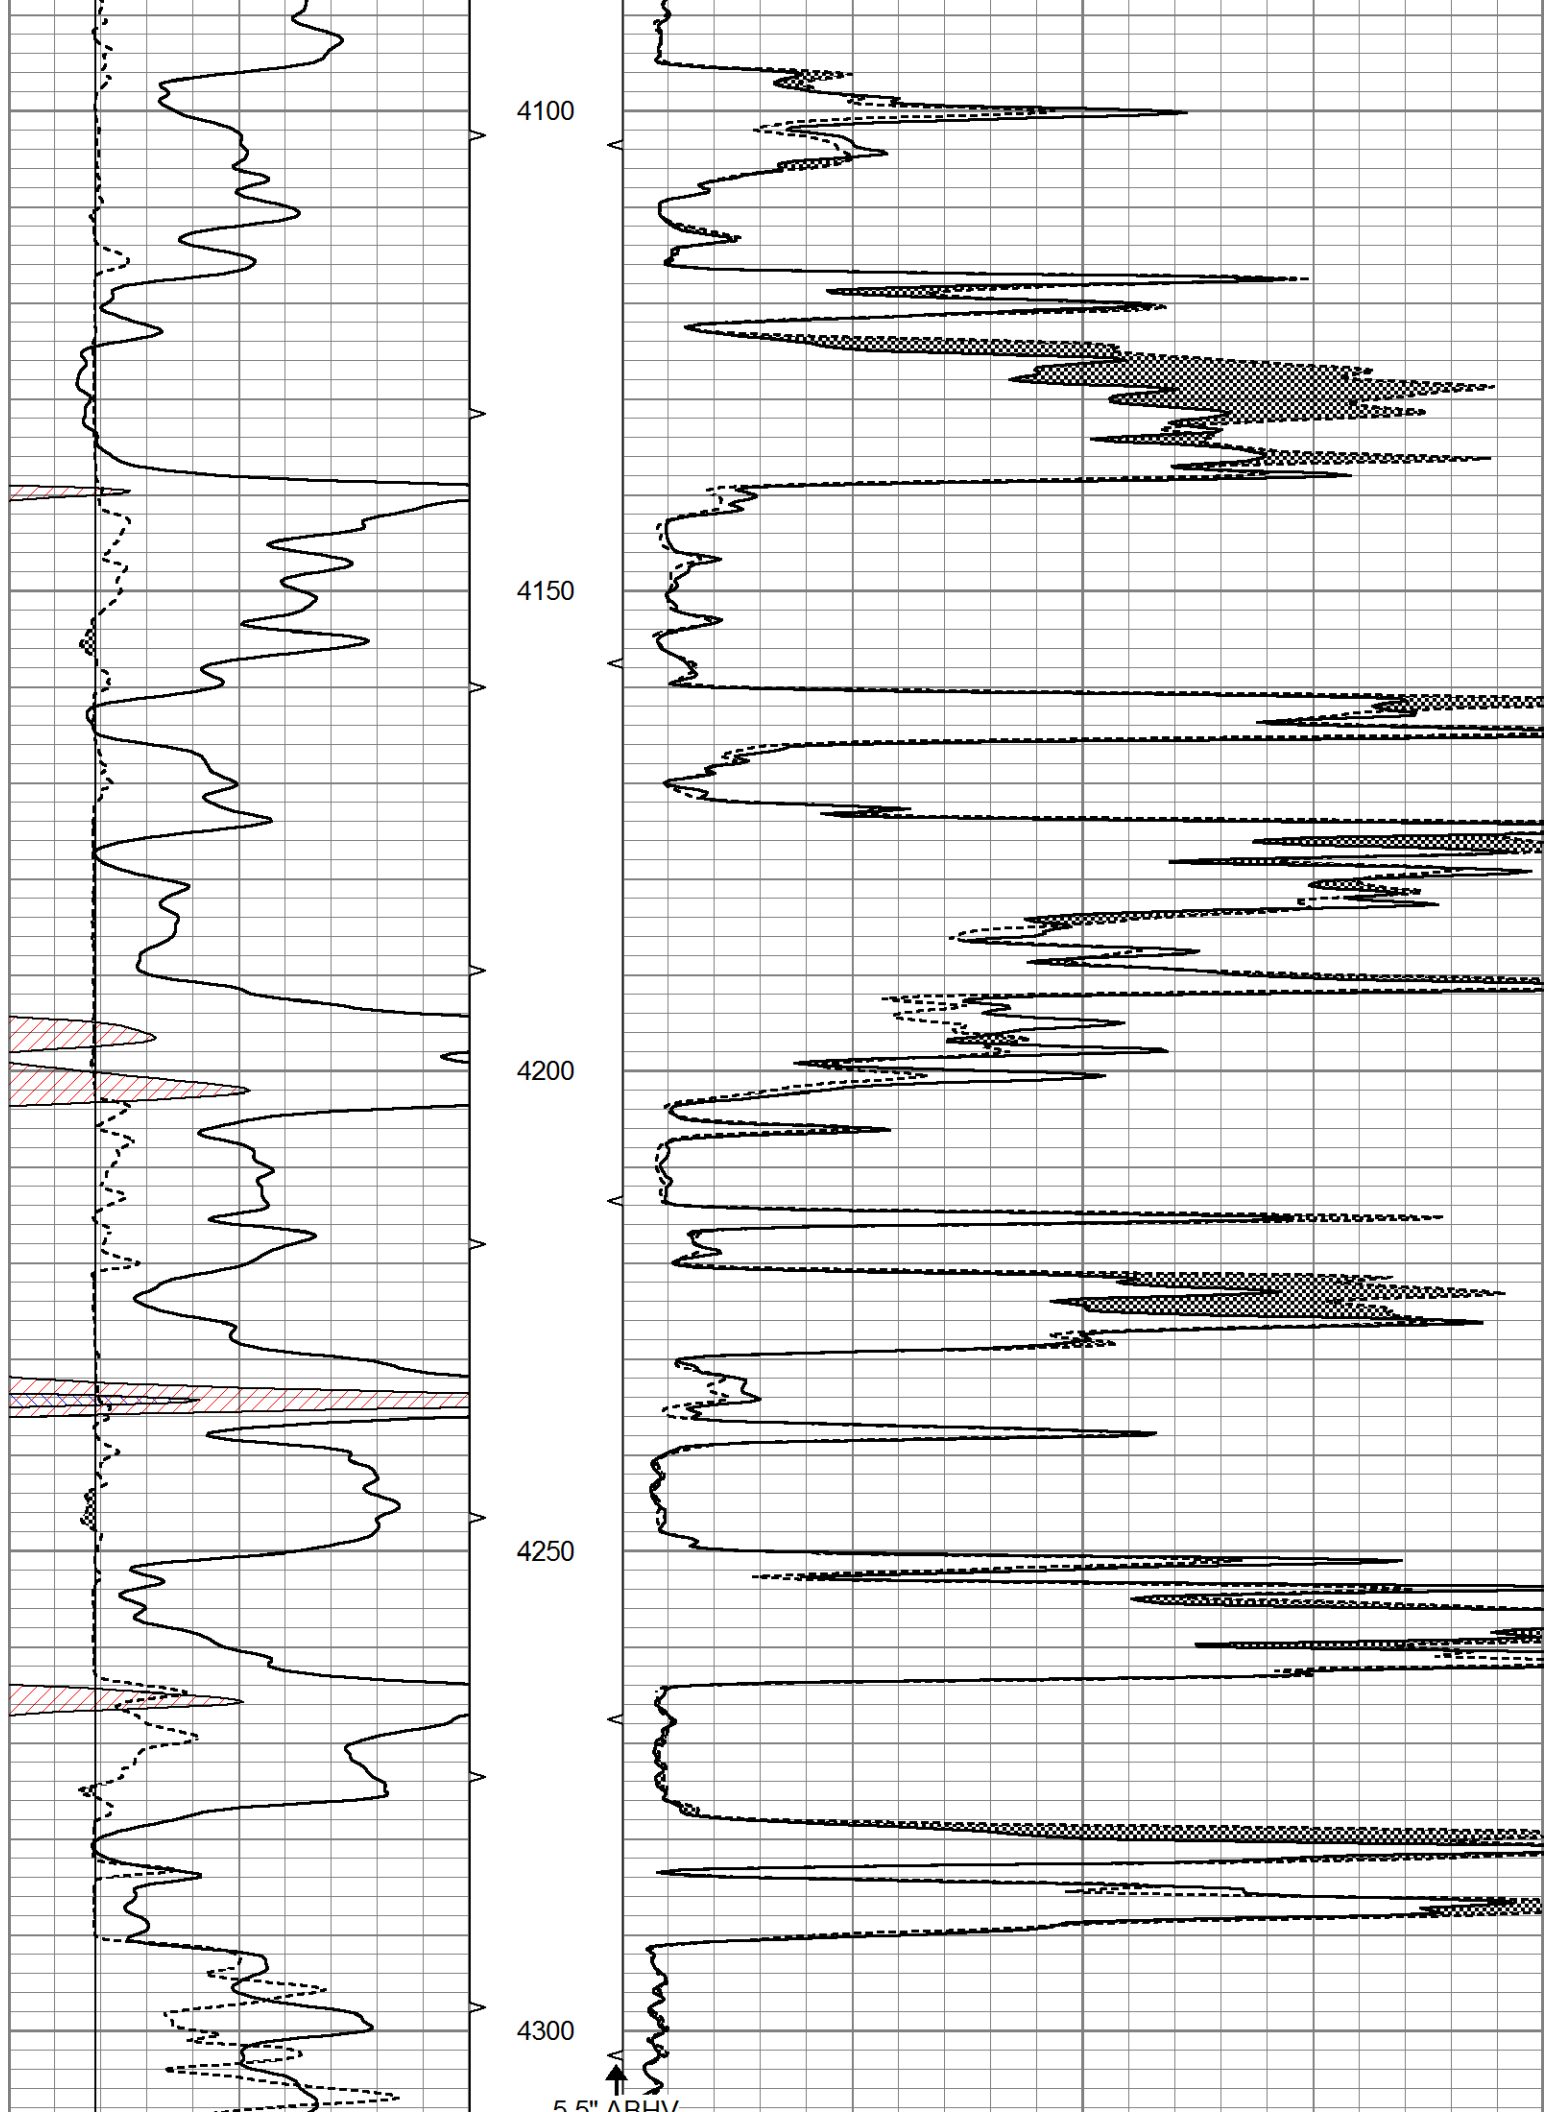


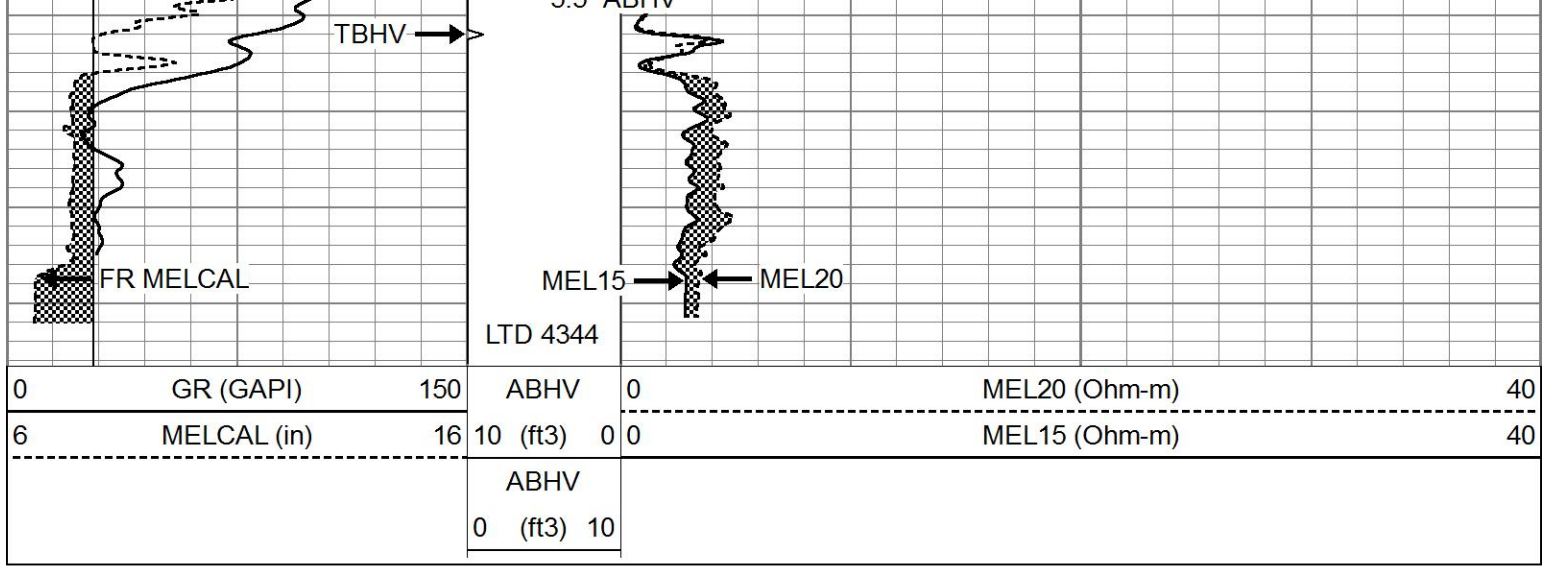

REPEAT SECTION

Database File 7314ddn.db
 Dataset Pathname pass7.1
 Presentation Format micro
 Dataset Creation Sat Aug 05 04:38:43 2023
 Charted by Depth in Feet scaled 1:240

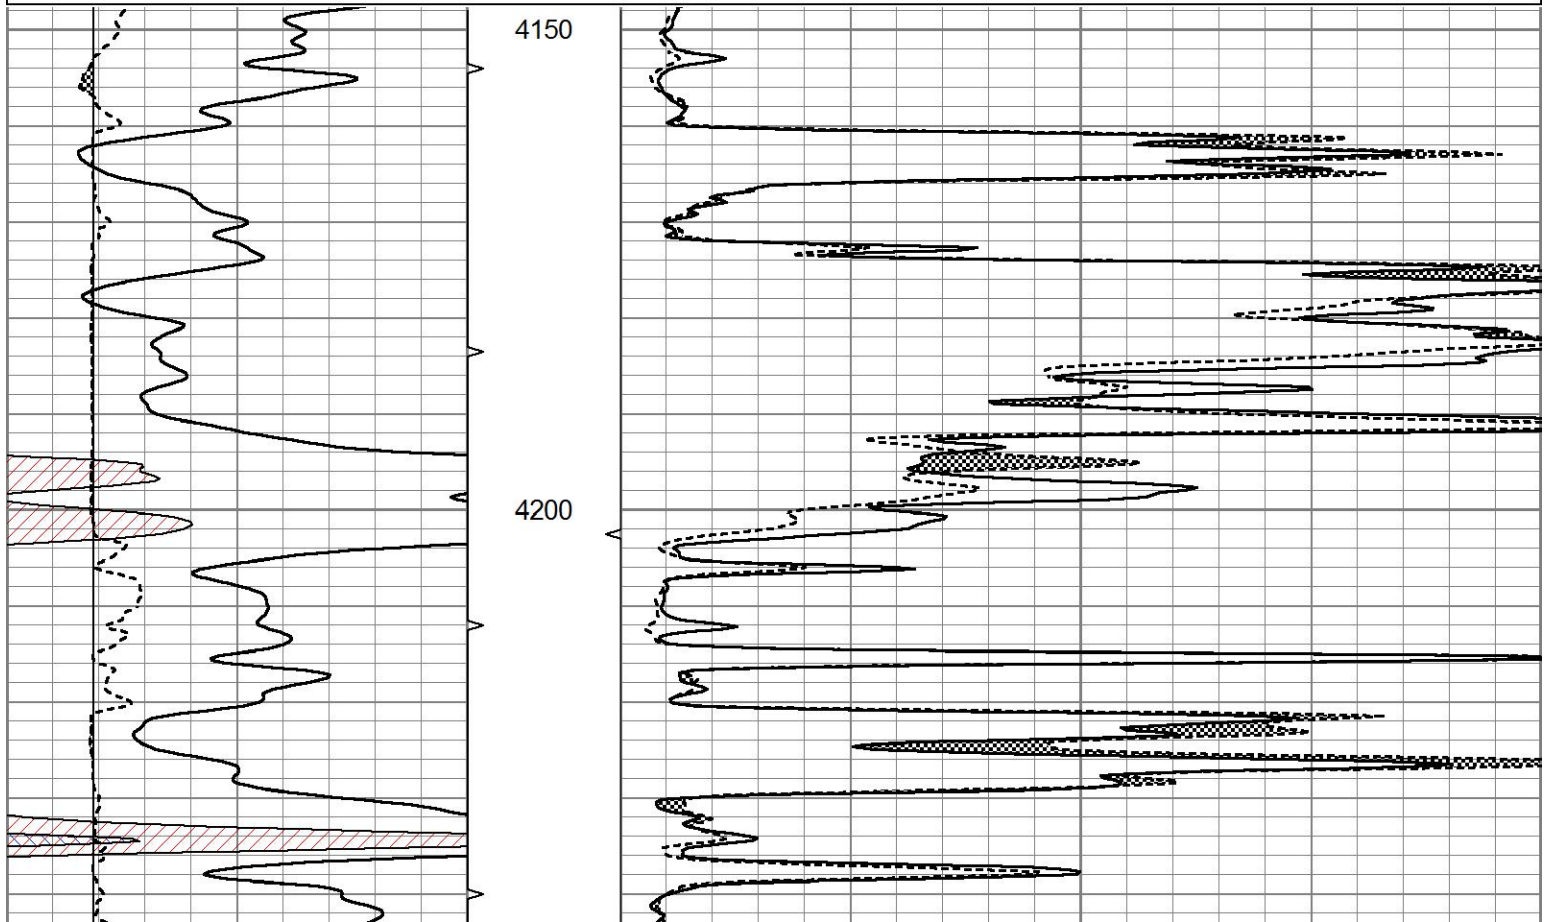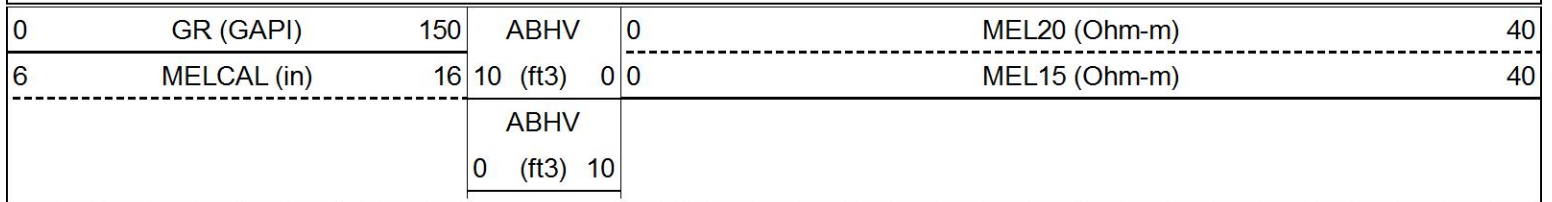

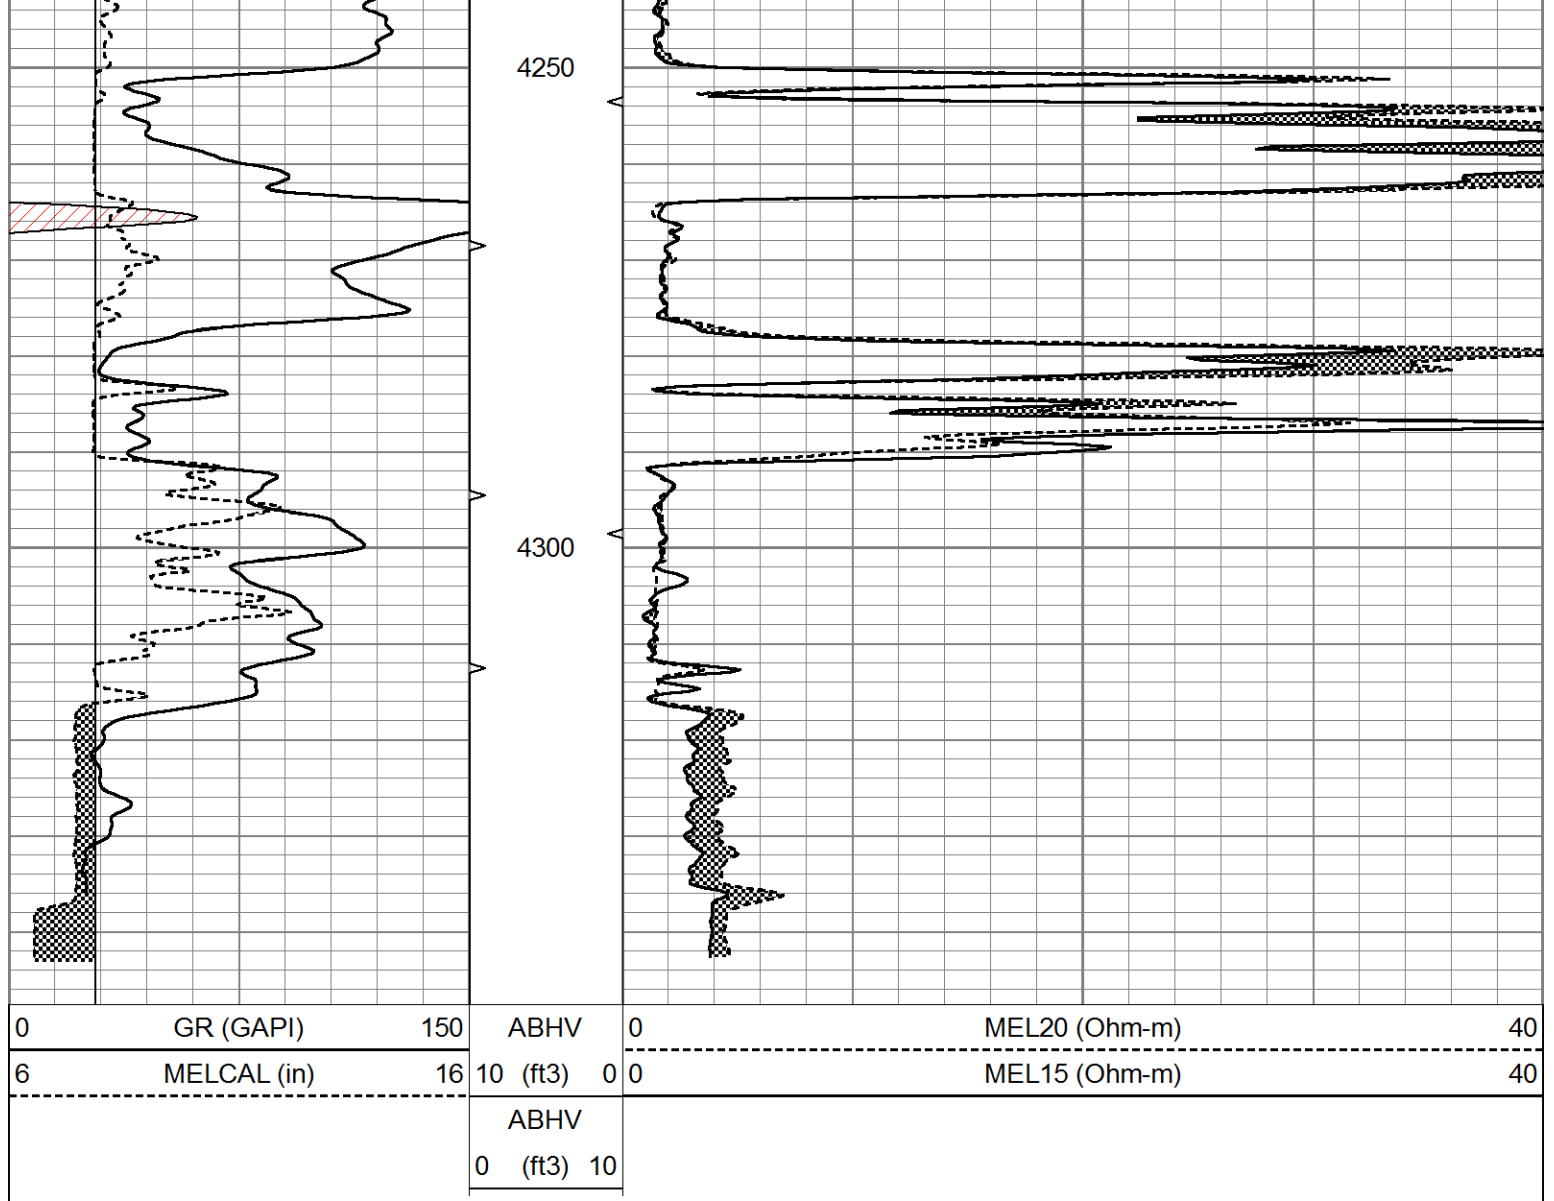

Calibration Report			
Database File	7314ddn.db		
Dataset Pathname	pass8.2		
Dataset Creation	Sat Aug 05 05:40:53 2023		
MICRO Calibration Report			
Serial Number:	070911		
Tool Model:	ProbeN		
Performed:	Sat Aug 05 04:35:04 2023		
Caliper Calibration:	Gain=4.706	Offset=2.353	
References	Low Cal	High Cal	
Readings	8.000	16.000	
	1.200	2.900	
1.5" Calibration:	Gain=40.000	Offset=0.000	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.001	1.291	
2" Calibration:	Gain=60.000	Offset=-0.500	
References	Low Cal	High Cal	
Readings	0.000	20.000	
	0.000	1.122	

Readings

0.003

1.103

Gamma Ray Calibration Report

Serial Number:	070559	
Tool Model:	OPEN_GR	
Performed:	Sun May 14 16:49:25 2023	
Calibrator Value:	1.0	GAPI
Background Reading:	0.0	cps
Calibrator Reading:	1.0	cps
Sensitivity:	0.3000	GAPI/cps