

15-163-00074-00-~~001~~

## DISTRICT CONSERVATION AGENT'S REPORT

TO:

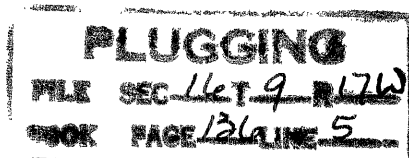
State Corporation Commission  
 Conservation Division  
 800 Bitting Building  
 Wichita, Kansas

FILE NO. 136-5LOCATION SE SE NESEC. 16 TWP. 9 RGE. 17Dry Hole \_\_\_\_\_ Abandoned Oil Well x Abandoned Gas Well \_\_\_\_\_

I have today completed supervision of plugging of:

Well No. 1 Lease CarmichaelOperator West Supply Co Address Box 306 Chase, KansField \_\_\_\_\_ County RooksTotal Depth 3547' Feet.

(Describe briefly the manner in which the well was plugged)

10" at 620', circulated with cement - 7" at 3250' with150 sax behind, ~~put~~ plugged back with cement and calseal to3442', 5 3/16" lined set 3192' to 3442', cemented in with75 sax cement, top perforations at 3267'.Filled hole with sand and mud to 3250', run 4 sax cementwith dump bailer, pulled 2200' of 7", filled hole with heavymud to 250', set rock bridge and 20 sax cement - filled withheavy mud to 30', set rock bridge and 10 sax cement (to) bottomcellar.Received  
4/17/50

E. J. Terry  
 District Conservation Agent  
 Date 4-12-50