

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-145-20697-00-00  
Spot: SESWSE Sec/Twnshp/Rge: 27-21S-15W  
330 feet from S Section Line, 1650 feet from E Section Line  
Lease Name: COSSMAN Well #: 2  
County: PAWNEE Total Vertical Depth: 3897 feet

Operator License No.: 30705  
Op Name: YOUNGER ENERGY COMPANY  
Address: 453 S. WEBB RD., STE 100  
WICHITA, KS 67207

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3730		
PROD	4.5	3894	2000	
SURF	8.625	926		WITH 450 SX CMT

\$ 126.65

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/14/2006 3:00 PM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 3590' & 4 SX CMT. PLUG AT 960' WITH 10 SX GEL - 200# HULLS - 50 SX CMT. PLUG AT 480' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 12/14/2006 4:05 PM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3595' & 4 SX CMT WITH DUMP BAILER. PUMPED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 960' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 480' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3864	3869		
3863	3870		
3862	3864		
3646	3650		


INVOICED

DATE 1-9-07  
INV. NO. 2007061119

Remarks: USED 60/40 POZMIX 6% GEL BY QUALITY CEMENTING.

Plugged through: CSG

District: 01

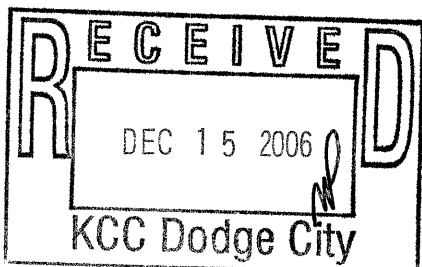

Signed

Richard M. Lacey

(TECHNICIAN)

RECEIVED

DEC 23 2006 Form CP-23

KCC WICHITA

*PKT*