

TO:
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION - PLUGGING
 130 SOUTH MARKET, SUITE 2078
 WICHITA, KANSAS 67202

API Well Number: 15-185-30038-00-00
 Spot: NENWSW Sec/Twnshp/Rge: 7-21S-12W
2310 feet from S Section Line, 4290 feet from E Section Line
 Lease Name: BAUER-NOLTE Well #: 3
 County: STAFFORD Total Vertical Depth: 3585 feet

Operator License No.: 5030

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		3496		

Op Name: VESS OIL CORPORATION

Address: 1700 WATERFRONT PARKWAY, BLDG 500
WICHITA, KS 67206

PROD	5.5	3584	2108	WITH 100 SX CMT	\$ 116.51
SURF	8.625	265		240 SX	

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 12/12/2006 7:30 AM

Plug Co. License No.: 31529

Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.

Proposal Rcvd. from: MIKE KELSO

Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND TO 3240' & 5 SX CMT. PLUG AT 690' WITH 10 SX GEL - 50 SX CMT. PLUG AT 290' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 12/12/2006 8:45 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 3240' & 5 SX CMT WITH DUMP BAILER. PUMPED PLUGS THROUGH CASING. 1ST PLUG AT 690' WITH 10 SX GEL - 50 SX CMT. 2ND PLUG AT 290' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 25 SX CMT.

Perfs:


Top	Bot	Thru	Comments
3543	3548		
3414	3419		
3378	3384		
3335	3341		
3303	3307		
3294	3298		

INVOICED
 DATE 1-9-07
 INV. NO. 2007061113

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: CSG

District: 01

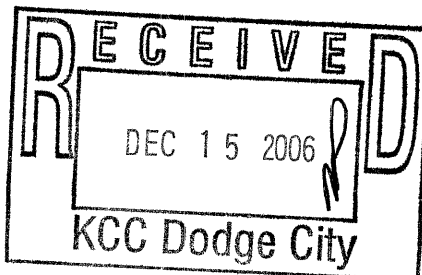

Signed

Richard M. Lacey

(TECHNICIAN)

RECEIVED

DEC 20 2006

KCC WICHITA

Form CR 2/5

PLUG