

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-21320-00-00

Spot: E2NESE

Sec/Twnshp/Rge: 12-23S-12W

1980 feet from S Section Line, 330 feet from E Section Line

Lease Name: BROCK

Well #: 1

County: STAFFORD

Total Vertical Depth: 3685 feet

Operator License No.: 31327

Op Name: PAULEY, GARY DBA PAULEY OIL

Address: PO BOX 163  
HOLYROOD, KS 67450

String Size Depth (ft) Pulled (ft) Comment

PROD 4.5 3684 0 WITH 175 SX CMT

SURF 8.625 408 WITH 285 SX CMT

\$ 119.76

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 12/18/2006 9:15 AM

Plug Co. License No.: 99981

Plug Co. Name: COPELAND ACID & CEMENT, INC.

Proposal Rcvd. from: GARY PAULEY

Company: PAULEY OIL

Phone: (785) 252-3286

Proposed  
Plugging  
Method:

CIBP @ 3300' & 2 SX CMT. PERFORATE AT 600'. CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 12/18/2006 11:55 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

RAN TUBING TO 3300' & PUMPED 50 SX CMT. GOOD CIRCULATION.  
PERFORATED 4 1/2" @ 600'. PULLED TUBING TO 620'. PUMPED 350 SX CMT. HAD  
CMT JUST TO SURFACE & LOST CIRCULATION. 12/19/06: TOPPED OFF 4 1/2" WITH  
20 SX CMT. PRESSURED 8 5/8" X 4 1/2" ANNULUS TO 400 PSIG WITH 5 SX CMT.

Perfs:

Top	Bot	Thru	Comments
3477	3543		
3407	3453		
3353	3392		

INVOICED

DATE 1-17-07

INV. NO. 2007061173

RECEIVED


JAN 03 2006

KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND ACID.

Plugged through: TBG

District: 01

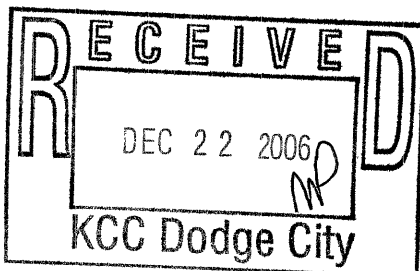

Signed

Richard W. Lacey

(TECHNICIAN)

Form CP-27

2169