

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-101-21972-00-00
Spot: E2W2NE Sec/Twnshp/Rge: 6-18S-30W
1290 feet from N Section Line, 1575 feet from E Section Line
Lease Name: CURRAN Well #: 1-6
County: LANE Total Vertical Depth: 4870 feet

Operator License No.: 5214
Op Name: LARIO OIL & GAS COMPANY
Address: 301 SOUTH MARKET STREET
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
SURF	8.625	303		WITH 200 SX CMT

\$158.28

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/18/2006 12:00 AM
Plug Co. License No.: 5822 Plug Co. Name: VAL ENERGY, INC.
Proposal Rcvd. from: RICK SMITH Company: VAL ENERGY, INC. Phone: (316) 263-6688

Proposed Plugging Method: 1ST PLUG AT 2190' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 330' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: NONE
Date/Time Plugging Completed: 12/18/2006 2:45 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

1ST PLUG AT 2190' WITH 50 SX CMT. 2ND PLUG AT 1500' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 330' WITH 50 SX CMT. 5TH PLUG AT 60' WITH 20 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. 7TH PLUG TO CIRCULATE MOUSE HOLE WITH 10 SX CMT.


Perfs:

INVOICED
DATE 1-11-07
INV. NO. 2007061169

Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

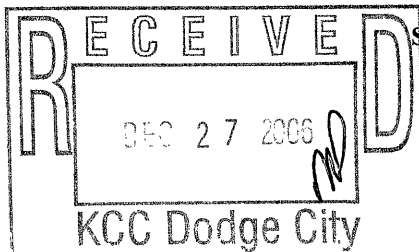

Signed Eric MacLaren

(TECHNICIAN)

RECEIVED

JAN 03 2006

KCC WICHITA

Form 6-23

PKT