

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-033-21147-00-01
Spot: SWSE Sec/Twnshp/Rge: 35-32S-18W
660 feet from S Section Line, 1900 feet from E Section Line
Lease Name: PEPPERD Well #: 2-35
County: COMANCHE Total Vertical Depth: 5850 feet

Operator License No.: 5254
Op Name: MIDCO EXPLORATION, INC.
Address: 414 PLAZA DRIVE #204
WESTMONT, IL 60559

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		4966		WITH 2 SX CMT
COND	20	70		
PROD	4.5	5307	4212	WITH 150 SX CMT
SURF	8.625	668		WITH 325 SX CMT

\$190.13

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 12/22/2006 10:40 AM
Plug Co. License No.: 30891 Plug Co. Name: LEIKER WELL SERVICE, INC.
Proposal Rcvd. from: DAVID MAYFIELD Company: MIDCO EXPLORATION Phone: (630) 655-2198

Proposed Plugging Method: CIBP @ 4966' WITH 2 SX CMT. PLUG AT 1080' WITH 15 SX GEL & 50 SX CMT. PLUG AT 690' WITH 50 SX CMT. PLUG AT 40' WITH 15 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/22/2006 11:55 AM KCC Agent: ERIC MACLAREN

Actual Plugging Report:

CIBP @ 4966' WITH 2 SX CMT. 1ST PLUG AT 1080' WITH 15 SX GEL & 50 SX CMT. 2ND PLUG AT 690' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 15 SX CMT. CMT CIRCULATED.

Perfs:


Top	Bot	Thru	Comments
5169	5171		
5154	5156		
5134	5148		
5123	5126		
5113	5116		
5108	5111		
5016	5026		

INVOICED
DATE 1-1-07
INV. NO. 2007061171

Remarks: USED 60/40 POZMIX 6% GEL BY CONSOLIDATED OIL WELL SERVICES.

Plugged through: CSG

District: 01

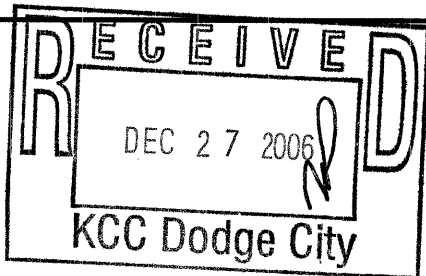

Signed Eric MacLaren

(TECHNICIAN)
RECEIVED

JAN 03 2006

KCC WICHITA

Form CP-2

PKG