

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-047-20391-00-00
Spot: SESE Sec/Twnshp/Rge: 21-26S-17W
660 feet from S Section Line, 660 feet from E Section Line
Lease Name: FISHER S Well #: 1
County: EDWARDS Total Vertical Depth: 4600 feet

Operator License No.: 5086
Op Name: PINTAIL PETROLEUM, LTD.
Address: 225 NORTH MARKET, STE 300
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	4597	2202	WITH 150 SX CMT \$149.50
SURF	8.625	261		WITH 180 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/12/2006 10:30 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 786-2001

Proposed Plugging Method: SAND TO 4490' & 4 SX CMT. PLUG AT 1200' WITH 15 SX GEL & 50 SX CMT. PLUG AT 300' WITH 50 SX CMT. PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: ERIC MACLAREN WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 12/13/2006 9:35 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:

SANDED TO 4490' & 4 SX CMT WITH DUMP BAILER. PUMPED PLUGS THROUGH CASING WHILE PULLING. 1ST PLUG AT 1200' WITH 15 SX GEL - 50 SX CMT. 2ND PLUG AT 300' WITH 100 SX CMT. LOST CIRCULATION. 12/13/06: TAGGED CMT AT 340'. RAN CASING BACK TO 300'. PUMPED 200# HULLS - 10 SX GEL - 150 SX CMT. CIRCULATED CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
4542	4546		


INVOICED
DATE 1-8-07
INV. NO. 2007061088

Remarks: USED 60/40 POZMIX 6% GEL BY COPELAND.

Plugged through: CSG

District: 01

Signed Richard M. Lacey

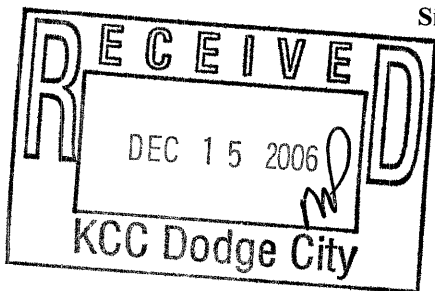

(TECHNICIAN)
RECEIVED
KANSAS CORPORATION COMMISSION
DEC 26 2006
CONSERVATION DIVISION
WICHITA, KS
Form CP-2/3

PKG