



MICRO LOG

Company	McCOY PETROLEUM CORPORATION		
Well	BUNYON "A" #1-29		
Field	UNNAMED		
County	SUMNER	State	KANSAS
Location:	API # : 15-191-22834-0000 825' FNL & 495' FWL NE - SW - NW - NW		Other Services CDL/CNL/PE DIL/SONIC
Permanent Datum	GROUND LEVEL	Elevation	1184
Log Measured From	KELLY BUSHING 13" A.G.L.		
Drilling Measured From	KELLY BUSHING		
Date	10/16/21		
Run Number	TWO		
Depth Driller	4125		
Depth Logger	4126		
Bottom Logged Interval	4110		
Top Log Interval	2200		
Casing Driller	8 5/8" @ 268'		
Casing Logger	270		
Bit Size	7 7/8"		
Type Fluid in Hole	CHEMICAL MUD	CHLORIDES 2,000 PPM	
Density / Viscosity	9.4/55		
pH / Fluid Loss	9.0/8.8		
Source of Sample	FLOWLINE		
Rm @ Meas. Temp	.950 @ 80F		
Rmf @ Meas. Temp	.713 @ 80F		
Rmc @ Meas. Temp	1.14 @ 80F		
Source of Rmf / Rmc	MEASUREMENT		
Rm @ BHT	.650 @ 117F		
Time Circulation Stopped	5 HOURS		
Time Logger on Bottom	7:15 A.M.		
Maximum Recorded Temperature	117F		
Equipment Number	922339		
Location	HAYS, KANSAS		
Recorded By	JEFF LUEBBERS		
Witnessed By	LARRY NICHOLSON		

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-191-22834-0000

Comments

THANK YOU FOR USING ELI WIRELINE HAYS, KANSAS (785) 628-6395
DIRECTIONS


I-35 & WELLINGTON EXIT, 1/2 E. ON HWY 160 TO "BROADWAY", 2S. TO "30TH ST.", 1W. TO SOUTH
SIDE ENTRANCE






MAIN SECTION


Database File	5670pe.db
Dataset Pathname	pass6.1M
Presentation Format	micro
Dataset Creation	Sat Oct 16 08:58:34 2021
Charted by	Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

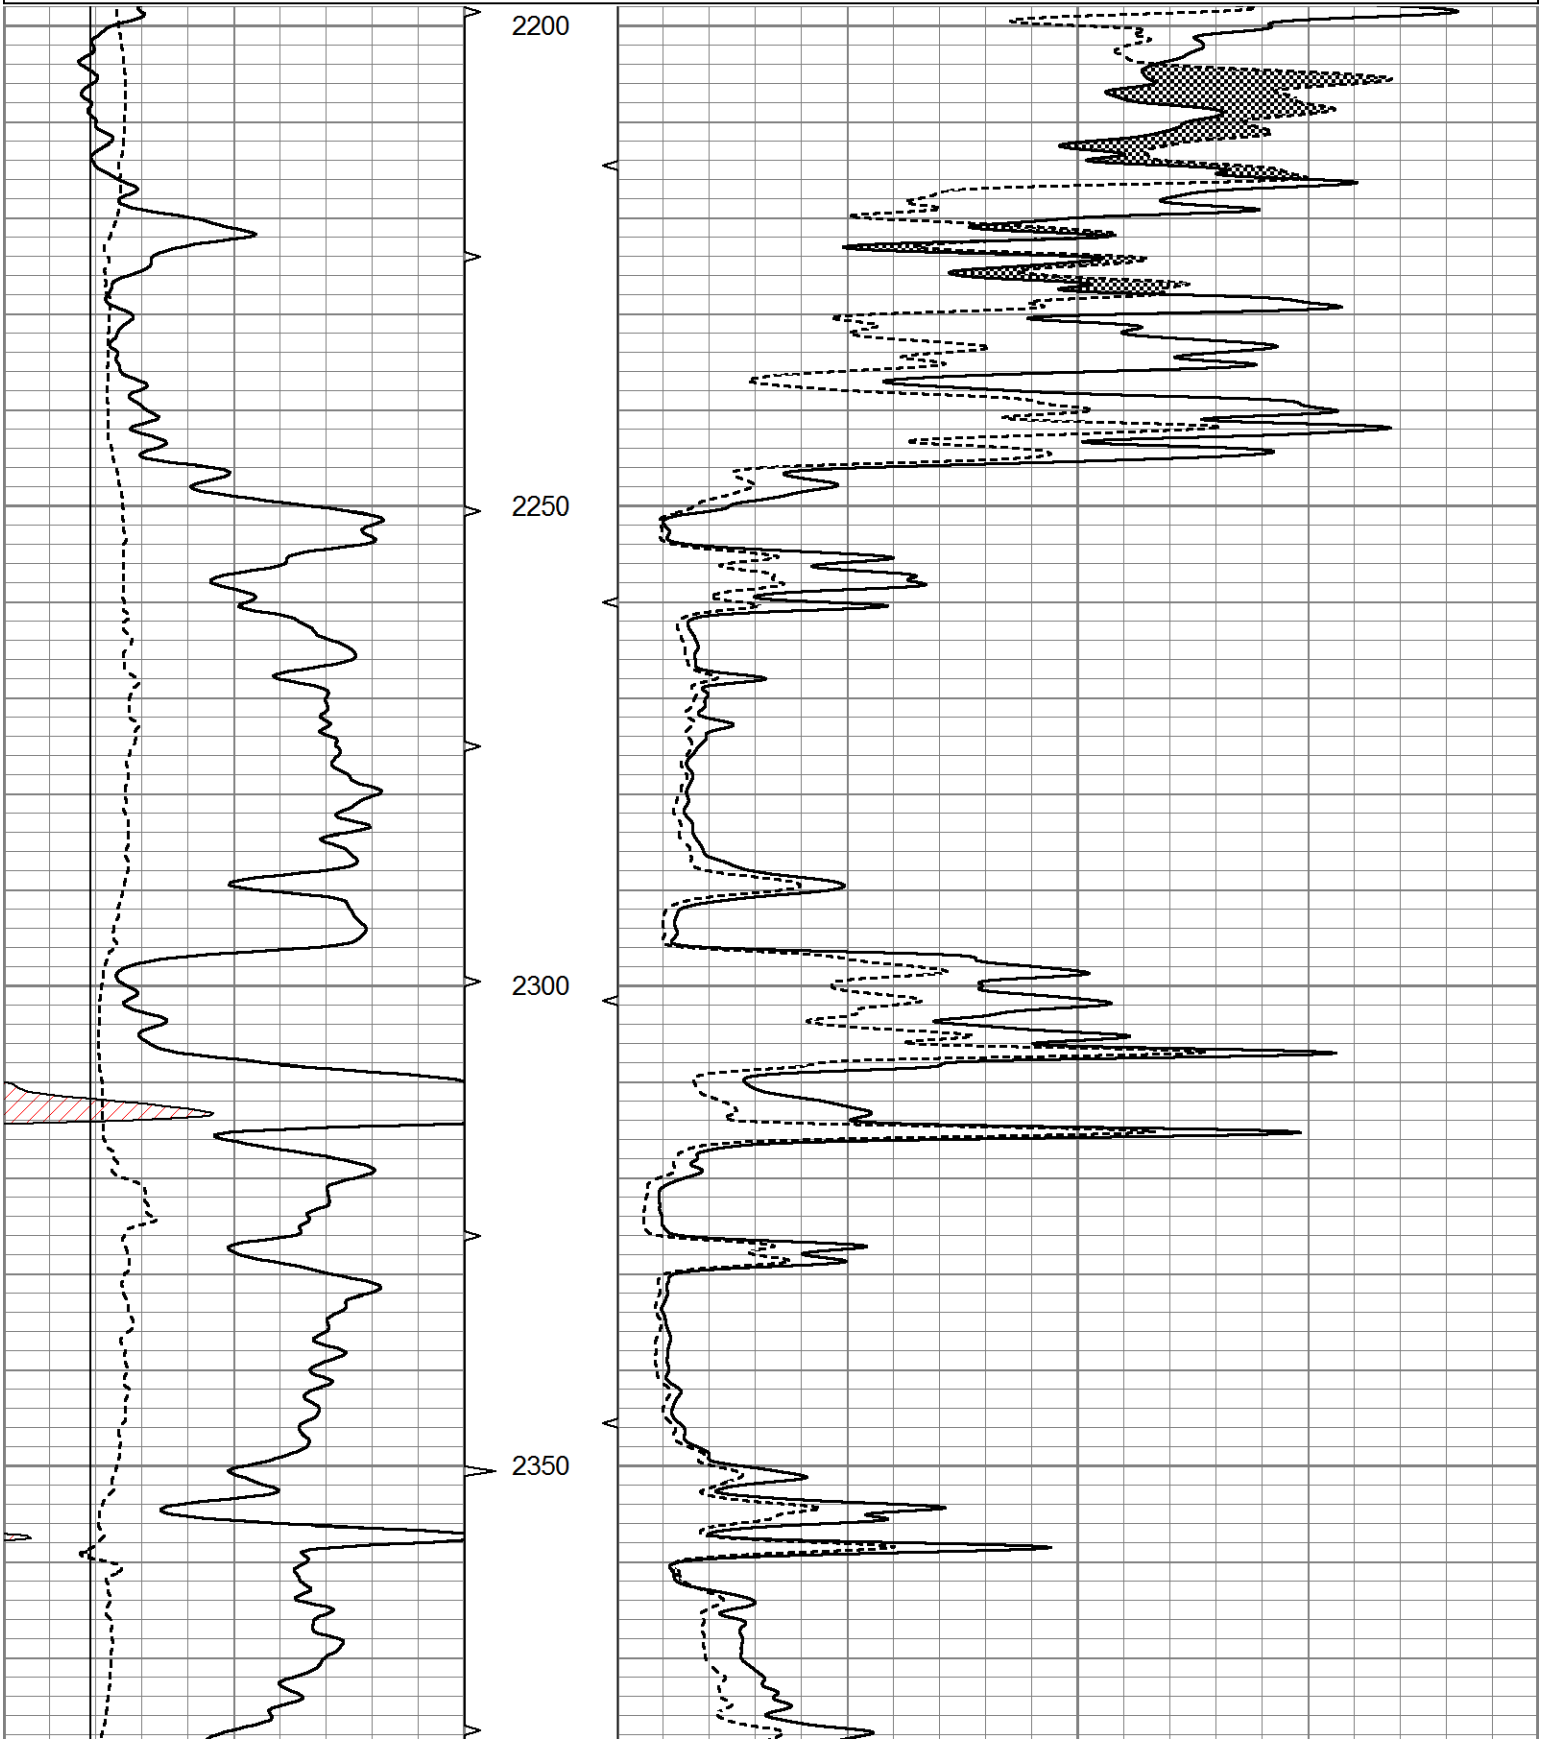

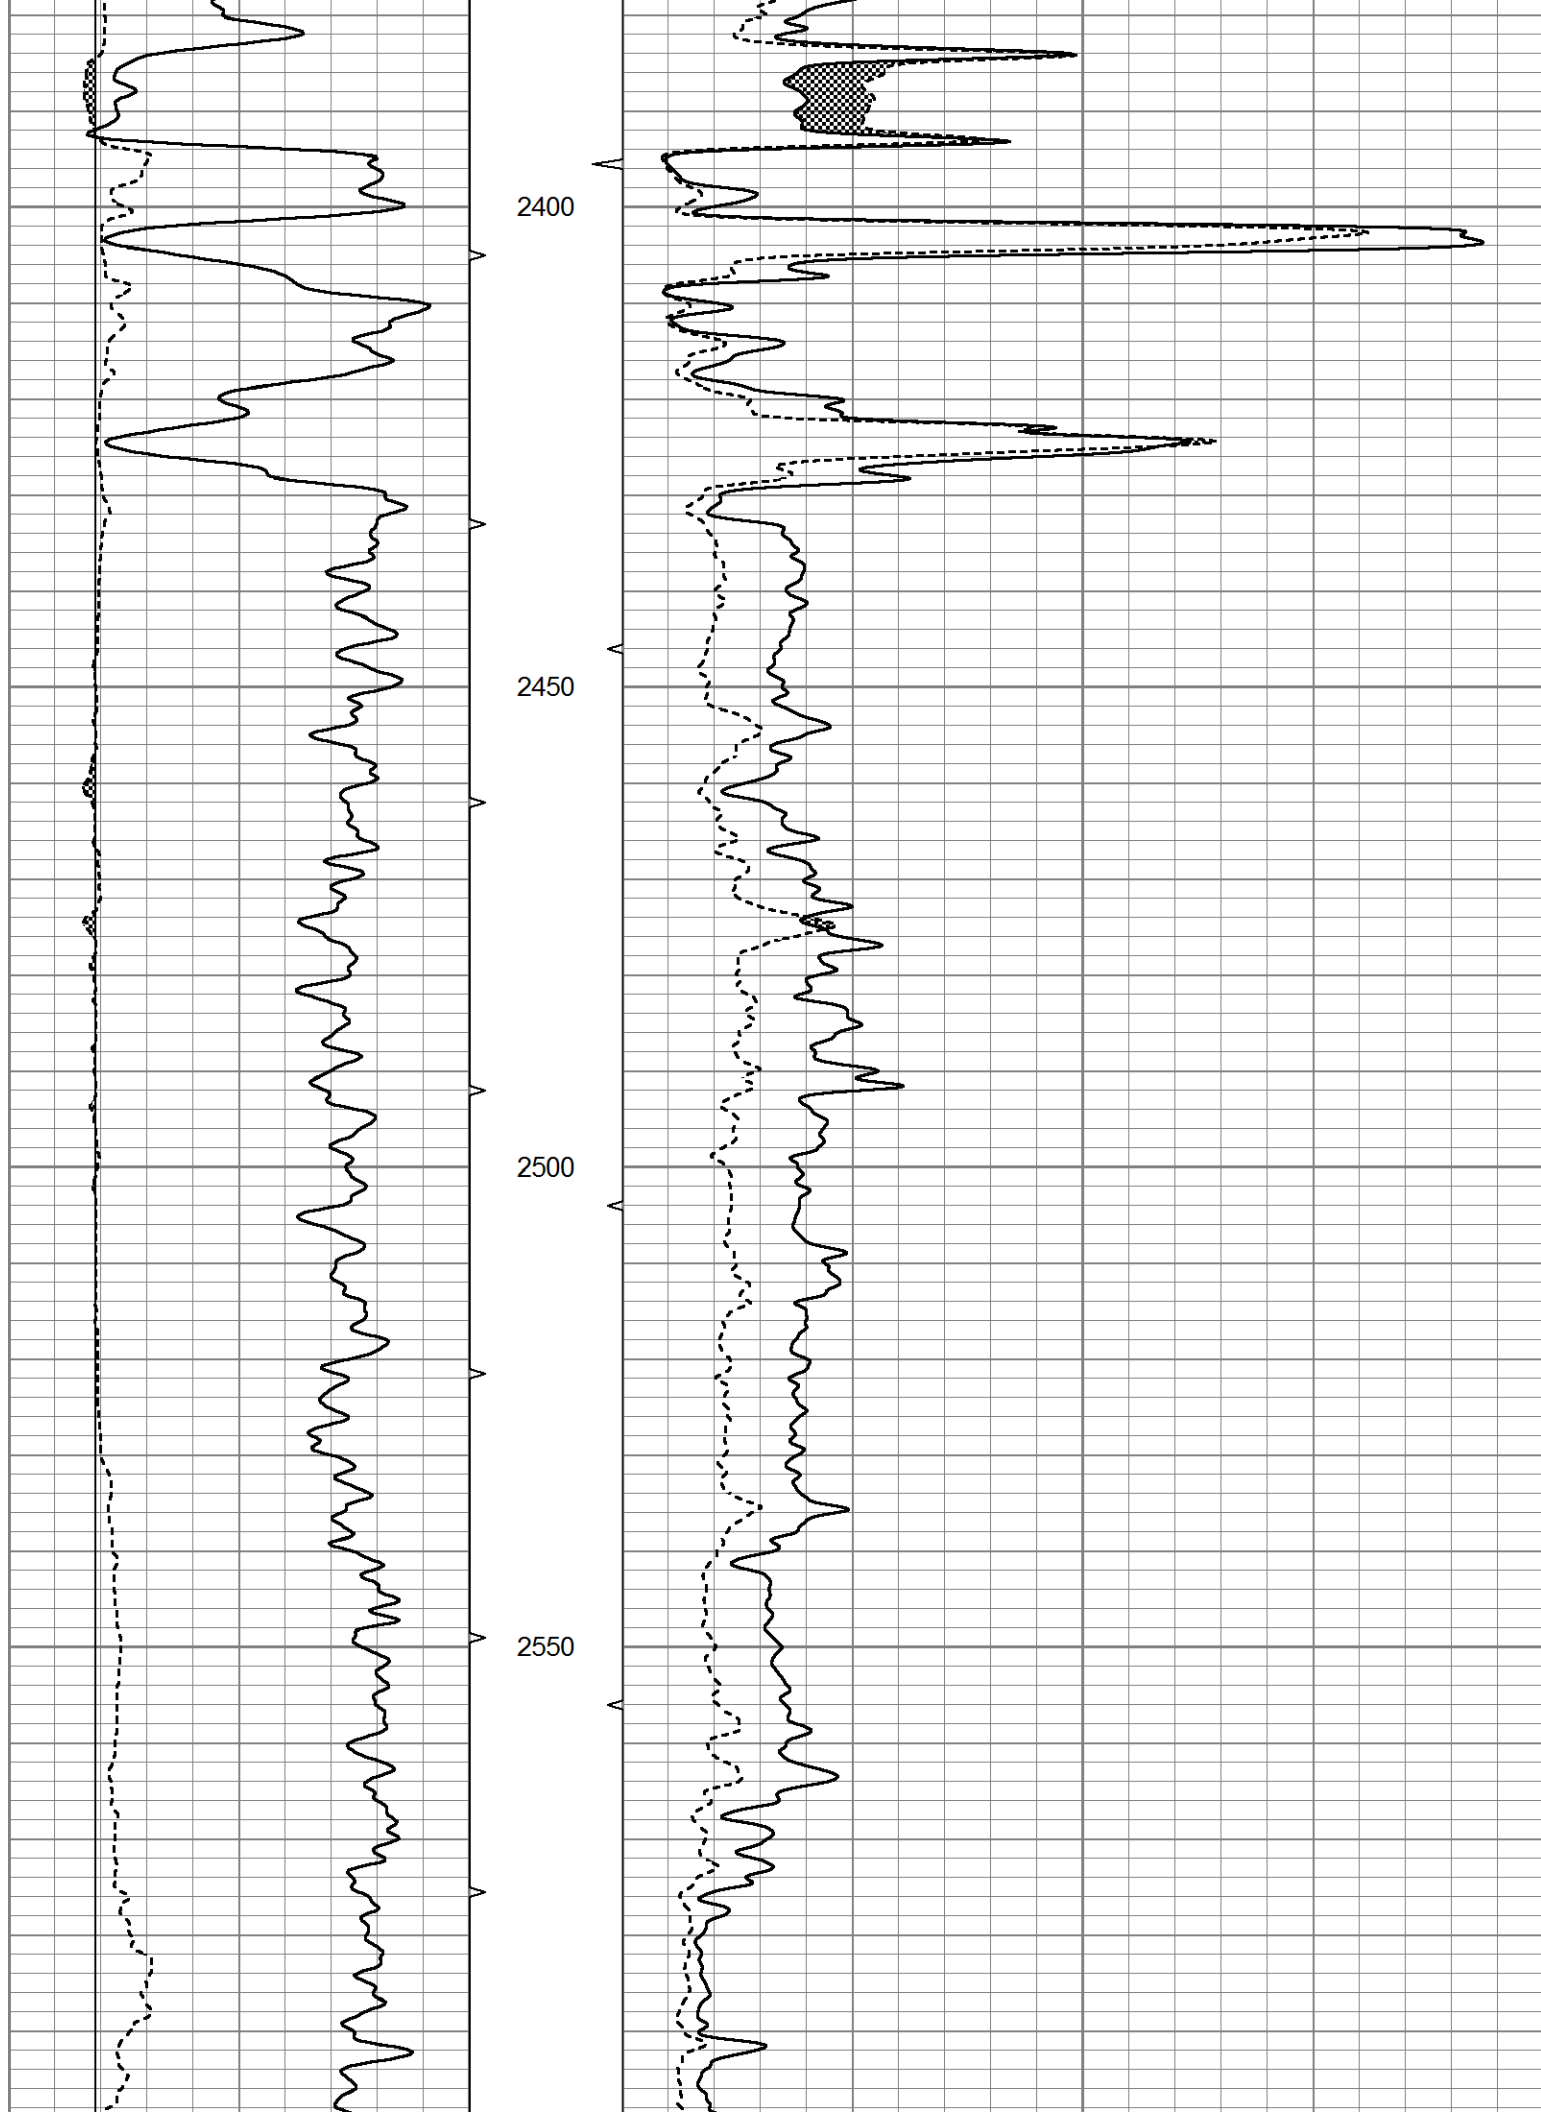

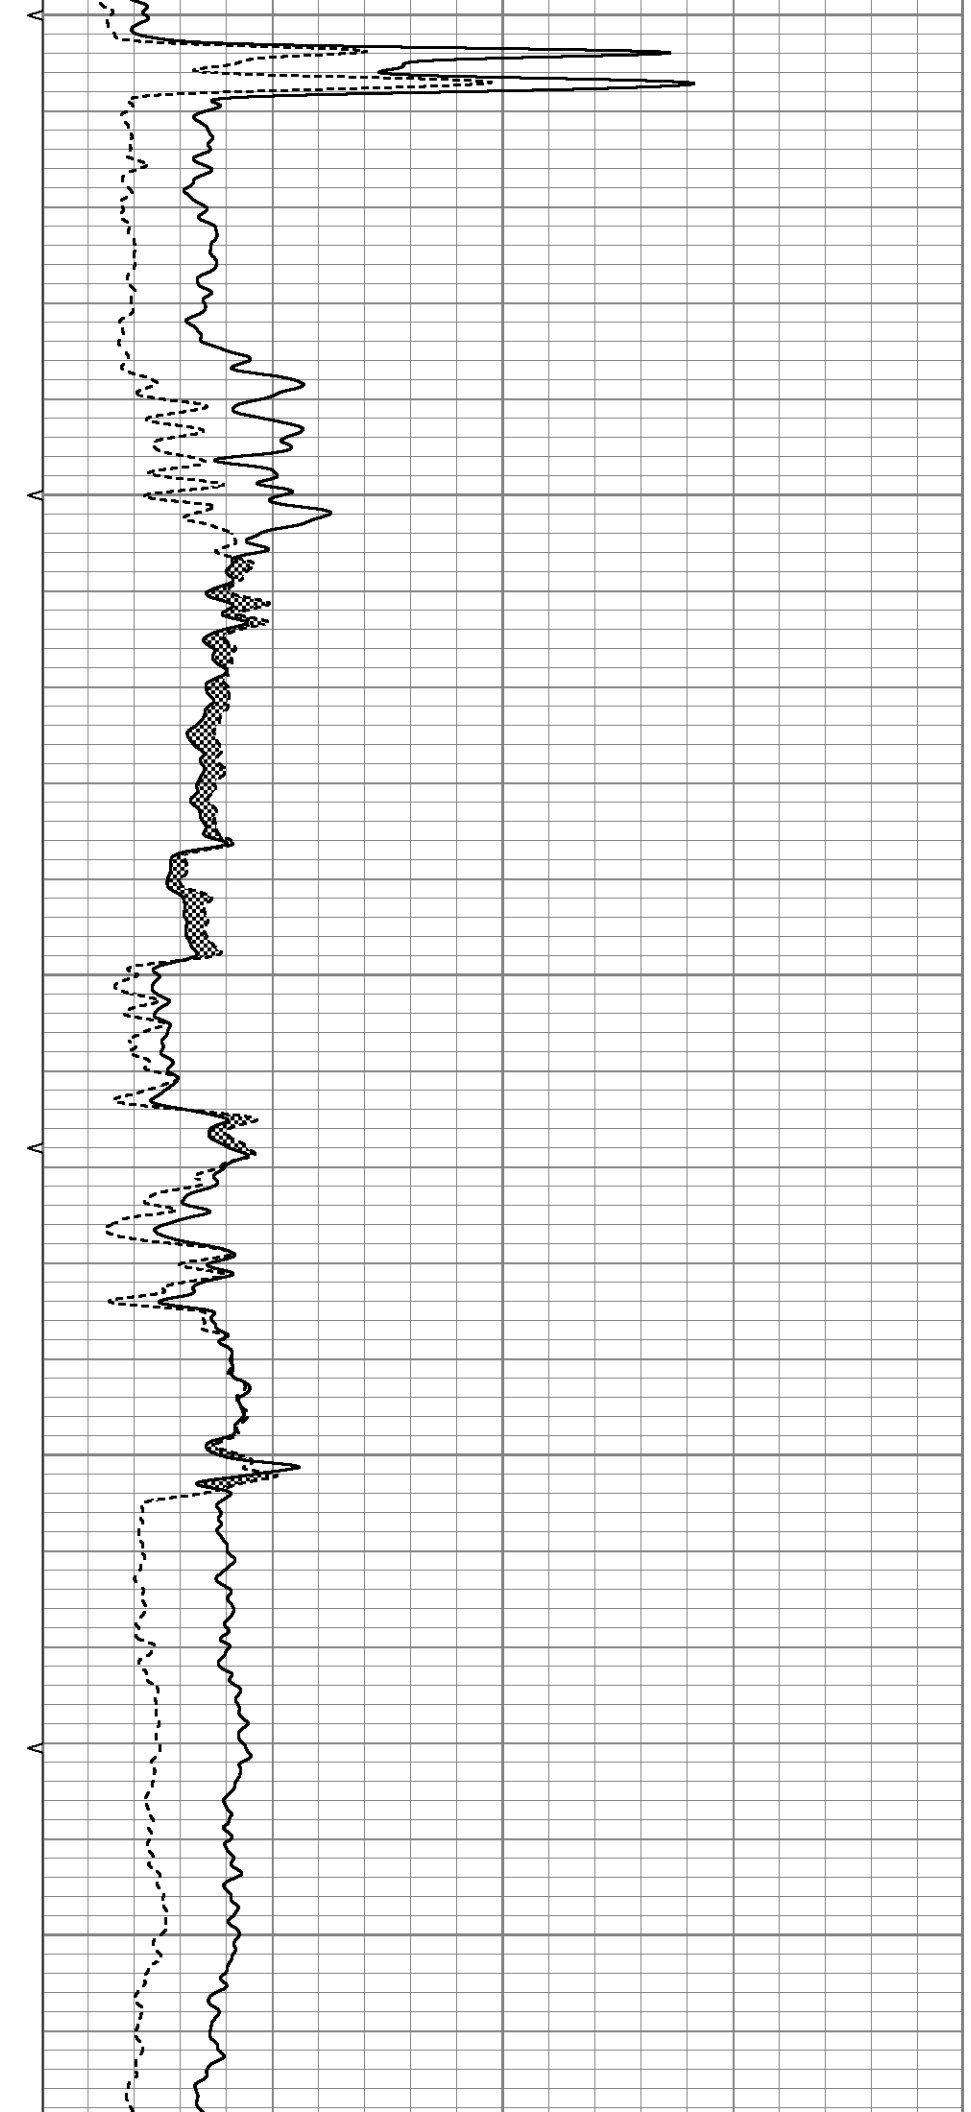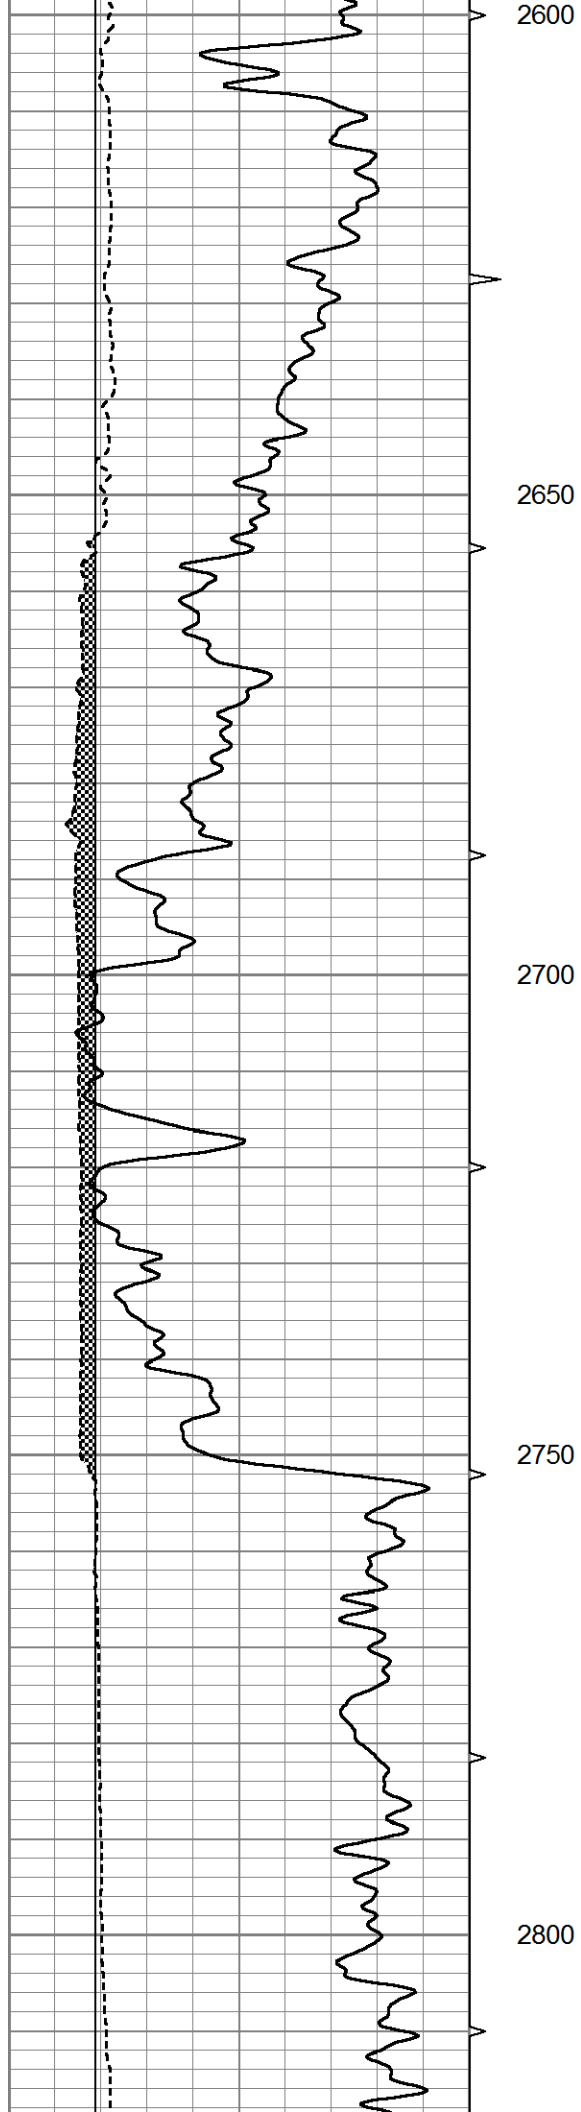

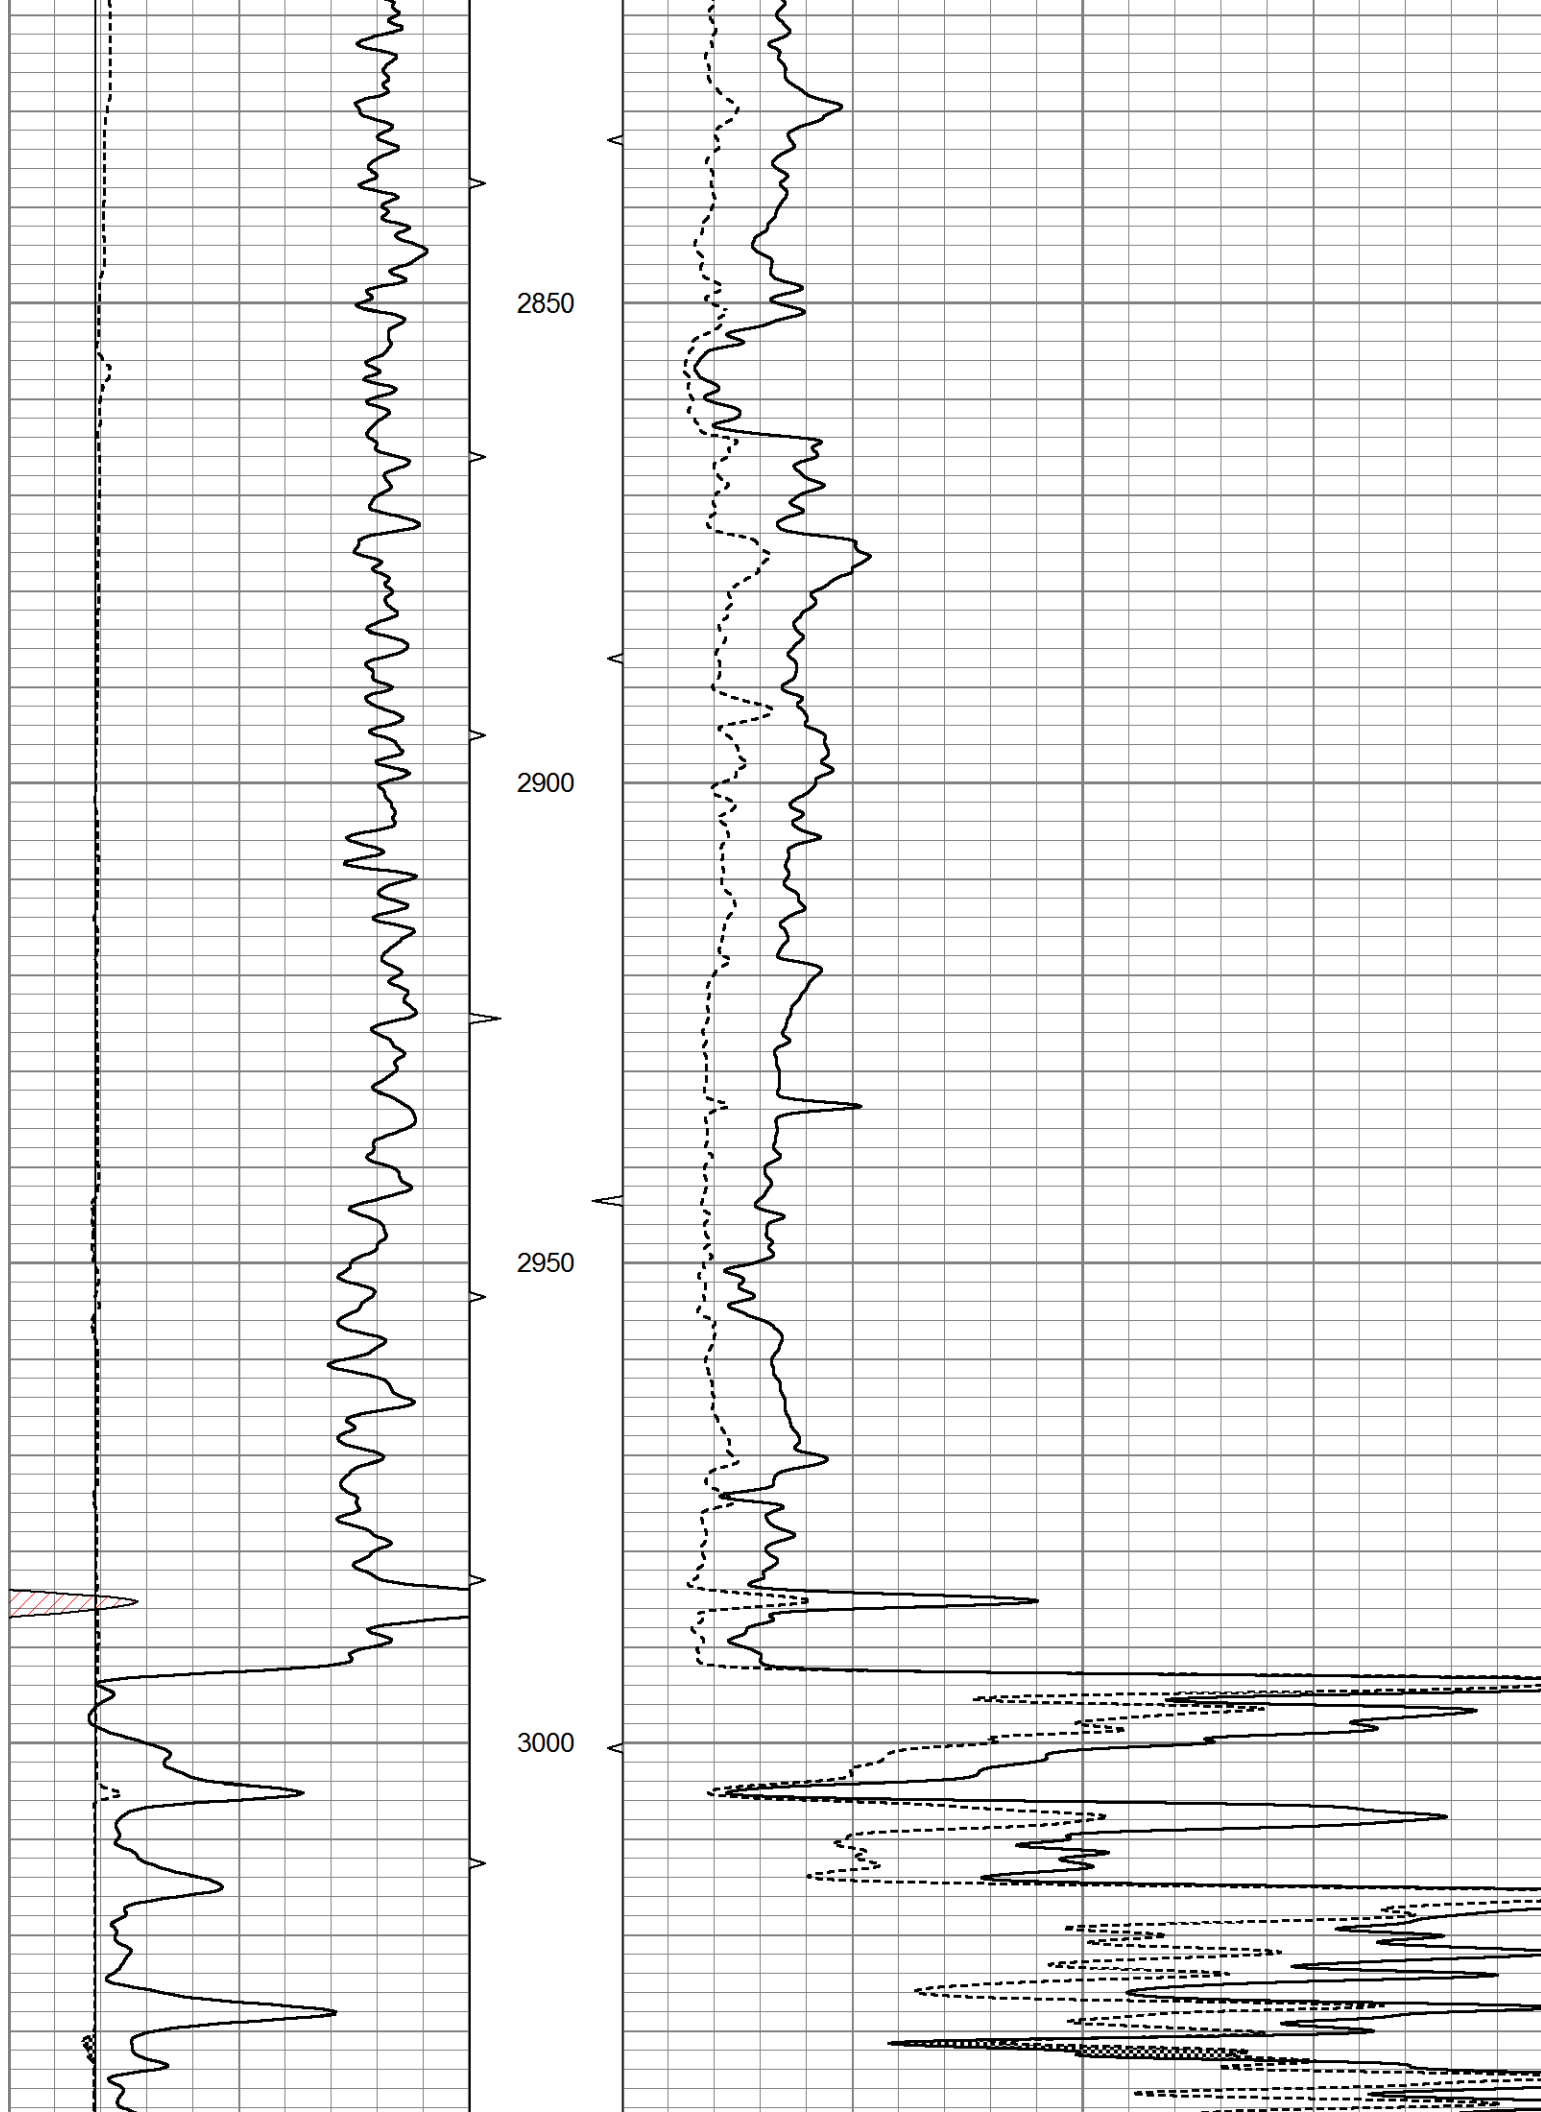

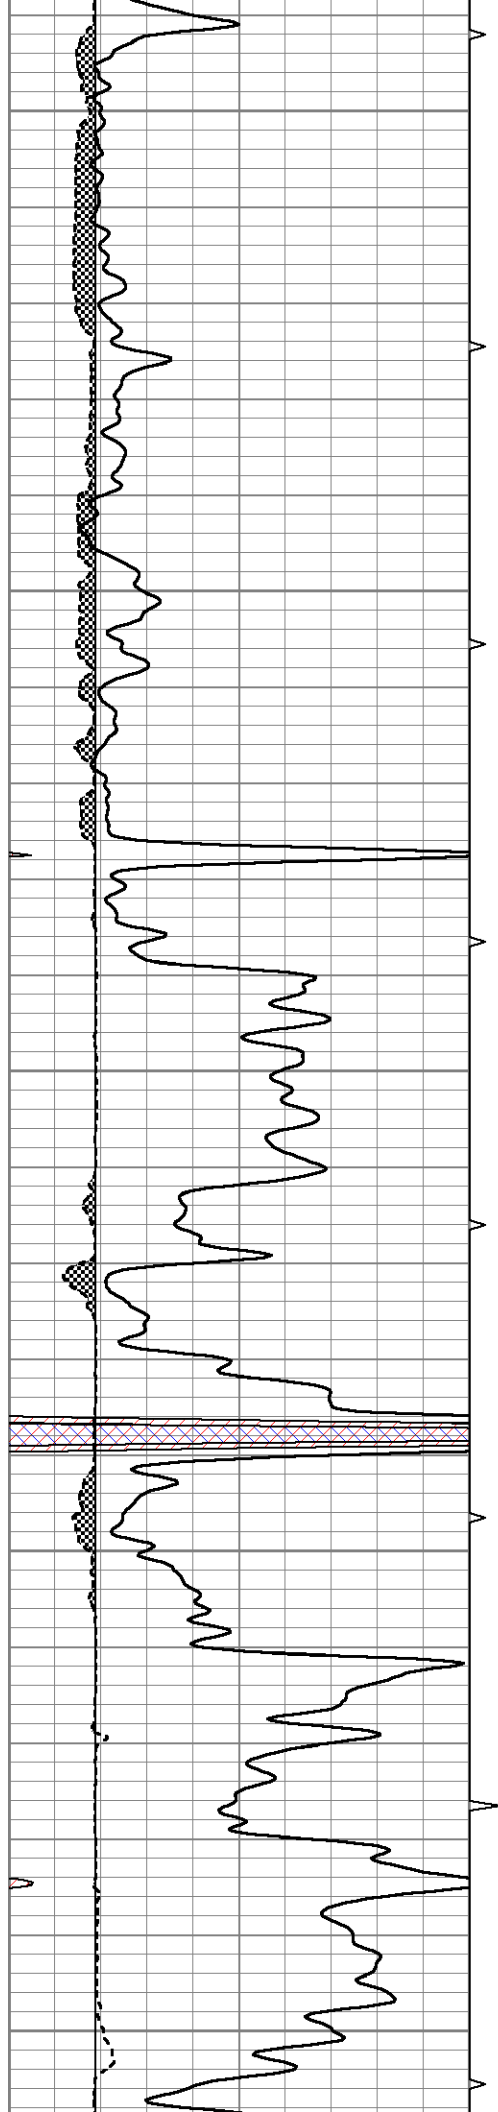


3050


3100

3150

3200

3250

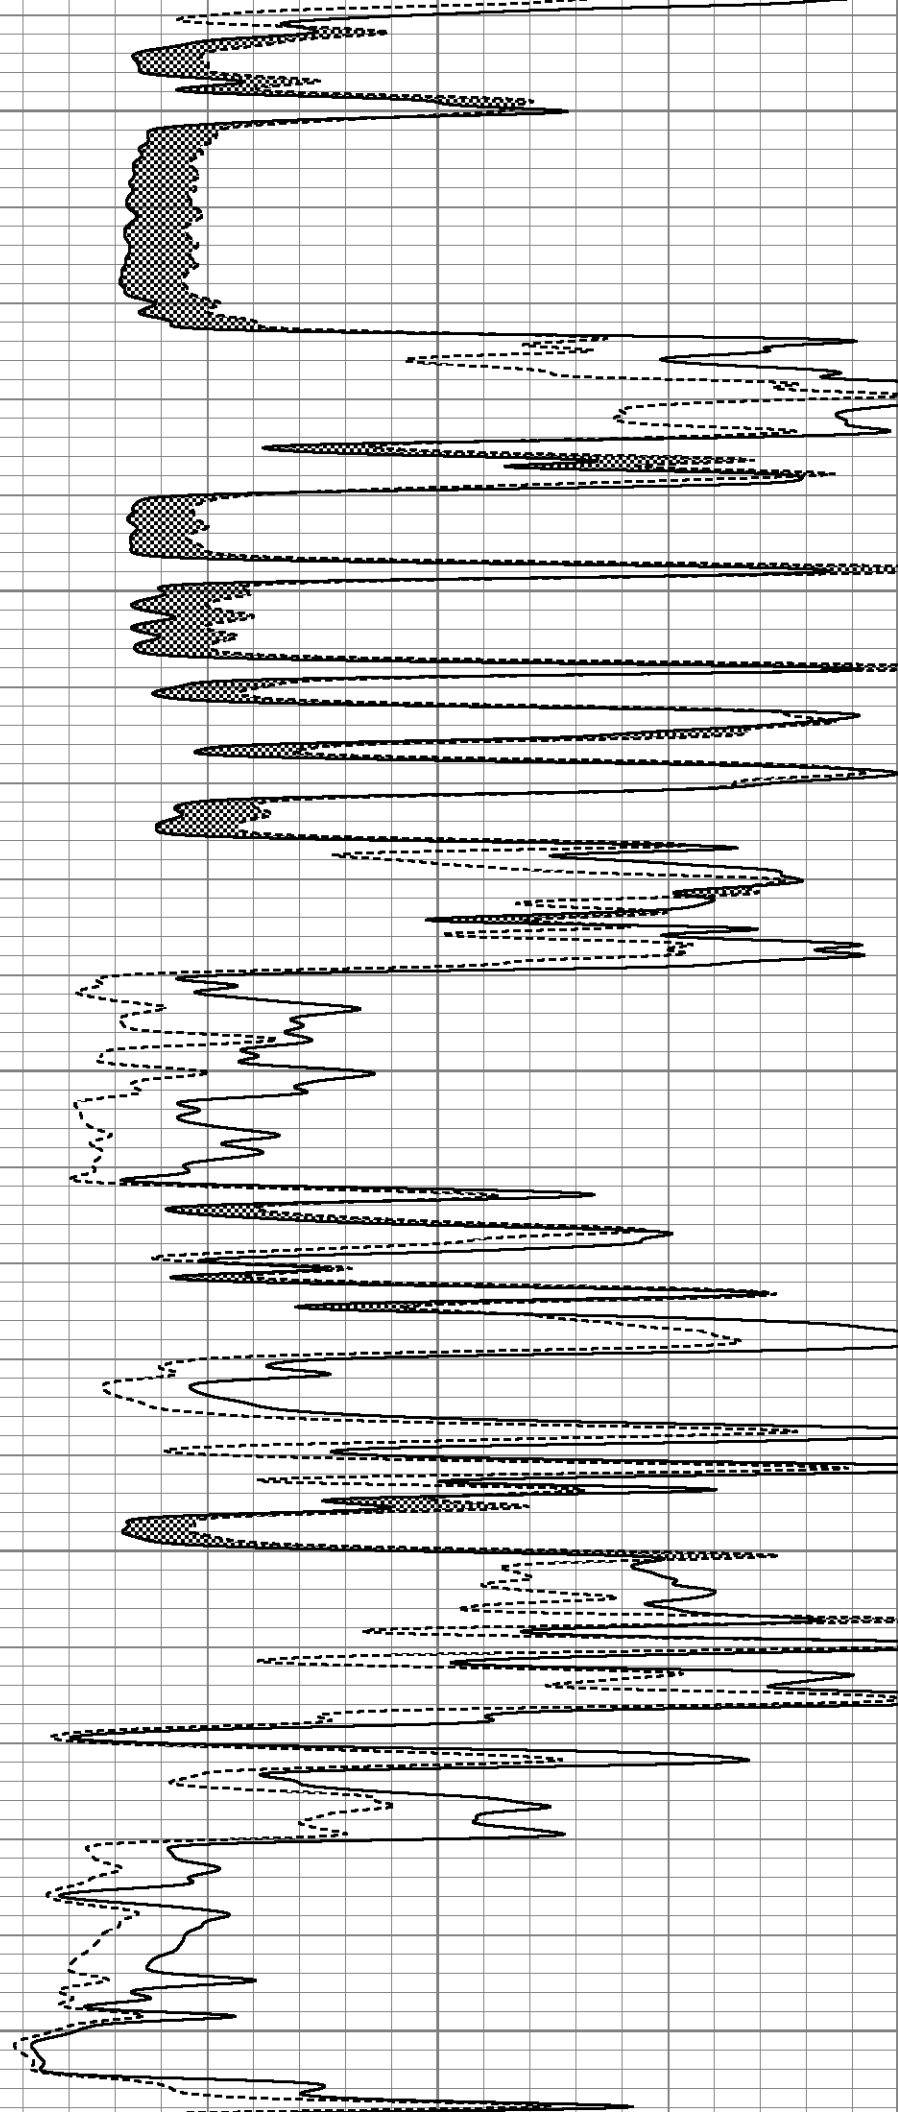

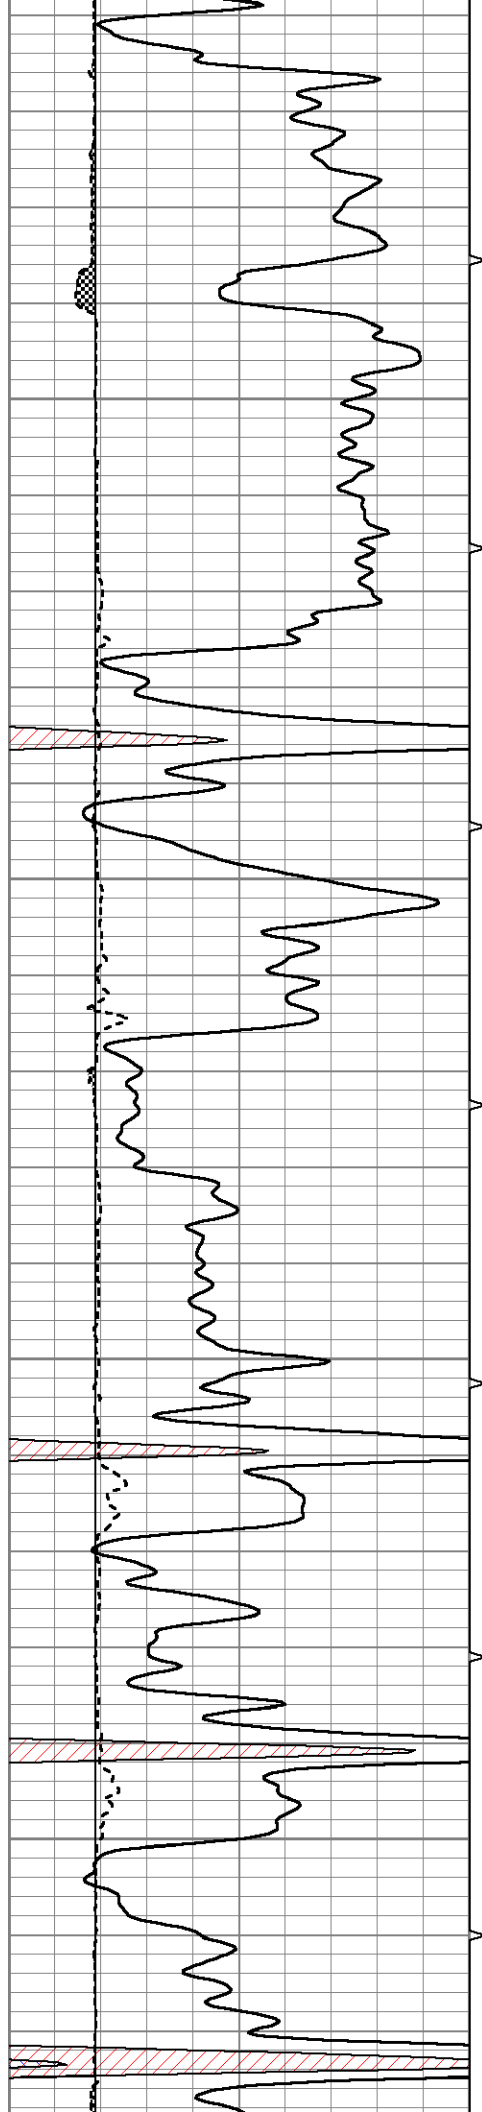



3300


3350


3400

3450

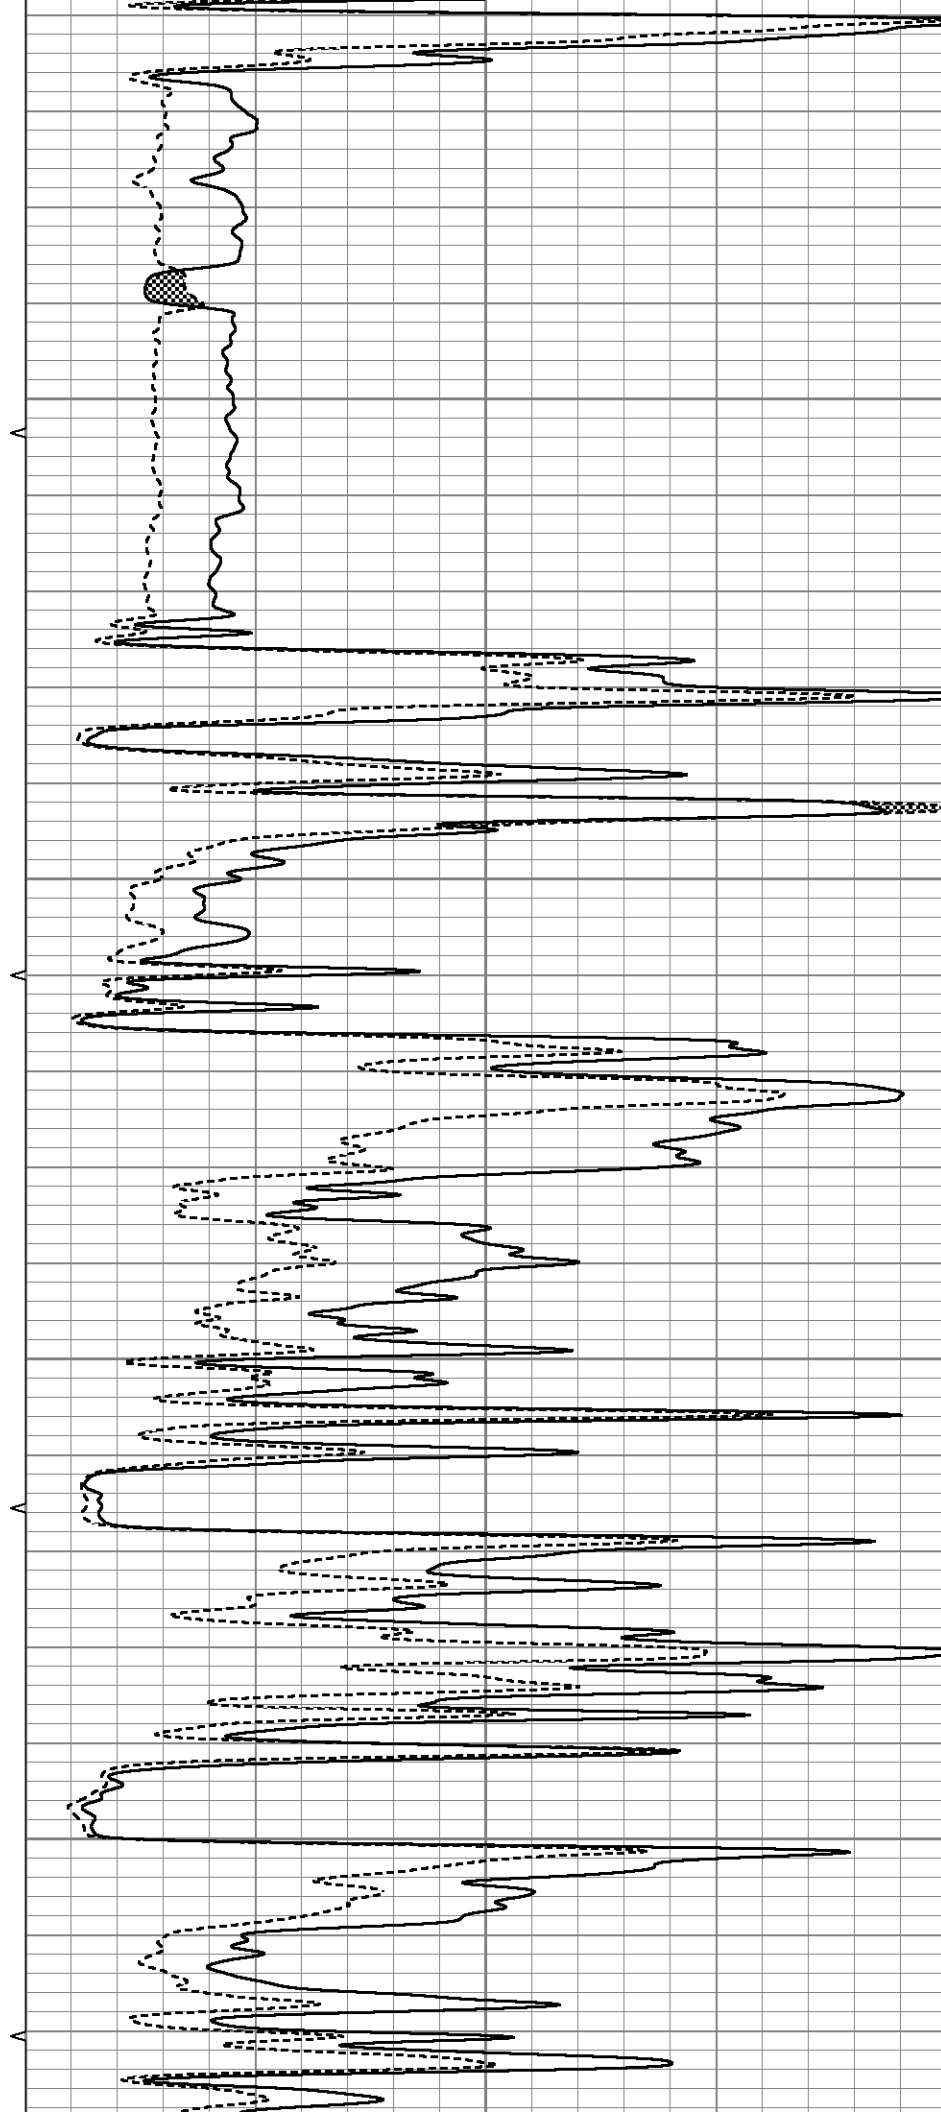

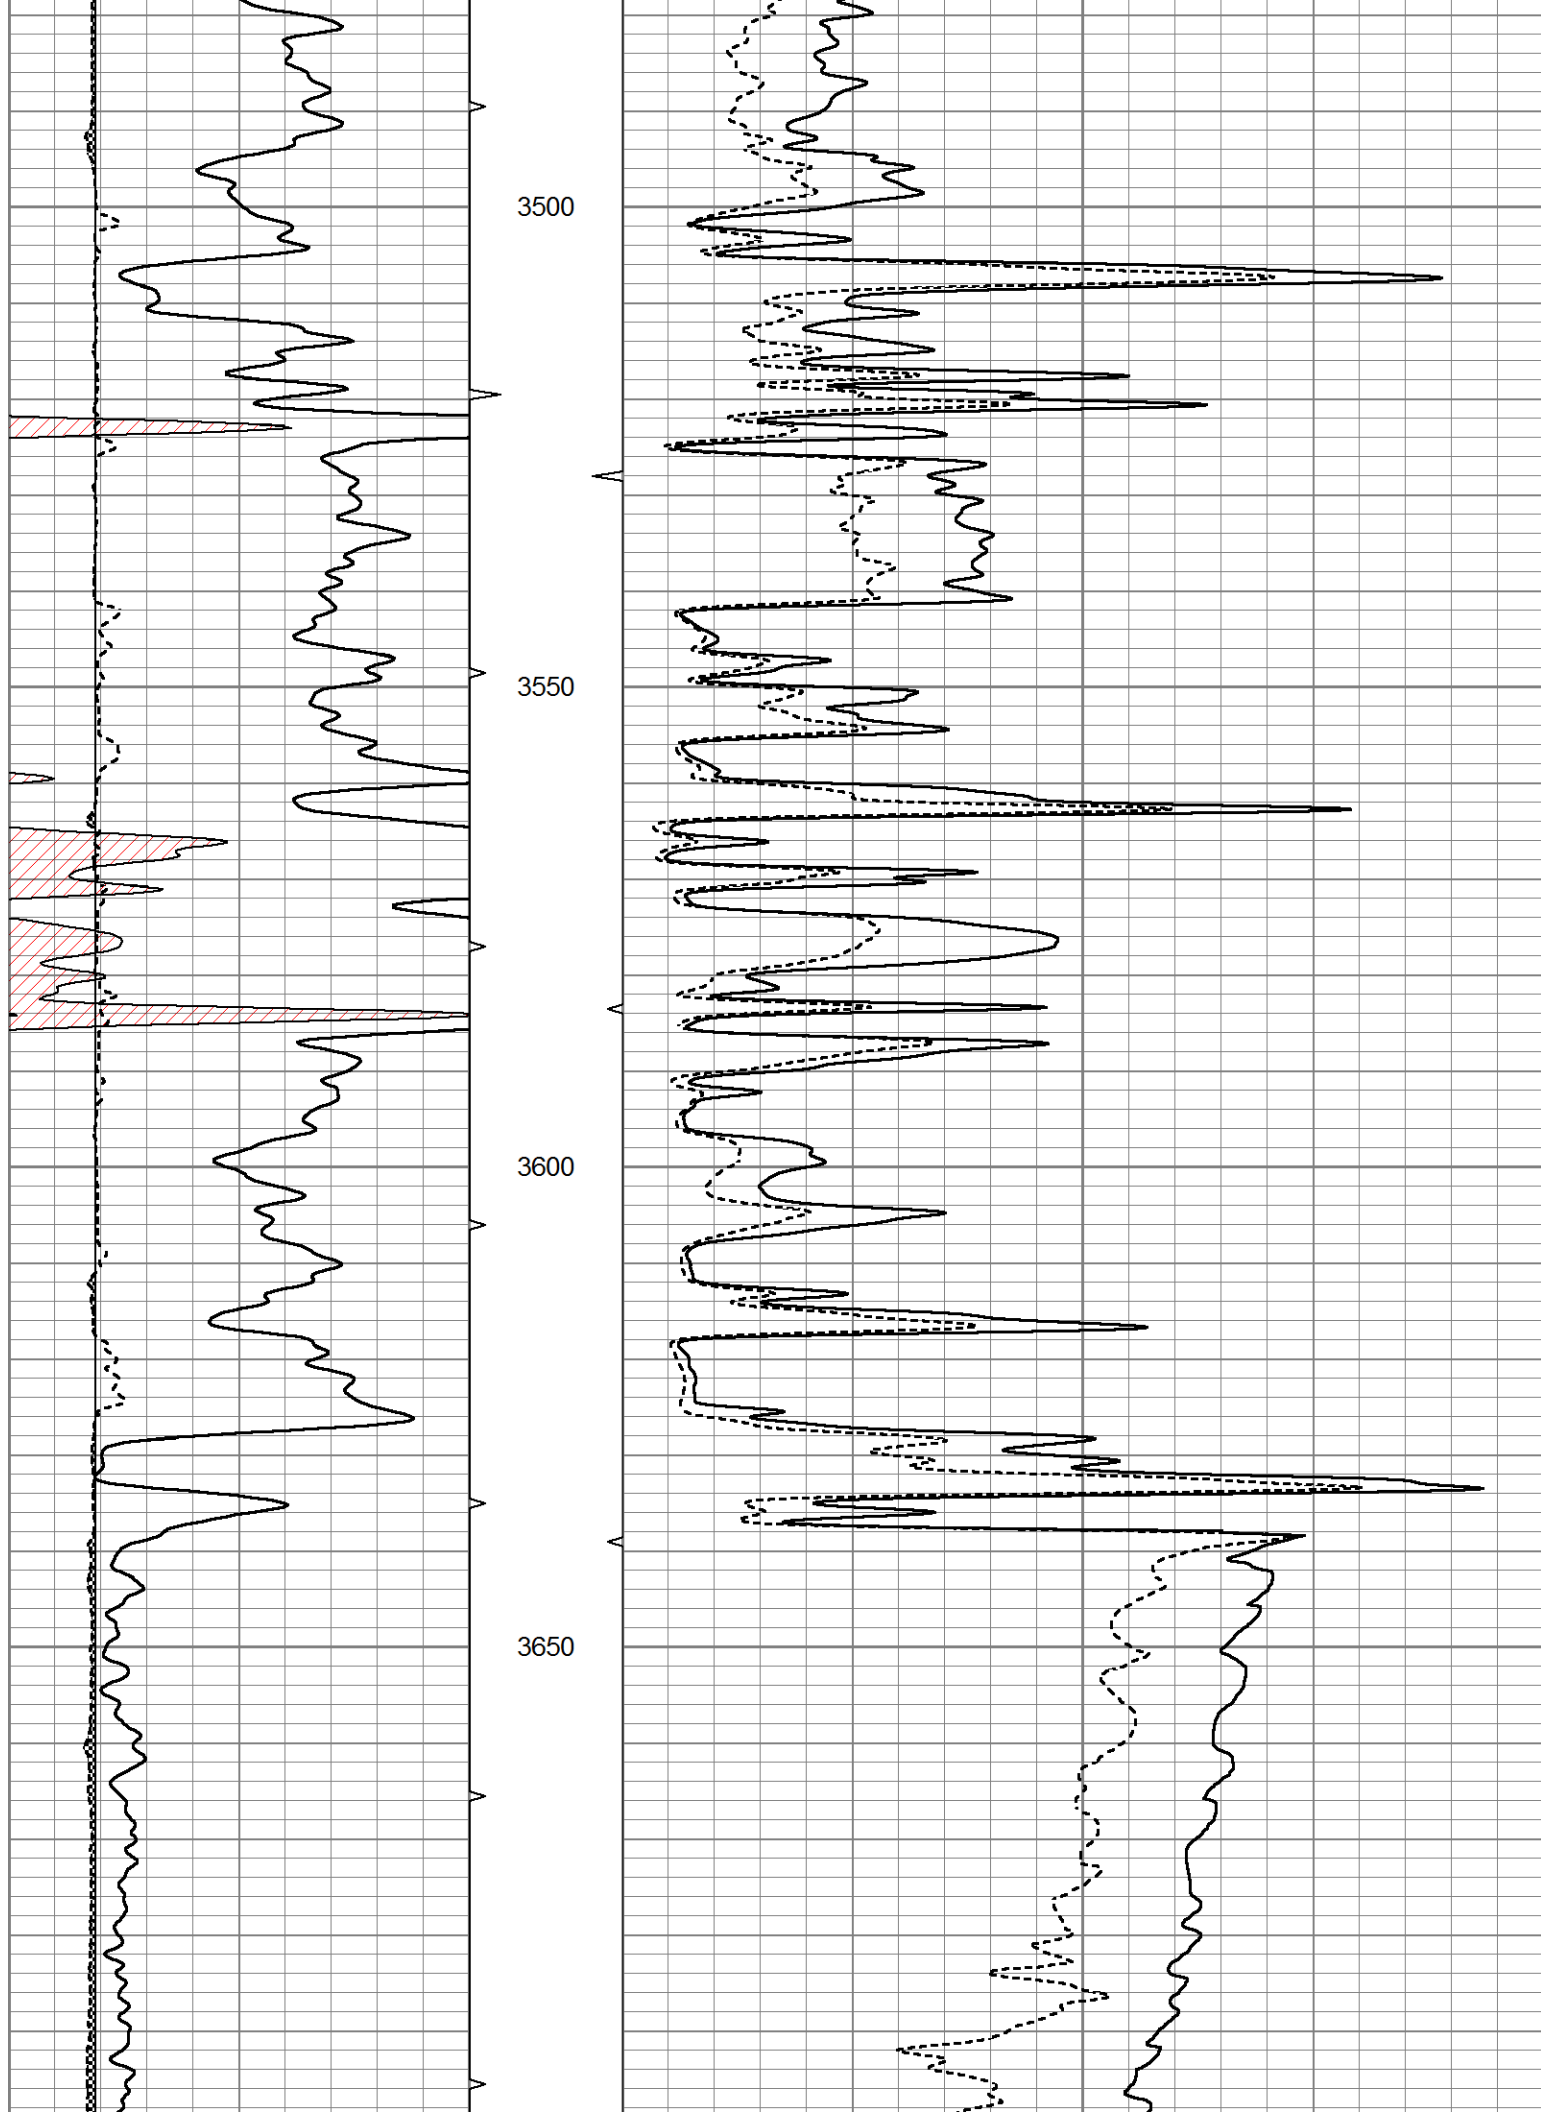

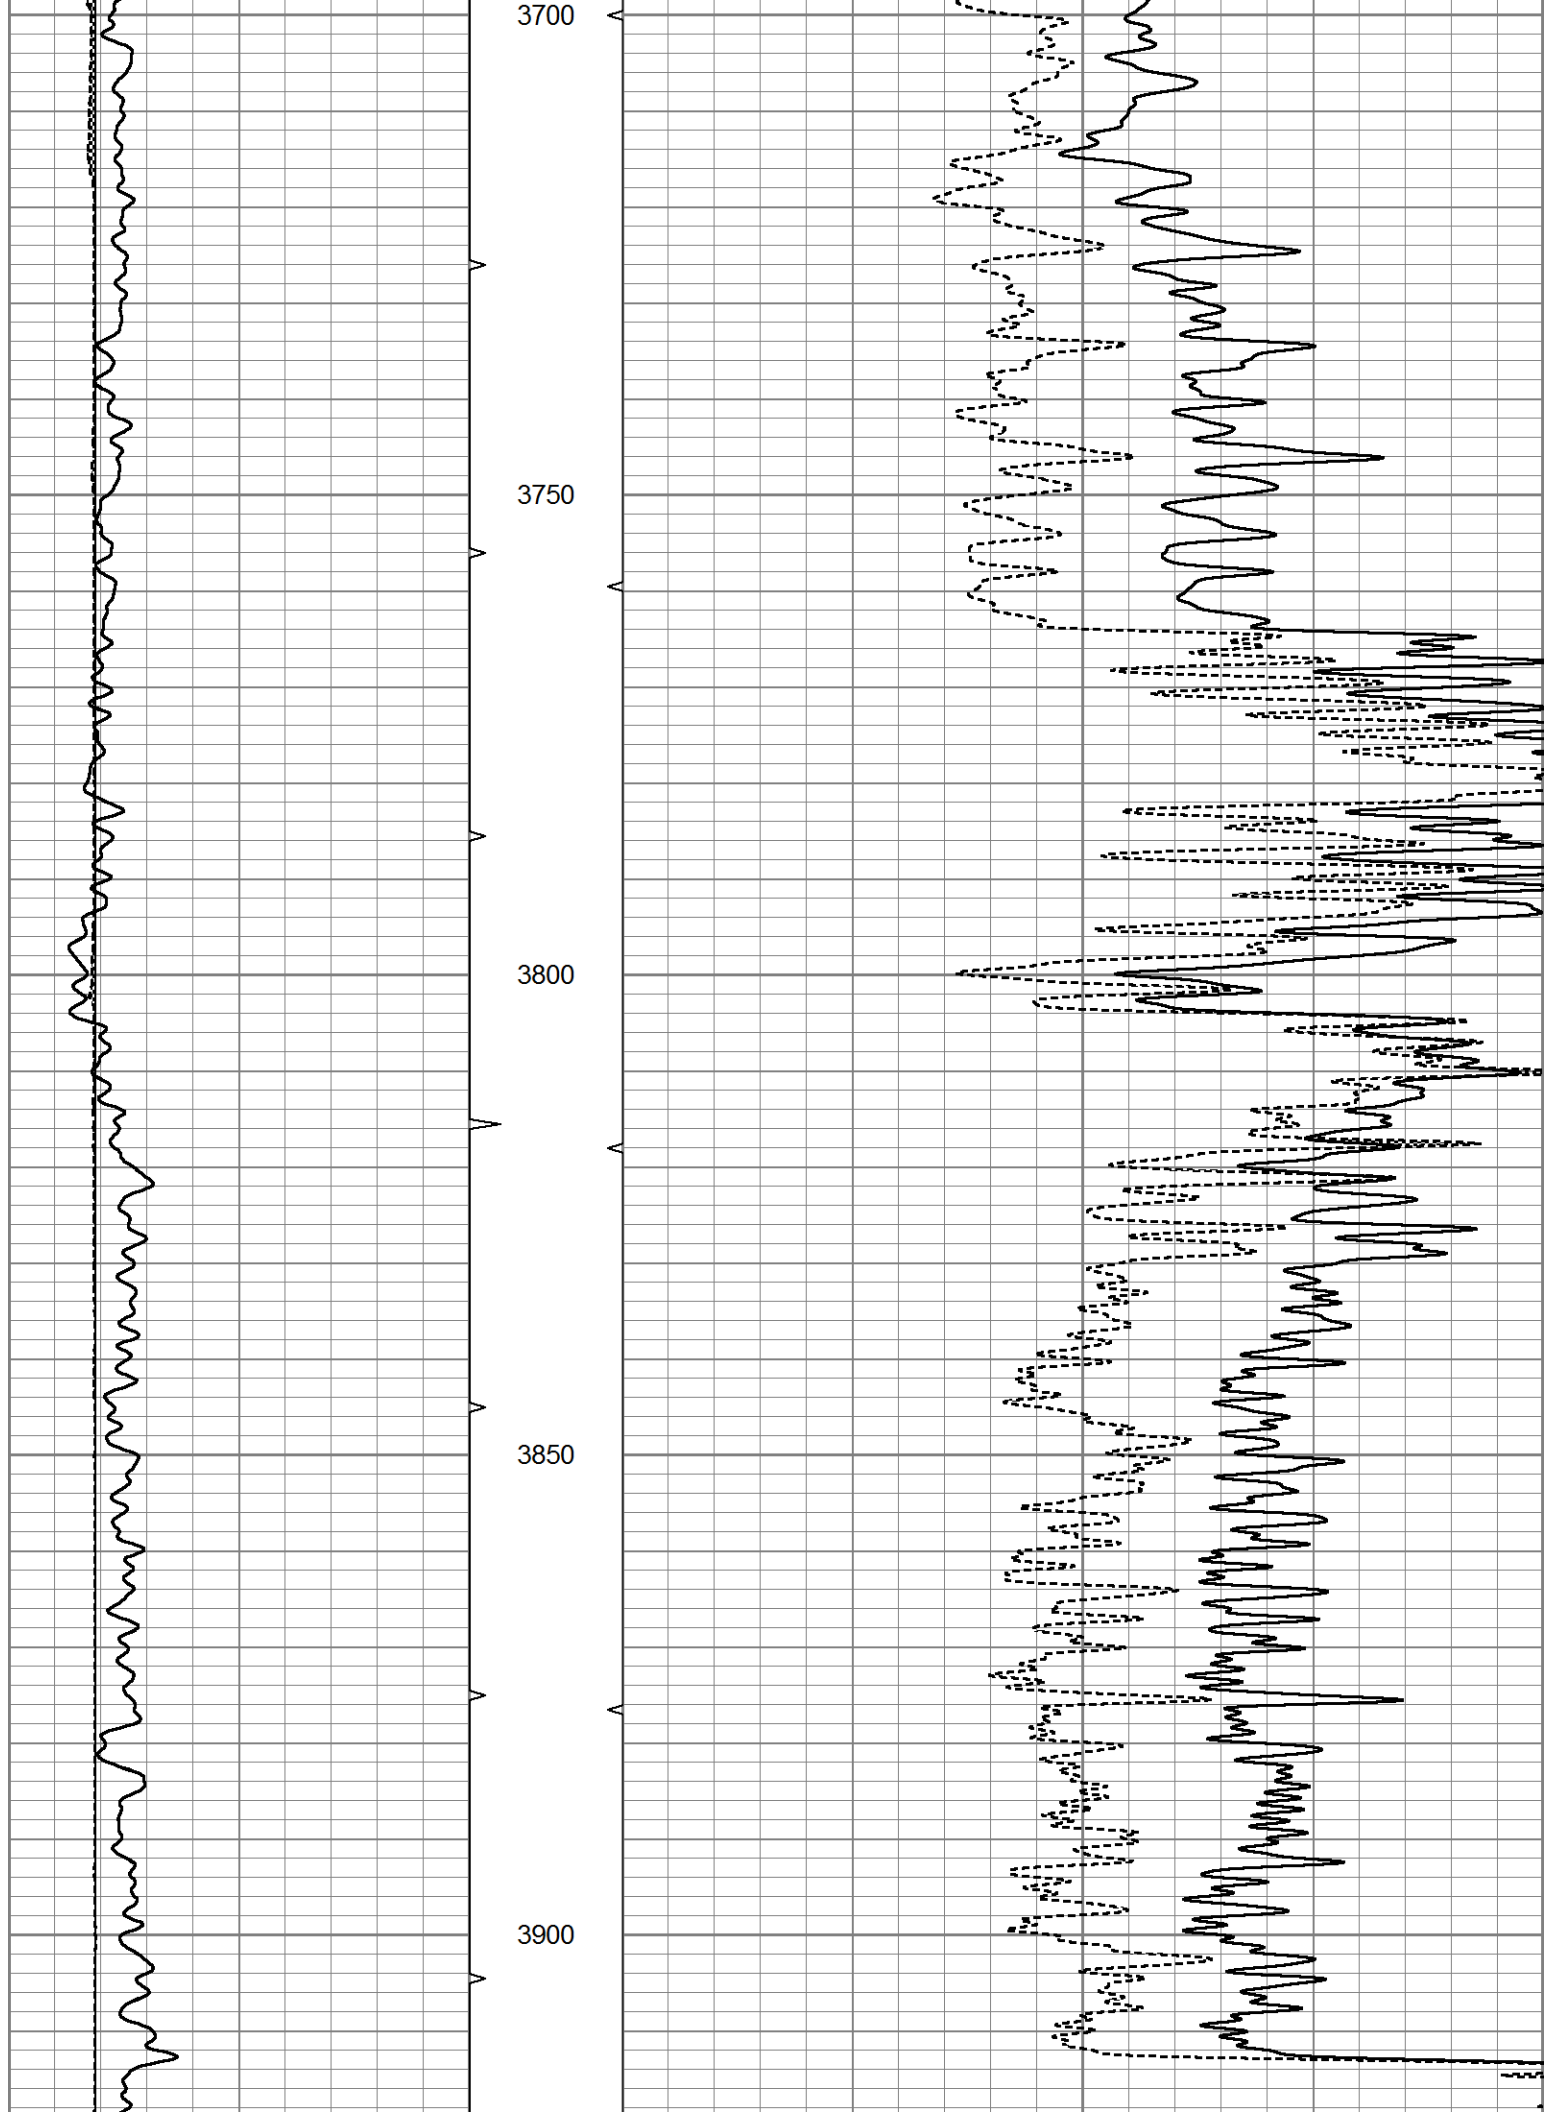

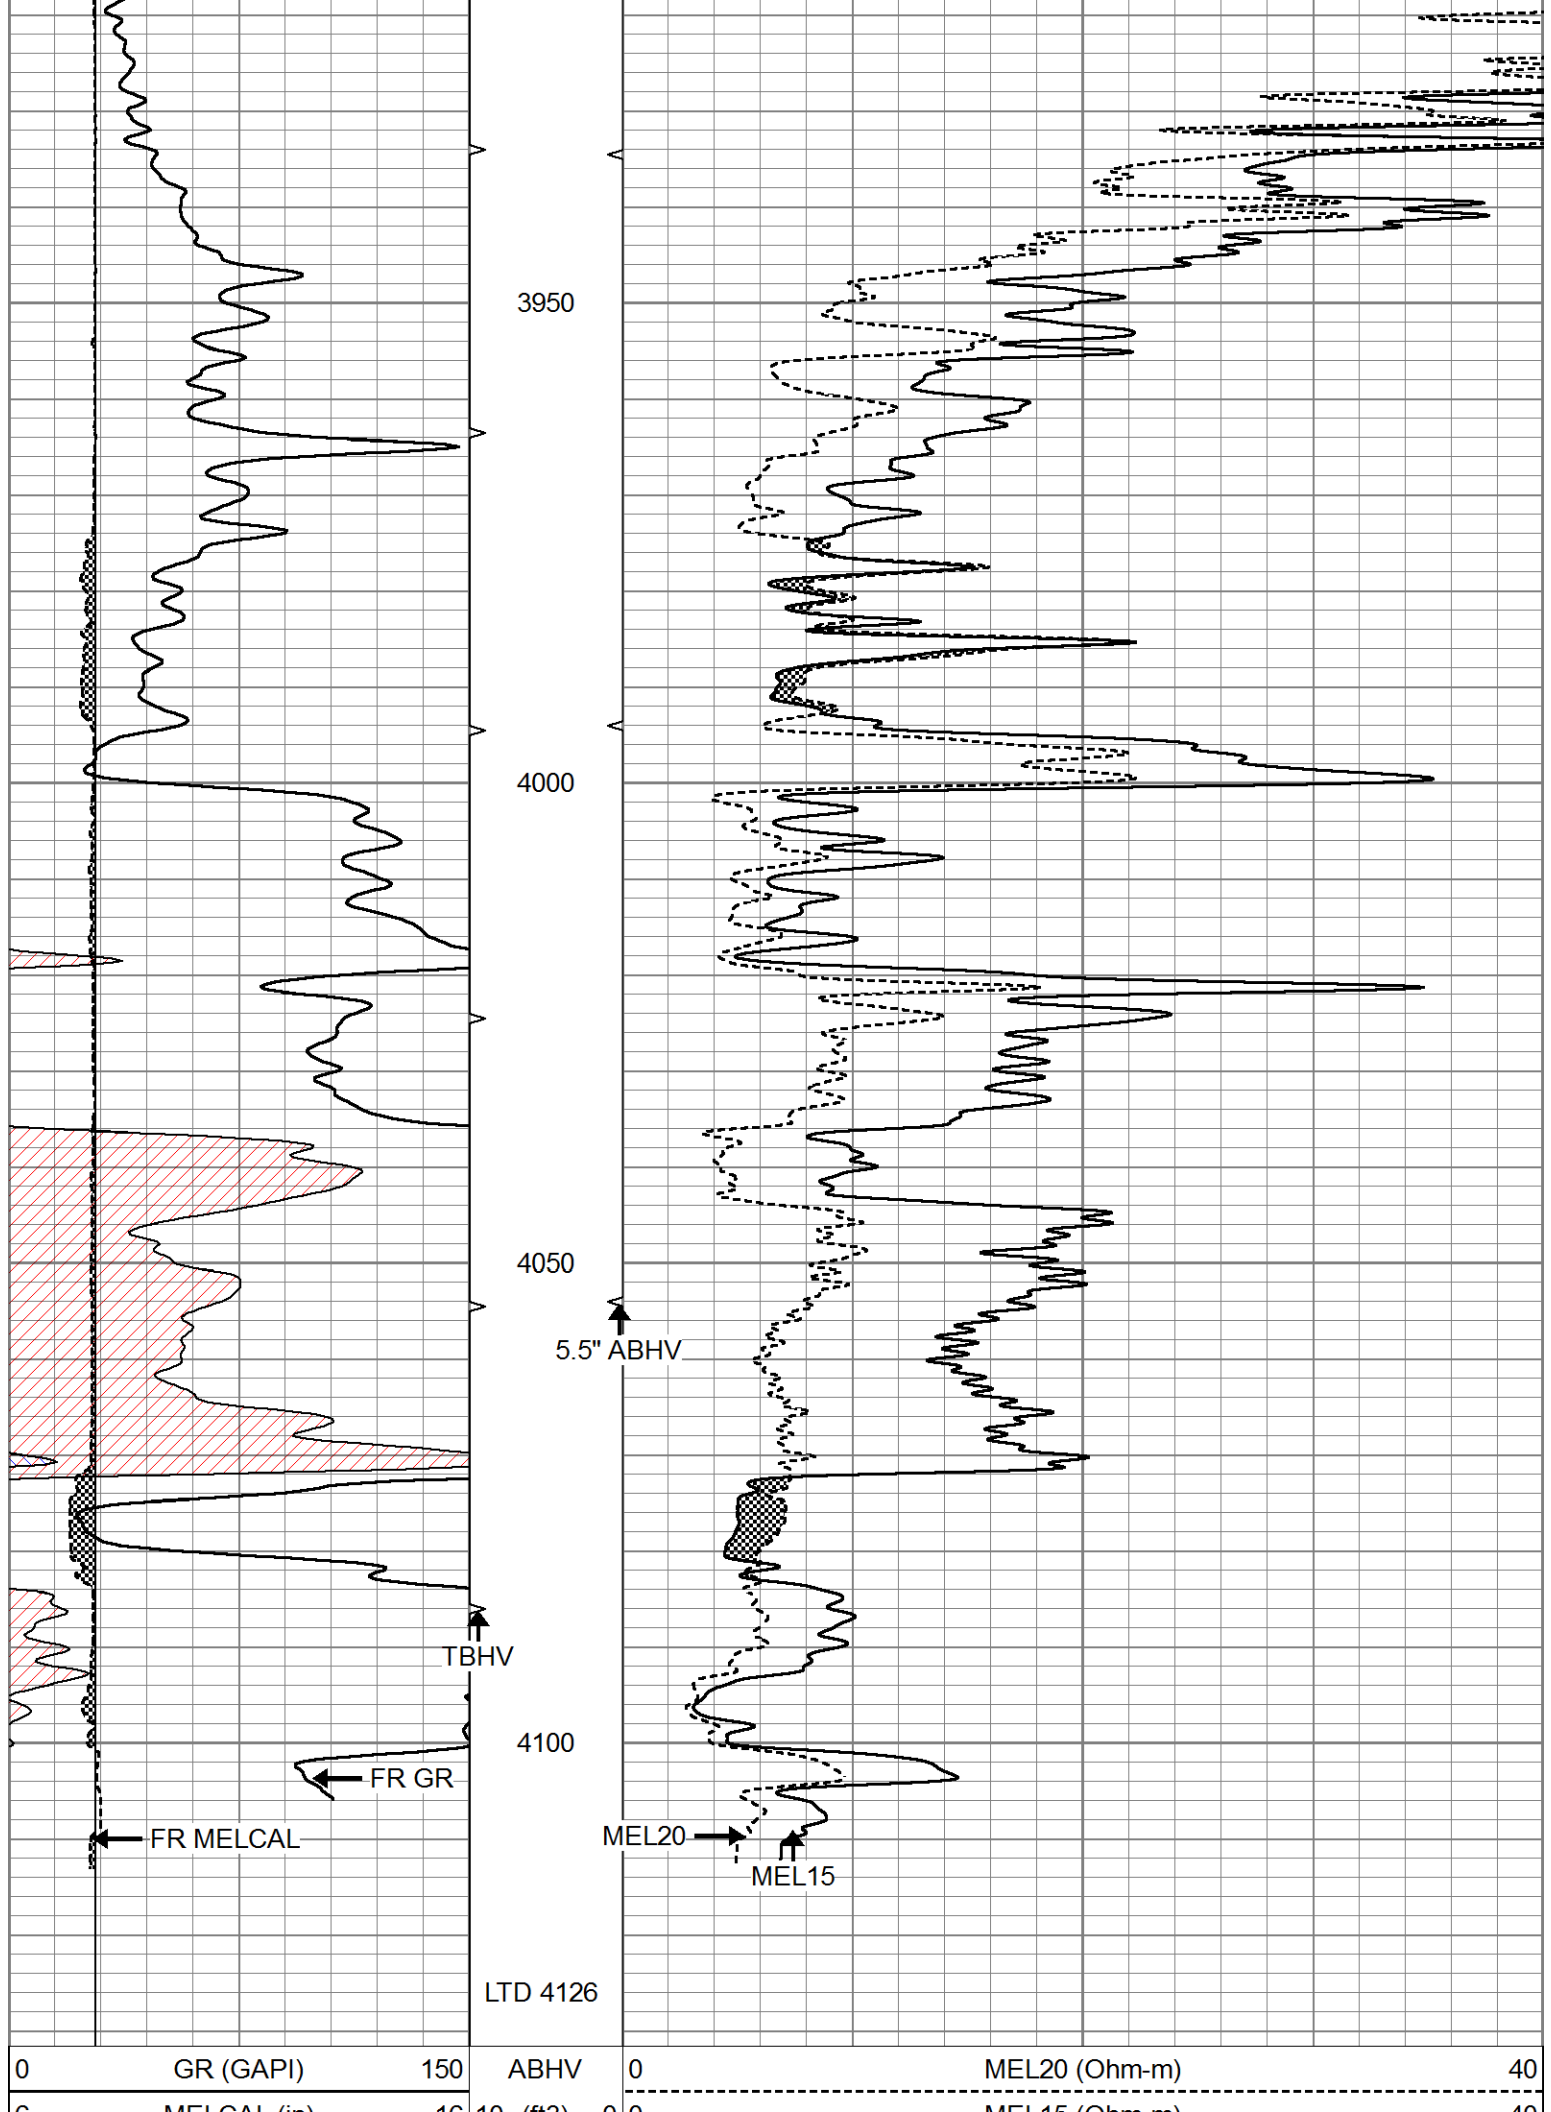


6	MELCAL (in)	16	10 (ft3)	0 0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			




REPEAT SECTION

Database File	5670pe.db
Dataset Pathname	pass5.4
Presentation Format	micro
Dataset Creation	Sat Oct 16 08:38:45 2021
Charted by	Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3) 0 0	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3) 10			

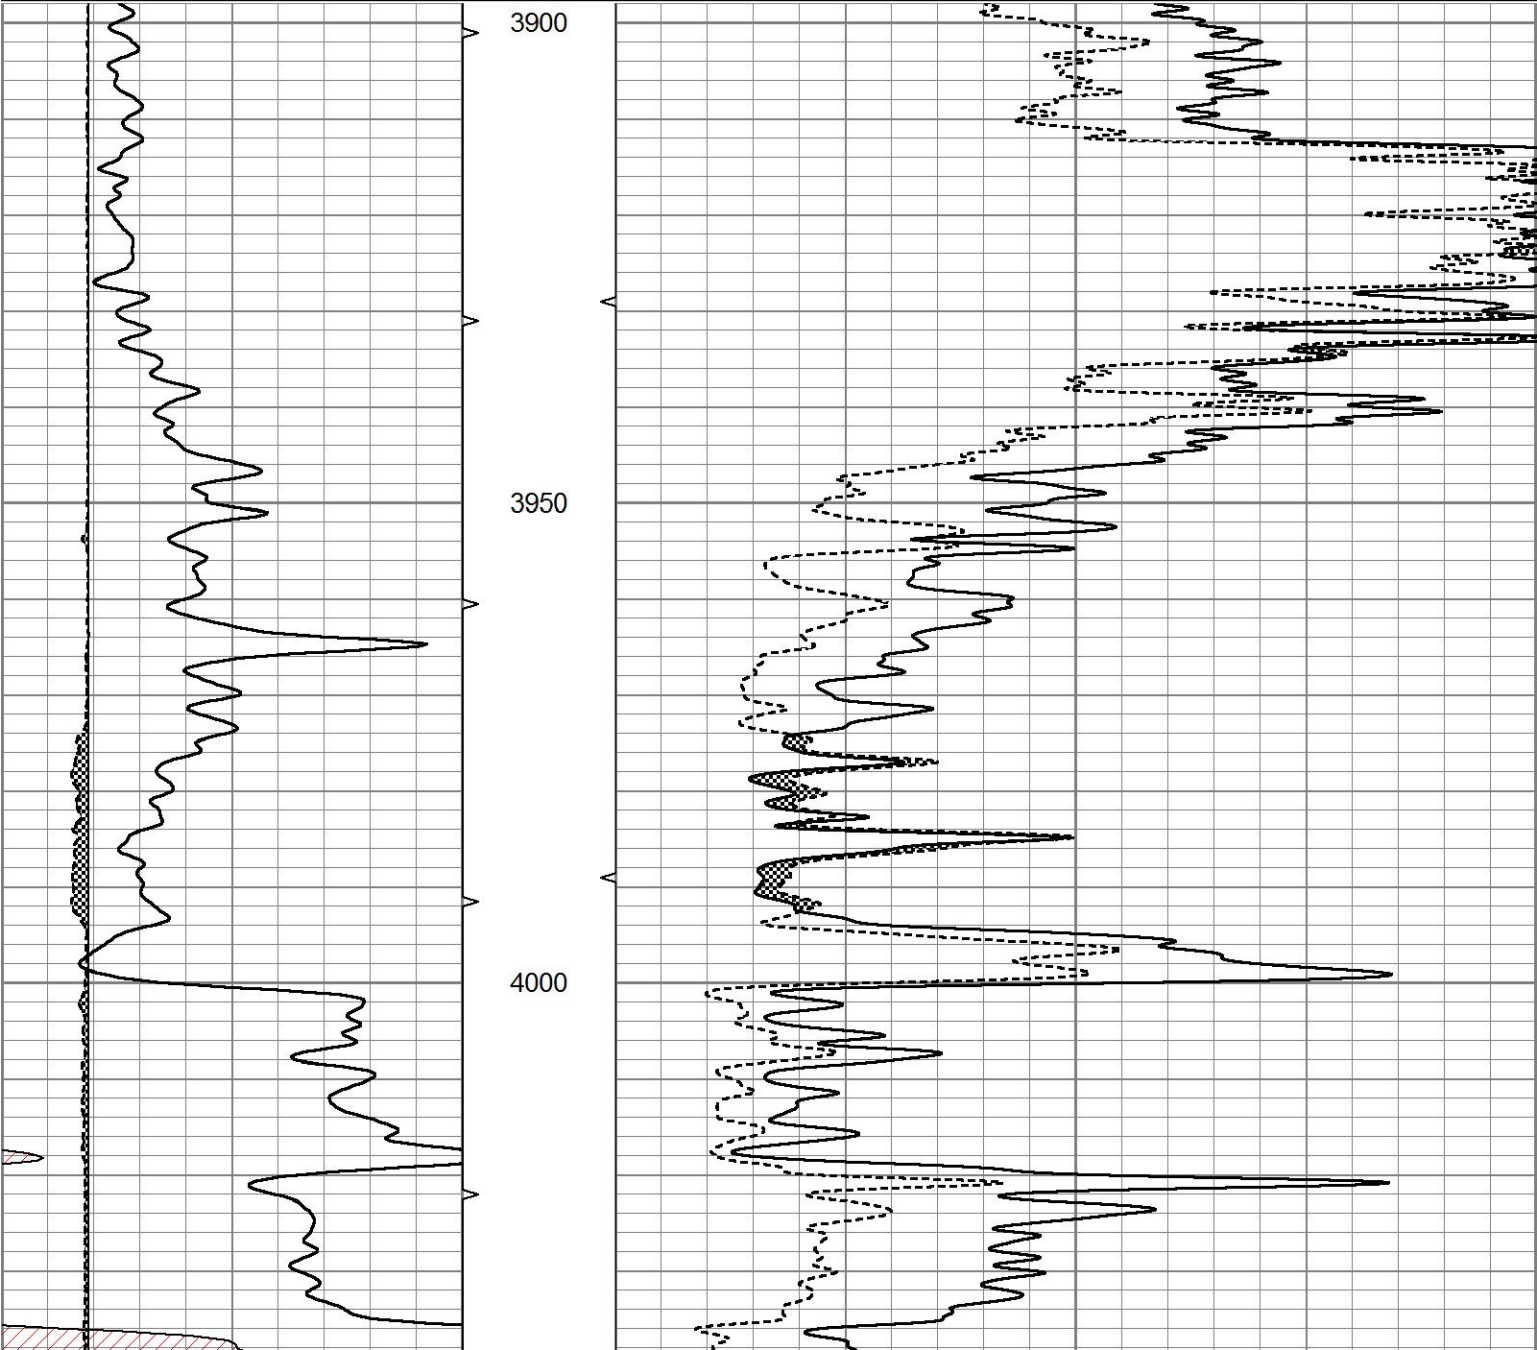

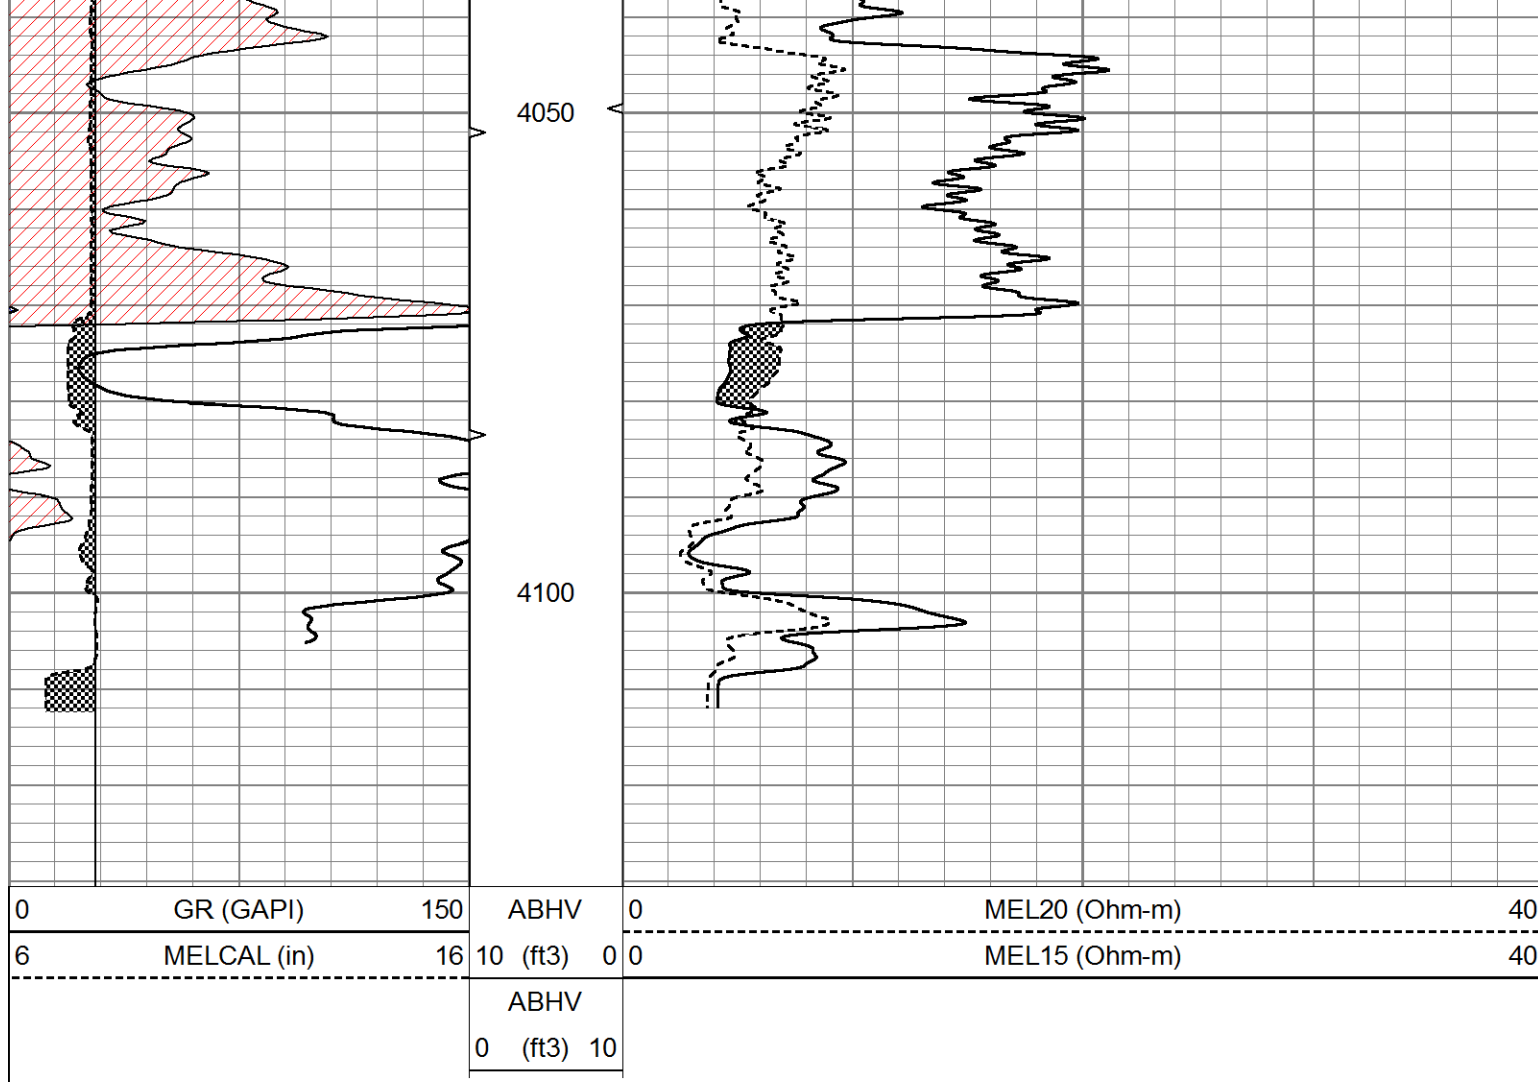

Database File		5670pe.db		Calibration Report	
Dataset Pathname		pass6.1M			
Dataset Creation		Sat Oct 16 08:58:34 2021			
MICRO Calibration Report					
Serial Number:		070912			
Tool Model:		ProbeN			
Performed:		Tue Sep 21 12:41:26 2021			
Caliper Calibration:		Gain=3.478		Offset=0.696	
References		Low Cal		High Cal	
Readings		8.000		16.000	
		2.100		4.400	
1.5" Calibration:		Gain=26.000		Offset=0.000	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.002		1.239	
2" Calibration:		Gain=32.000		Offset=0.000	
References		Low Cal		High Cal	
Readings		0.000		20.000	
		0.003		1.075	
Gamma Ray Calibration Report					

Serial Number:	070559
Tool Model:	OPEN_GR
Performed:	Thu Oct 07 18:44:52 2021

Calibrator Value:	1.0	GAPI
-------------------	-----	------

Background Reading:	0.0	cps
---------------------	-----	-----

Calibrator Reading:	1.0	cps
---------------------	-----	-----

Sensitivity:	0.3800	GAPI/cps
--------------	--------	----------