


MICRO LOG

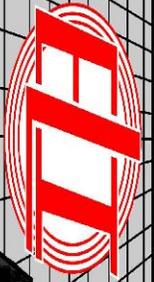

Company PALOMINO PETROLEUM, INC.
 Well ARIKAREE BREAKS #1
 Field WILDCAT
 County CHEYENNE State KANSAS

Location: API #: 15-023-21557-0000
 SE - NE - NE - SE
 SEC 31 TWP 1S RGE 40W
 Permanent Datum GROUND LEVEL Elevation 3311
 Log Measured From KELLY BUSHING 5" A.G.L.
 Drilling Measured From KELLY BUSHING
 Other Services CDL/CN/PE DIL/SONIC
 Elevation K.B. 3316 D.F. 3314 G.L. 3311

Date	9/30/21
Run Number	TWO
Depth Driller	5150
Depth Logger	5151
Bottom Logged Interval	5135
Top Log Interval	4000
Casing Driller	8 5/8"@201'
Casing Logger	201
Bit Size	7 7/8"
Type Fluid in Hole	CHEMICAL
Density / Viscosity	9.3/59
PH / Fluid Loss	11.0/7.2
Source of Sample	FLOWLINE
Rm @ Meas. Temp	1.30@105F
Rmf @ Meas. Temp	.975@105F
Rmc @ Meas. Temp	1.56@105F
Source of Rmf / Rmc	MEASUREMENT
Rm @ BHT	1.08@126F
Time Circulation Stopped	4:5 HOURS
Time Logger on Bottom	8:30 P.M.
Maximum Recorded Temperature	126F
Equipment Number	922339
Location	HAYS, KANSAS
Recorded By	JEFF LUEBBERS
Witnessed By	RYAN DAVIS

<<< Fold Here >>>

All interpretations are opinions based on inferences from electrical or other measurements and we cannot and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages, or expenses incurred or sustained by anyone resulting from any interpretation made by any of our officers, agents or employees. These interpretations are also subject to our general terms and conditions set out in our current Price Schedule.

15-023-21557-0000 Comments


THANK YOU FOR USING E.L.I. WIRELINE SERVICES HAYS, KANSAS (785)628-6395
 DIRECTIONS
 ST. FRANCIS, KS., (HWY 27 & 36) 6.8 N&W ON HWY 27 TO "RD. 11", 4.8 N. TO "RD. Y", 1.2 E.&S., W. I





MAIN SECTION

Database File 5662pe.db
 Dataset Pathname pass6.2
 Presentation Format micro
 Dataset Creation Thu Sep 30 21:38:40 2021
 Charted by Depth in Feet scaled 1:240


0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

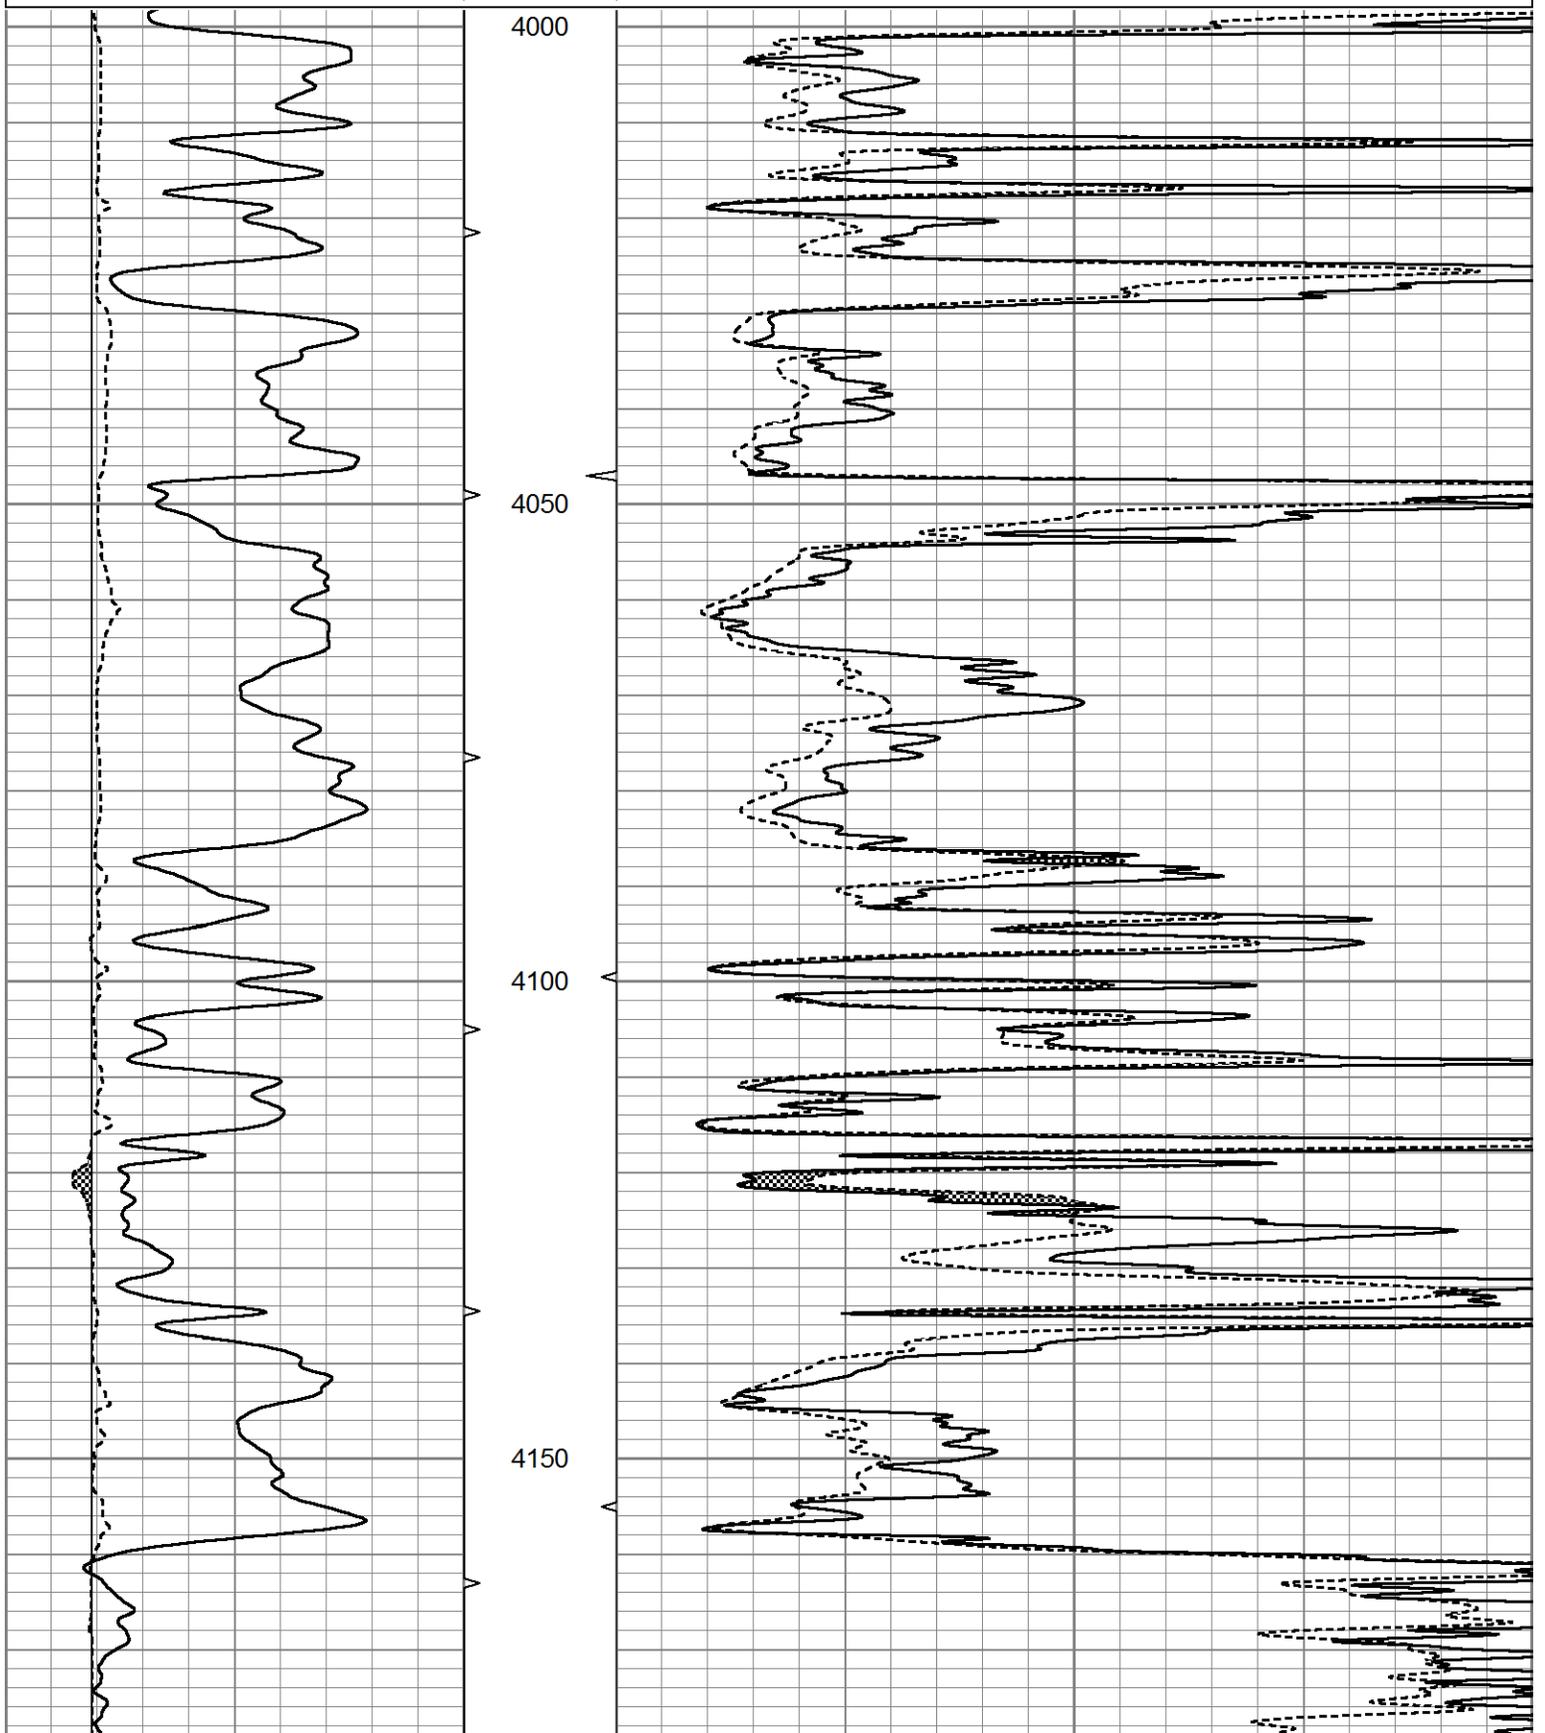


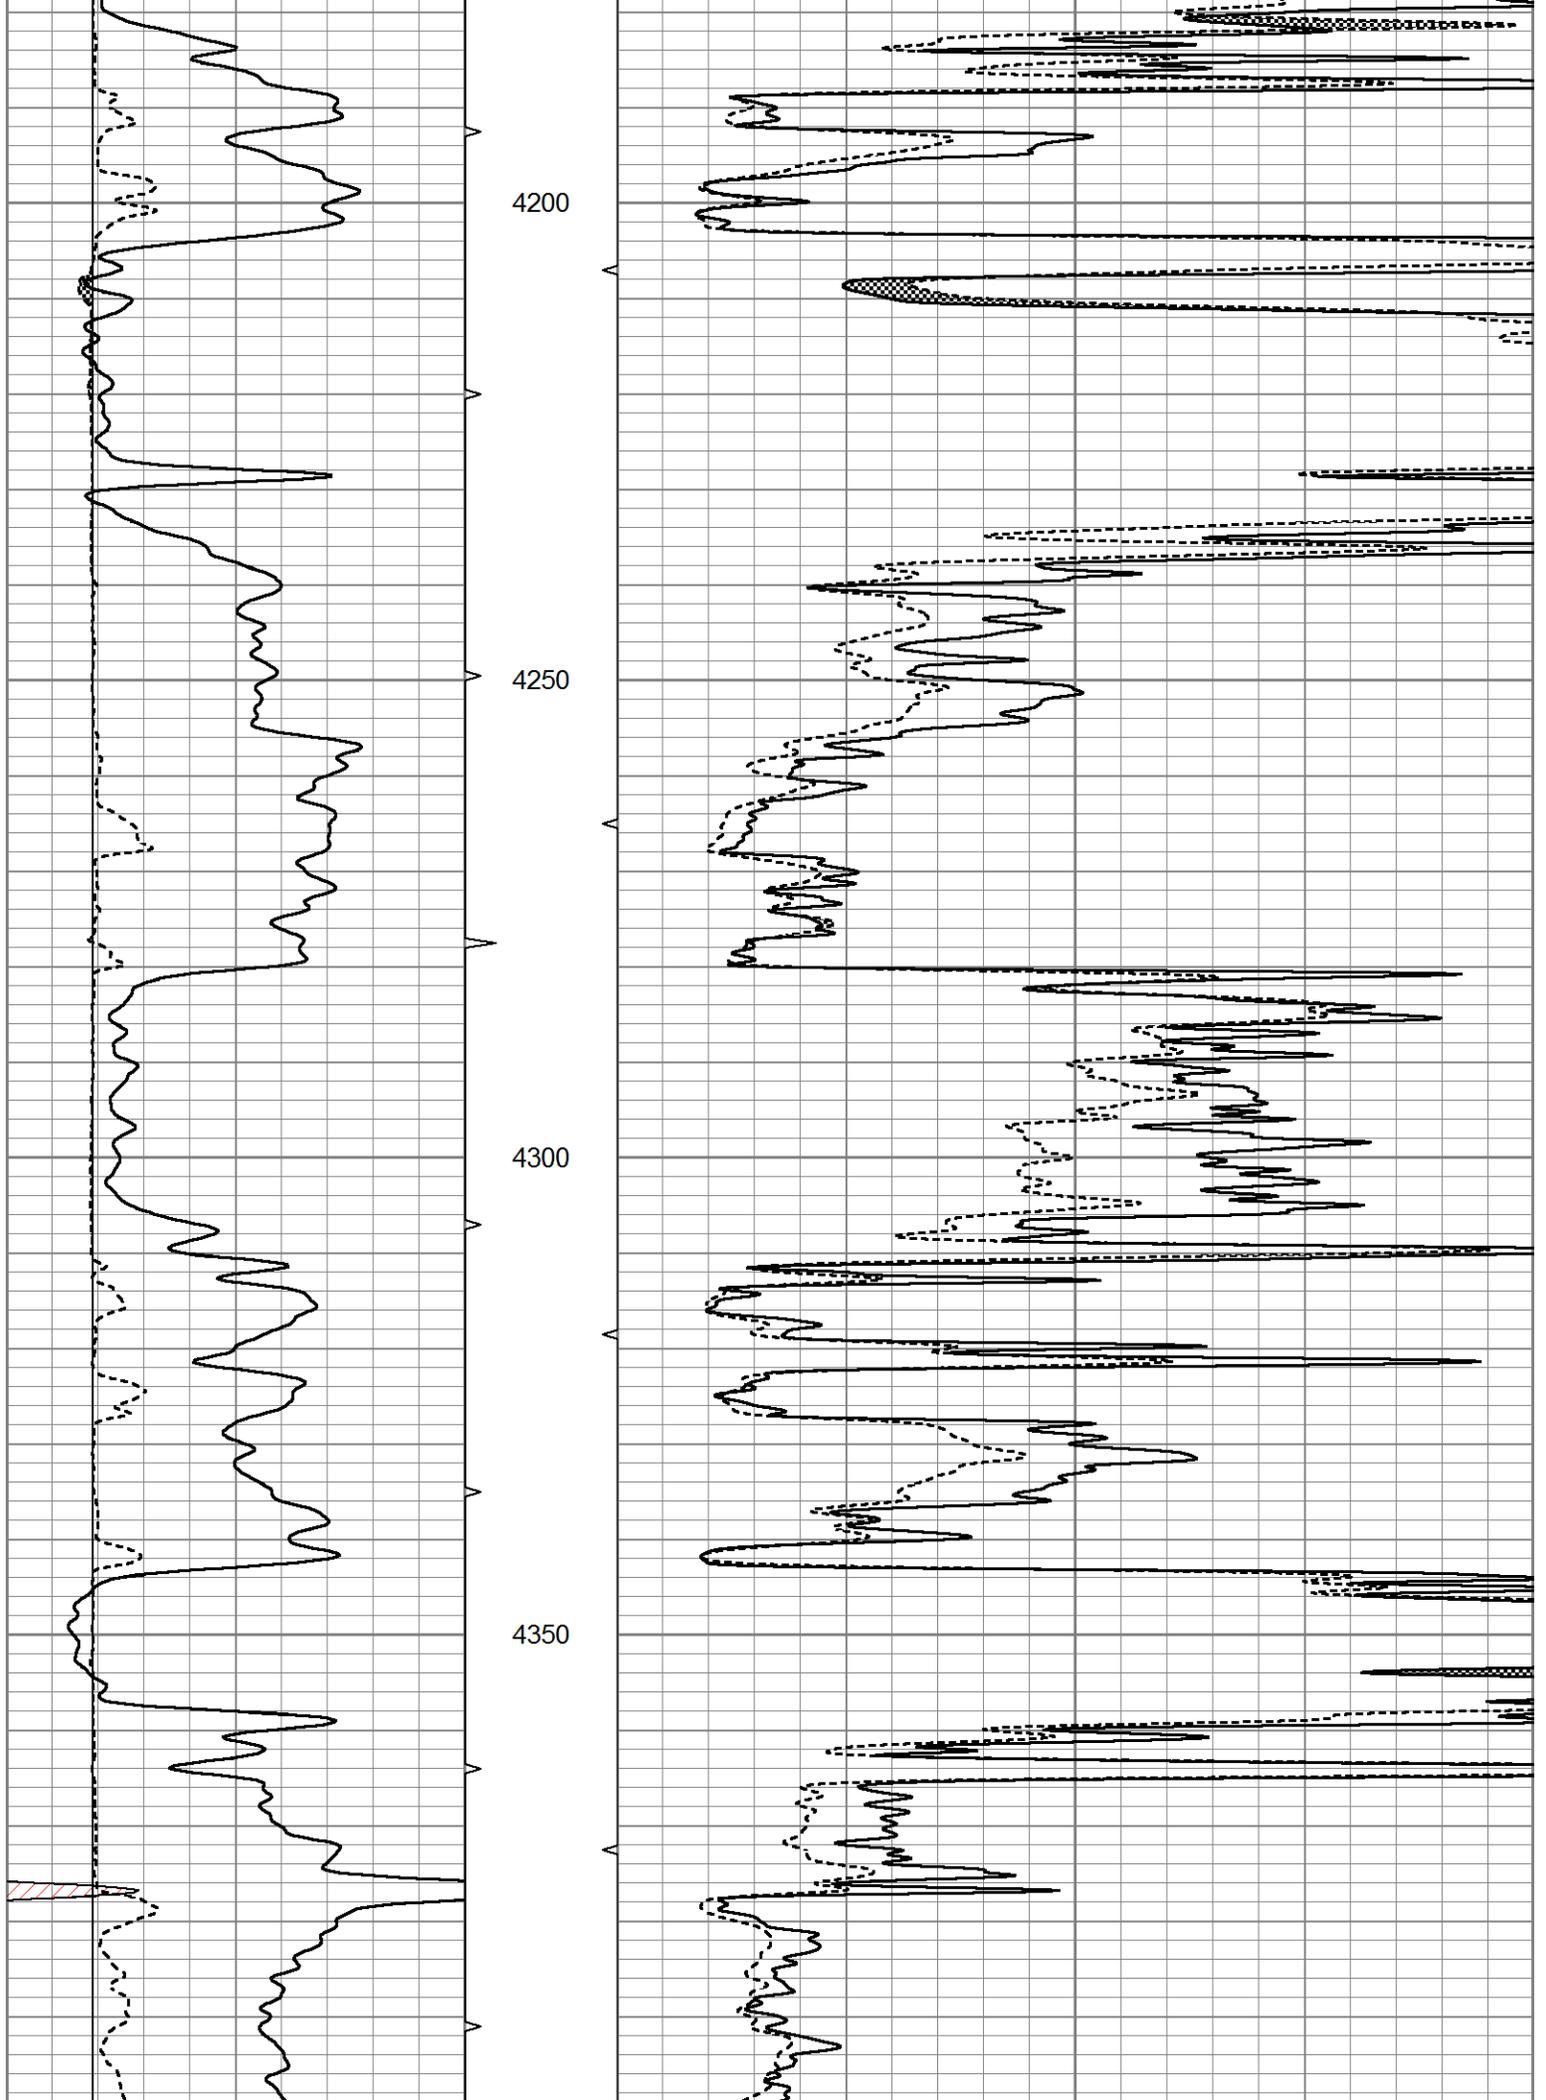

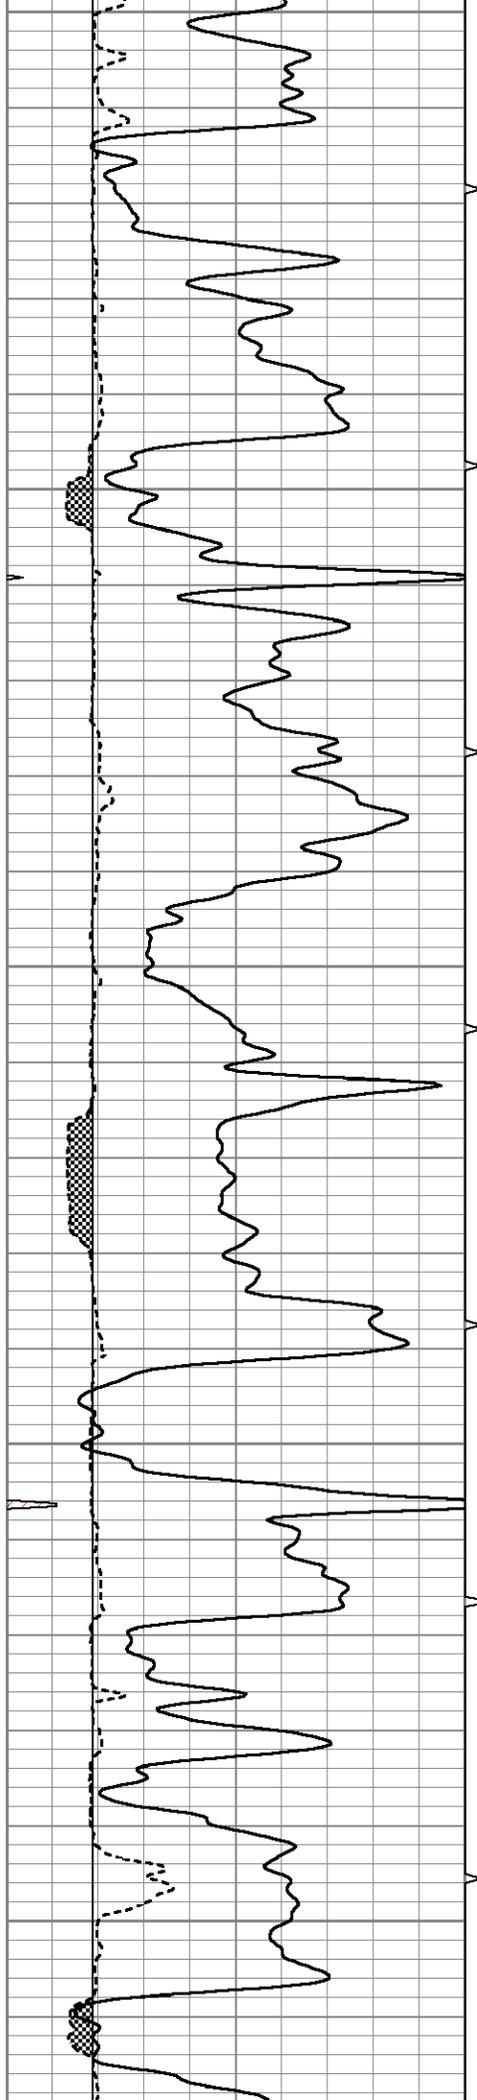

4400
4450
4500
4550
4600

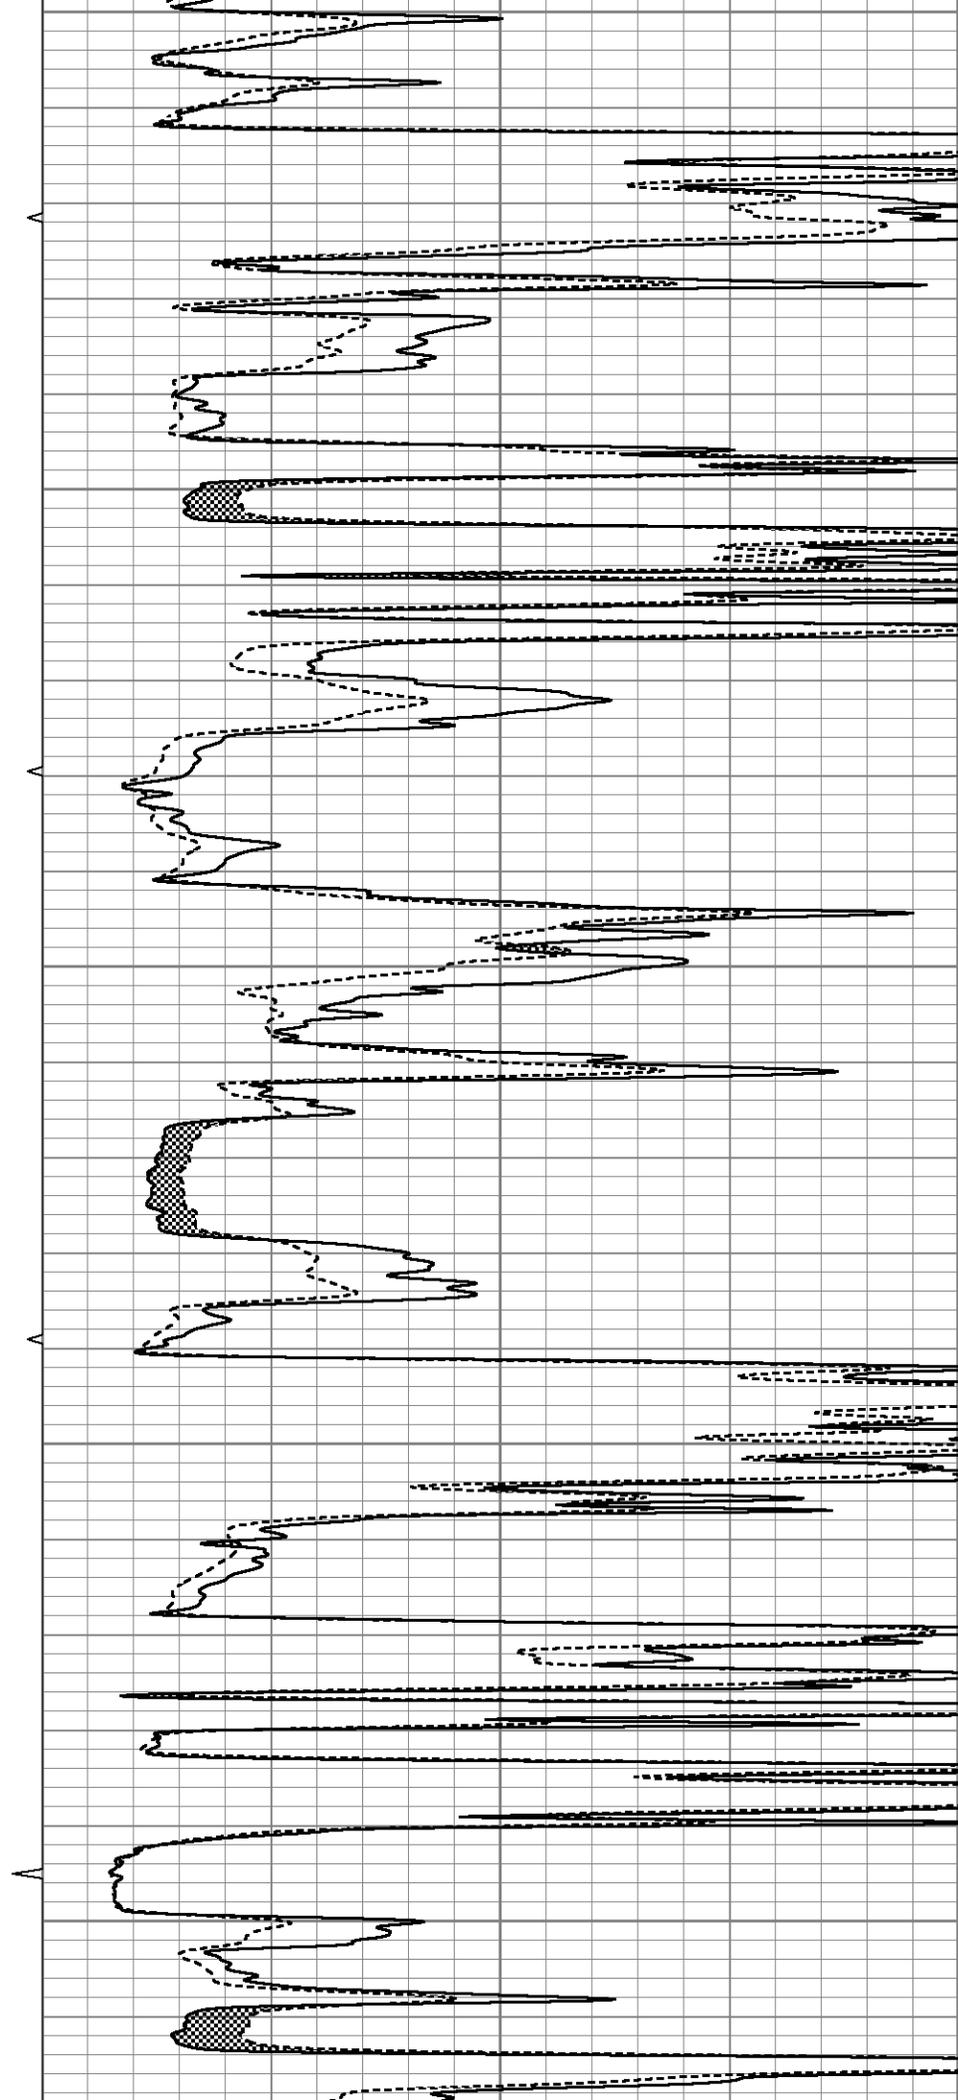

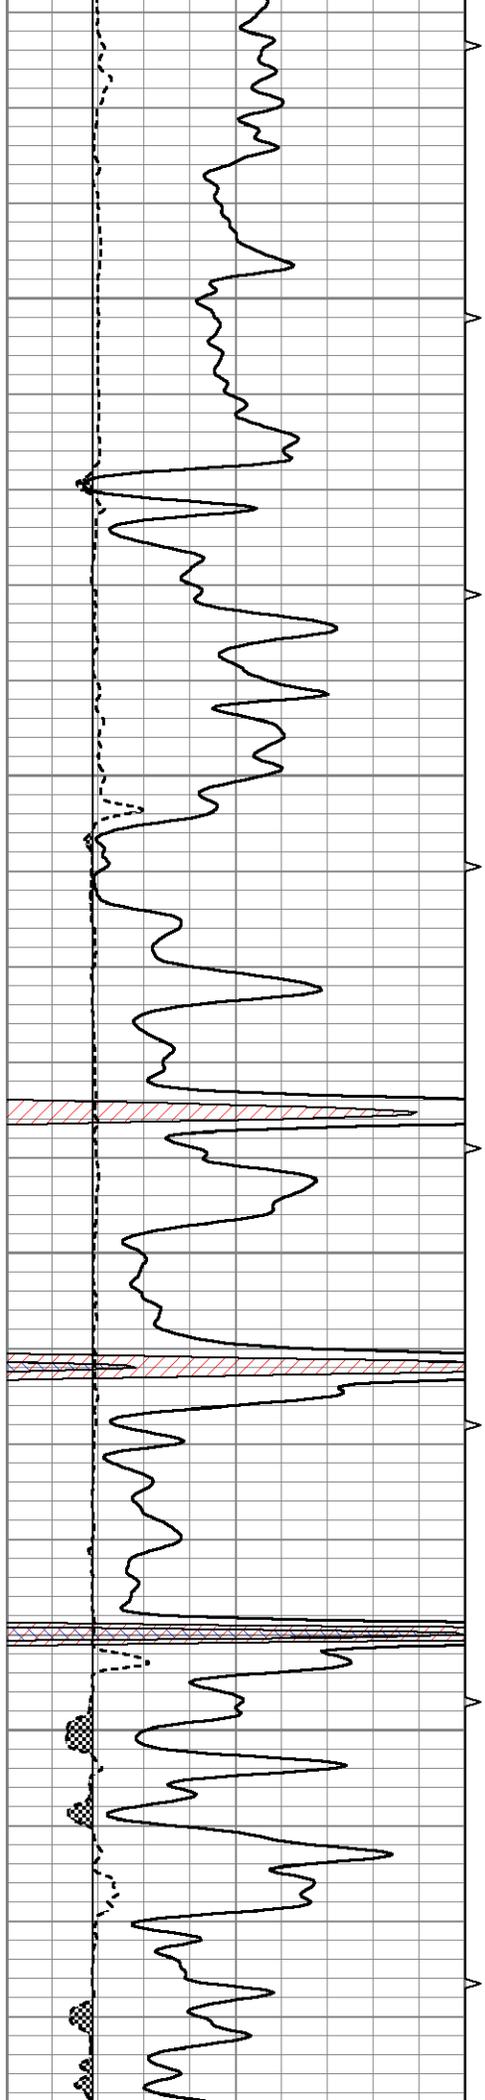



4650

4700

4750

4800

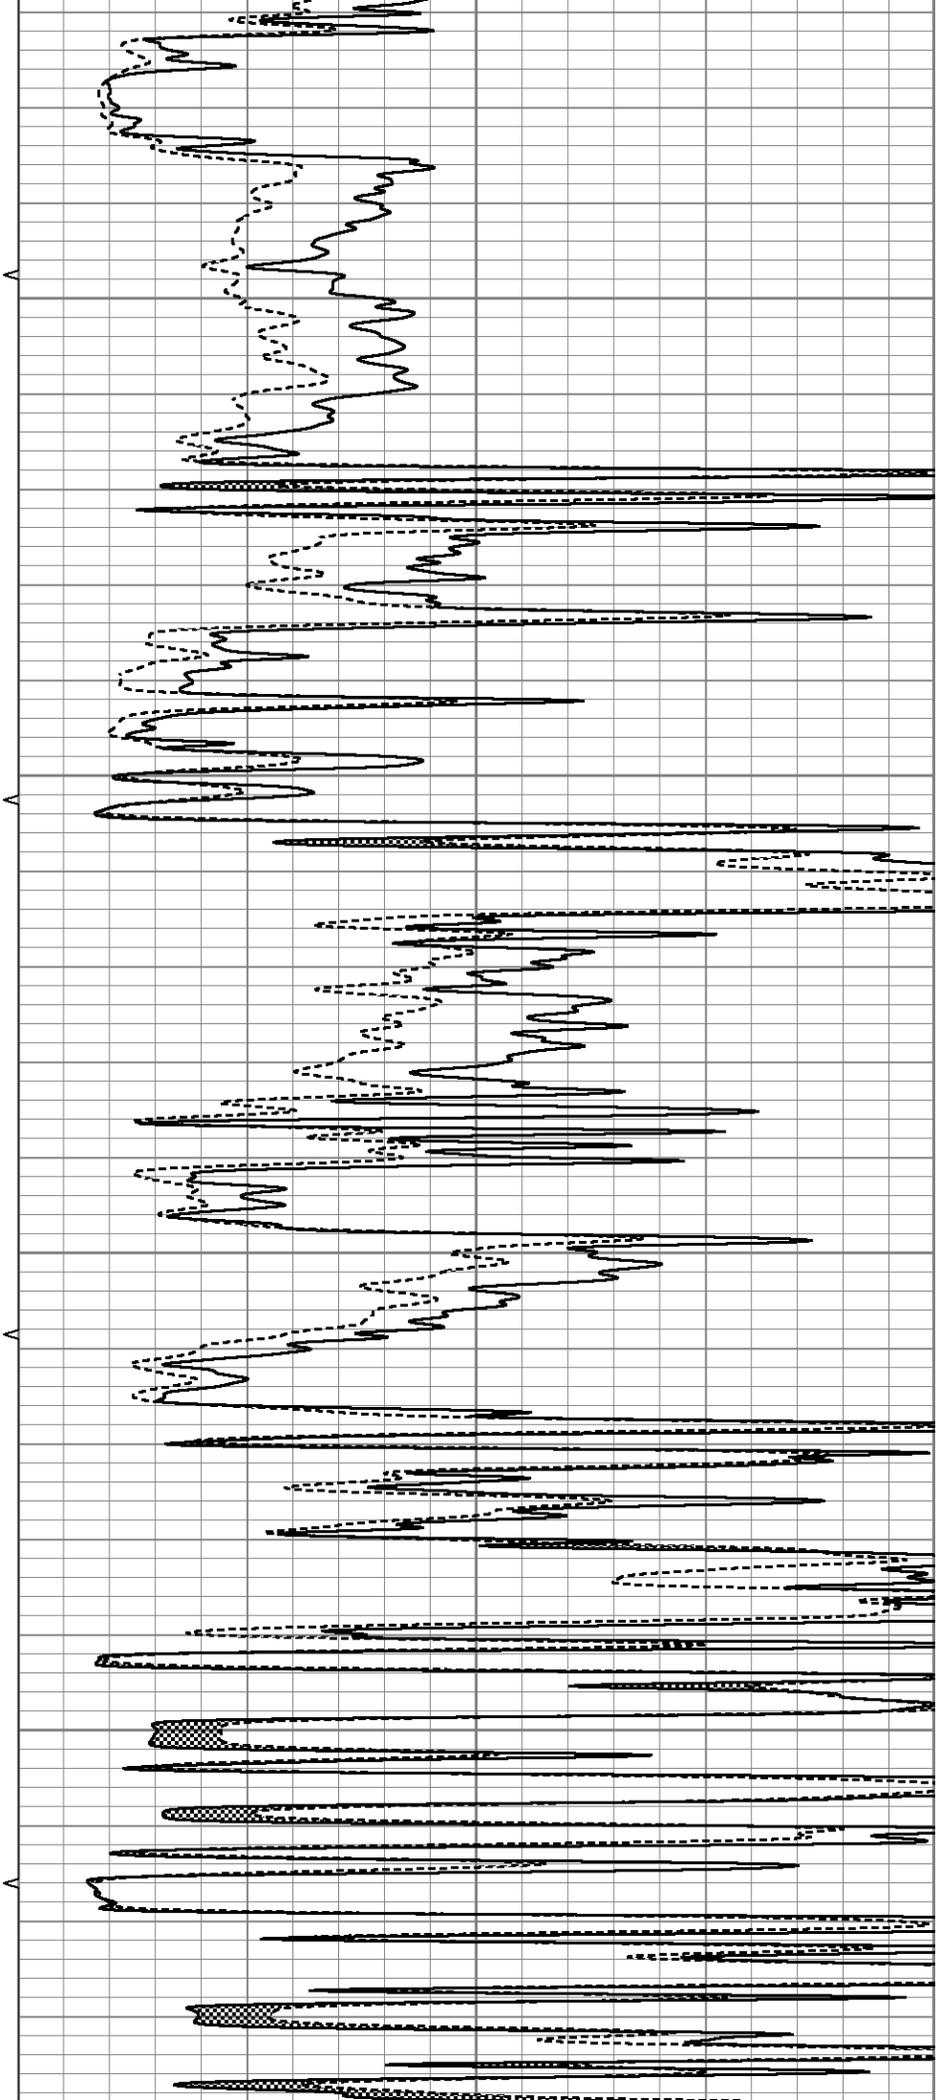


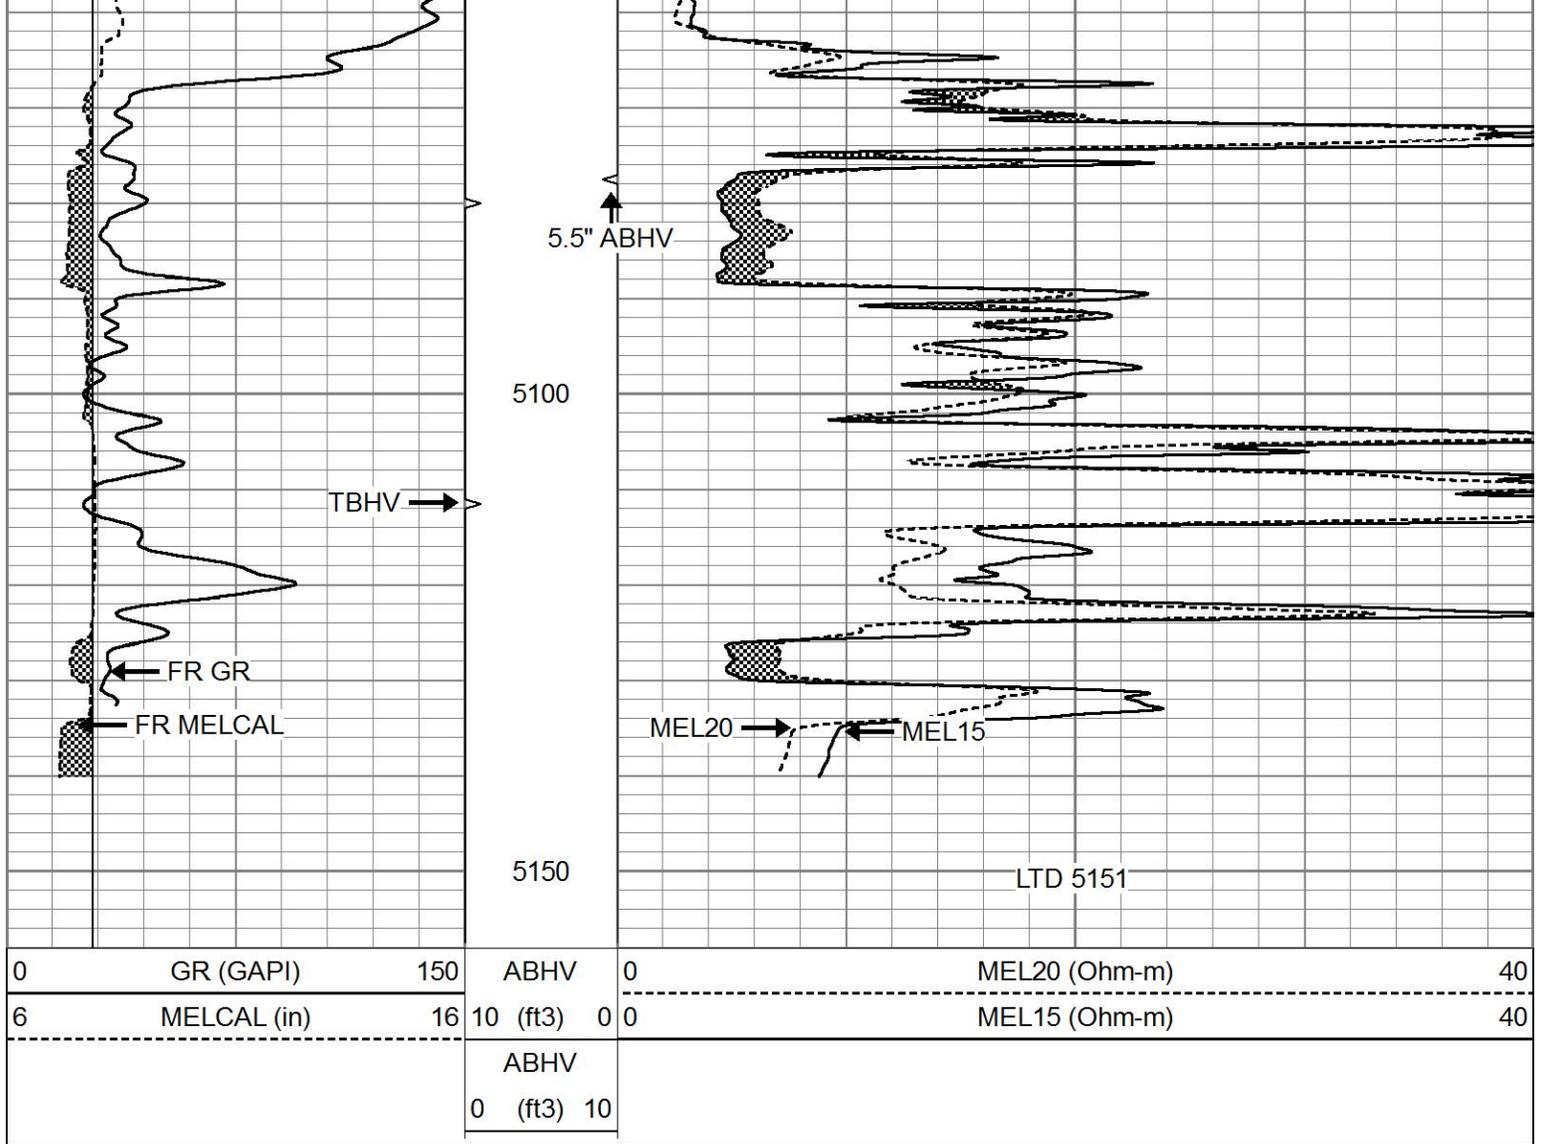


REPEAT SECTION

Database File 5662pe.db
 Dataset Pathname pass5.1
 Presentation Format micro
 Dataset Creation Thu Sep 30 21:52:19 2021
 Charted by Depth in Feet scaled 1:240

0	GR (GAPI)	150	ABHV	0	MEL20 (Ohm-m)	40
6	MELCAL (in)	16	10 (ft3)	0	MEL15 (Ohm-m)	40
			ABHV			
			0 (ft3)	10		

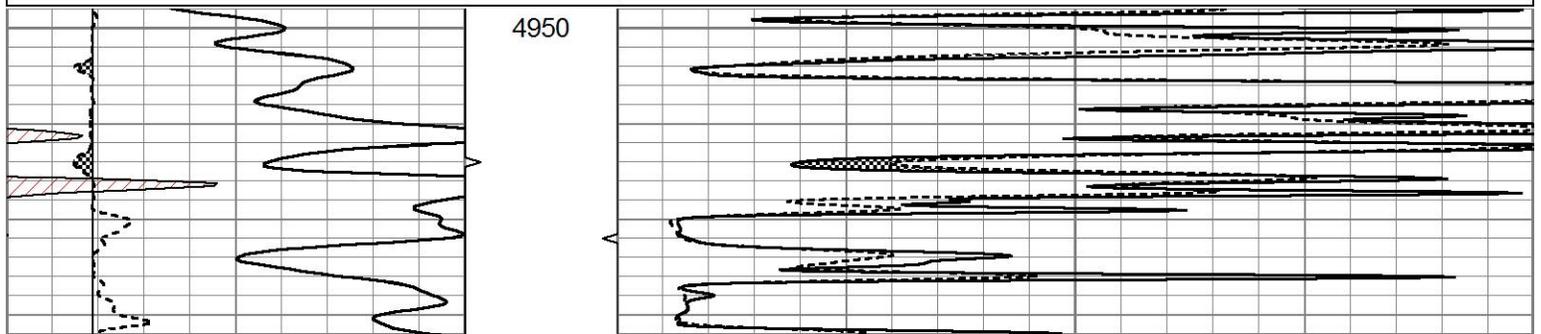

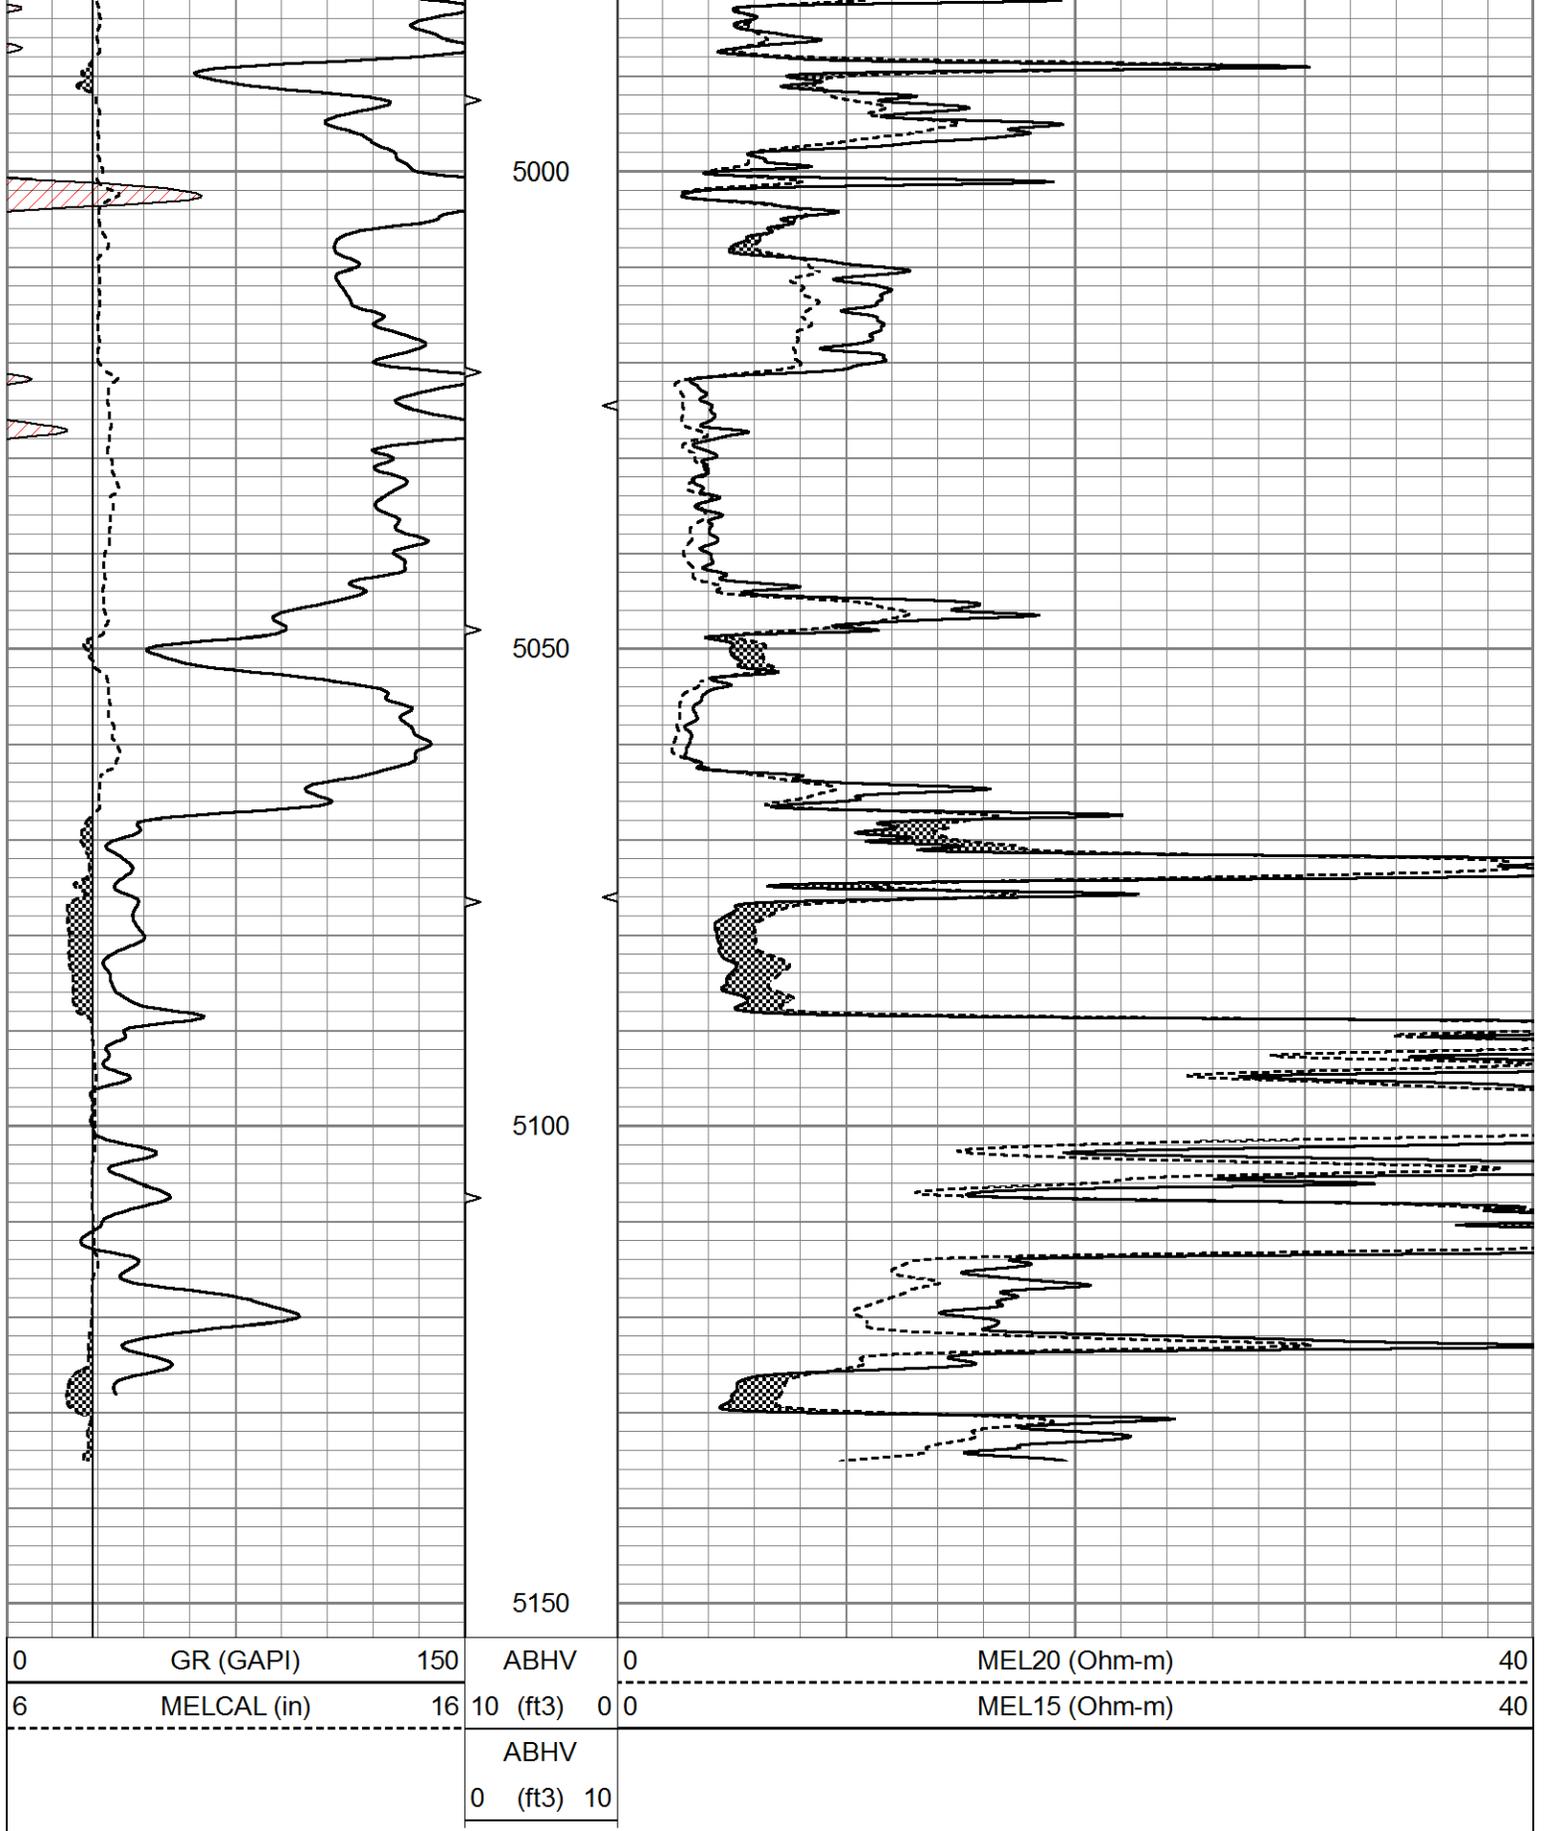

Calibration Report

Database File 5662pe.db
 Dataset Pathname pass6.2
 Dataset Creation Thu Sep 30 21:38:40 2021

Serial Number: 070912
Tool Model: ProbeN
Performed: Tue Sep 21 12:41:26 2021

Caliper Calibration: Gain=3.509 Offset=0.561

References Low Cal High Cal
Readings 8.000 16.000
 2.120 4.400

1.5" Calibration: Gain=32.000 Offset=0.000

References Low Cal High Cal
Readings 0.000 20.000
 0.002 1.239

2" Calibration: Gain=40.000 Offset=0.000

References Low Cal High Cal
Readings 0.000 20.000
 0.003 1.075

Gamma Ray Calibration Report

Serial Number: 070559
Tool Model: OPEN_GR
Performed: Wed Sep 08 16:32:59 2021

Calibrator Value: 1.0 GAPI

Background Reading: 0.0 cps
Calibrator Reading: 1.0 cps

Sensitivity: 0.3600 GAPI/cps