

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-151-10089-00-00

Spot: N2S2SE

Sec/Twnshp/Rge: 25-27S-11W

990 feet from S Section Line 1332 feet from E Section Line

Lease Name: CUNNINGHAM B

Well #: 42

County: PRATT

Total Vertical Depth: 3458 feet

Operator License No.: 3880

Op Name: KC RESOURCES, INC. DBA CRYSTAL R

Address: P. O. BOX 6749

SNOWMASS VILLAGE, CO 81615

String	Size	Depth (ft)	Pulled (ft)	Comment
--------	------	------------	-------------	---------

PKR		3330		
-----	--	------	--	--

PROD	5.5	3411	486.55	
------	-----	------	--------	--

SURF	12	1315		
------	----	------	--	--

\$ 112.39

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 12/14/2006 10:30 AM

Plug Co. License No.: 30437

Plug Co. Name: UNITED CEMENTING AND ACID CO., INC.

Proposal Rcvd. from: DON CAMPBELL

Company: KC RESOURCES

Phone: (970) 920-0245

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING REPORT

Plugging Proposal Received By: STEVE DURRANT

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 12/15/2006 9:55 AM

KCC Agent: RICHARD LACEY

Actual Plugging Report:

TUBING FISH TOP @ 1710'. BAKER PACKER @ 3330'. RAN TUBING TO 1210'. 1ST PUMPED 20 BBL MUD. 2ND PUMPED 50 SX 60/40 POZMIX 4% GEL 4% CC CMT. GOOD CIRCULATION. WAITED 90 MINUTES FOR CMT TO SET. PULLED TUBING 600'. PUMPED 225 SX 60/40 POZMIX & 98 SX CLASS A CMT. GOOD CIRCULATION NO CMT. 12/15/06: TAGGED CMT @ 80'. PUMPED 65 SX 60/40 POZMIX 4% GEL DOWN TUBING. CIRCULATED CMT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
3411	3458		

Remarks: USED 60/40 POZMIX 4% GEL BY UNITED CEMENTING.


Plugged through: TBG

INVOICED

DATE 1-8-07

INV. NO. 2007061073

District: 01

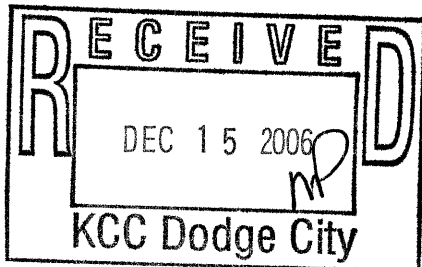

Signed

Richard W. Lacey

(TECHNICIAN)

RECEIVED  
KANSAS CORPORATION COMMISSION

DEC 26 2006

CONSERVATION DIVISION  
WICHITA, KS

PKT